

A SERIES

High-end smart LED poster



A SERIES

- Aluminum frame, super lightweight and ultra slim
- Easy for plug-in with USB
- Internet cable and WIFI control available
- Front/rear access
- Intelligent group management
- Multi installation (standing, hanging, wall mounting)
- Adjustable standing angle can be 0°, 5°, 10°, 15°
- IP65, creative DIY



Rental



Profiled Stitching



Noise Free





High Definition






Ultra Slim

CE ETL RoHS EMC



FEATURES

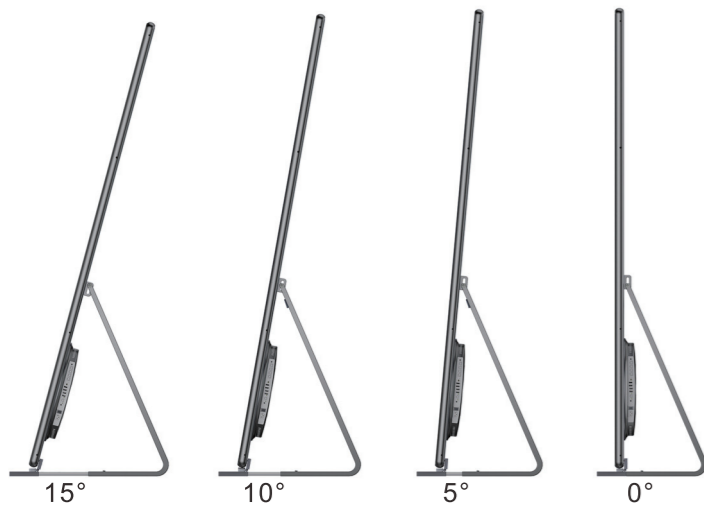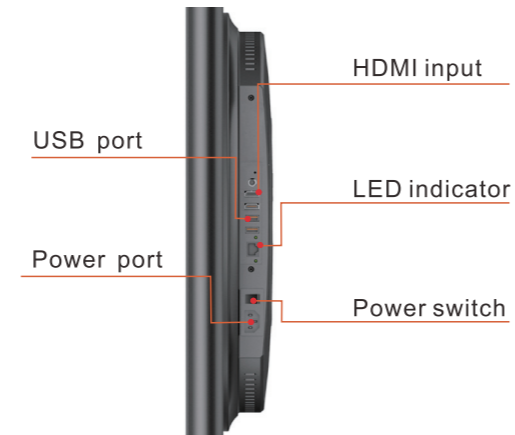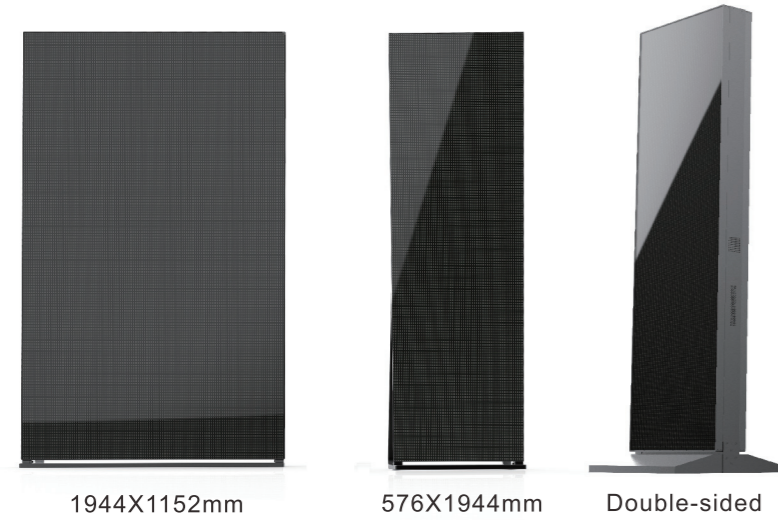

Adjustable floor stand



Multiple installation

SPECIFICATIONS

Parameter	Unit	A1.9i	A2.5i	A1.9	A2.5
Pixel pitch	mm	1.995	2.571	1.995	2.571
Brightness	nits	800	1000	3000	3500
Pixel configuration	R/G/B	SMD 3 in 1			
Colour temperature	deg.K	6500			
Viewing angle-Horizontal (50% brightness)	deg.	160 (+70/-70)			
Viewing angle-Vertical (50% brightness)	deg.	140 (+70/-70)			
Recommended minimum viewing distance	m	1.9	2.5	1.9	2.5
Panel width	mm	614		657	
Panel height	mm	1982		2250	
Panel depth	mm	40		85	
Panel area	m ²	1.2169		1.4783	
Panel material		Aluminum		Aluminum	
Panel weight	Kg	35		67	
Ingress protection (front/rear)	IP	41/30		65/54	
Pixel matrix per panel		288x972	224x756	288x972	224x756
Brightness control		255			
Digital processing	bit	13			
Frame rate	Hertz	50/60			
Display refresh rate	Hertz	1920			
Input voltage	VAC	100~240			
Input power frequency	Hertz	50~60			
Input power (Max.)	W/m ²	590	492	600	620
Input power (Avg.)	W/m ²	206	172	210	217
Operating temperature range	deg.C	-10 ~ +40		-20 ~ +45	
Lifetime (50% brightness)	Hour	100,000			