




| Input voltage | Output voltage | Output current | Output power | Efficiency | Size |
|---------------|----------------|----------------|--------------|------------|------------|
| 8-40V DC | 12V DC | 3 Amps | 36 Watts | 89.1% | 64*57*22mm |

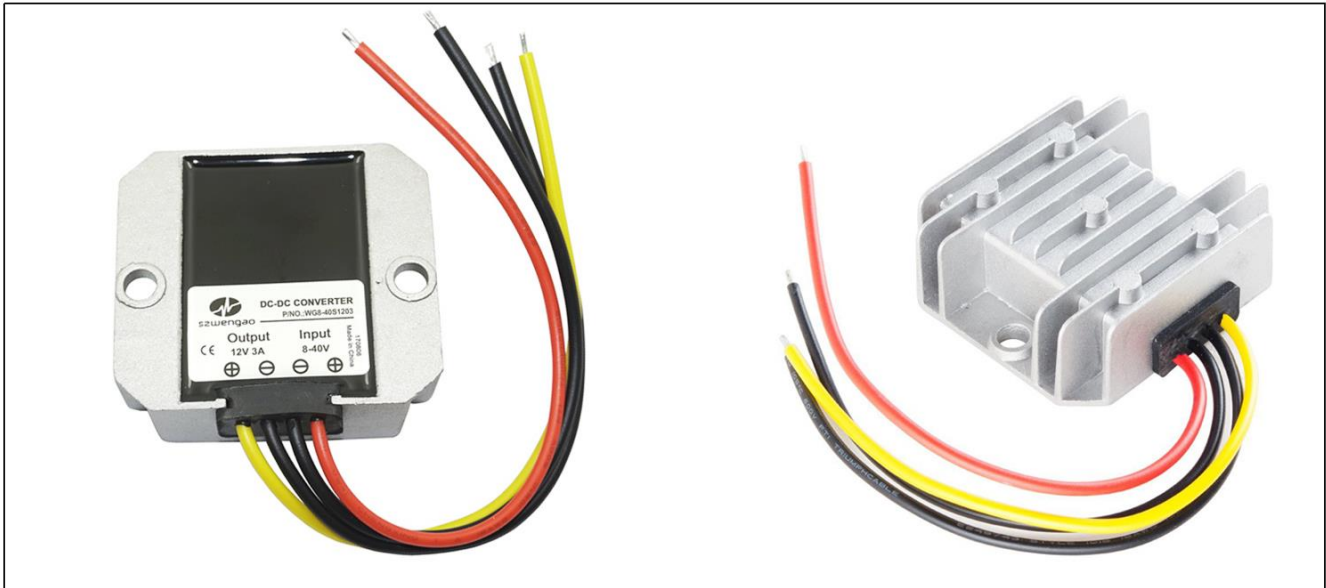

The WG8-40S1203 is a Non-isolated DC/DC buck-boost converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 64mm x 57mm x 22mm (2.52 in. x 2.24 in. x 0.86 in) and provides the rated output voltage of 12 V and the maximum output current of 3A.

Features

- Design meeting RoHS / CE
- High efficiency: 89.1% (@ 12Vin, 25°C)
- Import capacitors, high reliability
- Input transient absorption protection
- Support -40 °C environment
- 100% full load burn-in test
- Short circuit, Over load, Low voltage protections
- Remote ON/OFF control (optional)
- Waterproof level IP68
- 2 Years warranty

Applications

- Industrial
- Alternative Energy
- Golf Cart
- Forklift
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical
- Dual battery system
- LED Marketplaces and so on.

Model naming method

WG8-40S1203

WG: "szwengao" company name

8-40 : Input voltage

S : Single output type

12 : Output voltage

03 : Output current



szwengao

Non-Isolated DC/DC Converter Specification

Model No.: WG8-40S1203

Electrical Specifications

Conditions: TA = 25 °C (77°F), Airflow = 1 m/s (200LFM), Vin =12V, Vout =12V, unless otherwise specified.

| Parameter | Min. | Typ. | Max. | Units | Remarks |
|---------------------------------|------|-------|------|-------|--------------------------------------------------------------------------------------------|
| Absolute maximum ratings | | | | | |
| Operating ambient temperature | -40 | - | +50 | °C | |
| Shell ambient temperature | -40 | - | 80 | °C | |
| Storage temperature | -55 | - | 100 | °C | |
| Operating humidity | 5 | - | 95 | % | Non-condensing |
| Atmospheric pressure | 62 | - | 106 | Kpa | |
| Altitude | - | - | 4000 | m | |
| Cooling way | - | - | - | | Natural cooling |
| Input characteristics | | | | | |
| Input voltage | 8 | 12/24 | 40 | V | - |
| Max. input voltage | - | - | 40 | V | Continuous |
| Undervoltage shutdown | 7.8 | 8.0 | 8.2 | V | Automatic recovery |
| Undervoltage recovery | 8.5 | 8.6 | 8.7 | V | Automatic recovery |
| Max. input current | - | - | 5.7 | A | Vin =8.1V; Iout =3A |
| No load current | - | 51 | 54 | mA | Vin =12V |
| Positive electrode cable | 18 | - | - | AWG | If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter. |
| Negative electrode cable | 18 | - | - | AWG | |
| Enable PIN cable | 22 | - | - | AWG | If the product has this feature |
| Fuse | - | 20 | - | A | Input positive has built-in fuse |
| Output characteristics | | | | | |
| Efficiency | - | 89.1 | - | % | Vin =12V; Iout =3A |
| Output voltage | 11.9 | 12.0 | 12.3 | V | Vin =12V; Iout =3A |
| Regulator accuracy | - | ±1 | - | % | |
| Voltage regulation | - | ±1 | - | % | |
| Load Regulation | - | ±1 | - | % | |
| Overvoltage protection | - | - | - | V | |
| Output current | 0 | - | 3 | A | |
| Overcurrent protection | 5.7 | 6.1 | 6.3 | A | Vin=12V |
| External capacitance | 0 | 3000 | 4000 | μF | |
| Output ripple and noise | - | 300 | 340 | mVp-p | Vin =8-40V; Iout=3A, Oscilloscope bandwidth: 20 MHz |
| Output voltage rise time | - | 3.1 | 4.0 | mS | |
| Boot delay time | - | 11.3 | 12.8 | mS | |
| Out voltage overshoot | - | 1 | 2 | % | Vin =12V, 50%-75% Load step |
| Over temperature protection | - | - | - | °C | |
| Short circuit protection | - | - | - | | Long-term (4 hours) short circuit is not damaged, Hiccup mode |
| Positive electrode cable | 18 | - | - | AWG | If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter. |
| Negative electrode cable | 18 | - | - | AWG | |



| Safety and EMC features | | | | |
|-------------------------|-----------------|------------|------------------|------------------------------------------------------------------------|
| Anti-electric Strength | Input to Output | - | V | Leakage current $\leq 3.5\text{mA}$, 1min, no breakdown, no arcing |
| | Input to Shell | ≥ 500 | V | |
| | Output to Shell | ≥ 500 | V | |
| Insulation resistance | Input to Output | ≥ 50 | $\text{M}\Omega$ | Test voltage = 500V |
| | Input to Shell | | | |
| | Output to Shell | | | |
| Other characteristics | | | | |
| Weight | ≤ 120 | | g | |
| Package | White box | | | |
| MTBF | $\geq 200,000$ | | H | $V_{in} = 12\text{V}; I_{out} = 3\text{A}$ |
| Switching frequency | 80 ± 10 | | KHz | |

Characteristic Curves

Conditions: $T_A = 25^\circ\text{C}$ (77°F), $V_{in} = 12\text{V}$, $V_{out} = 12\text{V}$, unless otherwise specified.

Figure 1, Efficiency

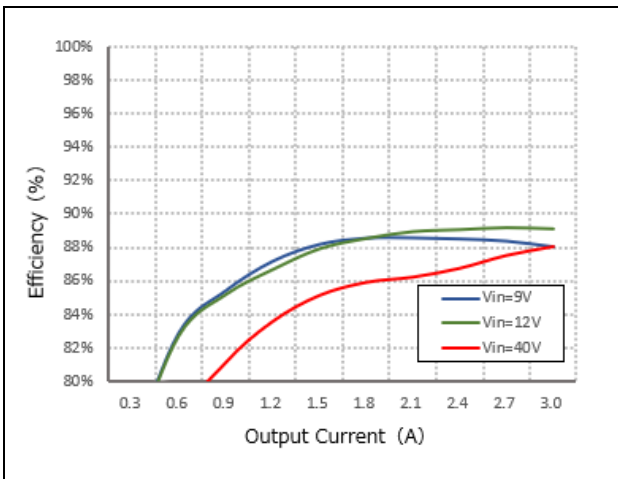


Figure 2, Power dissipation


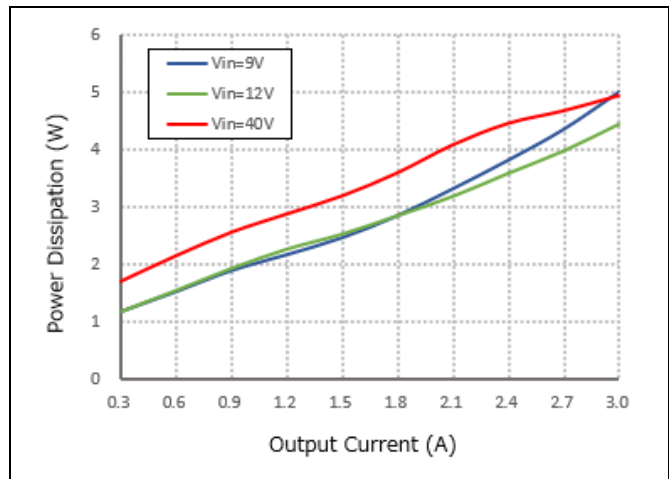


Figure 3, Input V-I, Iout=3A

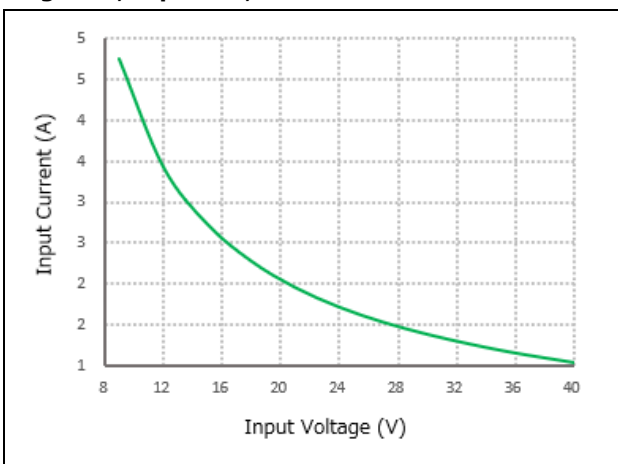

Typical Waveforms

Conditions: TA = 25° C (77° F), Vin = 12V, unless otherwise specified.

Figure 4, 25% - 50% load dynamic

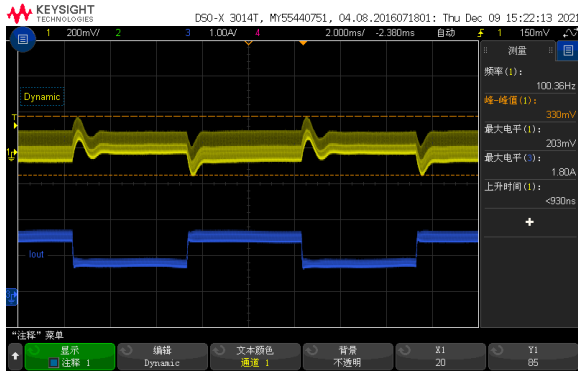


Figure 5, 50% - 75% load dynamic

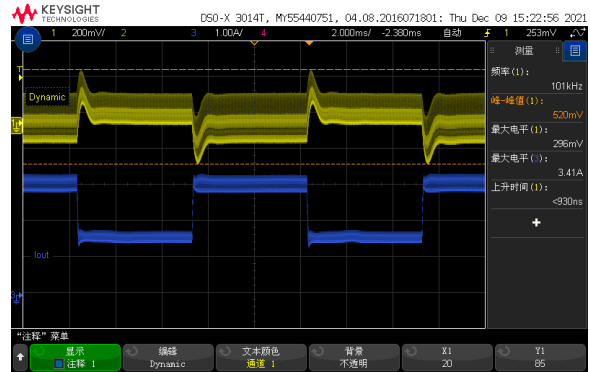


Figure 6, Output voltage established (Iout = 3A)

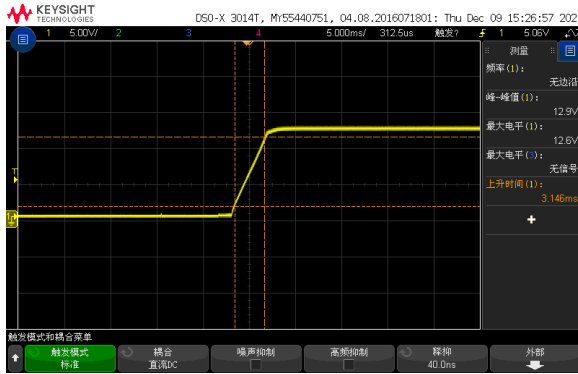


Figure 7, Output ripple & noise (Iout = 3A)

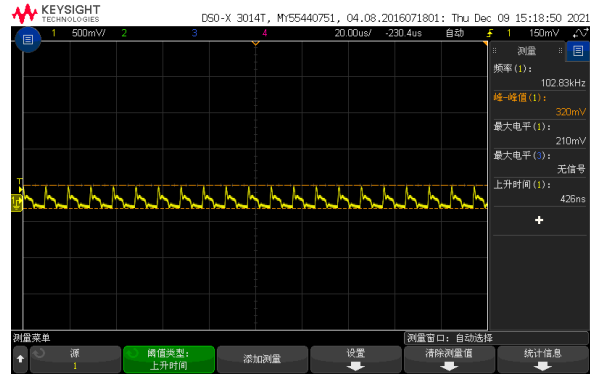


Figure 8, Boot delay time


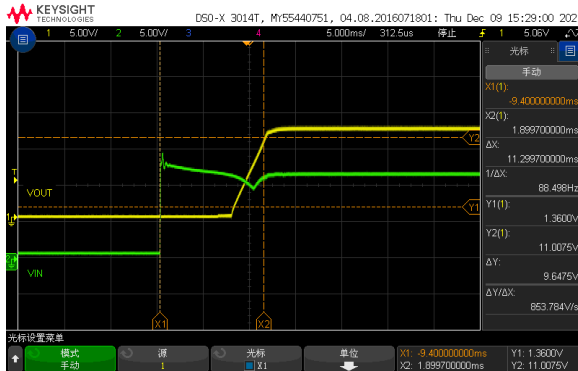


Figure 9, Short-circuit & Output voltage



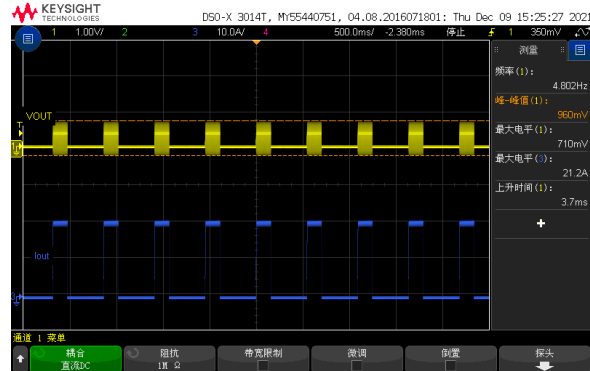


Feature Description


Remote On/Off (EN) (Optional)

| Logic Enable | Low level (0 - 8Vdc) | High level (8-40Vdc) | Left open |
|----------------|----------------------|----------------------|-----------|
| Positive logic | Off | On | Off |

Various circuits for driving the EN

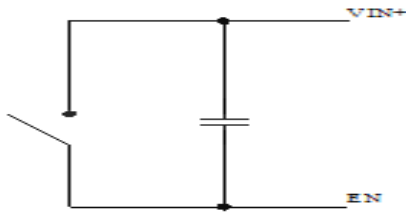

Simple control

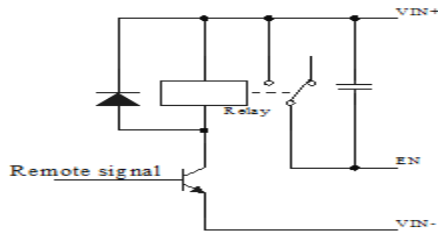

Transistor control

Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under-voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

Output Overcurrent Protection


The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

Wiring Instructions

The input and output of this product is terminals. The user should ensure that the input and output wires and terminals are connected reliably, and pay attention to the wire diameter to meet the requirements of the power supply current. If the cable to be used is long, it needs Considering the voltage drop of the wire, if the voltage drop is too large, the voltage output at the load end may not meet the load demand. In this case, consider using a thicker wire diameter or reducing the length of the wire. Generally, if long wiring is required. Long line should be used on the side where the current is relatively small. For example, this product is a step-down product, so long lines should be used on the input side.


Thermal Consideration

Sufficient airflow should be provided to help ensure reliable operating of the WG8-40S1203
 Therefore, thermal components are mounted on the top surface of the WG8-40S1203 to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

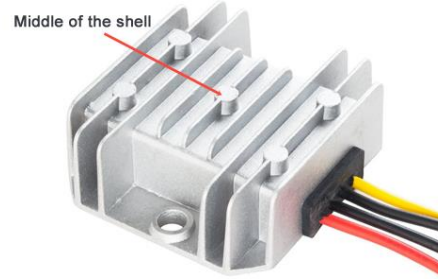

Dimension

Shell installation diagram
 Thickness : 22mm
 Center distance : 54mm

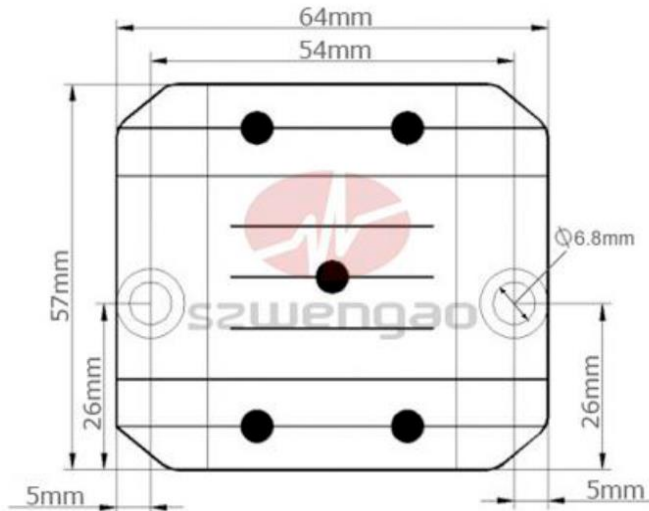

Shenzhen Wengao Electronic Co., Ltd

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061

F: +86 755 29418061

E: info@wengaoelec.com

W: www.wengaoelec.com