



**szwengao**

## Non-Isolated DC/DC Converter Specification

Model No.:WG-24S4810

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
18-36V DC	48V DC	10 Amps	480 Watts	97.3%	100*80*39mm



The WG-24S4810 is a Non-isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 100mm x 80mm x 39mm and provides the rated output voltage of 48V and the maximum output current of 10 A.

### Features

- High efficiency: 97.3% ( @ 24Vin, 25°C )
- Design meeting CE/RoHS
- Input transient absorption protection
- Support -40 ° C environment
- 100% full load burn-in test
- Over load, Over temperature protections
- Waterproof level IP68
- 1 Years warranty

### Applications

- Industrial
- Alternative Energy
- Golf Cart & Forklift
- Military
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical and so on.

### Model naming method

<b>WG-24S4810</b>	WG: " szwengao " company name
	24 : Input rated voltage
	S : Single output type
	48 : Output voltage
	10 : Output current

**szwengao****Non-Isolated DC/DC Converter Specification**

Model No.:WG-24S4810

**Electrical Specifications**

Conditions: TA = 25 ° C ( 77° F), Airflow = 1 m/s (200LFM), Vin =24V, Vout =48V , unless otherwise specified.

Parameter	Min.	Typ.	Max.	Units	Remarks
<b>Absolute maximum ratings</b>					
Operating ambient temperature	-40	-	+50	° C	
Shell ambient temperature	-40	-	80	° C	
Storage temperature	-55	-	100	° C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	Kpa	
Altitude	-	-	4000	m	
Cooling way	-	-	-		Natural cooling
<b>Input characteristics</b>					
Input voltage	18	24	36	V	-
Max. input voltage	-	-	40	V	Continuous
Undervoltage shutdown	9.2	9.6	10	V	Automatic recovery
Undervoltage recovery	9.6	10.2	10.6	V	Automatic recovery
Max. input current	-	-	28	A	Vin =18V; Iout =10A
No load current	-	200	250	mA	Vin =24V
Positive electrode cable	12	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	12	-	-	AWG	
Enable PIN cable	NC	-	-	AWG	If the product has this feature
Fuse	-	30	-	A	Without fuse set inside
<b>Output characteristics</b>					
Efficiency	-	97.3	-	%	Vin =24V; Iout =10A
Output voltage	24	24.2	24.5	V	Vin =24V; Iout =10A
Regulator accuracy	-	±1	-	%	
Voltage regulation	-	±1	-	%	
Load Regulation	-	±1	-	%	
Overvoltage protection		NC		V	
Output current	0	-	10	A	
Overcurrent protection	15	20	25	A	Vin=24V
External capacitance	0	2000	10000	μF	
Output ripple and noise	-	230	300	mVp-p	Vin =18-36V; Iout=10A Bandwidth: 20 MHz;
Output voltage rise time	-	25	30	mS	
Boot delay time	-	50	80	mS	
Out voltage overshoot	-	2	3	%	Vin=24V , 50%-75% Load step;
Over temperature protection	-	-	80	° C	Without over-temperature protectiong
Short circuit protection	-	-	-		
Positive electrode cable	16	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	16	-	-	AWG	




Safety and EMC features				
Anti-electric Strength	Input to Output	-	V	Leakage current $\leq 3.5\text{mA}$ , 1min, no breakdown, no arcing
	Input to Shell	$\geq 500$	V	
	Output to Shell	$\geq 500$	V	
Insulation resistance	Input to Output	$\geq 50$	$\text{M}\Omega$	Test voltage = 500V
	Input to Shell			
	Output to Shell			
Other characteristics				
Weight	$\leq 550$		g	
Package	white box			
MTBF	$\geq 200,000$		H	$V_{in} = 24\text{V}$ ; $I_{out} = 10\text{A}$
Switching frequency	$220 \pm 10$		KHz	


**Characteristic Curves**

Conditions:  $T_A = 25^\circ\text{C}$  ( $77^\circ\text{F}$ ),  $V_{in} = 24\text{V}$ ,  $V_{out} = 48\text{V}$ , unless otherwise specified.


**Figure 1, Efficiency**

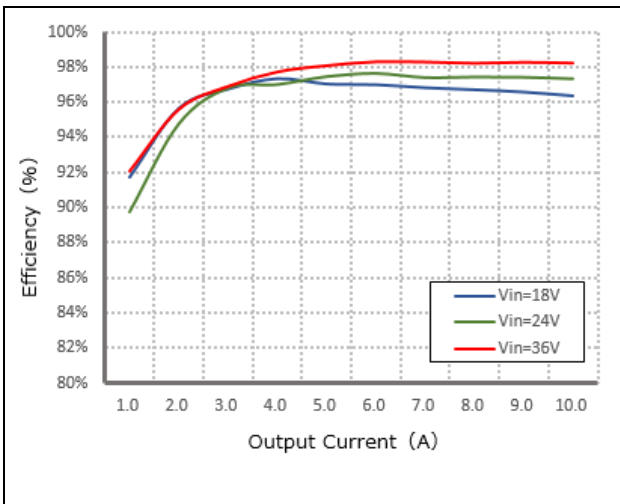

**Figure 2, Power dissipation**

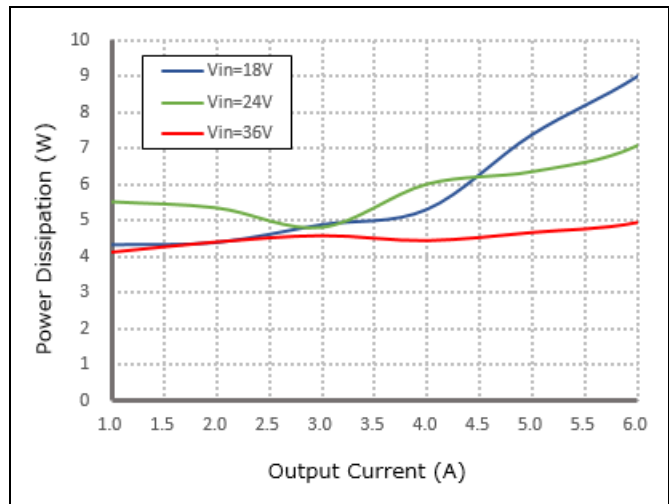


**Figure 3, Input V-I Iout=10A**

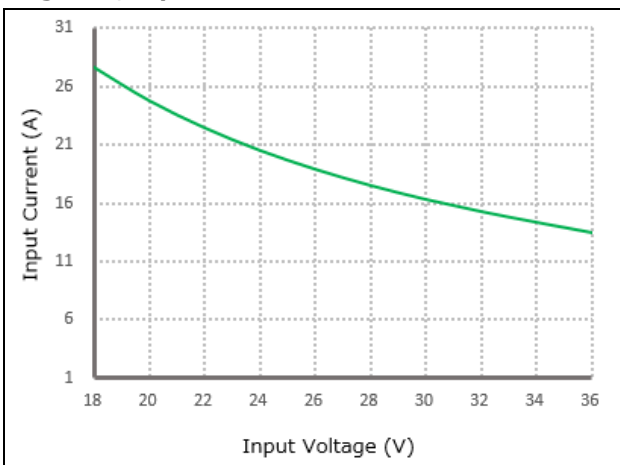


**Typical Waveforms**

Conditions: TA = 25° C (77° F), Vin = 24V, unless otherwise specified.

**Figure 4, 25% - 50% load dynamic**

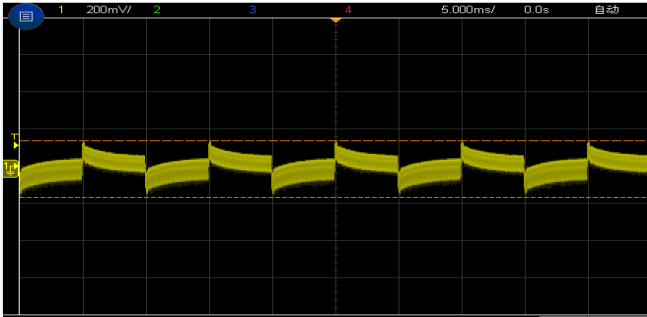


**Figure 5, 50% - 75% load dynamic**

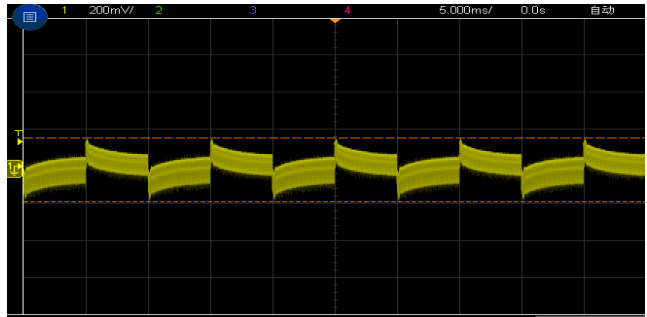

**Figure 6, Output voltage established (Iout = 10A)**



**Figure 7, Output ripple & noise (Iout = 10A)**

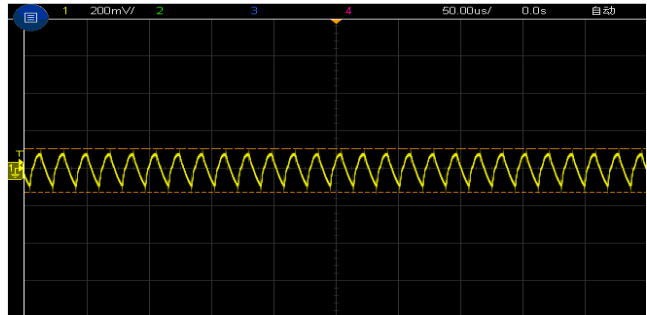


**Feature Description**


**Remote On/Off (EN) (Optional)**

Logic Enable	Low level (0 - 15Vdc)	High level (15 - 40Vdc)	Left open
Positive logic	Off	On	Off

**Various circuits for driving the EN**

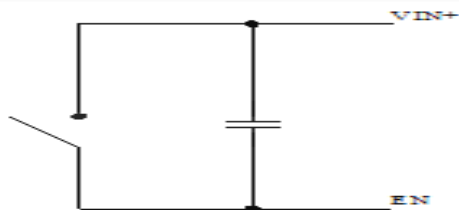

Simple control

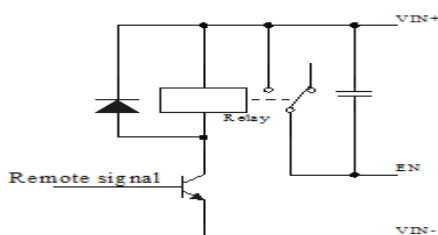

Transistor control

**Input Undervoltage Protection**

The converter will shut down after the input voltage drops below the under voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

**Output Overcurrent Protection**

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.



### Overtemperature Protection

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis


### Wiring Instructions

The input and output of this product are terminals. The user should ensure that the input and output wires and terminals are connected reliably, and pay attention to the wire diameter to meet the requirements of the power supply current. If the cable to be used is long, it needs Considering the voltage drop of the wire, if the voltage drop is too large, the voltage output at the load end may not meet the load demand. In this case, consider using a thicker wire diameter or reducing the length of the wire. Generally, if long wiring is required. Long line should be used on the side where the current is relatively small.

### Thermal Consideration


Sufficient airflow should be provided to help ensure reliable operating of the WG-24S4810.

Therefore, thermal components are mounted on the top surface of the WG-24S4810 to dissipate heat to the surrounding environment by conduction, convection and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

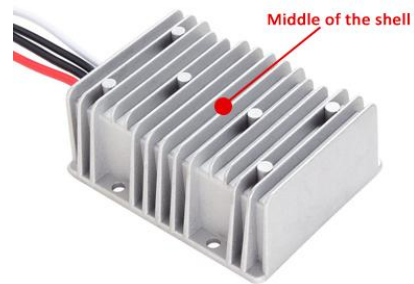



 Dimension

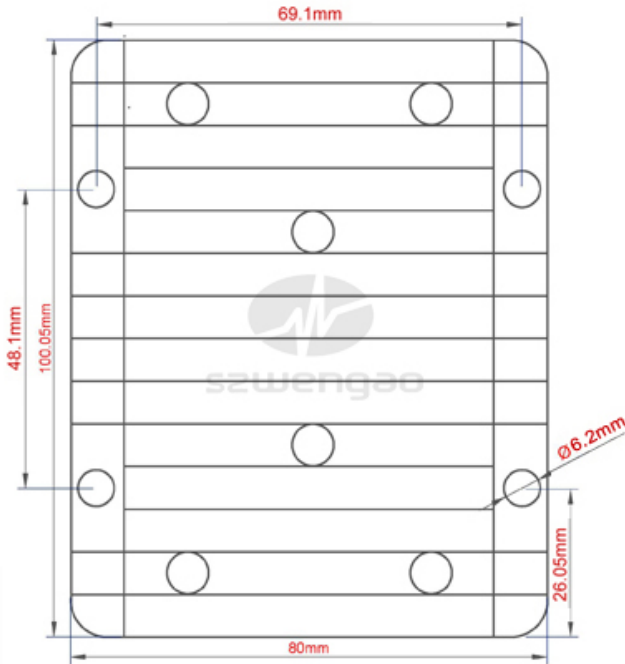

Shell installation diagram

Thickness : 39mm



**Shenzhen Wengao Electronic Co., Ltd**

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061

F: +86 755 29418061

E: [info@wengaoelec.com](mailto:info@wengaoelec.com)

W: [www.wengaoelec.com](http://www.wengaoelec.com)