

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
36-90V DC	12V DC	10 Amps	120 Watts	91%	110*70*23mm



The WGI10-72S12L is an isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 110mm x 70mm x 23mm (4.33 in. x 2.76 in. x 0.91 in.) and provides the rated output voltage of 12 V and the maximum output current of 10 A.

Features

- Design meeting RoHS / CE
- High efficiency: 91% (@ 72Vin, 25°C)
- Isolated between input and output
- Internal capacitor NCC & NICHICON etc. (high reliability)
- 100% full load burn-in test
- Short circuit, Over load, Over temperature
- Waterproof level IP65
- 2 Years warranty

Applications

- Industrial
- Alternative Energy
- Golf Cart & Forklift
- Electromotor
- Telecommunications
- Boat & Yacht
- RVs & BMS
- Medical and so on.

Model naming method

WGI10-72S12L

WG: "szwengao" company name

72 : Input rated voltage

S : Single output type

12 : Output voltage

10 : Output current

I : Isolated type

L : Shape of shell

Electrical Specifications

Conditions: TA = 25° C (77° F), Airflow = 1.0 m/s (200 LFM), Vin = 72V, Vout = 12V , unless otherwise specified.

Parameter	Min.	Typ.	Max.	Units	Remarks
Absolute maximum ratings					
Operating ambient temperature	-40	-	55	° C	
Shell ambient temperature	-40	-	80	° C	
Storage temperature	-55	-	100	° C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	Kpa	
Altitude	-	-	4000	m	
Cooling way	-	-	-		Natural cooling
Input characteristics					
Input voltage	36	60/72	90	V	-
Max. input voltage	-	-	100	V	Continuous
Undervoltage shutdown	30	34.7	36	V	Automatic recovery
Undervoltage recovery	31	35.8	36	V	Automatic recovery
Max. input current	-	-	5	A	Vin = 36V; Iout = 10A
No load current	-	11	30	mA	Vin = 72V
Positive electrode cable	-	18	-	AWG	recommend
Negative electrode cable	-	18	-	AWG	recommend
Enable PIN cable	-	-	-	AWG	If the product has this feature
Fuse	-	6.3	-	A	Input positive has built-in fuse
Output characteristics					
Efficiency	-	91	-	%	Vin = 72V; Iout = 10A
Output voltage	11.85	12	12.25	V	Vin = 72V; Iout = 10A
Regulator accuracy	-	±2	-	%	
Voltage regulation	-	±2	-	%	
Load Regulation	-	±1	-	%	
Oversupply protection	-	-	22	V	Hiccup mode
Output current	0	-	10	A	
Overcurrent protection	12	13	15	A	
External capacitance	-	-	-	μF	Don't need
Output ripple and noise	-	38	250	mVp-p	Vin = 36~90V; Oscilloscope bandwidth: 20 MHz;
Output voltage rise time	-	2.5	50	ms	
Boot delay time	-	36.7	300	ms	
Out voltage overshoot	-	-	3	%	
Over temperature protection	-	-	-	° C	Shell temperature, @ 80° C Restore working
Short circuit protection	-	YES	-		Long-term (4 hours) short circuit is not damaged, Hiccup mode
Positive electrode cable	-	16	-	AWG	recommend
Negative electrode cable	-	16	-	AWG	recommend

Safety and EMC features				
Anti-electric Strength	Input to Output	≥1500	V	Leakage current ≤ 1mA, 1min, no breakdown, no arcing
	Input to Shell	≥1500	V	
	Output to Shell	≥500	V	
Insulation resistance	Input to Output	≥10	MΩ	Test voltage = 500V
	Input to Shell			
	Output to Shell			
Other characteristics				
Weight	≤260	g		
Package	Color box			
MTBF	≥100,000	H	Vin = 72V; Iout = 10A	
Switching frequency	130±10	KHz		

Characteristic Curves

Conditions: TA = 25° C (77° F), Vin = 72 V, Vout = 12 V , unless otherwise specified.

Figure 1, Efficiency

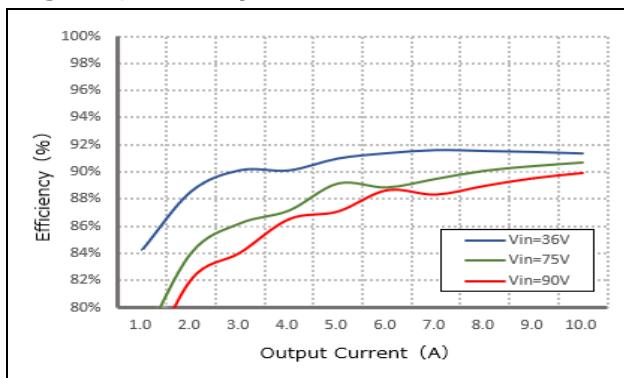


Figure 2, Power dissipation


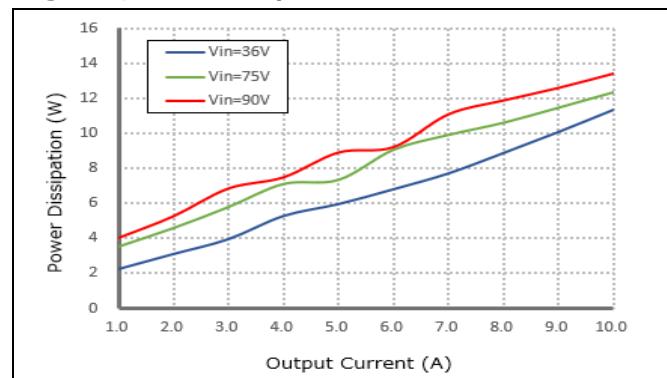


Figure 3, Input V-I

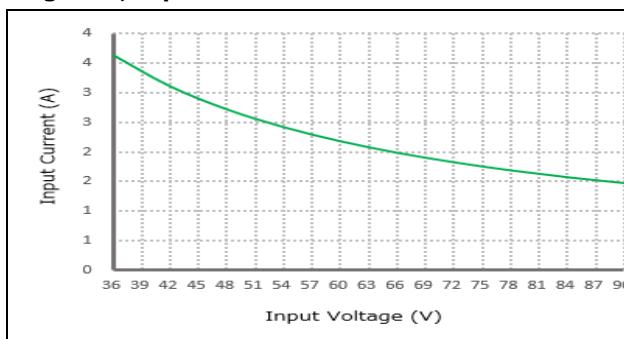

Typical Waveforms

Conditions: TA = 25° C (77° F), Vin = 72 V, unless otherwise specified.

Figure 4, 50% - 75% load dynamic

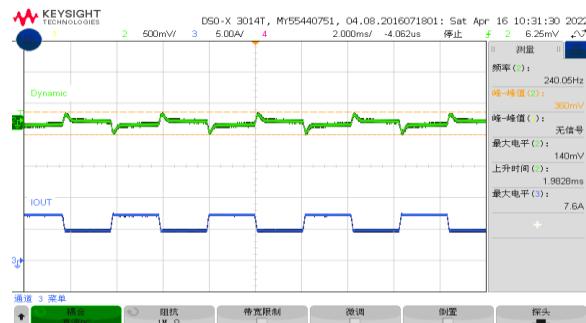


Figure 5, Output voltage established (Iout = 10A)

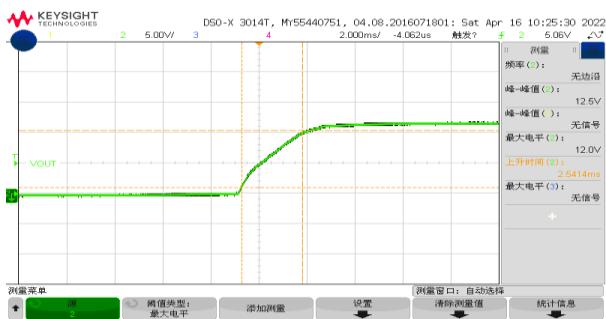


Figure 6, Output ripple & noise (Iout = 10A)


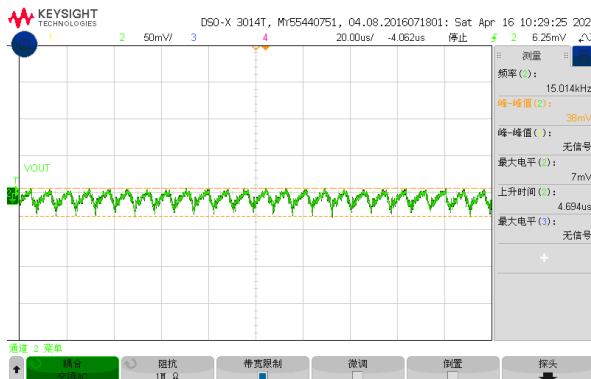


Figure 7, Boot delay time



Figure 8, Short circuit & Out voltage

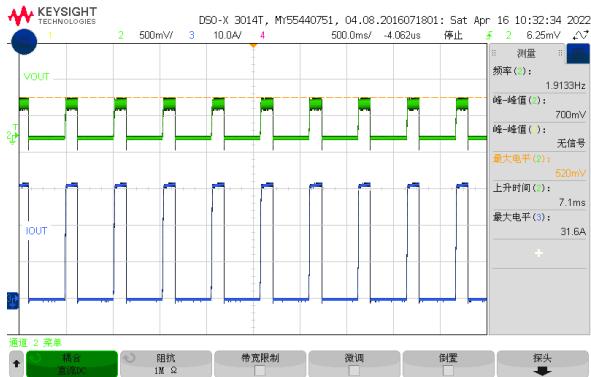


Feature Description


Remote On/Off (CNT) (Optional)

Logic Enable	Low level (0 - 36Vdc)	High level (36 - 90Vdc)	Left open
Positive logic	Off	On	Off


Various circuits for driving the CNT




Simple control

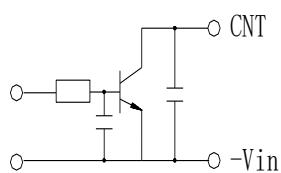

Transistor control



Isolation control

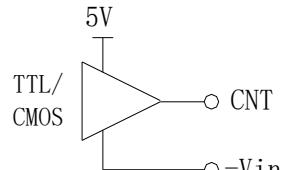

Direct logic drive

Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under-voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

Overtemperature Protection

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis

Reverse Protection

Reverse voltage protection circuits prevent damage to power supplies and electronic circuits in the event of a reverse voltage applied at the input terminals. The protection ensures that the components are not damaged by accidental swap of the power supply connections.


Output Overvoltage Protection

When the voltage directly across the output pins exceeds the output overvoltage protection threshold, the converter will enter hiccup mode. When the fault condition is removed, the converter will automatically restart.

Thermal Consideration


Sufficient airflow should be provided to help ensure reliable operating of the WGI10-72S12L.

Therefore, thermal components are mounted on the top surface of the WGI10-72S12L to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

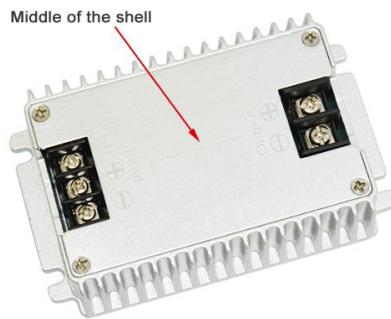

Dimension

unit: mm

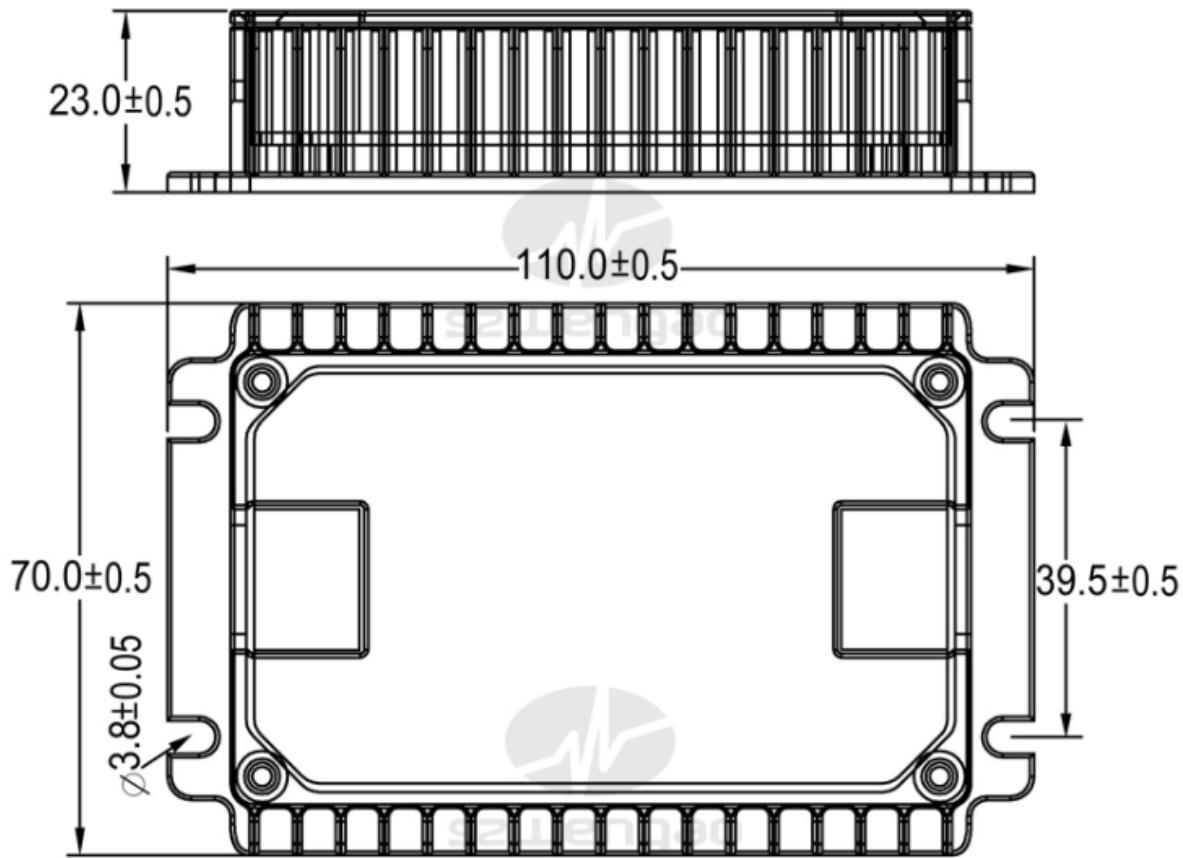

Shenzhen Wengao Electronic Co., Ltd

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061 F: +86 755 29418061 E: info@wengaoelec.com W: www.wengaoelec.com