





PF SERIES

Indoor front-fix
display



PF SERIES

- Ultra light & slim design.
- Noise free.
- Front / back access design, easy to install and service.
- Stable performance and high cost-effective.
- Special shape corner design is available for more flexible application.
- High contrast, high gray scale, wide viewing angle.



Front
Maintenance



Lightweight




Ultra Slim



Noise Free

FEATURES

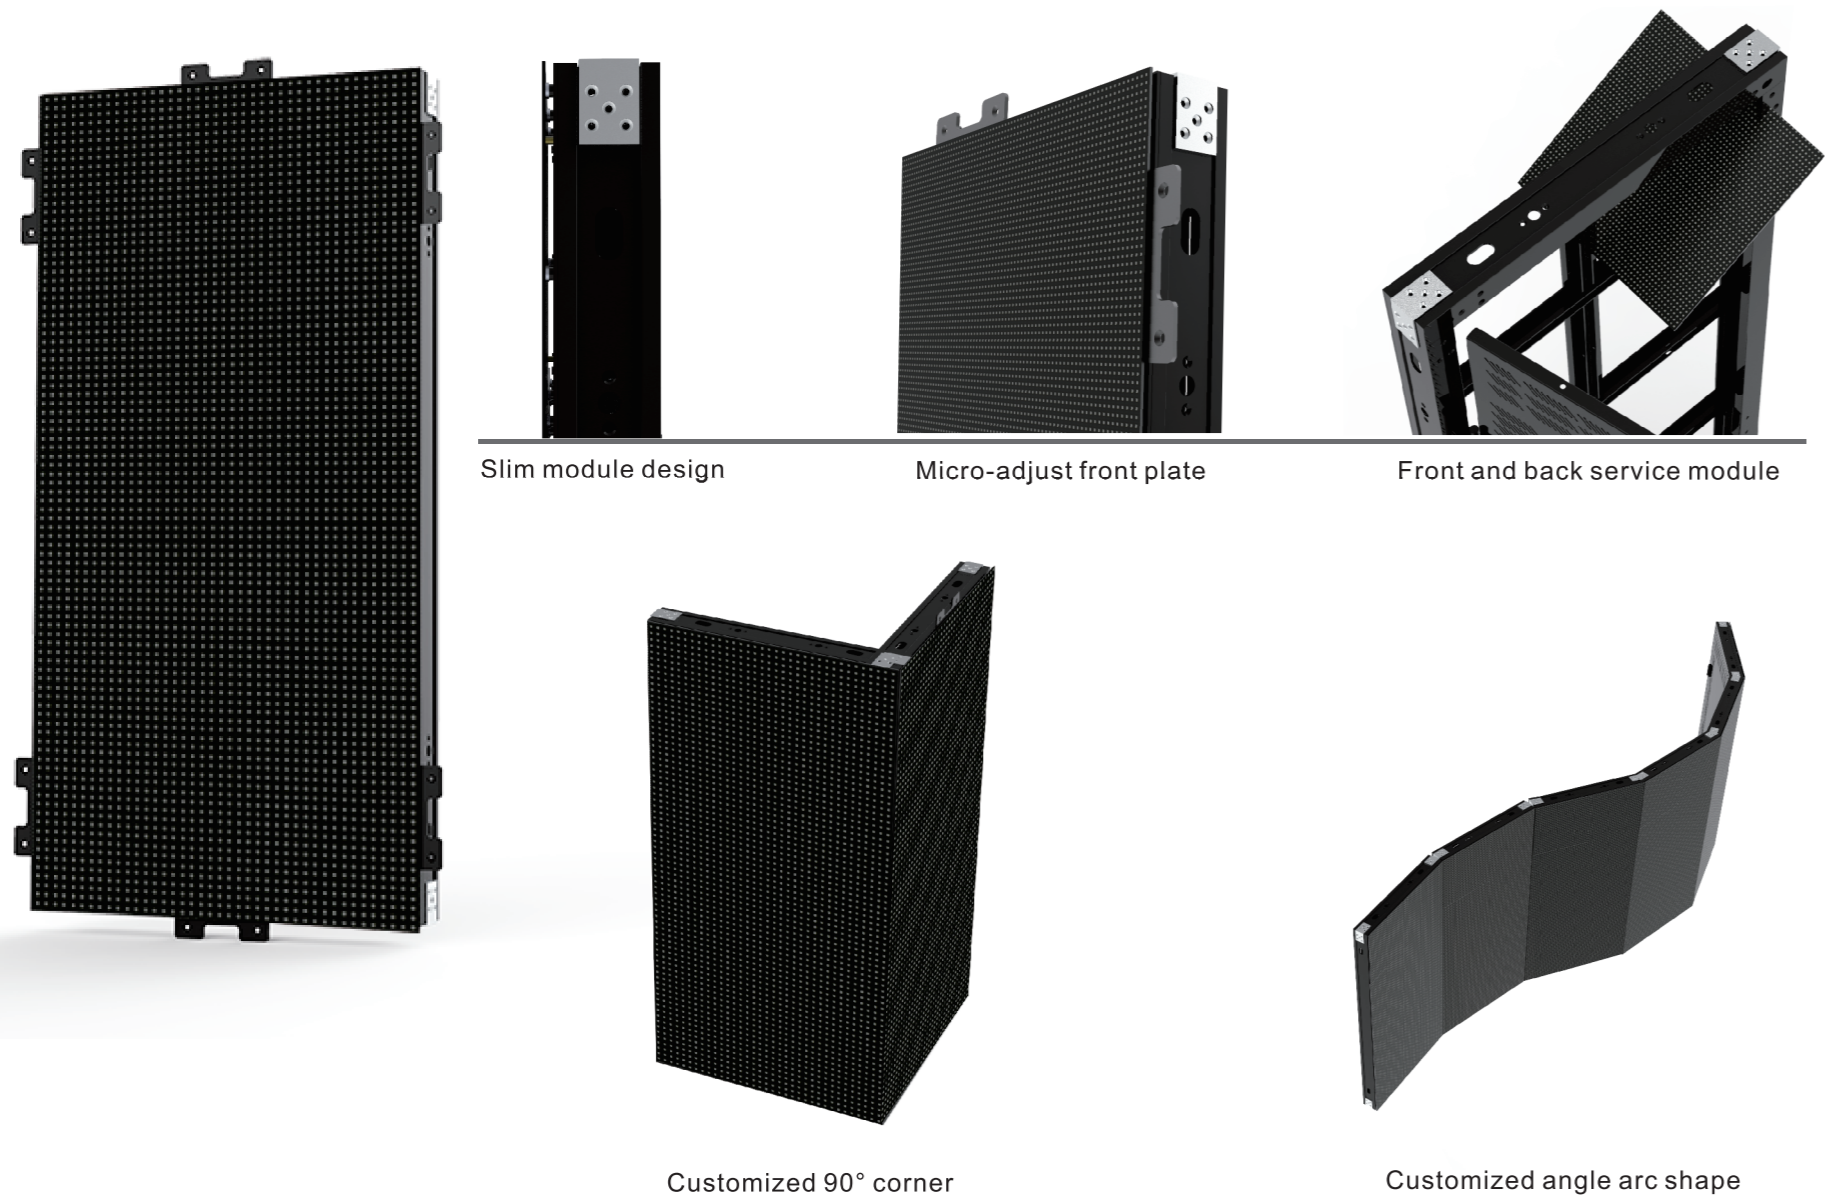

SPECIFICATIONS

Parameter	Unit	PF2	PF3	PF4	PF6
Pixel pitch	mm	2.976	3.906	4.807	6.25
Brightness	nits	1000			
Pixel configuration	R/G/B	SMD 3 in 1			
Colour temperature	deg.K	6500			
Viewing angle-Horizontal (50% brightness)	deg.	140 (+70/-70)			
Viewing angle-Vertical (50% brightness)	deg.	140 (+70/-70)			
Recommended minimum viewing distance	m	2.9	3.9	4.8	6.2
Panel width	mm	500			
Panel height	mm	1000			
Panel depth	mm	70			
Panel area	m ²	0.5			
Panel material		Aluminum			
Panel weight	Kg	14			
Ingress protection (front/back)	IP	30/30			
Pixel matrix per panel		168*336	128*256	104*208	80*160
Brightness control		255			
Digital processing	bit	13			
Frame rate	Hertz	50/60			
Display refresh rate	Hertz	1920			
Input voltage	VAC	100 ~ 240			
Input power frequency	Hertz	50 ~ 60			
Input power (Max.)	W/m ²	520	560	550	500
Input power (Avg.)	W/m ²	182	196	192	175
Operating temperature range	deg.C	-10 ~ +45			
Lifetime (50% brightness)	Hours	100,000			