

LCD Advertising Display

(FLOOR STAND)

ITATOUCH LCD Advertising Display is a cost-effective, high quality professional monitor display screen designed for use 24/7. Perfect for use as wayfinding or digital advertising display with stereo speakers and full high definition 1080P /2160P 4K.

This fantastic screen features quality, commercial grade components but retains a cost-effective price point.

Available in a selection of sizes, feature full HD displays.

Each digital advertising display has a built in "Plug and Play" system - simply upload your content onto a USB and insert this into the port on the screen.

The screens built in media player will automatically play the content on



SIZE RANGES: 32", 43", 49", 55", 65", 75", 86"

DIGITAL SIGNAGE

Product Highlights



HD Display

The original screen panel with A-class quality and 1920*1080P resolution, 4K 3840 *2160P UHD display option, offer people vivid presentation



Speaker

Embedded quality high simulation speakers into the multimedia display will give the users and audiences a cinematic audio-visual experience



Split Screens

Insert picture and playback modes, multiple screens (2/4 screens), the user can make the split screens per the actual advertising requirements



Cloud Management

The user can manage the advertising content via the server(Laptop, desk PC ..etc) LAN network to update the video and audio for the terminal display



Timer

The digital signage system can set the playing time, automatically manage the display time, and support 24 /7 working



Various interfaces

The advertising display built-in Android OS / PC Windows OS, which has USB, RJ45, and HDMI (option), allows the user to connect with other devices



Play Loop

Support files of video & Audios looping



Wide viewing angle

Excellent visual angle, up to 178 degrees.

Rotated | Portable | Landscape | Touch Screen (Option)



SPECIFICATIONS:

LCD Panel

Model#	HT-43D Floor Stand
Sizes	43"
Screen Panel Type	1800*599*460mm
Display Area	914.184(H)529.416(V)
Resolution	1920*1080
Display Rate	16:9
Brightness (type)	3000:1
Contrast	300cd/m2
Reviewing Angle	8ms (typ)
Colorful	16.7M
Response time	178°/178°
Speaker	5W,8Ω

Android Solutions (Standard)

Android board	RK3288 (Standard) RK3568 /RK3399
Android OS	Android 7.1 OS (Standard)
Android CPU	64-bit 4 cores, main frequency 1.5GHZ
Flash Nandi	8GB (Standard) /16GB /32 GB
RAM DDR	1GB (Standard) / 2GB /4GB
WIFI	Wi-Fi 2.4G, 802.11 1x1 BGN+BT
Internet	1*10/100M Ethernet
Interfaces	USB, TF, RJ45, HDMI In (Option)
Playing	APP publishing program in English Card read play
Feature	Support all format files of Videos & Audios, loop,Tming, split screens (2/4 screens), subtitles

Power

Power Supply	AC100V to AC240V
Consumption (standby)	≤1W
Consumption (max)	60W

Physical

Frame Color	Sliver / Black Color
Shell Materials	Aluminum frame drawing process metal backside and base stand
Dimension- Body Pack	1950*800*190mm
Dimension- Base Pack	780*500*60mm
Weight	55KG

Environments

Temperature	Working : 0°C to 40°C ; Storage :-20°C to 55°C;
Humidity	Working:10%-90% RH , Storage: 10%~95%RH
Working Time	24/7 hours working



PC Solutions (Optional)

Mainboard	X86 advertising mainboard
Processor	Intel I3, I5, I7 CPU
Memory	4GB / 8GB DDR3 /DDR4
Storage	128GB / 256GB SSD / HDD
WIFI	WIFI 2.4G, 802.11 1x1 BGN+BT
LAN	1*10/100 /1000M Ethernet
OS	Window 10 /11 OS (copy version)
Mainboard Port	HDMI, USB, RJ45

Touch Screen (Optional)

Technolgy	Infrared touch screen Optional: Capacitive Touch screen
Surface Protection	4mm tempered glass Anti-glared glass option

What's in the carton

Powe Cable	x1, 1.5m length
Remote Control	x1, English language
LCD Display	x1, plastic bag with foam inside
Base	x1

Certificate

CE	EMC, LVD, RED test
ROHS	Safety test
ISO	ISO9001 Quality Management
FCC	FCC Document

SPECIFICATIONS:

LCD Panel

Model# HT-50D Floor Stand

Sizes	50"
Screen Panel Type	1850*671.9*460mm
Display Area	1073.78(H)x604(V)
Resolution	1920*1080
Display Rate	16:9
Brightness (type)	3000:1
Contrast	300cd/m2
Reviewing Angle	6ms (typ)
Colorful	8bit 16.7M
Response time	178°/178°
Speaker	10W,8Ω

Android Solutions (Standard)

Android Board	RK3288 (Standard) RK3568 /RK3399
Android OS	Android 7.1 OS (Standard)
Android CPU	64-bit 4 cores, main frequency 1.5GHZ
Flash Nandi	8GB (Standard) /16GB /32 GB
RAM DDR	1GB (Standard) / 2GB /4GB
WIFI	Wi-Fi 2.4G, 802.11 1x1 BGN+BT
Internet	1*10/100M Ethernet
Interfaces	USB, TF, RJ45, HDMI In (Option)
Playing	APP publishing program in English Card read play
Feature	Support all format files of Videos & Audios, loop,Tming, split screens (2/4 screens), subtitles

Power


Power Supply	AC100V to AC240V
Consumption (standby)	≤1W
Consumption (max)	80W

Physical

Frame Color	Sliver / Black Color
Shell Materials	Aluminum frame drawing process metal backside and base stand
Dimension- Body Pack	1950*800*220mm
Dimension- Base Pack	780*500*60mm
Weight	63KG

Environments

Temperature	Working : 0°C to 40°C ; Storage :-20°C to 55°C;
Humidity	Working:10%-90% RH , Storage: 10%~95%RH
Working Time	24/7 hours working

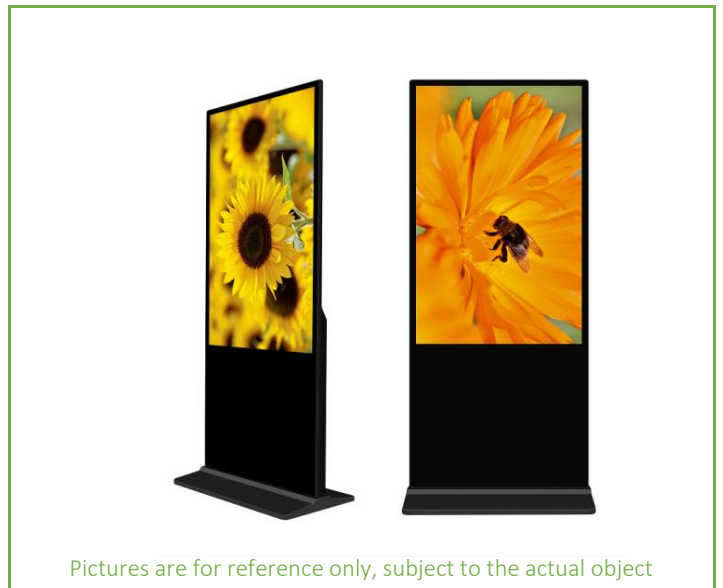

PC Solutions (Optional)

Mainboard	X86 advertising mainboard
Processor	Intel I3, I5, I7 CPU
Memory	4GB / 8GB DDR3 /DDR4
Storage	128GB / 256GB SSD / HDD
WIFI	WIFI 2.4G, 802.11 1x1 BGN+BT
LAN	1*10/100 /1000M Ethernet
OS	Window 10 /11 OS (copy version)
Mainboard Port	HDMI, USB, RJ45

Touch Screen (Optional)

Technolgy	Infrared touch screen Optional: Capacitive Touch screen
Surface Protection	4mm tempered glass Anti-glared glass option

What's in the carton

Powe Cable	x1, 1.5m length
Remote Control	x1, English language
LCD Display	x1, plastic bag with foam inside
Base	x1

Certificate

CE	EMC, LVD, RED test
ROHS	Safety test
ISO	ISO9001 Quality Management
FCC	FCC Document

SPECIFICATIONS:

LCD Panel

Model#HT-55D Floor Stand

Sizes	55"
Screen Panel Type	1900*755.9*460mm
Display Area	1209.6(H)x680.4(V)
Resolution	1920*1080
Display Rate	16:9
Brightness (type)	4000:1
Contrast	350cd/m2
Reviewing Angle	8ms (typ)
Colorful	16.7M
Response time	178°/178°
Speaker	10W,8Ω

Android Solutions (Standard)

Android board	RK3288 (Standard) RK3568 /RK3399
Android OS	Android 7.1 OS (Standard)
Android CPU	64-bit 4 cores, main frequency 1.5GHZ
Flash Nandi	8GB (Standard) /16GB /32 GB
RAM DDR	1GB (Standard) / 2GB /4GB
WIFI	Wi-Fi 2.4G, 802.11 1x1 BGN+BT
Internet	1*10/100M Ethernet
Interfaces	USB, TF, RJ45, HDMI In (Option)
Playing	APP publishing program in English Card read play
Feature	Support all format files of Videos & Audios, loop,Tming, split screens (2/4 screens), subtitles

Power

Power Supply	AC100V to AC240V
Consumption (standby)	≤1W
Consumption (max)	100W

Physical

Frame Color	Sliver / Black Color
Shell Materials	Aluminum frame drawing process metal backside and base stand
Dimension- Body Pack	1970*200*880mm
Dimension- Base Pack	850*500*60mm
Weight	75KG

Environments

Temperature	Working : 0°C to 40°C ; Storage :-20°C to 55°C;
Humidity	Working:10%-90% RH , Storage: 10%~95%RH
Working Time	24/7 hours working



PC Solutions (Optional)

Mainboard	X86 advertising mainboard
Processor	Intel I3, I5, I7 CPU
Memory	4GB / 8GB DDR3 /DDR4
Storage	128GB / 256GB SSD / HDD
WIFI	WIFI 2.4G, 802.11 1x1 BGN+BT
LAN	1*10/100 /1000M Ethernet
OS	Window 10 /11 OS (copy version)
Mainboard Port	HDMI, USB, RJ45

Touch Screen (Optional)

Technolgy	Infrared touch screen Optional: Capacitive Touch screen
Surface Protection	4mm tempered glass Anti-glared glass option

What's in the carton

Powe Cable	x1, 1.5m length
Remote Control	x1, English language
LCD Display	x1, plastic bag with foam inside
Base	x1

Certificate

CE	EMC, LVD, RED test
ROHS	Safety test
ISO	ISO9001 Quality Management
FCC	FCC Document

SPECIFICATIONS:

LCD Panel

Model# HT-65D Floor Stand

Sizes	65"
Screen Panel Type	2100*882.24*560mm
Display Area	1428.48(H)x803.52(V)
Resolution	1920*1080
Display Rate	16:9
Brightness (type)	4000:1
Contrast	360cd/m2
Reviewing Angle	8ms (typ)
Colorful	10bit 1.07B
Response time	178°/178°
Speaker	10W,8Ω

Android Solutions (Standard)

Android board	RK3288 (Standard) RK3568 /RK3399
Android OS	Android 7.1 OS (Standard)
Android CPU	64-bit 4 cores, main frequency 1.5GHZ
Flash Nandi	8GB (Standard) /16GB /32 GB
RAM DDR	1GB (Standard) / 2GB /4GB
WIFI	Wi-Fi 2.4G, 802.11 1x1 BGN+BT
Internet	1*10/100M Ethernet
Interfaces	USB, TF, RJ45, HDMI In (Option)
Playing	APP publishing program in English Card read play
Feature	Support all format files of Videos & Audios, loop,Tming, split screens (2/4 screens), subtitles

Power


Power Supply	AC100V to AC240V
Consumption (standby)	≤1W
Consumption (max)	150W

Physical

Frame Color	Sliver / Black Color
Shell Materials	Aluminum frame drawing process metal backside and base stand
Dimension- Body Pack	2200*1050*220mm
Dimension- Base Pack	980*500*60mm
Weight	83KG

Environments

Temperature	Working : 0°C to 40°C ; Storage :-20°C to 55°C;
Humidity	Working:10%-90% RH , Storage: 10%~95%RH
Working Time	24/7 hours working

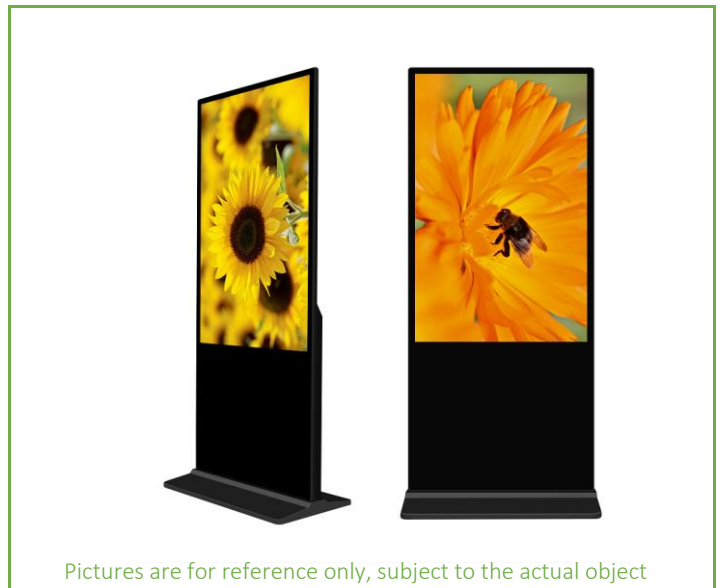

PC Solutions (Optional)

Mainboard	X86 advertising mainboard
Processor	Intel I3, I5, I7 CPU
Memory	4GB / 8GB DDR3 /DDR4
Storage	128GB / 256GB SSD / HDD
WIFI	WIFI 2.4G, 802.11 1x1 BGN+BT
LAN	1*10/100 /1000M Ethernet
OS	Window 10 /11 OS (copy version)
Mainboard Port	HDMI, USB, RJ45

Touch Screen (Optional)

Technolgy	Infrared touch screen Optional: Capacitive Touch screen
Surface Protection	4mm tempered glass Anti-glared glass option

What's in the carton

Powe Cable	x1, 1.5m length
Remote Control	x1, English language
LCD Display	x1, plastic bag with foam inside
Base	x1

Certificate

CE	EMC, LVD, RED test
ROHS	Safety test
ISO	ISO9001 Quality Management
FCC	FCC Document

WHY CHOOSE US ?

<p>Patient & Various Service</p>	<p>Directly factory offer with OEM, ODM, and SKD brand products Even 1pcs support also You will get a reply within 24~48 hours for any inquiries</p>
<p>Serious Quality Control</p>	<p>Original screen, Dust-free workshop assembling, 24~48 hours aging One by one inspection before the goods packing CE, ROHS, ISO, FCC Document certificate</p>
<p>Non-worried Shipment</p>	<p>We will assist you to arrange well transportation per your requirements. include shipping cost comparing check, wooden pallet settled, EXW, FCA, FOB, CFR CIF, DAP, DDP ... terms</p>
<p>Lifetime Technical Support</p>	<p>throughout the duration of your warranty and even after your warranty has expired we are here to support you. anytime we can provide free technical support by online, tel, and email.</p>
<p>Extended Warranty</p>	<p>Usually the interactive display come with 1 year commercial warranty as standard but if you want to extend this you can upgrade this to over a 3~5 year period at point of purchase.</p>
<p>Advanced Replacements</p>	<p>With along the bulks together, we will offer 1% spare parts to you in case any of the faulted parts. free charge replacement during warranty.</p>
<p>Witness of Global Clients</p>	<p>Our products and service have been gotten " Good Very Good " reviews by above 99% of clients from more than 30 countries and areas.</p>

THANK YOU

Inquiry: info@itatouch.com
 Website: <https://www.itatouch.com>
<https://www.smart-interactiveboard.com>



Let's grow together to be top suppliers in the industry!

We are willing to do more works to provide greater service and lower the cost of customers. Customer's benefits always come first. Be positive to work, willing to help, share the responsibility and achievement of our team