

YABO

Universal instruction manual



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.
Any questions, please feel free to contact us.

Specification:
Capacity: 3.7V/38400mAh 142.08Wh
Build-in battery: High quality lithium ion batteries (18650)
Input:
DC socket: 12.6V/2A
Output:
DC socket: 12V(12.6V-9V)/6A Max.
USB: 5V/2.4A Max.



PB120B1

Specification:
Capacity: 3.7V/38400mAh 142.08Wh
Build-in battery: High quality lithium ion batteries (18650)
Input:
DC socket: 12.6V/2A
Output:
DC socket: 12V(12.6V-9V)/6A Max.
USB: 5V/2.4A Max.
Wireless Charging
Output: 10W Max.



PB120B2

Operation guidance
1.Power ON and OFF
ON: Push switch to “I” position to make power on
OFF: Push switch to “O” position to make power off

2.Capacity display(Fuel Gauge): There are four power indicators, push switch to “I” position to make battery power on, power and capacity indicator lights will be lighted.

Capacity light	1 light on	2 light on	3 light on	4 light on
Capacity	25%	50%	75%	100%

How to charge the power bank
1.Connect AC-DC charger to power socket(100-240V available)
2.Connect power bank to AC-DC charger .
3.Push switch of power bank to “I” position to make charging circuit breaker.
4.The led indicator of AC-DC charger show RED means charging process going.
The led indicator of AC-DC charger show GREEN means charging process completed.
5.The led indicator of AC-DC charger will change from red to GREEN while the power bank be 95% of full charged.
6.Full charge time(estimated)=Capacity of power bank / output current of charge0r.

How to charge other devices(LED light /panel / strip, CCTV, IP CAMERA, AMPLIFIER, etc.)
1.Connect devices to power bank via lead wire of double male DC connector
2.Push switch of power bank to “I” position to make circuit breaker

Charging status
Charge power bank
Red indicator of AC-DC charger on: Charging process
Green indicator of AC-DC charger on: Power bank be full charged.

Accessories
1. PB120B1 or PB120B2 power bank
2. Power Cable
3.12.6V 2A Lithium ion battery charger


Cautions
1.The appliance should be taken to avoid exposure, percussion, water, and rain in the transport process, and make the battery positive and negative pole Insulation.
2.The appliance should be stored in a cool dry indoor storage, avoid flooding, rain.
3.No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
4.Do not immerse the appliance in water or become wet.
5.Do not modify or disassemble the appliance.
6.Do not reverse connect the input or output.
7.Be careful not to let the children touch appliance.
8.Do not put the appliance into the fire.
9.Please use qualified charger to charge the appliance.
10.Do not impact heavy and throw the appliance.
11.If the liquid of the appliance gets into your eyes, do not rub your eyes, rinse with water and consult doctors immediately.
12.If there is any abnormal or malfunction when charging please contact your dealer.

Contact us
If you have any questions about our products, [or you want to customize any other battery packs](#), please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: rome_jia@yabopower.com
Website: www.yabopower.com



Produced by TalentCell

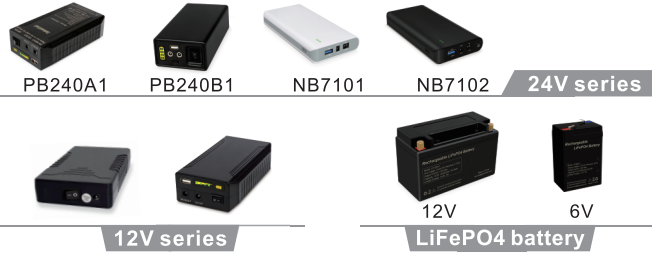

Customize batteries for your business, please feel free to contact us.

Dear Friend

Thanks for choosing TalentCell.
We are specialized in manufacturing rechargeable batteries and premium quality consumer electronic products and accessories since year of 2001.
We strive to offer the 100% satisfaction for all our customers, if you have any questions, please don't hesitate to contact us, we'll be sure to solve issues as soon as possible.

Best Regards! Have a nice day!
TalentCell Technology