


M300F Multi-parameter Analyzer



Automatic identification standard solution
Fast calibration and more accurate measurement

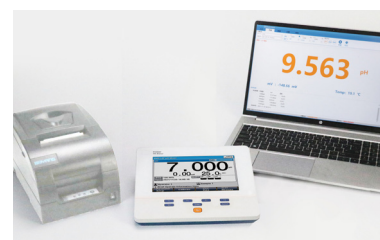

Multiple external devices available
PC, printer

GENERAL FEATURES

- High resolution LCD display, 5.7 inches.
- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic/Manual temperature compensation ensures accurate results.
- Auto-hold feature senses and locks the measurement endpoint.
- Data Storage 500 sets (GLP-compliant).
- Support for USB or RS-232 communication.
- Reset feature automatically resumes all settings back to factory default options.
- IP54 waterproof.

Ion

- 1-6 points calibration
- Selectable measurement unit, including $\mu\text{g/L}$, mg/L , g/L , mmol/L , pX , ppm , etc.
- Multi-measurement modes are supported, including Direct Reading mode, Standard Addition mode, Sample Addition mode and GRAN mode.
- Over 10 methods are built-in, including F^- , Cl^- , Br^- , I^- , NO_3^- , BF_4^- , NH_4^+ , K^+ , Na^+ , Ca^{2+} , Cu^{2+} , Pb^{2+} , Ag^+ and etc., user-defined method is supported.

pH

- 1-5 points calibration with Standard Recognition.
- Selectable pH buffer groups, including NIST, DIN, GB.
- Automatic electrode diagnosis with pH slope and offset display.

Conductivity

- 1-3 points calibration with Standard Recognition.
- Settable parameters, including cell constant, temperature compensation coefficient and TDS factor.
- Temperature compensation type (none, linear, pure water).

DO

- Support for air-saturated water or zero oxygen calibration.
- Auto barometric pressure compensation
- Manual Salinity Factor Correction
- Selectable pressure unit, including kPa, mbar, Torr, Atm.



Model		M300F
Parameters		pH/EC/ISE/DO/Temp. (mV/ORP/pX/Resistivity/TDS/Sal./DO Saturation)
pH	Range	-2.00 to 20.00pH
	Resolution	0.1, 0.01 pH
	Accuracy	± 0.01 pH
	Calibration Points	Up to 5
	Standard Customization	Yes
	Standard Recognition	NIST, GB and DIN buffers
	Slope Limit	Yes
mV	Range	-2000.0 to 2000.0 mV
	Resolution	0.1 mV
	Accuracy	± 0.3 mV or ± 0.1%
pX	Range	-2.00 to 20.00
	Resolution	0.1, 0.01 pX
	Accuracy	± 0.01 pX
	Calibration Points	Up to 5
ISE	Range	1E-9 to 9.999E9
	Unit	mol/L, mmol/L, g/L, mg/L, µ g/L, ppm
	Resolution	Up to 4 significant digits
	Accuracy	± 0.5%
	Calibration Points	Up to 5
Conductivity	Range	0.000 µ S/cm to 1000 mS/cm
	Resolution	0.001 µ S/cm minimum, various with range selection
	Accuracy	± 1.0% FS
	Reference Temperature	20, 25 °C
	Calibration Points	Up to 3
	Standard Recognition	84 µ S/cm, 1413 µ S/cm, 12.88mS/cm
Resistivity	Range	5.00 Ω ·cm~20.00 M Ω ·cm
	Resolution	0.01 Ω ·cm minimum
	Accuracy	± 1.0% FS
TDS	Range	0.00mg/L~300g/L
	Resolution	0.01mg/L minimum, various with range selection
	Accuracy	± 1.0% FS
Salinity	Range	(0.00~8.00)%
	Resolution	0.01%
	Accuracy	± 0.2%
Dissolved Oxygen Concentration	Range	0.00 to 20.00 mg/L
	Resolution	0.01mg/L
	Accuracy	± 0.1mg/L
	Calibration Points	Air-saturated water or zero point
	Barometric Compensation	Yes
Saturation	Manual Salinity Factor Correction	Yes
	Range	(0.0 to 200.0)%
	Resolution	0.1%
Temperature	Accuracy	± 2.0%
	Range	-5 to 110 °C, 23 to 230 °F
	Unit	°C, °F
	Resolution	0.1
Measurement	Accuracy	± 0.2
	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous
	Reading Prompts	Reading, Stable, Locked
Data management	Temp. Compensation	ATC, MTC
	Data Storage	500 results each
Inputs	GLP Features	Yes
	pH Electrode	BNC(Q9)
	DO with Temp. Probe	4-pin aviation connector
Outputs	Conductivity with Temp. Probe	5-pin aviation connector
	USB	USB 2.0 flash memory device, PC
Display options	RS 232	printer
	Backlight	Yes
	Auto Shutdown	1~60 min, off
	IP Rating	IP54
General	Date and Time	Yes
	Power	AC Adapter, 100-240V AC input, DC9V output
	Dimensions	242 × 195 × 68 mm
	Weight	900g (1.98 lb)