

封面

YABO PB6100

User manual



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.

Specification			
Model	PB6100	Capacity	22.2V 4500mAh 99.9Wh
Weight	Approx.600g	Size	154x58x52.9mm
Input	DC: 25.2V/5A Max. USB-C: PD 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max.		
Output	DC1(5521):22.2V(25.2-19V)/6A Max. DC2(4017):19.5V/3.5A 60W Max. USB-A:QC3.0 5V/3.4A 9V/2A 12V/1.5A 18W Max. USB-C: PD 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A 100W Max.		


Note: All inputs and outputs are plug and play and are not controlled by button switches.

USB-A OUT:
QC3.0 18W Max.

USB-C IN/OUT:
PD 100W Max.

DC2 OUT:
19.5V/3.5A 60W Max.
(DC4017)

DC1 IN: 25.2V/5A Max.
DC1 OUT: 22.2V(25.2-19V)/6A Max.
(DC5521)

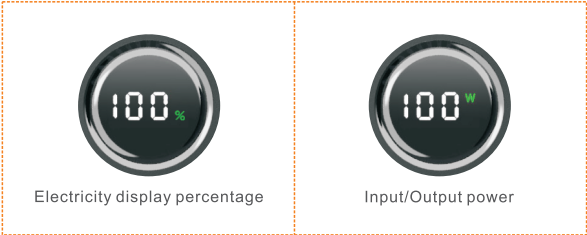

Press the switch button once, the display screen will light up, and it will automatically turn off when not working.



Discharge instructions

1. Connect the product output port to the device to complete the power supply.
2. When not in use, unplug the connector and stop the power supply.

Charge instructions

1. Insert the charger into the socket, and the charger indicator light will display green. Then connect the charger plug to the product input port. The charger indicator light turning red indicates charging is in progress.
2. When the charger indicator light turns green or blue, it indicates that the charging is complete or unloaded. (To ensure that it can be fully charged for an additional half hour). You can unplug the charger.
3. It is recommended to use the lithium battery charger provided by the original factory for charging.
4. It is prohibited to use chargers/adapters that do not match the battery specifications and models to charge the battery.

How to charge the power bank?

- 1: It can be charged via the DC port using the 25.2V AC/DC wall charger.
- 2: It can be charged via the USB-C port using the AC/DC wall charger.

The led indicator of AC-DC charger show RED means charging process going.
The led indicator of AC-DC charger show GREEN means charging process completed.
After the unit is fully charged, please remove the AC wall charger in time.

Cautions

1. The appliance should be taken to avoid exposure, percussion, water, and rain in the transport process, and make the battery positive and negative pole Insulation.
2. The appliance should be stored in a cool dry indoor storage, avoid flooding, rain.
3. No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
4. Do not immerse the appliance in water or become wet.
5. Do not modify or disassemble the appliance.
6. Do not reverse connect the input or output.
7. Be careful not to let the children touch appliance.
8. Do not put the appliance into the fire.
9. Please use qualified charger to charge the appliance.
10. Do not impact heavy and throw the appliance.
11. If the liquid of the appliance gets into your eyes, do not rub your eyes, rinse with water and consult doctors immediately.
12. If there is any abnormal or malfunction when charging please contact your dealer.

Contact us

For any inquiries or comments concerning our product or any quality-related issue with our product, [or you want to customize any other battery packs](#), please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: rome_jia@yabopower.com
Website: www.yabopower.com



Accessories

- 1PCS Power Bank
- 1PCS USB-C to USB-C Cable
- 1PCS DC5521 male to male
- 1PCS DC4017 male to DC5521 male



Power Bank



USB-C to USB-C Cable



DC5521 male to male



DC4017 male to DC5521 male

Dear Friend

Thanks for choosing TalentCell.
We are specialized in manufacturing rechargeable batteries and premium quality consumer electronic products and accessories since year of 2001.
We strive to offer the 100% satisfaction for all our customers, if you have any questions, please don't hesitate to contact us, we'll be sure to solve issues as soon as possible.

Best Regards! Have a nice day!
TalentCell Technology