



PB240A1/PB240B1/PB240B2

Universal instruction manual



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.

Specification:

Model: PB240A1
Capacity: 3.7V/22400mAh 82.88Wh

Input:

DC 5521: 29.4V/0.95A

Output:

DC 5521: 24V(29.4V-21V)/3A Max.

DC 5525: 12V/2A Max.

USB: 5V/2A Max.



PB240A1 Package Contents

- 1x PB240A1 Rechargeable Li-ion battery.
- 1x DC5525 male to DC5521 male power cable.
- 1x DC5521 1 female to 2 male power splitter cable.
- 1x 29.4V 0.95AAC/DC charger.

Specification:

Model: PB240B1	Model: PB240B2
Capacity: 3.7V/42980mAh 159Wh	Capacity: 3.7V/35000mAh 129.5Wh

Input:


DC 5521: 29.4V/0.95A

Output:

DC 5521: 24V(29.4V-21V)/5A Max.

DC 4017: 12V/2.5A Max.

USB: 5V/2.4A Max.

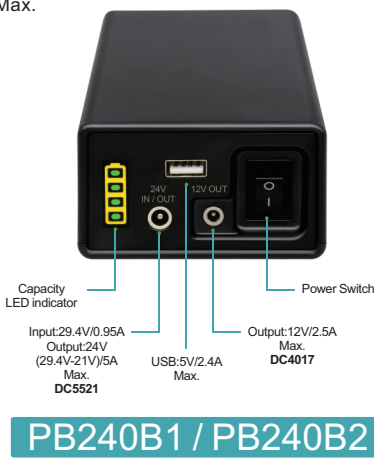

PB240B1/PB240B2 Package Contents

- 1x Rechargeable Li-ion battery.
- 1x DC5521 male to male power cable
- 1x DC4017 male to DC5521 male power cable
- 1x 29.4V 0.95AAC/DC charger.

Warning: Please confirm your device voltage before you use this battery. Low voltage devices can't be plugged into the high voltage output port, otherwise, it might damage your equipment.

Operation guidance

- 1.Power ON and OFF
ON: Push switch to “I” position to make power on
OFF: Push switch to “O” position to make power off

2.Capacity display(Fuel Gauge): There are four power indicators, push switch to “I” position to make battery power on, power and capacity indicator lights will be lighted.

Capacity light	1 light on	2 light on	3 light on	4 light on
Capacity	25%	50%	75%	100%

How to charge the power bank

- 1.Connect AC/DC charger to power socket(100-240V available).
- 2.**Turn on the battery switch to position “I”. Please be sure to turn on the switch first before plug to the AC/DC charger.**
- 3.Connect power bank to AC/DC charger.
- 4.The led indicator of AC/DC charger show RED means charging process going. The led indicator of AC/DC charger show GREEN means charging process completed or charging circuit is open, please check if you push switch of power bank to “I” position.
- 5.The led indicator of AC/DC charger will change from red to GREEN while the power bank be 95% of full charged.
- 6.Push switch of power bank to “O” (OFF) position to make circuit open to prevent electric consumption of led indicator.
- 7.Full charge time(estimated)=Capacity of power bank / output current of charger

Cautions

- 1.The appliance should be taken to avoid exposure, percussion, water, and rain in the transport process, and make the battery positive and negative pole Insulation.
- 2.The appliance should be stored in a cool dry indoor storage, avoid flooding, rain.
- 3.No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
- 4.Do not immerse the appliance in water or become wet.
- 5.Do not modify or disassemble the appliance.
- 6.Do not reverse connect the input or output.
- 7.Be careful not to let the children touch appliance.
- 8.Do not put the appliance into the fire.
- 9.Please use qualified charger to charge the appliance.
- 10.Do not impact heavy and throw the appliance.
- 11.If the liquid of the appliance gets into your eyes, do not rub your eyes, rinse with water and consult doctors immediately.
- 12.If there is any abnormal or malfunction when charging please contact your dealer.

Contact us

For any inquiries or comments concerning our product or any quality-related issue with our product, [or you want to customize any other battery packs](#), please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: rome_jia@yabopower.com

Website: www.yabopower.com



Other accessories

24V power cord DC5521 to DC7406

Note: this power cord is not included in the packaging, you need to purchase it separately.



If you want to use our 24V batteries to power for the Airsense 10, you can choose order this 24V power cord in addition.

ASIN: B07RFH6JQJ

If you have any questions, please feel free to contact us.

Dear Friend

Thanks for choosing TalentCell.
We are specialized in manufacturing rechargeable batteries and premium quality consumer electronic products and accessories since year of 2001.
We strive to offer the 100% satisfaction for all our customers. if you have any questions, please don't hesitate to contact us, we'll be sure to solve issues as soon as possible.

Best Regards! Have a nice day!
TalentCell Technology