

12 APP BATTERY

WIRELESS WATERPROOF

12*18W 6IN1 RGBAW UV BATTERY POWERD & WIRELESS



USER INSTRUCTION MANUAL

Thank you for purchasing the APP par from our company. Every product has been well tested and has shipped in perfect operating condition. When receiving our products carefully check the shipping cartoon for damage that may have happen during transport. In case of the damage inspect the fixture for the damages or missing accessories necessary to operate. If parts are missing or fixture has been damage please report this by Product.

Caution

Do not attempt any repairs yourself. Doing so will void your manufacturer's warranty. In the unlikely event your unit may require service please contact us

Warning

To prevent or reduce the risk of the electrical shock or fire, do not expose this unit to any moisture. Please read this manual carefully to familiarize yourself with basic operations of this unit

Safety precautions

1. Do not expose this unit to , wet moisture, explosive
2. Before plugging the power be sure local power outlets matches with the required voltage of the unit
3. Do not remove the cover under the circumstance in case you are not qualified to do so
4. Never connect the power when cover is removed
5. Never use this unit if it becomes damaged
6. Never connect this unit to any if dimmer and / or power pack
7. If the unit will not be used for the long time , disconnect it from the power supply
8. Always mount this unit safe and stable and make sure the area will have proper ventilation. Take care this unit will not be mounted in areas close to heat sources such as lighting fixtures, amplifiers, heat registers, stoves and radiators
9. Always contact us in case you have any doubts

General Instruction

Crux is a battery powered and wireless Dmx intelligent RGBAW UV color light. User can control the light by using wireless Dmx transmitter or run at master and slave mode. Fixture it has 12 static color, user can set lights at static color mode without using the Dmx controller.

Set Up

Crux has used switching voltage power supply, User can use directly plug in any voltage from 90V-240V when charging or operating at charging mode. Battery it can be fully charged after 3-4 hours of charging, user can also operate the light while charging the battery. When User ready to operate the light or use in event or any places first user need to turn on the power switch. After on the Power switch user can start to set up light at wireless Dmx mode, wire Dmx mode, master and slave. Sound active mode, static color mode, auto mode, strobe, fade or test mode. There are 2 things must be remembered by user

1. Operate light at Dmx Mode: Always set the fixture from menu at "SI1 or SI2" mode, process; Press menu then press up/down key until appear "Slnd" press enter at "Slnd" choose SI1 or SI2 and press Enter, after some second light will be stay at "stby" means at standby mode to catch dmx signal, no matter its cable or wireless Dmx.

Note: when operate light at wireless Mode, make sure that signal switch is on, fixture is not too far from the wireless DMX

Transmitter, after on the signal switch wireless indicator bulb should show red color, once fixture starts to receive the signal this indicator bulb will show blipping green color led, some time if wireless signal indicator bulb shows other color then continually press black button below the led indicator bulb until it shows red color. Some manufacturers wireless transmitter it has different led bulb color signal, make sure with supplier which color indicates the transmitting signal and set same color at fixture's wireless signal indicator by pressing the black button(id code selector) of fixture, once both colors are the same wireless signal led it will start to blip green color, remember green color means its receiving signal from master unit or dmx controller.

1. Operate light without using Dmx controller or built in color or effects or strobe or fade or static color, sound active or master and slave: Always set the fixture from Menu at "Nast" mode, then user can go inside the "Shnd" and choose any built in effects such as sound active, static color, strobe, fade, Process;

Press menu then press up/down key until appear "Slnd" press enter at "Slnd" choose "nast" and press Enter then Press Up button choose "Shnd" then press enter, now user can choose any type of effect mode, sound for sound active mode, color for static color mode, StCo for strobe and Fade for built in effect types.

Examples:

1. Set light at sound active and stay at sound active mode

Press Menu then press up/down button until appear Slnd, press enter at Slnd, find nast by pressing up/down button then press enter, Press up button Shnd will appear at display then press enter now

you can see sound at display then press enter, after some second of pressing enter light it will start to work at sound active mode.

If you wish connect other light also at same mode without setting or slave mode, then Press Menu, find Slnd and press enter then choose Sl1 or Sl2 then press enter. Follow same process at all light you want to work at same mode, after some seconds light it will start to work same function as first light. You can connect the lights by Dmx cable or also can connect wirelessly. When connect wireless make sure signal switch it's on. This is function of master and slave .(App #. 1)

2. Set and stay at static color: Press Menu- Up/down button Slnd-enter- press up button- Shnd- Press enter- up button- colo- press enter- choose any color number from 1-12 and press enter after some seconds your choose color it will start. For link fixtures follow App #. 1.

3. Make own custom color and display: Press menu, Slnd- Press enter choose Nast- enter, press up button, find nanu put the value 1-255 on RGBAW each color and press up/down button find- shnd press enter- choose colo press enter and choose Co11 and press enter, after some second light it will start to project custom made color as per value of color you put.

APP Guideline

DMX CHANNEL

THIS APP Battery has 6,8, 10 DMX channel mode.

User can choose mode by menu, chnd and choose 6/8/10 DMX channel mode

channel	6ch	8CH	10CH
CH1	0-255 RED DIMMER	0-255 GENERAL DIMMER	0-255 GENERAL DIMMER
CH2	0-255GREEN DIMMER	0-9 close, 10-255strobe (slow to fast)	0-255 RED DIMMER
CH3	0-255Blue dimmer	0-255 RED DIMMER	0-255GREEN DIMMER
CH4	0-255White dimmer	0-255GREEN DIMMER	0-255Blue dimmer
CH5	0-255Amber dimmer	0-255Blue dimmer	0-255White dimmer
CH6	0-255UV dimmer	0-255White dimmer	0-255Amber dimmer
CH7		0-255Amber dimmer	0-255UV dimmer
CH8		0-255UV dimmer	0-9 close, 10-255strobe (slow to fast)

CH9			0-9close 10-50select color, 10CH select 32kinds static color 51-100color change, 10CHadjust speed 101-150color fade, 10CHadjust speed 151-200color jump, 10CHadjust speed 201-220color change sound control 221-240jump change sound 241-255strobe sound control
CH10			0-255 speed

Product Description

Power supply: AC110V-250V

Frequency: 50-60Hz

Light source: 12pcs 18W high brightness 6 in 1 leds

Lamp life: 6-10 ten thousand hrs

LED angle: 15/25/40 degree

Color: 16.7 million kinds of color change

Control channels: 6/10 CH

Waterproof: IP65

Control mode: DMX512, master/slave, auto, sound active, infrared control, phone App.


Automatic model (by function button) : color change, color strobe, color dimmer, color gradual change/color jump change

Operation menu: 4 digit digital LED display

size: 270*270*330mm

N.W: 5.5kg

MENU MAP

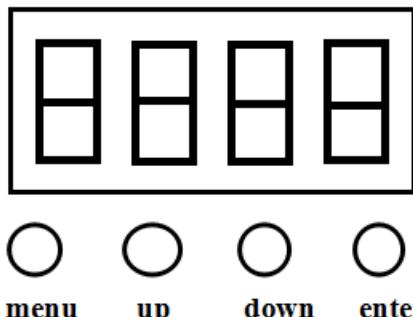

MODE	FUNCTION
A001 (A001—A512)	ADDRESS CODE
CHND (6CH/8CH/10CH)	CHANNEL MODE
CL01 (CL01—CL32)	32 Mixing color mode
CC01 (CC01—CC99)	Change color mode, ENTER key adjust speed SP01-99
EE01 (EE01—EE99)	jump color change mode, ENTER key adjust speed SP01-99
FF01 (FF01—FF99)	fade color change mode, ENTER key adjust speed SP01-99
ST01 (ST01—ST32)	strobe, ENTER key adjust speed SP01-99
SOU1 (SOU1/2/3/4)	Sound mode: SOU1 fade SOU2 jump color change SOU3 strobe SOU4 fade+jump change+strobe (ENTER key adjust sensitivity SE01-99)
NANU	R manual dimmer 0-255 G manual dimmer 0-255 B manual dimmer 0-255 W manual dimmer 0-255 Y manual dimmer 0-255 P manual dimmer 0-255
WIFI	Phone app mode ((Apple 5.0 or more and Android supported))
NDIN (CUR1/2/3/4)	4 Dimming curve (Square, straight, logarithmic, S-shaped)

	Press the "ENTER" key to adjust the curve delay on / off
2.4G(ON/OFF)	WIRELESS 2.4G ON/OFF
IRCL(ON/OFF)	REMOTE ON/OFF
POUR(ON/OFF)	KEY switch ON/OFF
LED(ON/OFF)	DISPLAY ON/OFF
T000(OFF/40-100)	Temperature display and power reduction temperature setting

Remarks:

- A. One-button power on / off function. After selecting the display function to "POWR" for confirmation, select the upper and lower keys to the "ON" state. Press the menu button to turn on the device and press the menu button to turn off the device.
- B. Hide the current regulation. In the A001 menu mode, press and hold the OK key for 5 seconds to automatically enter the current regulation function. Use the up and down keys to change the value. Press the OK key once to change the adjustment color (save the machine). Press the OK key frequently to change the on-line adjustment current (save the machine). The host will blink once when the host is saving. Just go back.
- C. When using mobile APP control software;

Step 1: Scan the QR code to download and install the software.

Step 2: Adjust the display function of the lamp to WIFI mode, press the button and wait, the display on the display will show "LXXX" .

Step 3: Open the main interface of the mobile phone, find the "Settings" icon and enter. Open the mobile WIFI and click to search for the WIFI name. After the search, find the relevant "LXXX" and connect.

Step 4: Find the control APP software on the main interface of the mobile phone again and open the connection successfully.

- D. This version supports two communication protocols, DMX512 and RDM (remote address code can be set)

