

LED-Lghts_TFT

Technical parameters

Voltage: AC90~240V Wide voltage range input


Channel: 4/12/44CH

Power supply: 300W

Operation:DMX512, Auto, Sound, Master-slave

Key Operation Instructions

1.Key Diagram:

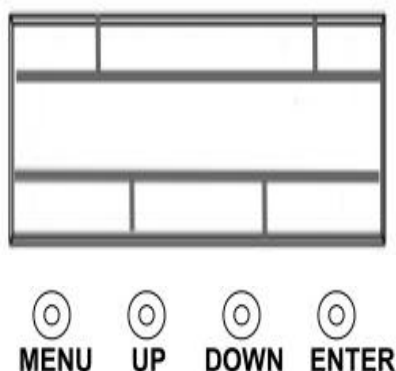

MENU: Back **UP:** Add **DOWN:** Dec **ENTER:** Confirm

2. Key Description

MENU Back: Press the back button to return to the previous screen.

UP Add: Pressing this key enables value addition and function selection, and long presses trigger continuous triggering.

DOWN Dec: Pressing this key enables value subtraction and function selection, and pressing and holding it continuously triggers.

ENTER Confirm: Press this key to save the currently set parameter function and enter the function page.

Main screen - Features

N0	Show	Functions and descriptions
1	中文	English and Chinese
2	12CH	4CH/12CH/44CH/Auto Mode displayed
3	○	Reverse theme switching
4	Man	Self-propelled menu mode
5	Set	parameter settings
6	Sys	Back office settings

12Channel Model(12CH)

CH	Display	Function
CH1	Dimmer	R、G、B、W dimmer : from dark to bright
CH2	R Dimmer	Dimmer- Dark to Bright
CH3	G Dimmer	Dimmer- Dark to Bright
CH4	B Dimmer	Dimmer- Dark to Bright
CH5	W Dimmer	Dimmer- Dark to Bright
CH6	Strobe	R、G、B、W strobe: from slow to fast
CH7	RGBW run code	1-30 type RGBWYP run code
CH8	RGBW run code speed	RGBW run code speed,From slow to fast 0-128:Forward;129-255:Reverse
CH9	R Background dimming	R Background dimming,From dark to bright
CH10	G Background dimming	G Background dimming,From dark to bright
CH11	B Background dimming	B Background dimming,From dark to bright
CH12	W Background dimming	W Background dimming,From dark to bright

4Channel Model(4CH)

CH	Display	Function
CH1	R Dimmer	Dimmer- Dark to Bright
CH2	G Dimmer	Dimmer- Dark to Bright
CH3	B Dimmer	Dimmer- Dark to Bright
CH4	W Dimmer	Dimmer- Dark to Bright

44Channel Model(44CH)

CH	Display	Function
CH1	R1 Dimmer	Dimmer- Dark to Bright
CH2	G1 Dimmer	Dimmer- Dark to Bright
CH3	B1 Dimmer	Dimmer- Dark to Bright
CH4	W1 Dimmer	Dimmer- Dark to Bright
...	...	...
CH41	R11 Dimmer	Dimmer- Dark to Bright
CH42	G11 Dimmer	Dimmer- Dark to Bright
CH43	B11 Dimmer	Dimmer- Dark to Bright
CH44	W11 Dimmer	Dimmer- Dark to Bright

4. Man mode

NO	Show	Numerical	Functions and descriptions
1	Color		(Manual dimming)
2	Auto	01-30	Functional effects.
3	Speed	01-99	Effect speed adjustment.
4	STROBE	01-99	Strobe, slow to fast speed.
5	SOUND	1-99	Set voice control sensitivity

4. Manual dimming

NO	Show	Numerical	Functions and descriptions
1	Red	000-255	dark to light.
2	GREEN	000-255	dark to light.

3	BLUE	000-255	dark to light.
4	WHITE	000-255	dark to light.

5. Set

NO	Show	Numerical	Functions and descriptions
1	Address	000-512	512 Address Code
2	Channel	4CH/12/44CH	Channel selection
3	Menu_Mode	DMX/AUTO	Run Mode
4	Dimming	001-30	Linear dimming
5	Dmx-Keep	NO/OFF	Signal Hold
6	T-Temo	50-85	Temperature protection
7	T-Power	050-250	Power Protection
8	T-Fan	45-70	Fan speed control

4. Man mode

NO	Show	Numerical	Functions and descriptions
1	Color_ALL		(Power Regulation)
2	Color_S	01-06	Functional effects.
3	CH_Mode	CH-R/L	Effect speed adjustment.
4	Versions	M1.0	version (Current Sending)

4. Power Regulation

NO	Show	Numerical	Functions and descriptions
1	LED_SW	NO/OFF	Switchgear
2	Set_Red	000-255	dark to light.
3	Set_GREEN	000-255	dark to light.
4	Set_BLUE	000-255	dark to light.
5	Set_WHITE	000-255	dark to light.