



JINDASIGNAL

www.jindasignal.com

Product Name : Hybrid Coupler ,4 in 4 out 694-2700MHz

Product Model : HC0727-4I4O-OMH

The Hybrid Coupler is a high-performance passive RF device primarily used for signal combining, splitting, and power distribution in wireless communication systems. Featuring a high-quality cavity structure and precision manufacturing processes, it offers extremely low intermodulation distortion and excellent electrical performance. It is widely applied in base stations, repeaters, and In-Building distribution systems, supporting efficient transmission and distribution of multi-band and multi-system signals. The Hybrid Coupler excels in low intermodulation (PIM), low insertion loss, and high isolation, making it suitable for wireless network optimization, In-Building Distribution Systems (IBS), Base Transceiver Stations (BTS), Distributed Antenna Systems (DAS), and Antenna Feeder System (AFS).

Product Description

- Wide frequency band: 694 to 2700MHz
- High power capacity and isolation
- Low insertion loss
- Extremely low PIM
- Supporting indoor and outdoor applications



Specifications

Frequency range	694-2700MHz
Insertion Loss	6.1dB ± 1.0dB
Isolation	≥25dB
VSWR	≤1.25 dB
Inter-modulation IM3	≤-160dBc REV (2x43 dBm)
RF Input Power, CW	300W
Impedance	50Ω
RF Connector Type	4.3-10 Female
Net Weight	≤2.2 kg
Dimensions (exclude connectors)	294 x 105 x 35 mm /11.57x4.13x1.38 inch
Operating temperature	-35°C to +70°C
Relative humidity	0~95%
Color	Grey (ML440c)
RoHS	Comply with RoHS
Ingress protection	IP67

Shenzhen Jindasignal Technology Co., Ltd.

Address: 3F, 1st Block, West Industrial Area, No. 29 Makan Rd., Xili Town, Nanshan District, Shenzhen City China

Phone: +86-755-86564010


Web site: www.jindasignal.com




JINDASIGNAL

www.jindasignal.com

Block Diagram

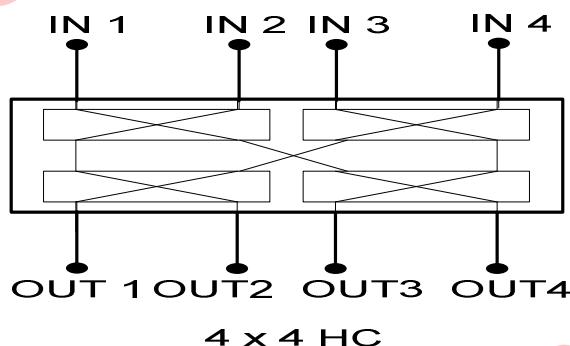

Outline Drawing

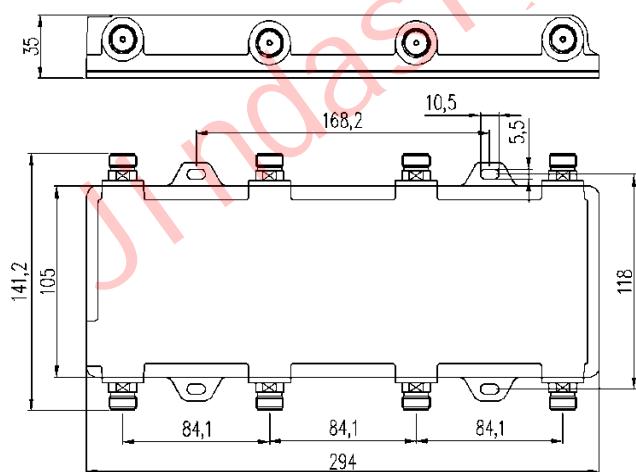

Shenzhen Jindasignal Technology Co., Ltd.

Address: 3F, 1st Block, West Industrial Area, No. 29 Makan Rd., Xili Town, Nanshan District, Shenzhen City China

Phone: +86-755-86564010

Web site: www.jindasignal.com