

# 底面

# 封面

### Cautions

- 1.No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
- 2.Do not modify or disassemble the appliance.
- 3.Do not reverse connect the input or output.
- 4.Be careful not to let the children touch appliance.
- 5.Do not put the appliance into the fire.
- 6.Please use qualified charger to charge the appliance.
- 7.Do not impact heavy and throw the appliance.
- 8.If there is any abnormal or malfunction when charging please contact your dealer.

### Contact us

For any inquiries or comments concerning our product or any quality-related issue with our product, [or you want to customize any other battery packs](#), please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: [rome\\_jia@yabopower.com](mailto:rome_jia@yabopower.com)

Website: [www.yabopower.com](http://www.yabopower.com)



**YABO WP3100**

User manual **IP67 Waterproof**



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.

# 内页


### Specification:

- Model:** WP3100
- Capacity:** 11.1V 2600mAh 29Wh
- Input:** DC 5521: 12.6V/3A Max.
- Output:**DC (5521): 12.6V-9V (Nominal: 11.1 volt) /3A Max
- Size:** 53.7\*49.4\*98mm / 2.1\*2.0\*3.9in
- Weight:** 210g/0.46Lb.



The switch only controls the indicator light, it doesn't control the battery charging/discharging.

### Detail

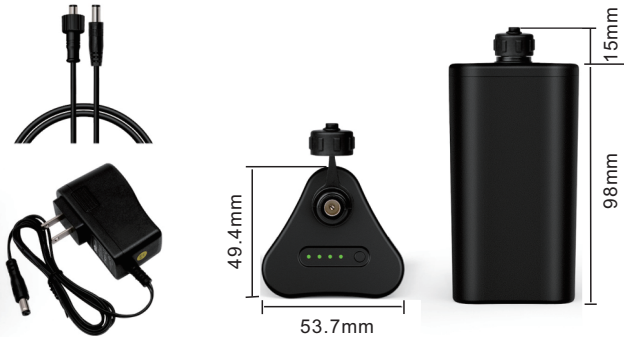

### WP3100 Package Contents:

1x WP3100 Power bank | 1x DC5521 male power cable | 1x 12.6V 1A AC/DC charger.

### How to charge the power bank (Full charge time: about 2.5 hours)

- 1. Connect the AC-DC charger to the power socket(100-240V available)
- 2. Connect the power bank to the AC-DC charger .
- 3. The LED indicator of the AC-DC charger showing **Red** means the charging process is working. The LED indicator of the AC-DC charger showing **Green** means the charging process has completed or the charging circuit is open.
- 4. The LED indicator of the AC-DC charger will change from **Red** to **Green** while the power bank is charged with 95% of the full.
- 5. After the unit is fully charged, please remove the AC wall charger in time.
- 6. Full charge time (estimated)=Capacity of power bank / output current of charger



Red-Charging



Green-Full

The indicator of the battery will not light during charging. You need to check the led indicator of the AC/DC charger. It show Red means charging process going. It show Green means charging process completed, the battery be fully charged.

### Application:

Compatible with LED strip light products, CCTV Camera, IP Camera, Telescopes, LED Panel, Amplifier, Modem, Car DVR, Speaker, mobile phone, breast pump portable and most 12V devices, etc.