

Cautions

1. The appliance should be taken to avoid exposure, percussion, water, and rain in the transport process, and make the battery positive and negative pole Insulation.
2. The appliance should be stored in a cool dry indoor storage, avoid flooding, rain.
3. No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
4. Do not immerse the appliance in water or become wet.
5. Do not modify or disassemble the appliance.
6. Do not reverse connect the input or output.
7. Be careful not to let the children touch appliance.
8. Do not put the appliance into the fire.
9. Please use qualified charger to charge the appliance.
10. Do not impact heavy and throw the appliance.
11. If the liquid of the appliance gets into your eyes, do not rub your eyes, rinse with water and consult doctors immediately.
12. If there is any abnormal or malfunction when charging please contact your dealer.

Contact us

For any inquiries or comments concerning our product or any quality-related issue with our product, or you want to customize any other battery packs, please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: rome_jia@yabopower.com

Website: www.yabopower.com



YABO NB3200

User manual



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.

Specification:

Capacity: 10.8V 6400mAh(19200mAh at 3.6V) 69.12Wh

Input:

USB-C: 30W Max.

DC(5521): 12.6V/4.5A Max.


Output:

USB-A: 20W Max.

USB-C: 5V/3A 9V/3A 12V/2.5A 15V/2A 20V/1.5A 30W Max.

DC(5521): 10.8V(12.6-9V)/4.5A Max.


Size: 160x82x22mm

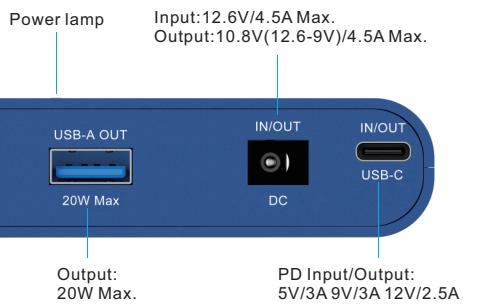

Two charging methods

1. DC port: AC/DC12.6V charger

2. USB-C port: USB wall charger

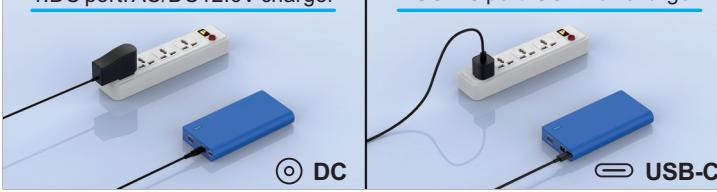

How to charge the power bank?

- 1: It can be charged via the DC port using the 12.6V AC/DC wall charger.
- 2: It can be charged via the USB-C port using the AC/DC wall charger.
- 3: It can be charged via the DC port using the 18V Solar panels.

The led indicator of AC-DC charger show RED means charging process going. The led indicator of AC-DC charger show GREEN means charging process completed. After the unit is fully charged, please remove the AC wall charger in time.

Package content:

- 1x Power Bank
- 1x 12.6V/1A AC/DC Charger
- 1x USB-C to USB-C Cable
- 1x DC5521 1 female to 2 male power splitter Cable



12.6V/1A AC/DC Charger



DC5521 female to 2 male Cable