
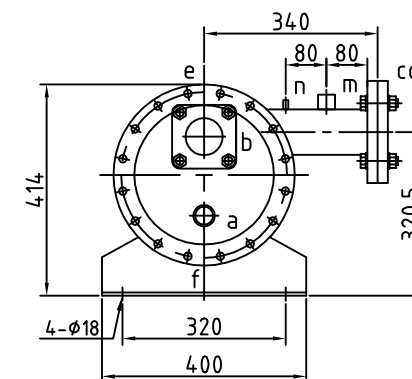


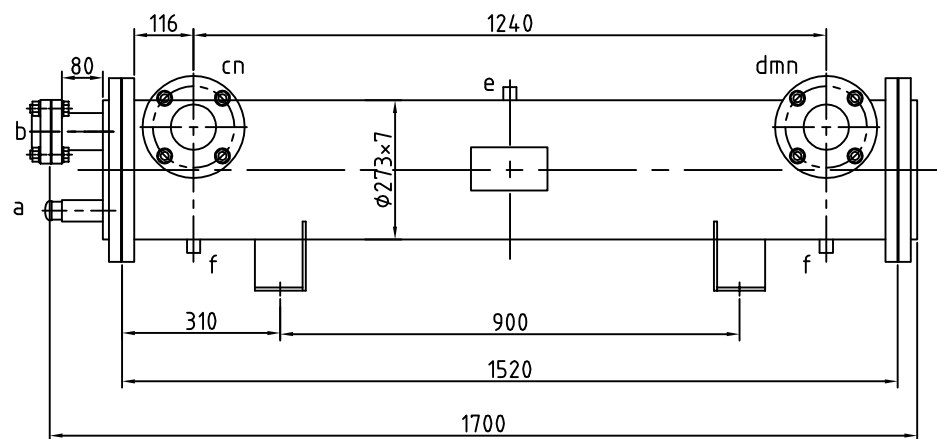

Specification (规格): 50RT
 Shell material (外壳): carbon steel (碳钢)
 Tube material (管): copper (铜)
 Water connection (水接头): flanged (法兰式)
 Refrigerant (制冷剂): R22
 Evaporator temp (蒸发温度): 2 c
 Condenser temp (冷凝温度): 40c
 Sub cool (过冷): 5 k
 Super heat (过热): 5 k
 Water inlet (进水温度): 12
 Water outlet (出水温度): 7
 Fouling factor (污垢系数): 0.000044 m2k/w

Technical Characteristics

Item	Shell Side	Tube Side
Operating Pressure (MPa)	1.0	1.4
Design Pressure (MPa)	1.0	2.4
Test Pressure (MPa)	1.25	2.76
Working Temperature (℃)	38	38
Design Temperature (℃)	38	38
Working Medium	H ₂ O	R22/R410a
Heat Transfer Area (m ²)	13.5	
Heat Transfer Area (m ²)	Q235-B, T2	
Corrosion allowance (mm)	1	
Pressure Vessel Class	/	
Design Life (Years)	20	

Symbol	Nominal Diameter	Connections	Usage
a	φ35	Brazing	Refrigerant Inlet
b	φ67	RF	Refrigerant Outlet
c	DN65	RF	Water Inlet
d	DN65	RF	Water Outlet
e	Rc1/2	Screw	Gas Outlet
f	Rc3/8	Screw	Gas Outlet
m	Rc1	Screw	Water Flow Meter Seat
n	Rc3/8(φ14×2)	Screw	Temperature test

						Plans			Dry Type Evaporator
标记	处数	分区	更改文件号	签名	年月日				
设计			标准化			阶段标记	重量	比例	JDEV176A10(50RT)
校核									
审核									
工艺			批准			共 张 第 张			