

IV2Q12160T4Z – 1200V 160mΩ Gen2 Automotive SiC MOSFET


Features

- 2nd Generation SiC MOSFET Technology with +18V gate drive
- High blocking voltage with low on-resistance
- High speed switching with low capacitance
- High operating junction temperature capability
- Very fast and robust intrinsic body diode
- Kelvin gate input easing driver circuit design


Applications

- Automotive DC/DC converters
- On-board chargers
- Solar inverters
- Motor drivers
- Automotive compressor inverters
- Switch mode power supplies


Outline:

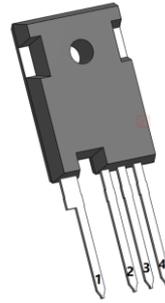

TO247-4

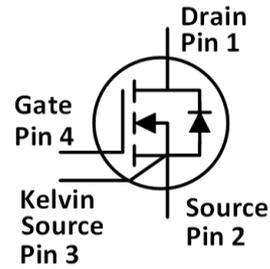

Marking Diagram:

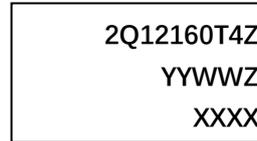

2Q12160T4Z= Specific Device Code
 YY = Year
 WW = Work Week
 Z = Assembly Location
 XXXX = Lot Traceability

Absolute Maximum Ratings (T_c=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
V _{DS}	Drain-Source voltage	1200	V	V _{GS} =0V, I _D =100μA	
V _{GSmax} (DC)	Maximum DC voltage	-5 to 20	V	Static (DC)	
V _{GSmax} (Spike)	Maximum spike voltage	-10 to 23	V	Duty cycle<1%, and pulse width<200ns	
V _{GSon}	Recommended turn-on voltage	18±0.5	V		
V _{GSoff}	Recommended turn-off voltage	-3.5 to -2	V		
I _D	Drain current (continuous)	19	A	V _{GS} =18V, T _c =25°C	Fig. 23
		14	A	V _{GS} =18V, T _c =100°C	
I _{DM}	Drain current (pulsed)	47	A	Pulse width limited by SOA	Fig. 26
P _{TOT}	Total power dissipation	136	W	T _c =25°C	Fig. 24
T _{stg}	Storage temperature range	-55 to 175	°C		
T _J	Operating junction temperature	-55 to 175	°C		
T _L	Solder Temperature	260	°C	wave soldering only allowed at leads, 1.6mm from case for 10 s	

Thermal Data

Symbol	Parameter	Value	Unit	Note
R _{θ(j-c)}	Thermal Resistance from Junction to Case	1.1	°C/W	Fig. 25

Electrical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value			Unit	Test Conditions	Note
		Min.	Typ.	Max.			
I_{DSS}	Zero gate voltage drain current		5	100	μA	$V_{DS}=1200\text{V}, V_{GS}=0\text{V}$	
I_{GSS}	Gate leakage current			± 100	nA	$V_{DS}=0\text{V}, V_{GS}=-5\sim 20\text{V}$	
V_{TH}	Gate threshold voltage	1.8	2.8	4.5	V	$V_{GS}=V_{DS}, I_D=2\text{mA}$	Fig. 8, 9
			2.1			$V_{GS}=V_{DS}, I_D=2\text{mA}$ @ $T_J=175^\circ\text{C}$	
R_{ON}	Static drain-source on-resistance		160	208	$\text{m}\Omega$	$V_{GS}=18\text{V}, I_D=5\text{A}$ @ $T_J=25^\circ\text{C}$	Fig. 4, 5, 6, 7
			285		$\text{m}\Omega$	$V_{GS}=18\text{V}, I_D=5\text{A}$ @ $T_J=175^\circ\text{C}$	
C_{iss}	Input capacitance		575		pF	$V_{DS}=800\text{V}, V_{GS}=0\text{V},$ $f=1\text{MHz}, V_{AC}=25\text{mV}$	Fig. 16
C_{oss}	Output capacitance		34		pF		
C_{rss}	Reverse transfer capacitance		2.3		pF		
E_{oss}	C_{oss} stored energy		14		μJ		Fig. 17
Q_g	Total gate charge		29		nC	$V_{DS}=800\text{V}, I_D=10\text{A},$ $V_{GS}=-3$ to 18V	Fig. 18
Q_{gs}	Gate-source charge		6.6		nC		
Q_{gd}	Gate-drain charge		14.4		nC		
R_g	Gate input resistance		10		Ω	$f=1\text{MHz}$	
E_{ON}	Turn-on switching energy		115		μJ	$V_{DS}=800\text{V}, I_D=10\text{A},$ $V_{GS}=-3.5$ to $18\text{V},$ $R_{G(ext)}=3.3\Omega,$ $L=300\mu\text{H}$ $T_J=25^\circ\text{C}$	Fig. 19, 20
E_{OFF}	Turn-off switching energy		22		μJ		
$t_{d(on)}$	Turn-on delay time		2.5		ns		
t_r	Rise time		9.5				
$t_{d(off)}$	Turn-off delay time		7.3				
t_f	Fall time		11.0				
E_{ON}	Turn-on switching energy		194		μJ	$V_{DS}=800\text{V}, I_D=10\text{A},$ $V_{GS}=-3.5$ to $18\text{V},$ $R_{G(ext)}=3.3\Omega, L=300\mu\text{H}$ $T_J=175^\circ\text{C}$	Fig. 22
E_{OFF}	Turn-off switching energy		19		μJ		

Reverse Diode Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value			Unit	Test Conditions	Note
		Min.	Typ.	Max.			
V_{SD}	Diode forward voltage		4.0		V	$I_{SD}=5\text{A}, V_{GS}=0\text{V}$	Fig. 10, 11, 12
			3.7		V	$I_{SD}=5\text{A}, V_{GS}=0\text{V},$ $T_J=175^\circ\text{C}$	
t_{rr}	Reverse recovery time		26		ns	$V_{GS}=-3.5\text{V}/+18\text{V},$ $I_{SD}=10\text{A}, V_R=800\text{V},$ $R_{G(ext)}=15\Omega, L=300\mu\text{H}$ $di/dt=3000\text{A}/\mu\text{s}$	
Q_{rr}	Reverse recovery charge		92		nC		
I_{RRM}	Peak reverse recovery current		10.6		A		

Typical Performance (curves)

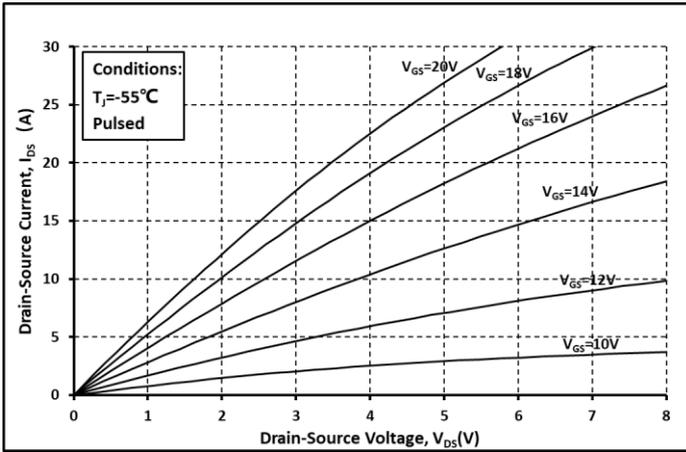


Fig. 1 Output Curve @ $T_j = -55^\circ\text{C}$

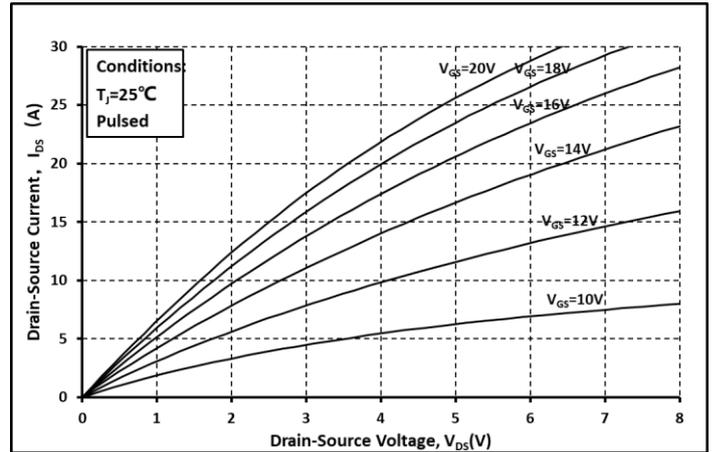


Fig. 2 Output Curve @ $T_j = 25^\circ\text{C}$

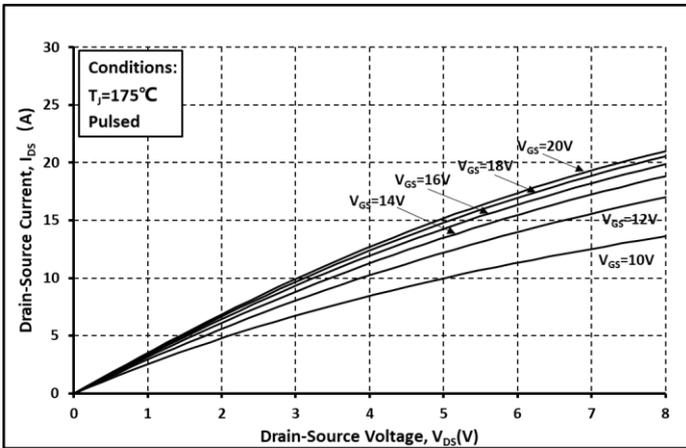


Fig. 3 Output Curve @ $T_j = 175^\circ\text{C}$

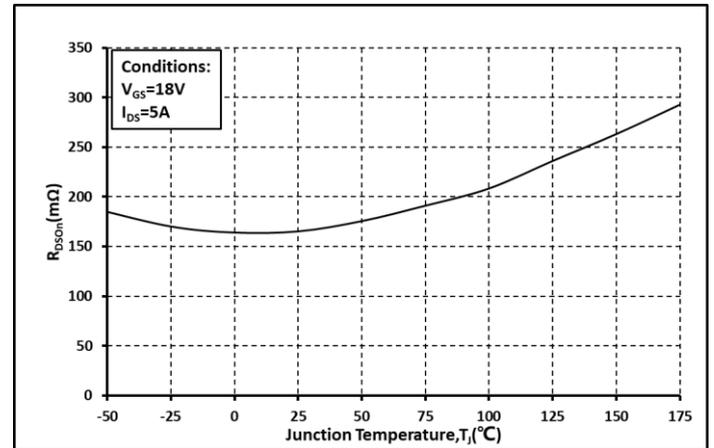


Fig. 4 R_{on} vs. Temperature

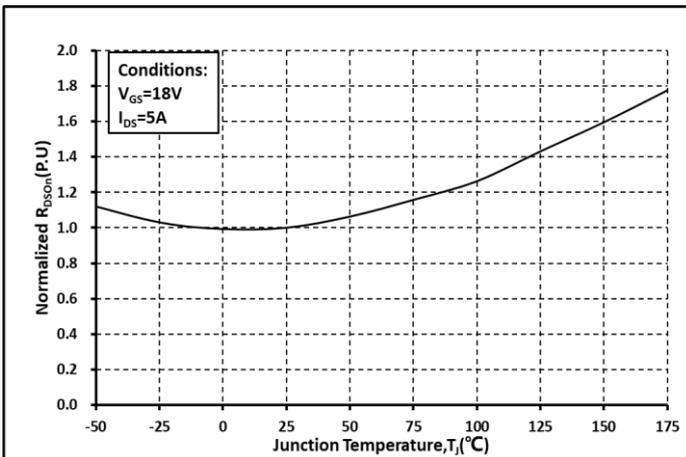


Fig. 5 Normalized R_{on} vs. Temperature

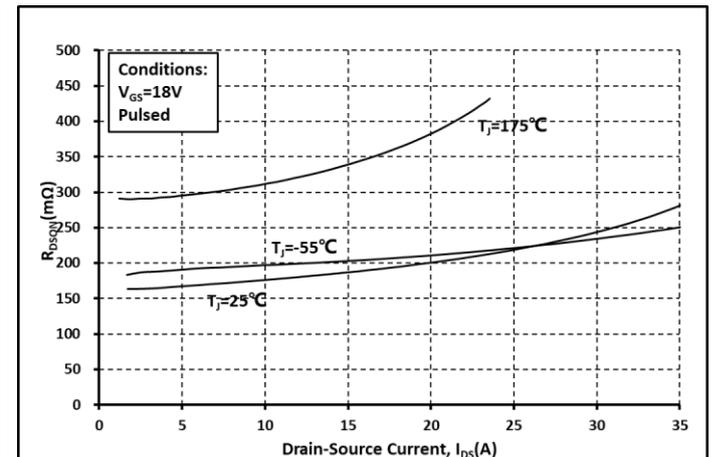


Fig. 6 R_{on} vs. I_{DS} @ Various Temperature

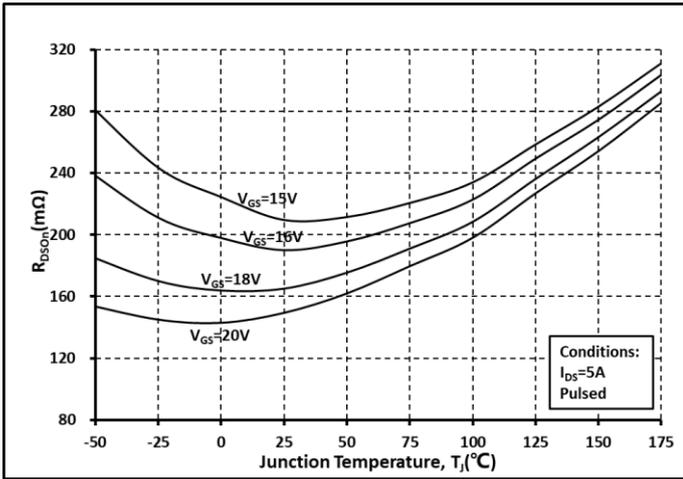


Fig. 7 Ron vs. Temperature @ Various V_{GS}

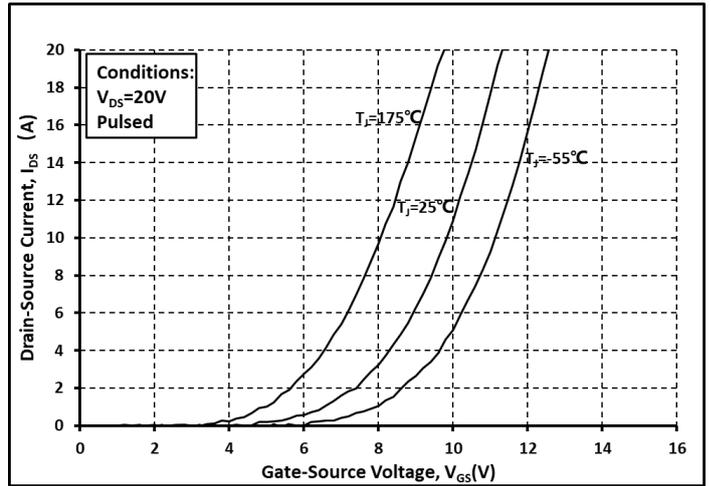


Fig. 8 Transfer Curves @ Various Temperature

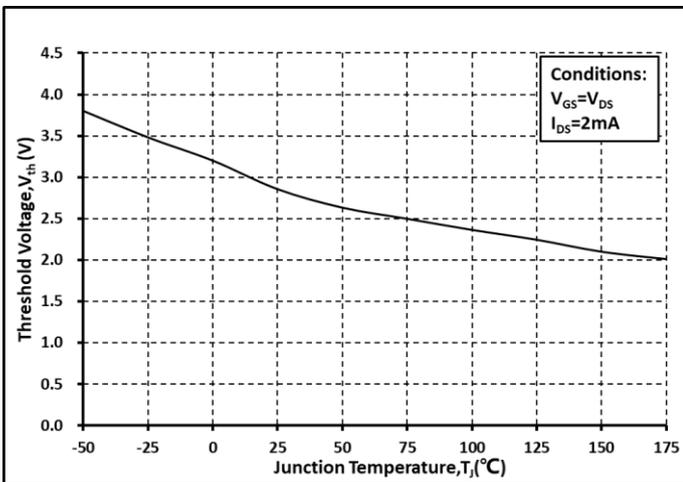


Fig. 9 Threshold Voltage vs. Temperature

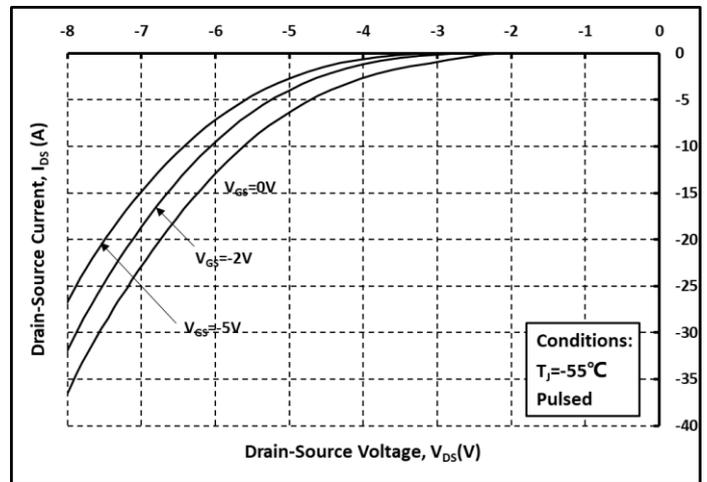


Fig. 10 Body Diode curves @ $T_J = -55^\circ\text{C}$

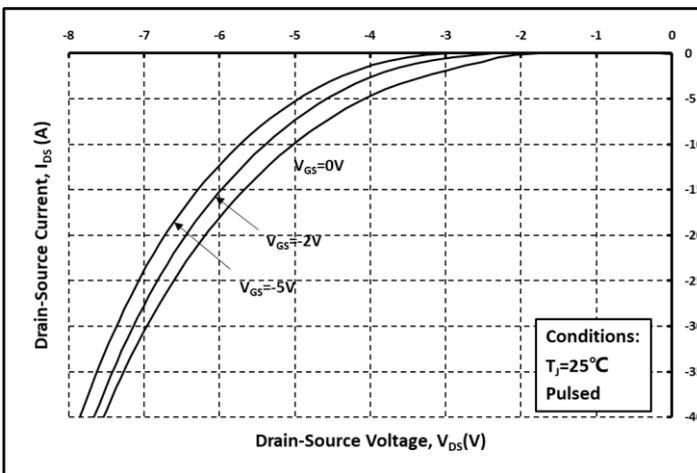


Fig. 11 Body Diode curves @ $T_J = 25^\circ\text{C}$

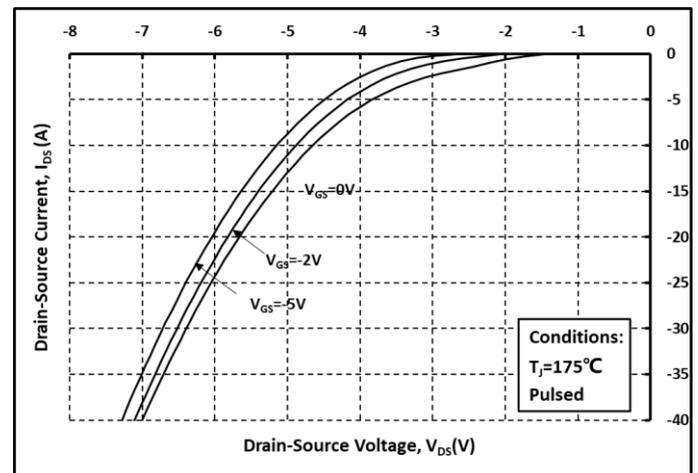


Fig. 12 Body Diode curves @ $T_J = 175^\circ\text{C}$

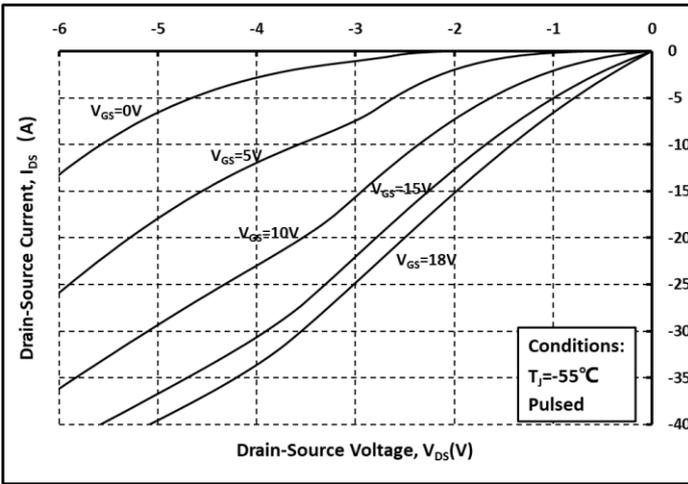


Fig. 13 3rd Quadrant curves @ $T_j = -55^\circ\text{C}$

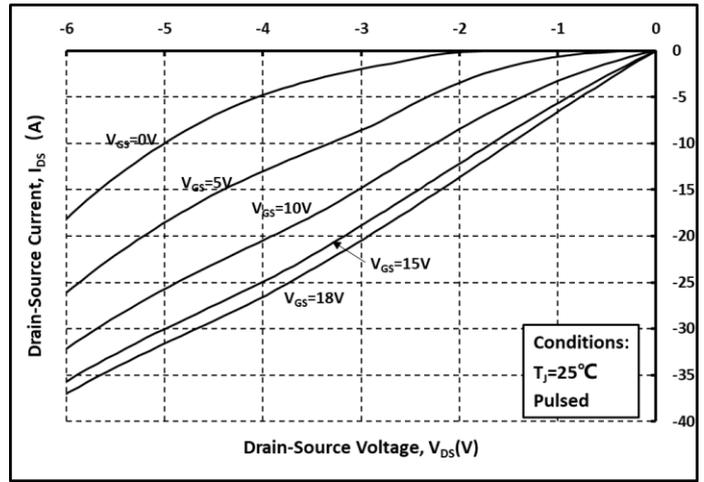


Fig. 14 3rd Quadrant curves @ $T_j = 25^\circ\text{C}$

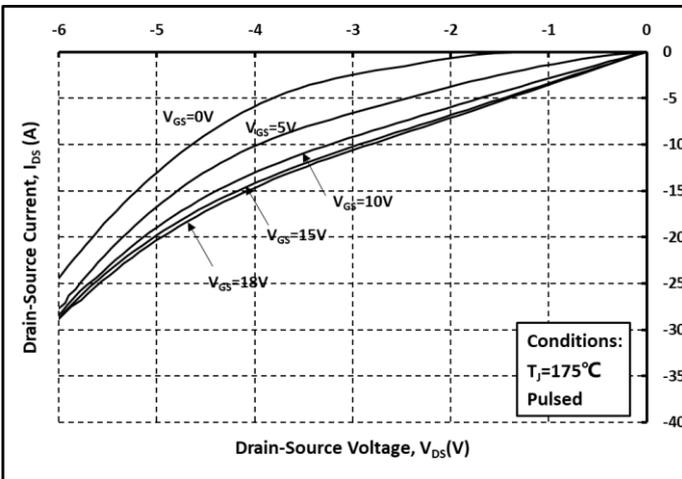


Fig. 15 3rd Quadrant curves @ $T_j = 175^\circ\text{C}$

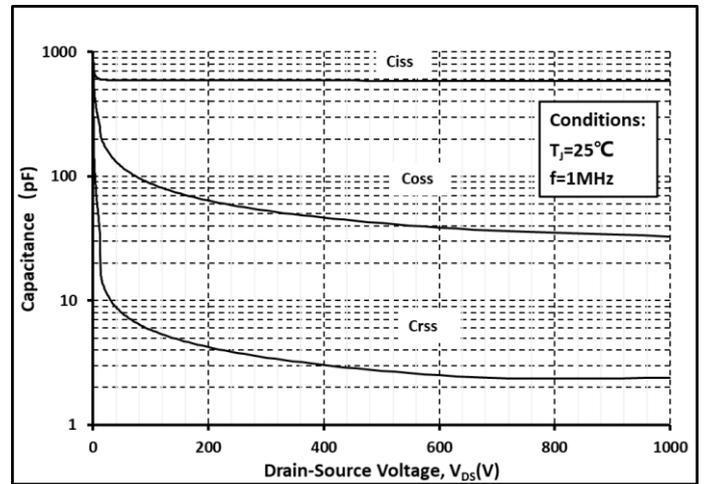


Fig. 16 Capacitance vs. V_{DS}

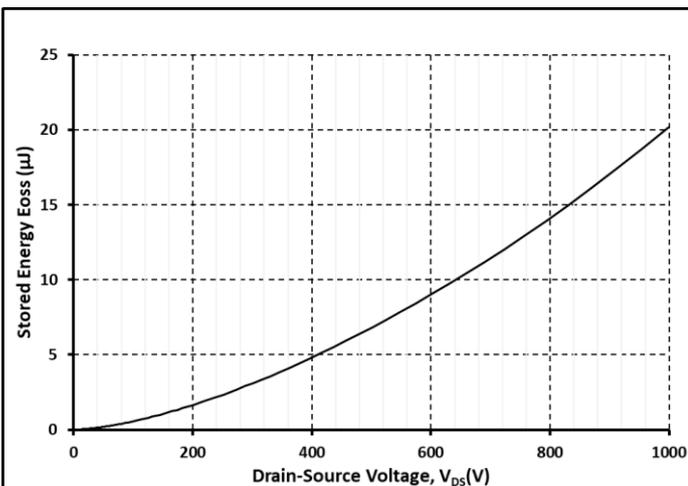


Fig. 17 Output Capacitor Stored Energy

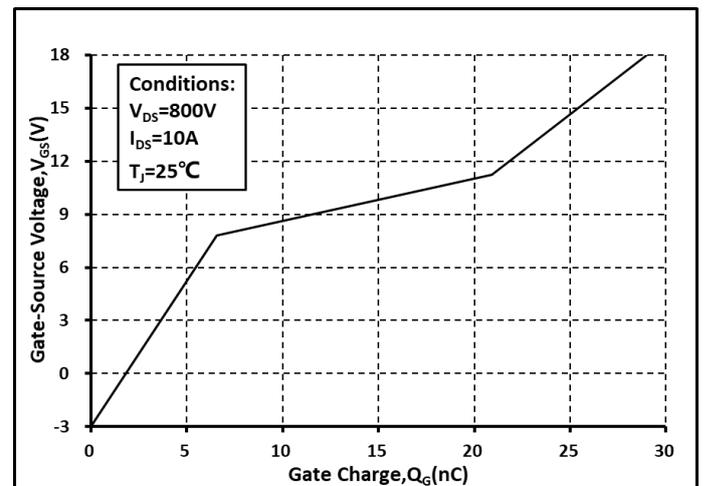


Fig. 18 Gate Charge Characteristics

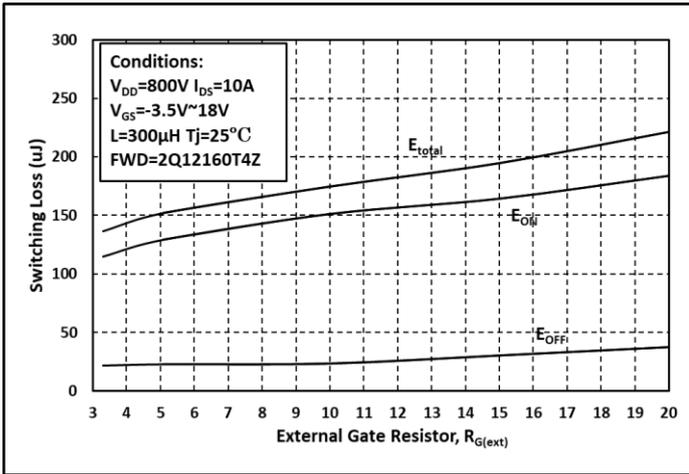


Fig. 19 Switching Energy vs. $R_{G(ext)}$

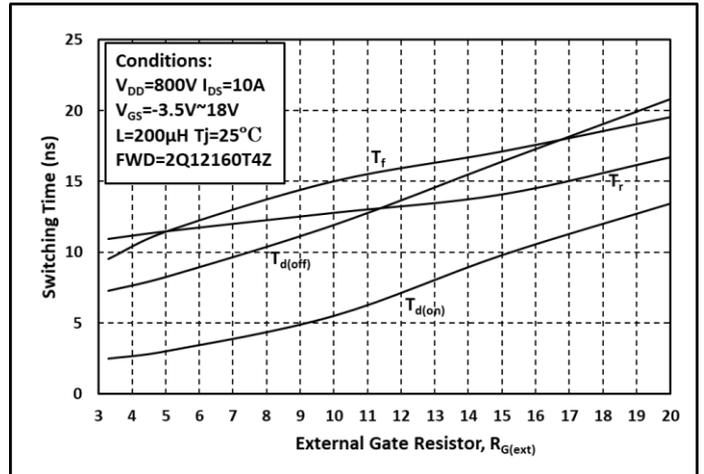


Fig. 20 Switching Times vs. $R_{G(ext)}$

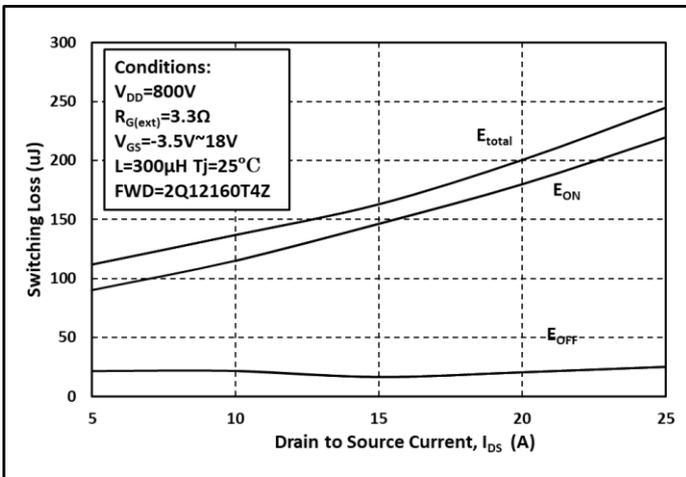


Fig. 21 Switching Energy vs. I_{DS}

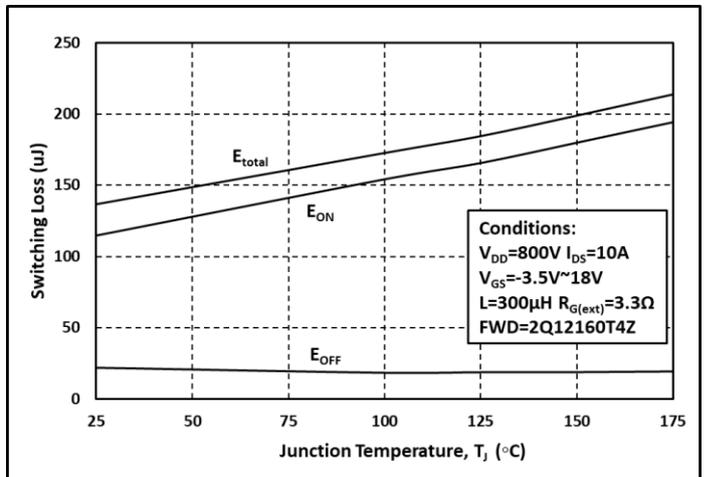


Fig. 22 Switching Energy vs. Temperature

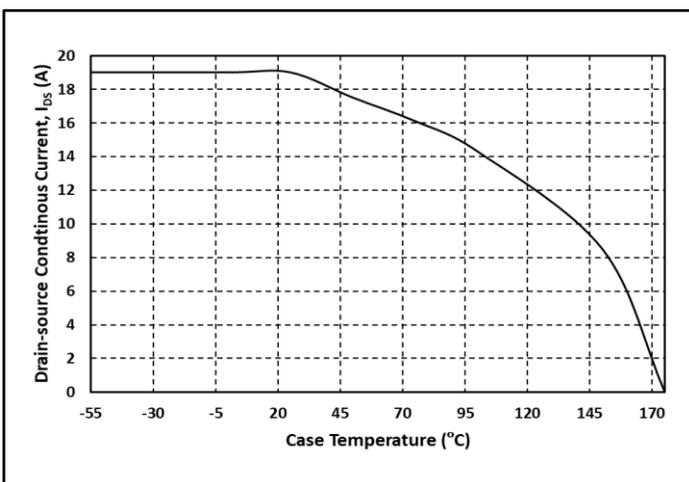


Fig. 23 Continuous Drain Current vs. Case Temperature

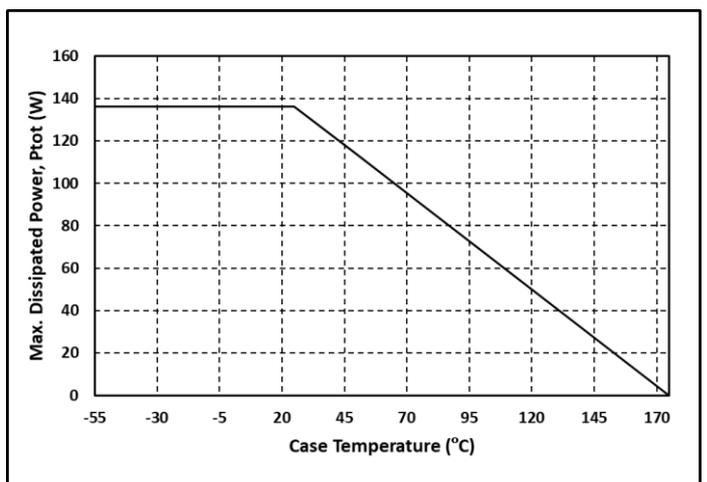


Fig. 24 Max. Power Dissipation Derating vs. Case Temperature

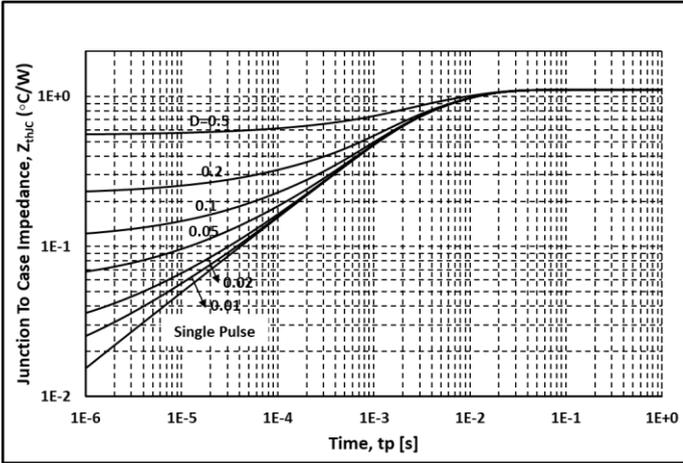


Fig. 25 Thermal impedance




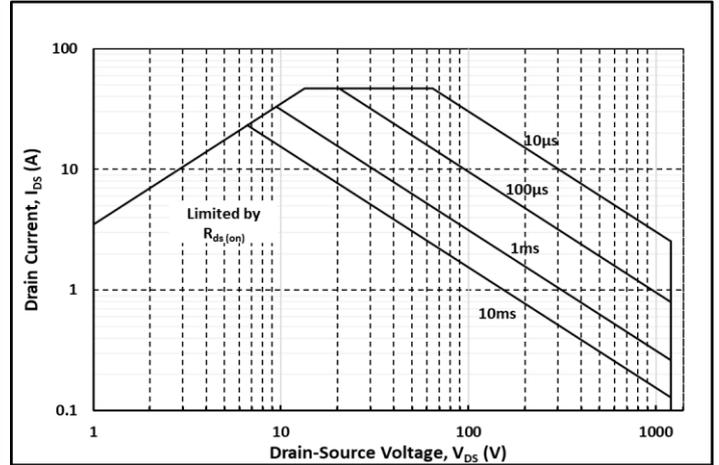


Fig. 26 Safe Operating Area


Package Dimensions

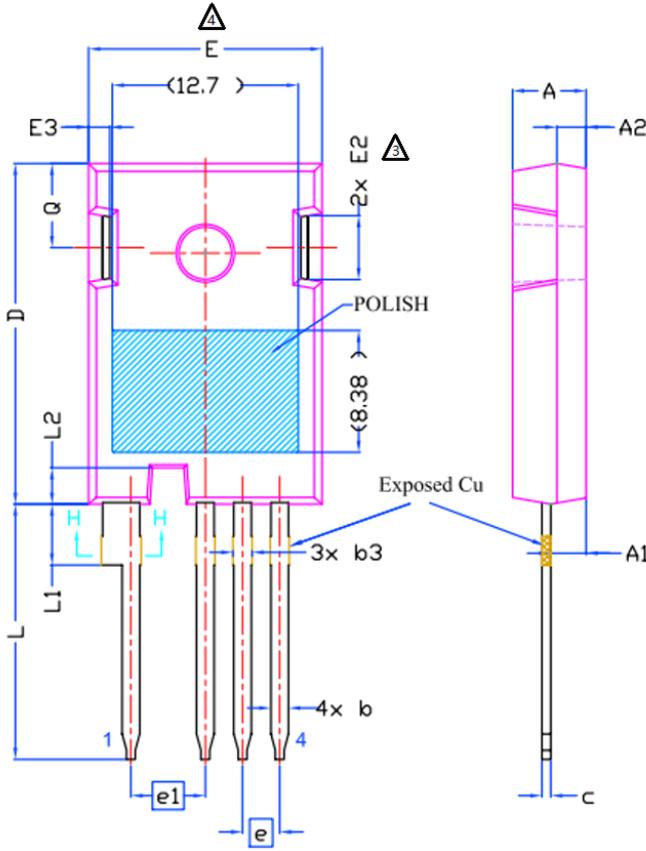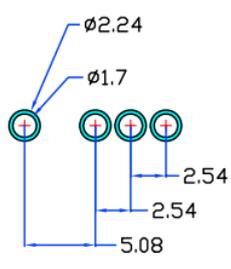

Dimensions In Millimeters		
SYMBOL	MIN.	MAX.
A	4.83	5.21
A1	2.29	2.54
A2	1.91	2.16
b	1.07	1.33
b'	1.07	1.28
b1	2.39	2.94
b2	2.39	2.84
b3	1.07	1.60
b4	1.07	1.50
b5	2.39	2.69
b6	2.39	2.64
c	0.55	0.68
c1	0.55	0.65
D	23.30	23.60
D1	16.25	17.65
D2	0.95	1.25
E	15.75	16.13
E1	13.10	14.15
E2	3.68	5.10
E3	1.00	1.90
E4	12.38	13.43
e	2.54 BSC	
e1	5.08 BSC	
L	17.31	17.82
L1	3.97	4.37
L2	2.35	2.65
N	4	
φP	3.51	3.65
φP1	7.18 REF.	
Q	5.49	6
S	6.04	6.3

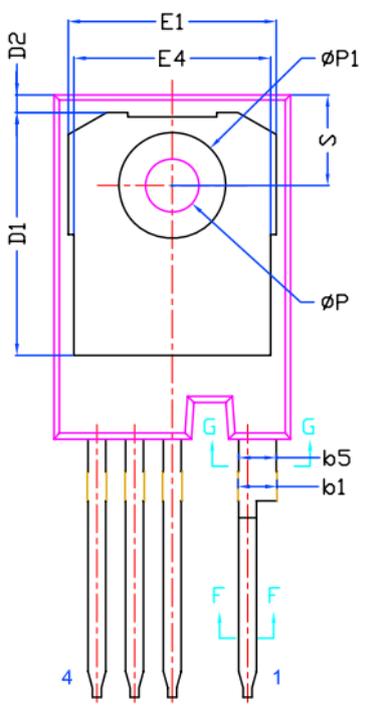

Recommended Solder Pad Layout

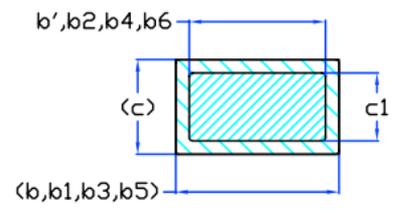

Section F--F, G--G, H--H

- Note:**
1. Package Reference: JEDEC TO247, Variation AD
 2. All Dimensions are in mm
 3. Slot Required, Notch May Be Rounded
 4. Dimension D&E Do Not Include Mold Flash
 5. Subject to Change Without Notice