

Surge Protection SPCT2



Powering Business Worldwide

SG04913



Description

- Class 2 tested SPD
- Suitable for applications without an external lightning protection system
- For TT, TN-C and TN-S supply systems
- Auxiliary contact and busbar available as an accessory
- SPCT 280 and 335 (inserts and combinations) are additional class 3 tested

Types

SPC „BB“

- SPD which can be connected via busbar to a 4pole protective device/switch disconnecter

SPC „NPE“

- Galvanic separated SPD path between neutral and protective earth
- Suitable for TT and TN-S systems due to the 3+1 connection

Poles	Max. Continuous Operating Voltage U_c	I_n (8/20) μ s	Type Designation	Article No.	Units per package
-------	---	----------------------	------------------	-------------	-------------------

Plug-in surge arrester SPCT2

sg04413



Single phase supply / 1+0 connection

1pole	280 VAC	20 kA	SPCT2-280/1	T3 tested	167593	12/120
1pole	335 VAC	20 kA	SPCT2-335/1	T3 tested	167598	12/120
1pole	385 VAC	20 kA	SPCT2-385/1		167603	12/120
1pole	460 VAC	20 kA	SPCT2-460/1		167608	12/120
1pole	580 VAC	20 kA	SPCT2-580/1		167613	12/120
1pole	260 VAC	40 kA	SPCT2-NPE60/1	T3 tested	167618	12/120

sg04613



Single phase supply / 1+1 connection

1+N	280 VAC	20 kA	SPCT2-280-1+NPE	T3 tested	167619	1/60
1+N	335 VAC	20 kA	SPCT2-335-1+NPE	T3 tested	167621	1/60
1+N	385 VAC	20 kA	SPCT2-385-1+NPE		167623	1/60
1+N	460 VAC	20 kA	SPCT2-460-1+NPE		167625	1/60
1+N	580 VAC	20 kA	SPCT2-580-1+NPE		167627	1/60

sg04613



Single phase supply / 2+0 connection

2pole	280 VAC	2x20 kA	SPCT2-280/2	T3 tested	167594	1/60
2pole	335 VAC	2x20 kA	SPCT2-335/2	T3 tested	167599	1/60
2pole	385 VAC	2x20 kA	SPCT2-385/2		167604	1/60
2pole	460 VAC	2x20 kA	SPCT2-460/2		167609	1/60
2pole	580 VAC	2x20 kA	SPCT2-580/2		167614	1/60

sg04713



Three phase supply / 3+0 connection (TN-C)

3pole	280 VAC	3x20 kA	SPCT2-280/3	T3 tested	167595	1/40
3pole	335 VAC	3x20 kA	SPCT2-335/3	T3 tested	167600	1/40
3pole	385 VAC	3x20 kA	SPCT2-385/3		167605	1/40
3pole	460 VAC	3x20 kA	SPCT2-460/3		167610	1/40
3pole	580 VAC	3x20 kA	SPCT2-580/3		167615	1/40

sg04913



Three phase supply / 3+1 connection (TN-S/TT)

3+N	280 VAC	20 kA	SPCT2-280-3+NPE	T3 tested	167620	1/30
3+N	335 VAC	20 kA	SPCT2-335-3+NPE	T3 tested	167622	1/30
3+N	385 VAC	20 kA	SPCT2-385-3+NPE		167624	1/30
3+N	460 VAC	20 kA	SPCT2-460-3+NPE		167626	1/30
3+N	580 VAC	20 kA	SPCT2-580-3+NPE		167628	1/30

sg06514



Three phase supply / 3+1 connection with additional busbar

3+N/BB	280 VAC	3x20 kA	SPCT2-280-3+NPE/BB	T3 tested	167629	1
3+N/BB	335 VAC	3x20 kA	SPCT2-335-3+NPE/BB	T3 tested	167630	1
3+N/BB	385 VAC	3x20 kA	SPCT2-385-3+NPE/BB		167631	1
3+N/BB	460 VAC	3x20 kA	SPCT2-460-3+NPE/BB		167632	1

Poles	Max. Continuous Operating Voltage U_c	I_n (8/20) μ s	Type Designation	Article No.	Units per package
-------	---	----------------------	------------------	-------------	-------------------

sg04813



Three phase supply / 4+0 connection (TN-S)

4pole	280 VAC	4x20 kA	SPCT2-280/4	T3 tested	167596	1/30
4pole	335 VAC	4x20 kA	SPCT2-335/4	T2 tested	167601	1/30
4pole	385 VAC	4x20 kA	SPCT2-385/4		167606	1/30
4pole	460 VAC	4x20 kA	SPCT2-460/4		167611	1/30
4pole	580 VAC	4x20 kA	SPCT2-580/4		167616	1/30

Plug-in surge arrester SPCT2. Insert

sg08213



Insert (1pole/path)

Insert	280 VAC	20 kA	SPCT2-280	T3 tested	167592	2/120
Insert	335 VAC	20 kA	SPCT2-335	T2 tested	167597	2/120
Insert	385 VAC	20 kA	SPCT2-385		167602	2/120
Insert	460 VAC	20 kA	SPCT2-460		167607	2/120
Insert	580 VAC	20 kA	SPCT2-580		167612	2/120
Insert	260 VAC	40 kA	SPCT2-NPE60		167617	2/120

Description Surge Protective Class T2

- Field of application:
For the protection of low voltage distribution systems against transient overvoltage caused by direct and indirect lightning stroke and switching operations
- Test class **II** according to IEC 61643-11
- SPD-type **T2**, according to EN 61643-11
- Auxiliary switch ASAXSC-SPM for remote message transmission can be mounted onto the device
- SPCT 280 and 335 are additional class 3 tested


Technical Data

Inserts		SPCT2-075	SPCT2-135	SPCT2-175	SPCT2-280	SPCT2-335	SPCT2-385	SPCT2-460
Electrical								
Mechanical coding		x	x	x	x	x	x	x
Responding time (rate of voltage rise 5 kV/μs)		< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns
Voltage protection level at nominal discharge current / U_{oc}	U_p	< 750 V	< 900 V	< 1.0 kV	< 1.4 kV	< 1.5 kV	< 1.7 kV	< 1.9 kV
Voltage protection level at 5 kA (8/20) μs	U_n	400 V	550 V	700 V	1000 V	1200 V	1350 V	1700 V
Max. continuous operating voltage	U_c	75 VAC	135 VAC	175 VAC	280 VAC	335 VAC	385 VAC	460 VAC
TOV test value (5 s)	U_T	87 VAC	174 VAC	= U_c	348 VAC	348 VAC	348 VAC	580 VAC
Rated frequency		50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Open circuit voltage	U_{oc}	—	—	—	10 kV	5 kV	—	—
Nominal discharge current (8/20) μs	I_n	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Max. discharge current	I_{max}	30 kA	40 kA	40 kA	40 kA	40 kA	40 kA	40 kA
Follow current interrupt rating	I_{fi}	—	—	—	—	—	—	—
Open Circuit Voltage	U_{oc} [T3]	—	—	—	6 kV	6 kV	—	—
Voltage protection level	U_p [T3]	—	—	—	900 V	1000 V	—	—

Maximum back-up fuse
Maximum short-circuit current

 ≤ 125 AgL 50 kA _{r.m.s.}	 PLHT-C100 20 kA _{r.m.s.}
--	---



Connection diagram



Mechanical

Frame size	45 mm
Device height	80 mm
Device width	
1pole	17.5 mm (1MU)
1+1pole, 2pole	35 mm (2MU)
3pole	52.5 mm (3TE)
3+1pole, 4pole	70 mm (4TE)
Mechanical coding	
1pole	x
1+1pole	yx
2pole	xx
3pole	xxx
3+1pole	yxxx
4pole	xxxx
Weight base 1P, 1+1P, 2P, 3P, 3+1P, 4P	53/120/120/180/240/240 g
Weight complete devices 1P, 1+1P, 2P, 3P, 3+1P, 4P	110/201/220/330/412/440 g
Permitted ambient temperature	-40°C to +70°C
Degree of protection	IP20
Upper and lower lift terminal capacity	4 - 25 mm ²
Upper and lower open mouthed terminals for busbar thickness up to	1.5 mm
Tightening torque of terminal screws	2.4 - 3 Nm
Quick fastening on DIN rail according to	IEC/EN 60715
Accessories: busbars 16 mm ²	Type ZV-KSBI ...

Technical Data

Inserts	SPCT2-580	SPCT2-NPE60
Electrical		
Mechanical coding	x	y
Responding time (rate of voltage rise 5 kV/ μ s)	< 25 ns	< 100 ns
Voltage protection level at nominal discharge current / U_{oc}	U_p 2100 V	< 1.5 kV
Voltage protection level at 5 kA (8/20) μ s	U_p 2000 V	–
Max. continuous operating voltage	U_c 580 VAC	260 VAC
TOV test value	$U_T = U_c$ (5 s)	1200 VAC (200 ms)
Rated frequency	50 Hz	50 Hz
Open circuit voltage	U_{oc} –	6 kV
Nominal discharge current (8/20) μ s	I_n 15 kA	40 kA
Max. discharge current	I_{max} 40 kA	60 kA
Follow current interrupt rating	I_{fi} –	100 A _{r.m.s.}
Maximum back-up fuse		
Maximum short-circuit current		


Connection diagram





Mechanical

Frame size	45 mm
Device height	80 mm
Device width	
1pole	17.5 mm (1MU)
1+1pole, 2pole	35 mm (2MU)
3pole	52.5 mm (3TE)
3+1pole, 4pole	70 mm (4TE)
Mechanical coding	
1pole	x
1+1pole	yx
2pole	xx
3pole	xxx
3+1pole	yxxx
4pole	xxxx
Weight base 1P, 1+1P, 2P, 3P, 3+1P, 4P	53/120/120/180/240/240 g
Weight complete devices 1P, 1+1P, 2P, 3P, 3+1P, 4P	110/201/220/330/412/440 g
Permitted ambient temperature	-40°C to +70°C
Degree of protection	IP20
Upper and lower lift terminal capacity	4 - 25 mm ²
Upper and lower open mouthed terminals for busbar thickness up to	1.5 mm
Tightening torque of terminal screws	2.0 - 3 Nm
Quick fastening on DIN rail according to	IEC/EN 60715
Accessories: busbars 16 mm ²	Type ZV-KSBI ...

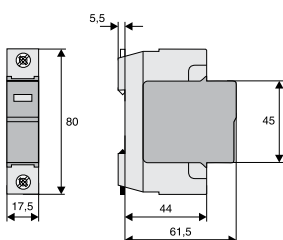
Dimensions (mm)



Technical Data

		SPCT2-1+NPE		SPCT2-3+NPE	
Electrical					
Mechanical coding			yx		yxxx
Responding time (rate of voltage rise 5 kV/μs)	L-N/N-PE/L-PE		< 25ns/< 100ns/< 100ns		< 25ns/< 100ns/< 100ns
Max. continuous operating voltage	L-N/N-PE	U_C	335VAC/260VAC		280VAC/260VAC
TOV test value		U_T			
5 s	L-N		415 VAC		350 VAC
200 ms	N-PE		1200 VAC		1200 VAC
Rated frequency			50 Hz		50 Hz
Nominal discharge current (8/20) μs	L-N/N-PE/L-PE	I_n	20 kA		20 kA
Voltage protection level at I_n	L-N/N-PE/L-PE	U_D	≤ 1600V/≤ 1000V/≤ 1650V		≤ 1000V/≤ 1000V/≤ 1300V
Max. discharge current (8/20) μs	L-N/N-PE/L-PE	I_{max}	40 kA		40 kA
Follow current interrupt rating	N-PE	I_{fi}	100 A _{r.m.s.}		100 A _{r.m.s.}
Maximum back-up fuse			 ≤ 125 AgL		 PLHT-C100
Maximum short-circuit current			50 kA _{r.m.s.}		20 kA _{r.m.s.}


Connection diagram

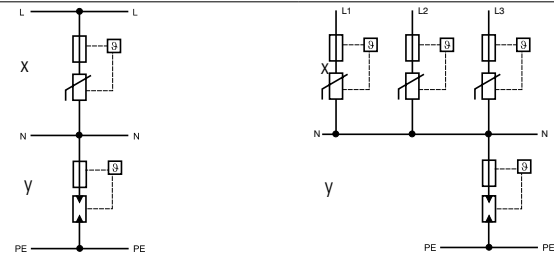

Mechanical

Mechanical coding of base		yx		yxxx
Frame size		45 mm		45 mm
Device height		80 mm		80 mm
Device width		35 mm		70 mm
Weight		201 g		412 g
Permitted ambient temperature		-40°C to +70°C		-40°C to +70°C
Degree of protection (built-in)		IP40		IP40
Upper and lower lift terminal capacity		1 - 25 mm ²		1 - 25 mm ²
Upper and lower open mouthed terminals for busbar thickness up to		1.5 mm		1.5 mm
Tightening torque of terminal screws		2.4 - 3 Nm		2.4 - 3 Nm
Quick fastening on DIN rail according to		IEC/EN 60715		IEC/EN 60715
Accessories: busbars 16 mm ²		Type ZV-KSBI ...		Type ZV-KSBI ...


Dimensions (mm)

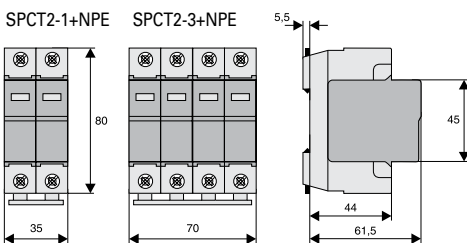

Application Examples

SPCT2-1+NPE


TN-, TT-System
3 x 230/400 VAC
3 x 240/415 VAC

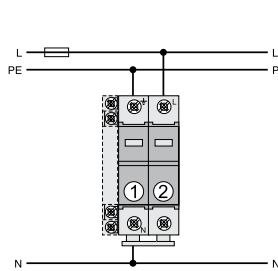

- ① ... SPCT2-NPE
- ② ... SPCT2-335

SPCT2-3+NPE

TN-S-, TT-System
3 x 230/400 VAC
3 x 240/415 VAC

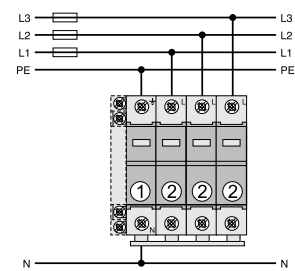

- ① ... SPCT2-NPE
- ② ... SPCT2-280

Surge arrester Sets

SPCT2 class 2/3 tested with pre-fitted busbar (BB)

Surge Arrester Set SPCT2-335-3+NPE/BB

- The 3+1 circuit offers a universal solution for surge protection in low voltage distribution systems
- Suitable for TT- and TN-S-systems according to IEC 60364-5-53 Clause 534
- Remote message transmission is possibly by mounting auxiliary switch ASAXSC-SPM
- Busbar connected, minimum installation work required

Content

SPCT2-335-3+NPE/BB

- | | |
|--------------------------|-----------------------|
| - 1 unit SPCT2-335-3+NPE | Surge arrester |
| - 1 unit ASLTT-63 | Lead-through terminal |
| - busbar included | |
-

sg64812



Description

- Test class 2 tested SPD
- Fulfills the minimum requirements for an application without external lightning protection system
- For TT, TN-C and TN-S supply systems
- Auxiliary contact and busbar available as an accessory

Types

SPE „NPE“

- Galvanic separated SPD path between neutral and protective earth
- Suitable for TT and TN-S systems due to the 3+1 connection

Poles	Max. Continuous Operating Voltage U_c	I_n (8/20) μ s	Type Designation	Article No.	Units per package
-------	---	----------------------	------------------	-------------	-------------------

Surge arrester SPET2, 1- to 4pole

SG64012



Single phase supply / 1+0 connection

1pole	280 VAC	10 kA	SPET2-280/1	168741	2/120
1pole	335 VAC	10 kA	SPET2-335/1	168695	2/120

Single phase supply / 1+1 connection

1pole+N	280 VAC	10 kA	SPET2-280/1+NPE	168699	1/60
1pole+N	335 VAC	10 kA	SPET2-335/1+NPE	168701	1/60

Single phase supply / 2+0 connection

2pole	280 VAC	2x10 kA	SPET2-280/2	168742	1/60
2pole	335 VAC	2x10 kA	SPET2-335/2	168696	1/60

SG64812



Three phase supply / 3+0 connection (TN-C)

3pole	280 VAC	3x10 kA	SPET2-280/3	168692	1/40
3pole	335 VAC	3x10 kA	SPET2-335/3	168697	1/40

Three phase supply / 3+1 connection (TN-S / TT)

3pole+N	280 VAC	10 kA	SPET2-280/3+NPE	168700	1/30
3pole+N	335 VAC	10 kA	SPET2-335/3+NPE	168702	1/30

Three phase supply / 4+0 connection (TN-S / TT)

4pole	280 VAC	4x10 kA	SPET2-280/4	168693	1/30
4pole	335 VAC	4x10 kA	SPET2-335/4	168698	1/30

Surge arrester SPET2, Insert

sg63412



Insert (1pole/path)

Insert	280 VAC	10 kA	SPET2-280	168740	2/120
Insert	335 VAC	10 kA	SPET2-335	168694	2/120

Accessories

SG63311



Auxiliary switch for SPBT12, SPCT2, SPET2, SPDT3	ASAUWSC-SPM	131785	8/80
--	-------------	--------	------

Description	Type Designation	Article No.	Units per package
-------------	------------------	-------------	-------------------

Lead-through terminal for SPB, ASLTT-63

SG59511





Lead-through terminal	ASLTT-63	131784	12/120
-----------------------	----------	--------	--------

Description Surge arrester SPET2

- Field of application:
For the protection of low voltage distribution systems against transient overvoltage caused by direct and indirect lightning stroke and switching operations
- Test class **II** according to IEC 61643-11
- SPD-type **T2**, according to EN 61643-11
- Busbars ZV-KSBI are available for all customary applications
- Suitable for busbar connection to all Xtra Combinations switchgear

Technical Data

	SPET2-280	SPET2-335	SPET2-NPE60
Electrical			
Responding time (rate of voltage rise 5 kV/μs)	< 25 ns	< 25 ns	< 100 ns
Voltage protection level at nominal discharge current	U_p < 1.2kV	< 1.3kV	< 1.5 kV
Voltage protection level at 5 kA (8/20) μs	U_p 1000 V	1200 V	-
Max. continuous operating voltage	U_c 280 VAC	335 VAC	260 VAC
TOV test value (5 s)	U_T 335 VAC	400 VAC	1200 VAC
Rated frequency	50 Hz	50 Hz	50 Hz
Nominal discharge current (8/20) μs	I_n 10 kA	10 kA	40 kA
Max. discharge current	I_{max} 20 kA	20 kA	60 kA
Follow current interrupt rating	I_{fi} -	-	100 A _{r.m.s.}
Maximum back-up fuse	 ≤ 125 AgL	 ≤ C63	
Maximum short-circuit current	50 kA _{r.m.s.}	10 kA _{r.m.s.}	


Connection diagram



Mechanical


Frame size	45 mm
Device height	80 mm
Device width	17.5 mm
Weight	87 g
Permitted ambient temperature	-40°C to +70°C
Degree of protection	IP20
Upper and lower lift terminal capacity	4 - 25 mm ²
Upper and lower open mouthed terminals for busbar thickness up to	1.5 mm
Tightening torque of terminal screws	2.4 - 2.5 Nm
Quick fastening on DIN rail according to	IEC/EN 60715
Accessories: busbars 16 mm ²	Type ZV-KSBI ...

Dimensions (mm)

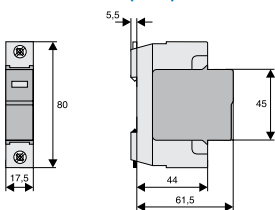


Application Examples SPET2 according to IEC 60364-5-53 Clause 534


TN-C-System
3 x 230/400 VAC
(3 x 220/380 VAC)
(3 x 240/415 VAC)




TN-S-System
3 x 230/400 VAC
(3 x 220/380 VAC)
(3 x 240/415 VAC)




TT-System
3 x 230 VAC
(3 x 220 VAC)




TN-S-/TT-System
3 x 230/400 VAC
(3 x 220/380 VAC)
(3 x 240/415 VAC)




TN-S-System
1 x 230 VAC
(1 x 220 VAC)
(1 x 240 VAC)




TN-S-/TT-System
1 x 230 VAC
(1 x 220 VAC)
(1 x 240 VAC)




TN-S-/TT-System
1 x 230 VAC
(1 x 220 VAC) (1 x 240 VAC)



TN-S-/TT-System
230 VAC



TN-S-/TT-System
3 x 230/400 VAC



		①	②	③	④	
	IEC 60364-5-53 Clause 534	SPET2-280/3	SPET2-280/4	—	SPET2-335/3+NPE	
(A)	ÖVE ÖNORM E8101	SPET2-335/3	SPET2-335/4	—	SPET2-335/3+NPE	
(D)	VDE V 0100-534	SPET2-280/3	SPET2-280/4	—	SPET2-335/3+NPE	
(N)		SPET2-280/3	SPET2-280/4	SPET2-280/3	—	

		⑤	⑥	⑦	⑧	
	IEC 60364-5-53 Clause 534	SPET2-280/2	SPET2-335/1+NPE	—	—	
(A)	ÖVE ÖNORM E8101	SPET2-335/2	SPET2-335/1+NPE	—	—	
(D)	VDE V 0100-534	SPET2-280/2	SPET2-335/1+NPE	—	—	
(F)	UTE C 20-443	—	—	SPET2-280/1	SPET2-280/3	

Description Auxiliary switch for Surge arrester ASAUXSC-SPM

- Field of application:
For mounting onto surge protective devices for external defect message transmission
- Design basically in accordance with IEC 60947-5-1
- Can be mounted subsequently
- Suitable with SPBT12, SPCT2, SPET2, SPDT3, SP-B+C


Technical Data

	ASAUXSC-SPM
Electrical	
Rated insulation voltage	250 V
Rated frequency	50 Hz
Switching contact	1 CO
Minimum voltage per contact	24 VAC
Rated operational current AC12	2 A / 250 VAC
Maximum back-up fuse	2 A gL
Overvoltage category	IV
Pollution degree	2
Mechanical	
Frame size	45 mm
Device height	80 mm
Device width	8.8 mm
Mounting	Screw-mounting
Degree of protection, built-in	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274
Upper and lower terminals	lift terminals
Terminal capacity	2 x 2.5 mm ²
Tightening torque of terminal screws	0.8 - 1 Nm


Connection diagram



Dimensions (mm)

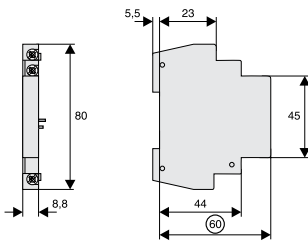

Application Examples

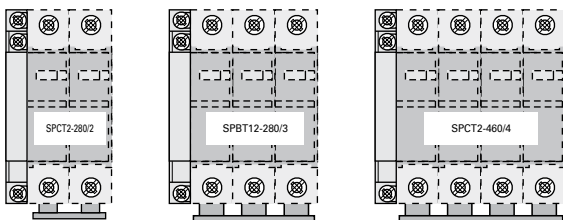

Description Lead-Through Terminal for Surge Protective Devices, SPD-type 2 (Surge Protective Class C), ASLTT-63

- The lead-through terminal permits orderly wiring of SPDs types 2 (Surge Protective Class C).
It serves as lead-through terminal in circuits requiring vertical connections from the upper to the lower SPD connection level.
- 1pole
- Suitable for standard busbar connection to EATON switchgear


Technical Data

	ASLTT-63
Electrical	
Rated voltage	690 V AC/DC
Rated current	63 A
Rated frequency	50 Hz
Mechanical	
Frame size	45 mm
Device height	80 mm
Device width	17.5 mm
Mounting	quick fastening on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274
Upper and lower terminals	Lift- and Maulklemme
Terminal capacity	1 - 25 mm ²
Busbar thickness	0.8 - 2 mm
Tightening torque of terminal screws	2.4 - 3 Nm


Connection diagram



Dimensions (mm)

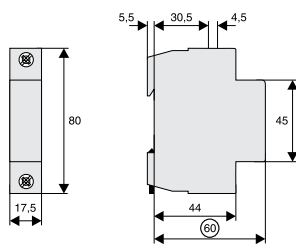

Application Example / Connection type 2 according to IEC 60364-5-53 Clause 534

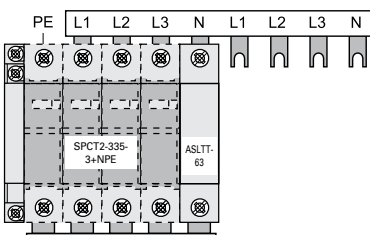

1.14


Surge Protection













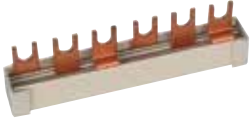

xPole

Busbar

Used for	Type Designation	Article No.	Units per package
Busbar Z-GV-16/3P-3TE/6			
for SPBT12 & SPCT2	Z-GV-16/3P-3TE/6	267511	12/240

WA_SG11202



Poles	Type Designation	Article No.	Units per package
Busbar ZV-KSBI for SPBT12 & SPCT2			
	2MU	ZV-KSBI-2MU	263961 10/600
	3MU	ZV-KSBI-3TE	263962 10/600
	3MU	ZV-KSBI-3TE/S	263963 10/600
	2MU+1.5MU	ZV-KSBI-3TE+HI	112370 50/150
	4MU	ZV-KSBI-4TE	263964 10/600
	5MU	ZV-KSBI-5TE	263965 10/200
	5MU	ZV-KSBI-5TE/N	263966 10/200
	2MU+3x1.5MU	ZV-KSBI-5TE+HI	112371 50/150
	6MU	ZV-KSBI-6TE	113118 50/500
	7MU	ZV-KSBI-7TE	263967 50/500
	7MU	ZV-KSBI-7TE/S	263968 10/100
	7MU	ZV-KSBI-7TE/N	263969 10/100
	9MU	ZV-KSBI-9TE/N	266874 50/500
	11MU	ZV-KSBI-11MU	263970 50/500


Description busbar ZV-KSBI

- With the ZV KSBI busbar bracket you can realize the common combinations of arrestors.
- Used for SPB-..., SPC-..., Z-D63
- The rated cross-section of the ZV-KSBI bridge metals is 16 mm²
- The busbar mounting bracket can be shortened

Technical Data

ZV-KSBI	
Electrical	
Rated voltage	230/400 V, 50/60 Hz
Rated current	63 A
Mechanical	
Busbar cross section	16 mm ² Cu

Design

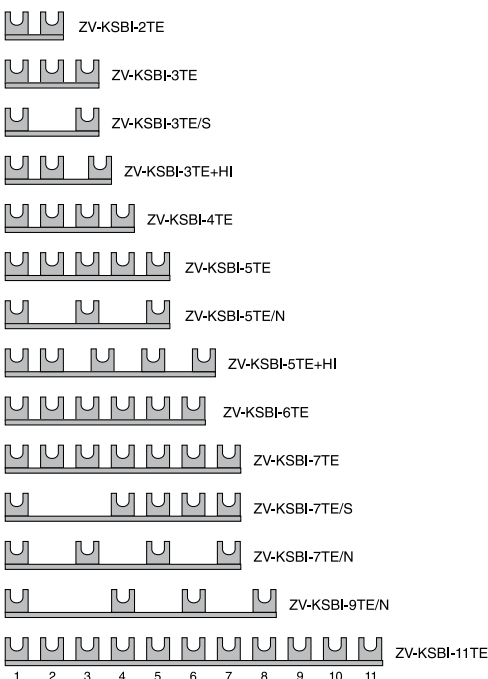

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



Eaton Industries (Austria) GmbH
Scheydgasse 42
1210 Vienna
Austria

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland

© 2022 Eaton
All Rights Reserved
Publication No. CA010005EN
Article number 301982-MK
April 2022

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

