



## ■ **180lm/W** LED Waterproof Light

- Plug & play NFC
- Plug & play Sensors
- Plug & play EM pack (Tool free)

IP66 IK08 CE CB 



Add: No.2 Building, No.688 Hang Xing Rd, Hangzhou

Tel: +86-186 5511 3201


Email: [info@holux.net](mailto:info@holux.net)

Web: [www.holux.net](http://www.holux.net)

# Product Details

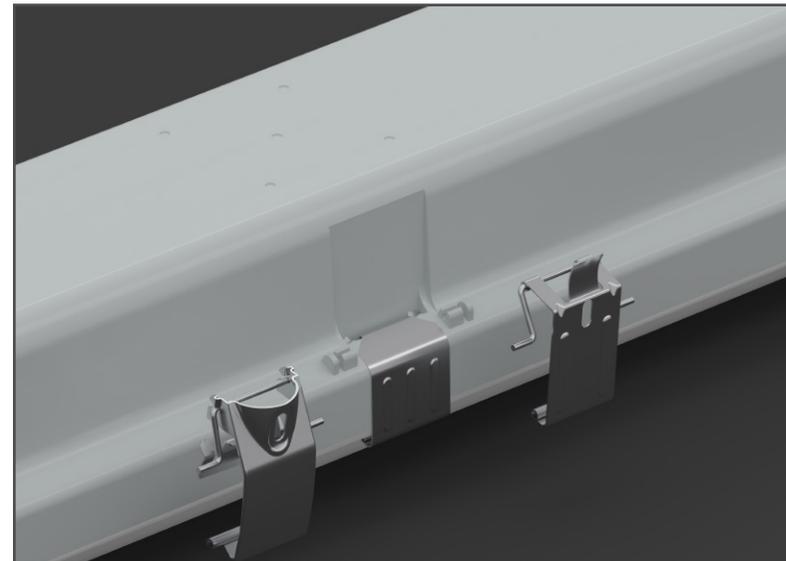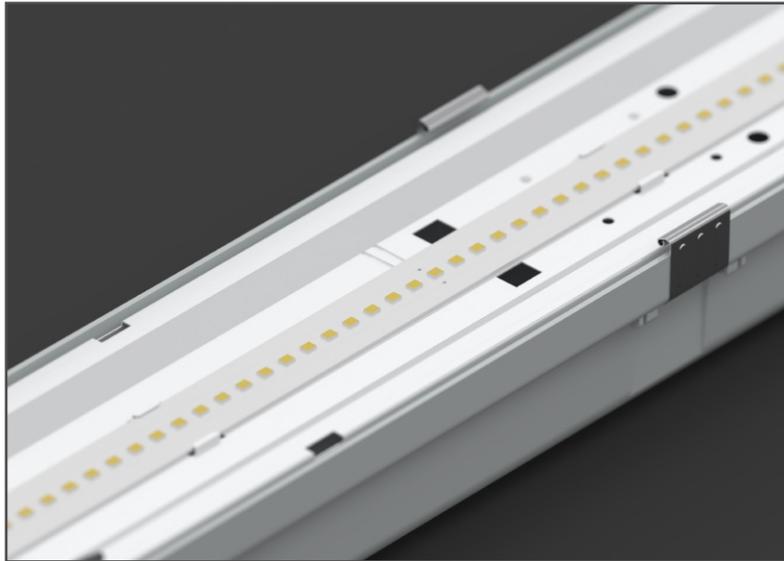


# Advantages

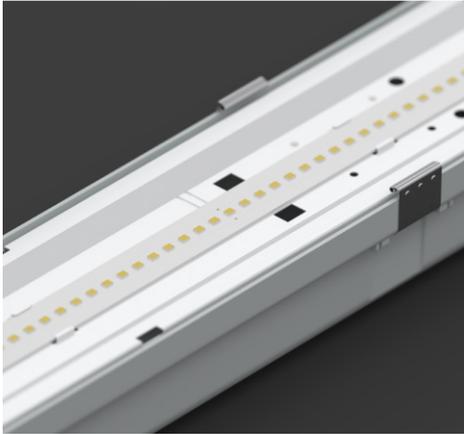

High efficiency LED module




CCT switch

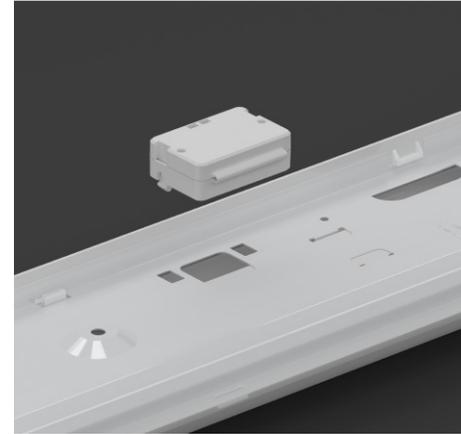


Sensor module optional




Power switch optional

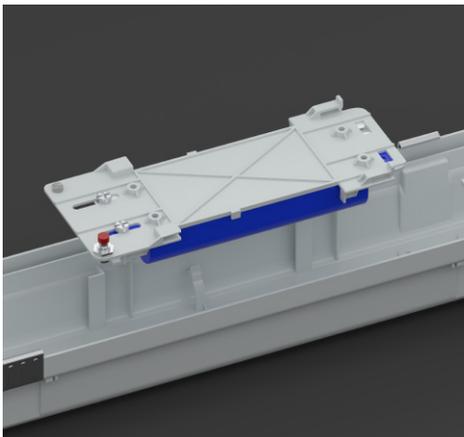


Plug & play EM pack  
( tool free )

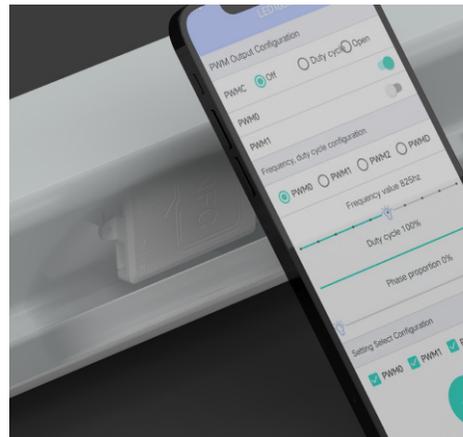

Optional NFC to adjust  
the power


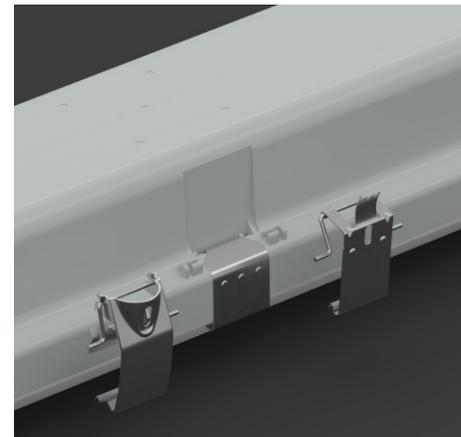


Optional clips

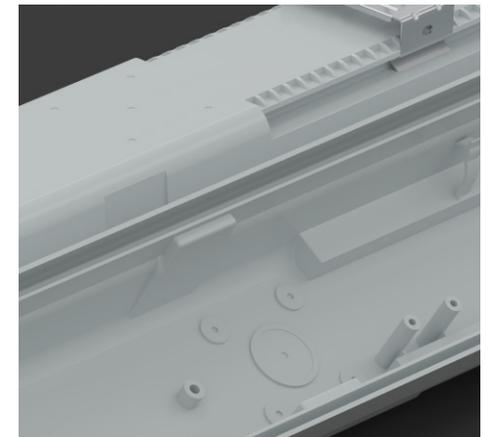


Ceiling and hanging, the housing  
reserve BESA hole for UK market

# Bat Wings Light Distribution

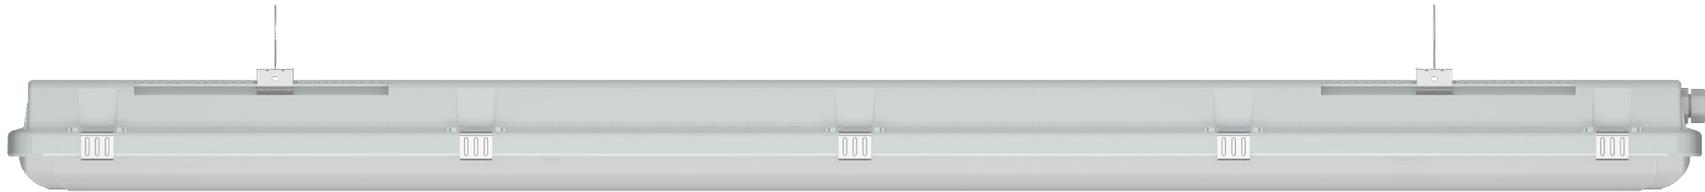


TP-12-36



TP-15-55


# Specification

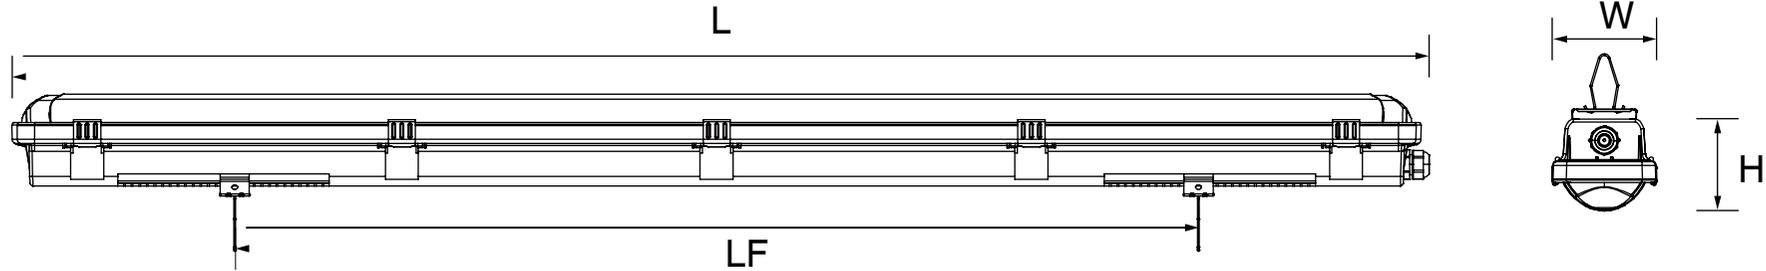

Product code	Size (mm)	Size(mm) (LF)	Wattage	Light Efficiency	Luminous Flux	CCT	Power Supply
TP-12-36F2	L1200*W89*H78	690-990	20/26/31/36W	180lm/W	3600/4680/5580/6480lm	4000K	Tridonic on/off
TP-15-55F2	L1500*W89*H78	950-1290	30/38/47/55W	180lm/W	5400/6840/8460/9900lm	4000K	Tridonic on/off
TP-12-36FS TP-12-36FS(sensor 1) TP-12-36FS(sensor 2) TP-12-36FS(NFC) TP-12-36FS(Emergency)	L1200*W89*H78	690-990	17/23/29/36W	180lm/W	1360/1840/5220/6480lm	4000K	PWM dimmable + 2* 12V DC APS
TP-15-55FS TP-15-55FS(sensor 1) TP-15-55FS(sensor 2) TP-15-55FS(NFC) TP-15-55FS(Emergency)	L1500*W89*H78	950-1290	32/40/47/55W	180lm/W	5760/7200/8460/9900lm	4000K	PWM dimmable + 2* 12V DC APS

- NFC: NFC smart function optional
- Emergency : 2 watts , 3 Hours
- Sensor 1 : 100% on after detection- 10% on in 3 minutes without detection - off after 3 minutes
- Sensor 2: 100% on after detection- 10% on in 3 minutes without detection - keep 10% on after 3 minutes

# Package

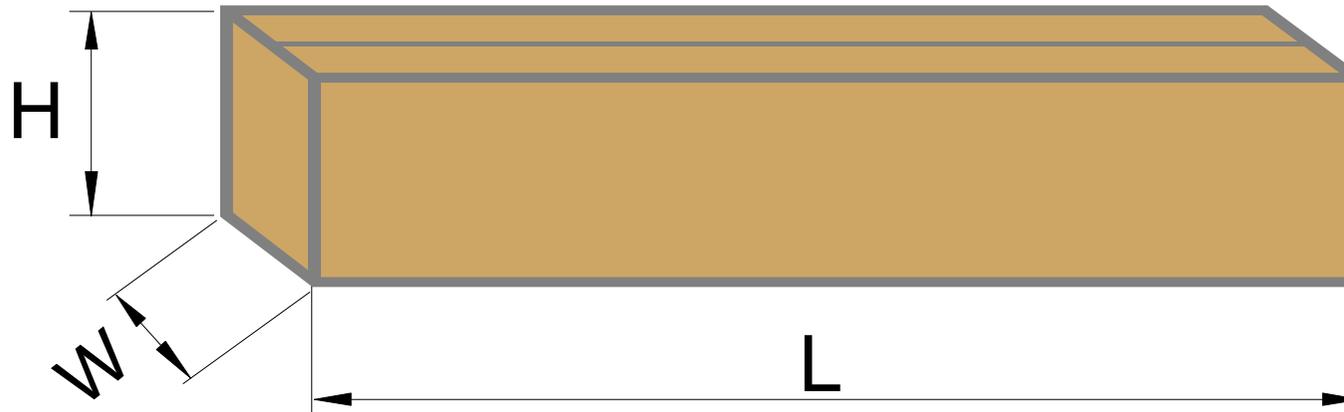

Package Way	Model	TP-12-36	TP-15-55
Innerbox Package	QTY/CTN	6	6
	Dimension(mm)	1230*305*190mm	1530*305*190mm
	G.W(kg)	9	11.5