



## 主要技术特征：

## 材料与涂覆


壳体	黄铜镀硬金或镍及不锈钢钝化
插针	锡青铜镀硬金
插孔	铍青铜镀硬金
绝缘体	聚四氟乙烯
压接套	铜合金镀镍或镀金

## 界面尺寸


51

	插头(mm)	
A	2.00	最大值
B		1.63
C	2.97	
D	0.18	
E	0.18	0.94
F	3.58	
G	3.58	


	插座 (mm)	
A	3.66	3.71
B	2.08	
C	0.48	0.53
D		0.25
E	3.33	3.58
F	0.69	0.94
G		2.97
H	1.32	
J		0.18
K		0.18

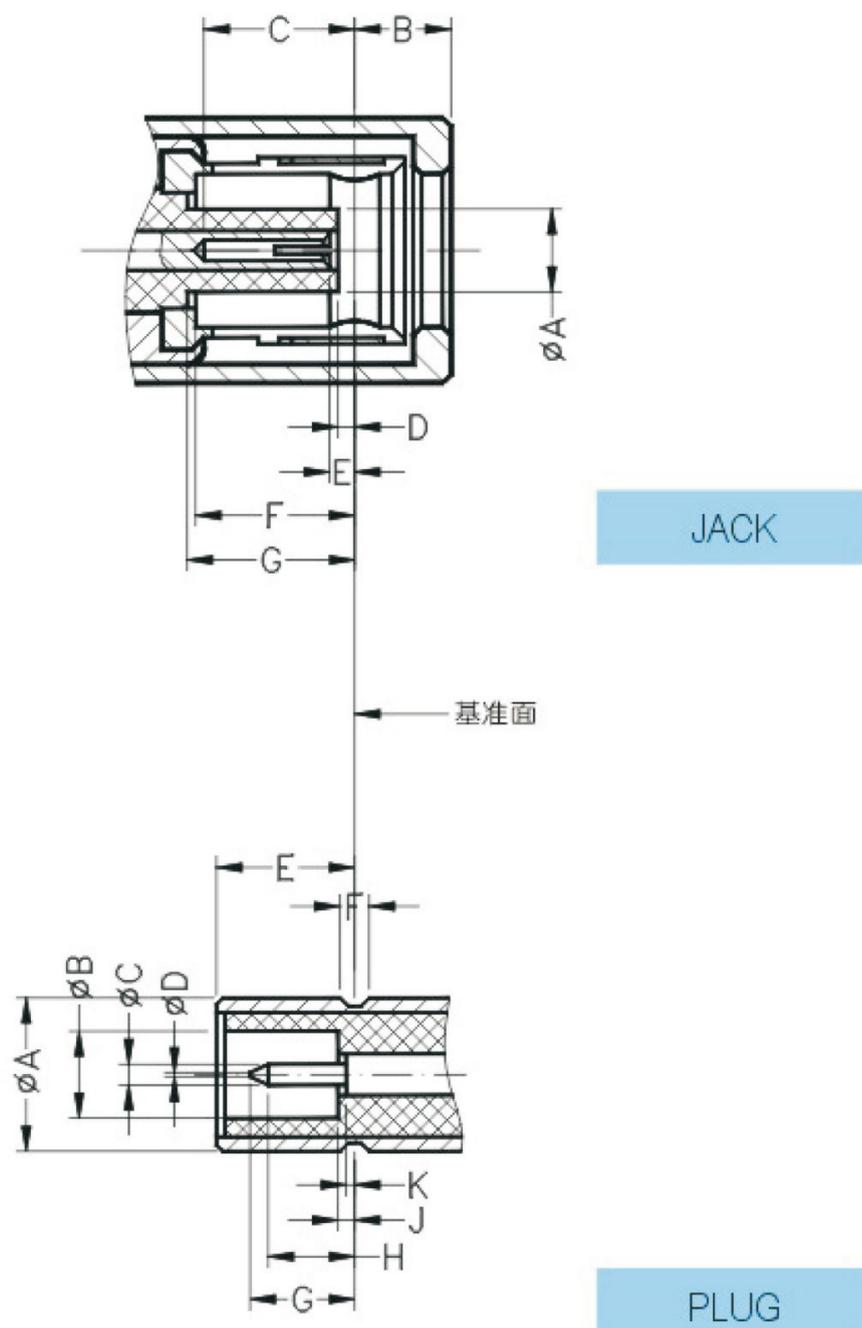

## 1. 半刚电缆、半柔电缆连接器

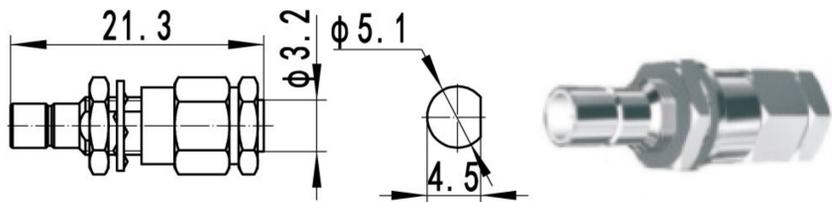


型号	电缆组别	备注
SMB-JYB2a	085	

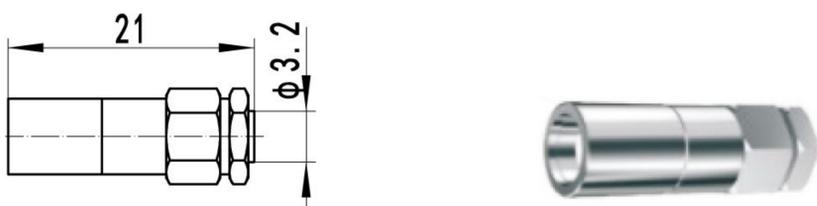


SMB-KB2a	085	
----------	-----	--


## 2. 软电缆连接器

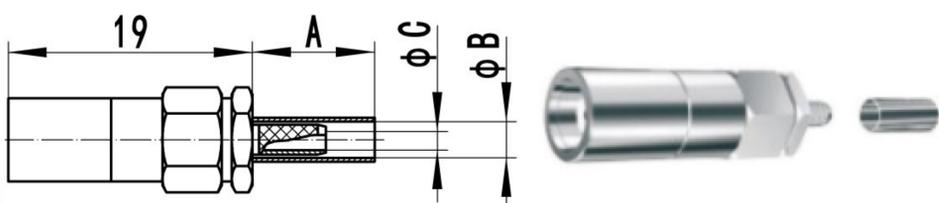

SMB-K2	2/50S	A=7.5, B=2.5, C=1.0
SMB-K3	3/50S	A=9.0, B=3.5, C=1.6
SMBY-TK3	3/50D	A=9.0, B=3.1, C=1.6

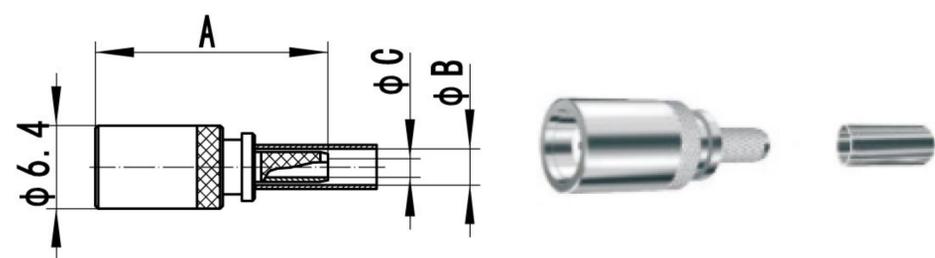


SMB-K2.5	2.6/50S	A=22, B=2.8, C=1.6
SMB-K2.5D	2.6/50D	A=22, B=3.4, C=1.6
SMB-K3a	3/50S	A=21.5, B=3.1, C=1.6
SMB-K5	5/50S	A=24.5, B=5.2, C=3.1
SMB-K223	5/50D	A=27.5, B=5.7, C=3.1

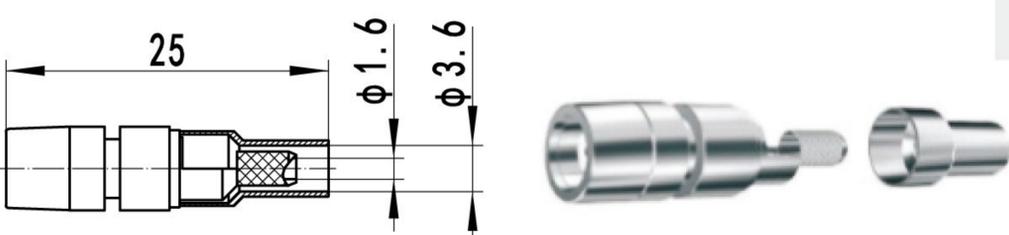


SMB-K3C	3/50D	台阶线夹镀金
---------	-------	--------


## 2. 软电缆连接器

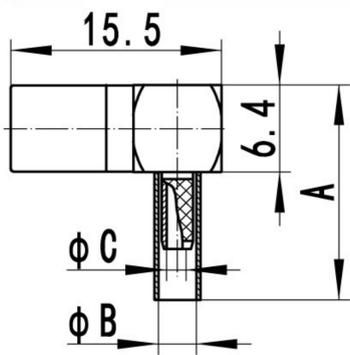


型号	电缆组别	备注
SMB-KW2	2/50S	A=14.9, B=2.5, C=1.0
SMB-KW2.5	2.6/50S	A=16.5, B=2.8, C=1.6
SMB-KW2.5D	2.6/50D	A=16.5, B=3.4, C=1.6
SMB-KW3	3/50S	A=16.4, B=3.1, C=1.6
SMB(Ni)-KW3	3/50S	A=16.4, B=3.1, C=1.6
SMBY-TKW7	3/50D	A=16.4, B=3.5, C=1.6

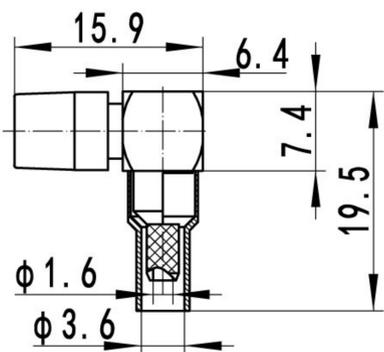


SMB-KW3A	3/50S	台阶线夹
----------	-------	------

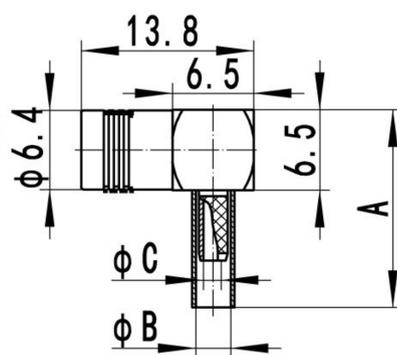

SMB-KW2A	2/50S	A=14, B=2.5, C=1.0
SMB-KW2.5A	2.6/50S	A=16, B=2.8, C=1.6
SMB-KW2.5DA	2.6/50D	A=16, B=3.4, C=1.6
SMB-KW3A	3/50S	A=15.5, B=3.1, C=1.6
SMB-KW3DA	3/50D	A=15.5, B=3.7, C=1.6
SMB-KW4A	4/50S	A=16.5, B=4.2, C=2.3
SMB-KW5A	5/50S	A=18.5, B=5.2, C=3.1

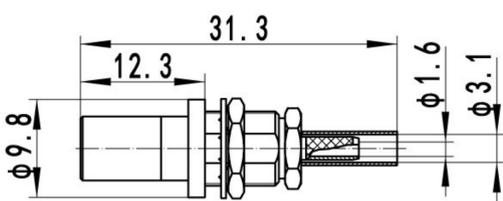


SMB-KY3	3/50S	
---------	-------	--

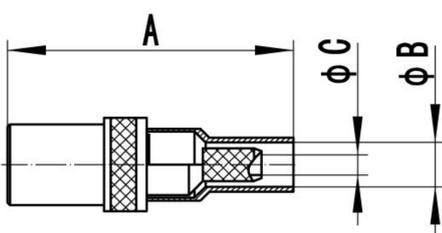


SMB-K2B	2/50S	A=35.4, B=2.5, C=1.0
SMB-KW3	3/50S	A=35.9, B=3.1, C=1.6
SMB-KW4	4/50S	A=37.4, B=4.2, C=2.3
SMB-KW5	5/50S	A=39.4, B=5.2, C=3.1


## 2. 软电缆连接器

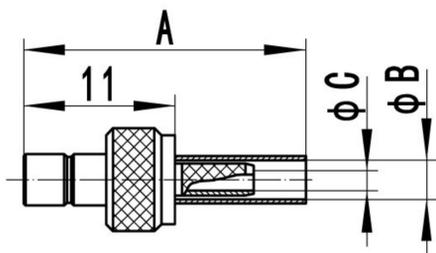


型号	电缆组别	备注
SMB-J2.5A	2.6/50S	A=20.5, B=2.8, C=1.6
SMB-J2.5DA	2.6/50D	A=20.5, B=3.4, C=1.6
SMB-J3A	3/50S	A=20.0, B=3.1, C=1.6
SMB-(E)J5	5/50S	A=17.2, B=5.2, C=3.1

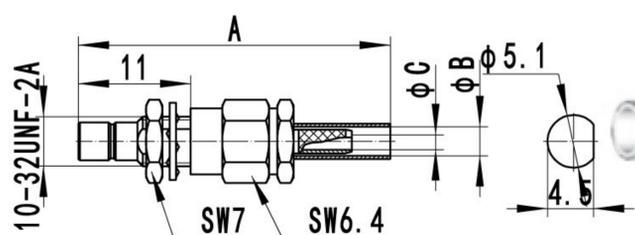


SMB-JY2	2/50S	A=27.8, B=2.5, C=1.0
SMB(Ni)-JY2.5	2.6/50S	A=29.8, B=2.8, C=1.6
SMB-JY3	2/50S	A=29.8, B=3.4, C=1.6
SMB(Ni)-JY3	2/50S	A=29.8, B=3.4, C=3.1

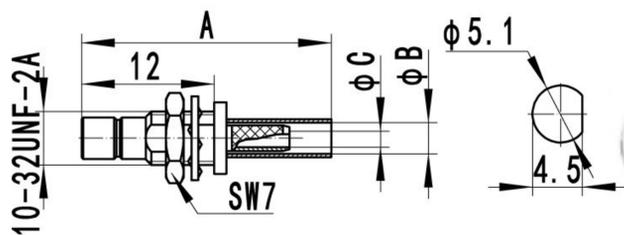

SMB-JY2.5Y	2.6/50S	A=20.6, B=2.8, C=1.6
SMB-JY3Y	3/50S	A=22.1, B=3.1, C=1.6




SMB-JW2	2/50S	A=14.9, B=2.5, C=1.0
SMB-JW2.5	2.6/50S	A=16.5, B=2.8, C=1.6
SMB-JW2.5D	2.6/50D	A=16.5, B=3.4, C=1.6
SMB-JW3	3/50S	A=16.4, B=3.1, C=1.6
SMB-JW4	4/50S	A=17.4, B=4.2, C=2.3
SMB-JW5	5/50S	A=19.4, B=5.2, C=3.1

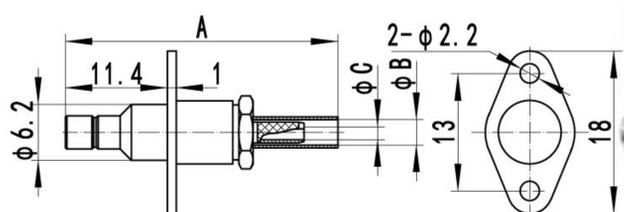

SMB-JF2	2/50S	A=20.6, B=2.8, C=1.6
SMB-JF3	3/50S	A=22.1, B=3.1, C=1.6


## 3. 印刷电路板连接器

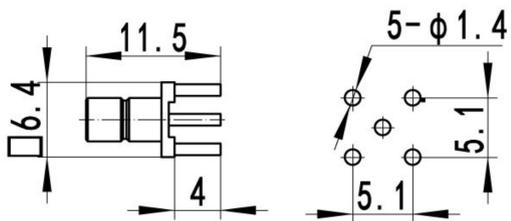

型号


备注

SMB-(E)JHD

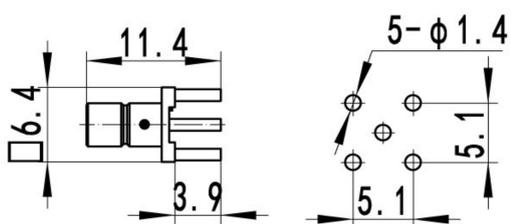


SMB-JHD7

55

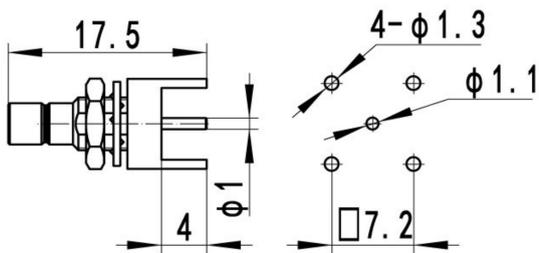

SMB-JYHD

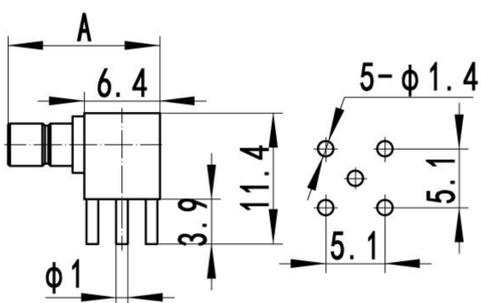


SMB-JWHD1

A=13.5


SMB-JWHD10

A=15.5

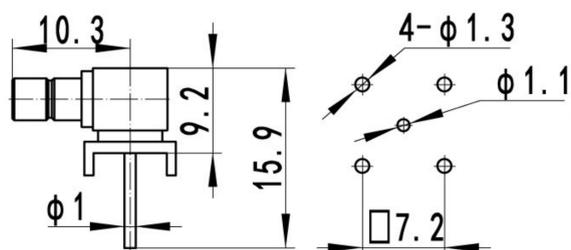

SMB-JWHD2


## 3. 印刷电路板连接器

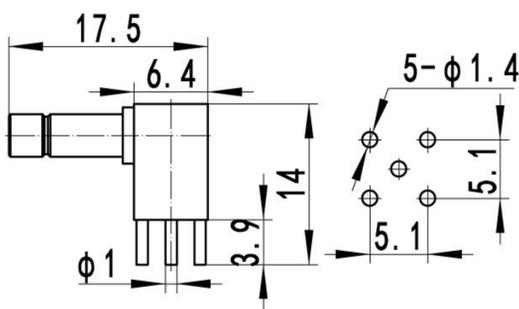


型号

备注


SMB-JHD11

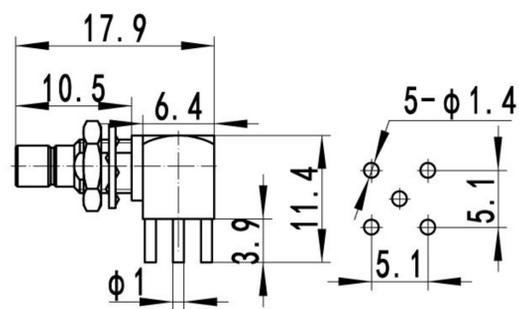

SMB-JWHY

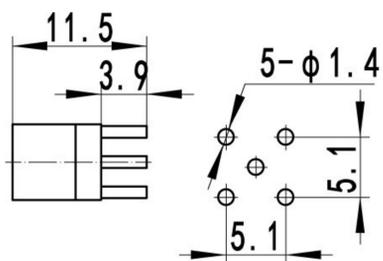


SMB-KHD2

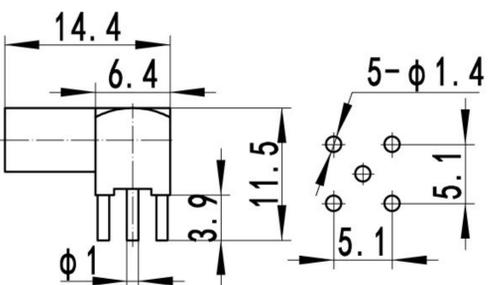

SMB-KWHDA

## 4. 法兰安装式终端连接器

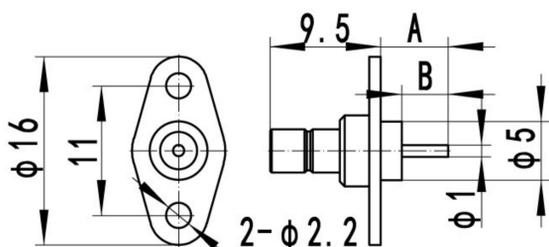


SMB-JFD

A=3.8, B=2.0

SMB-JFD1

A=5.8, B=4.0


## 4. 法兰安装式终端连接器

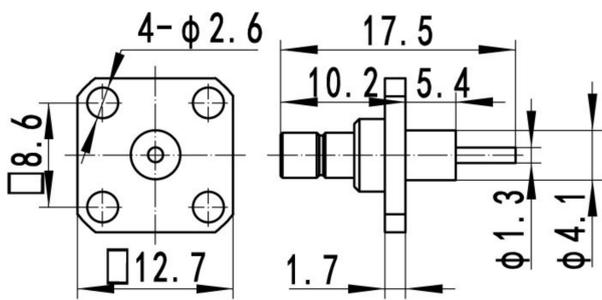

型号


备注

SMB-JFD20

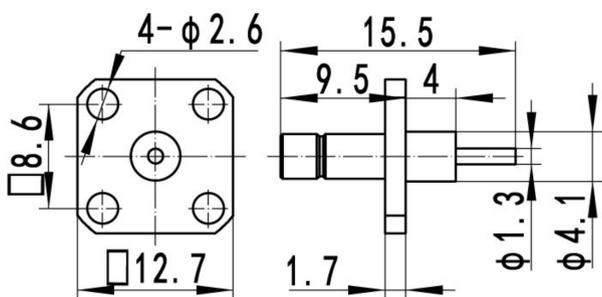


SMB-JFD21


## 5. 穿孔安装式终端连接器

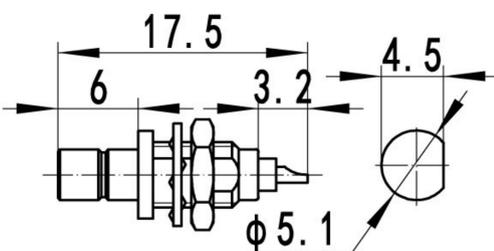

SMB-JY

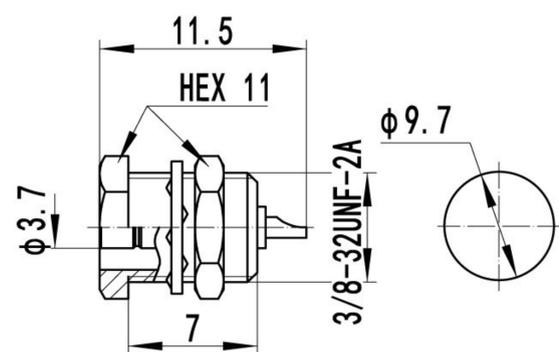


SMB-JYA

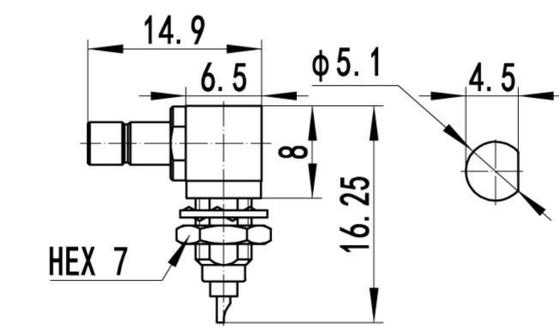

SMB-JWY

## 5.穿孔安装式终端连接器

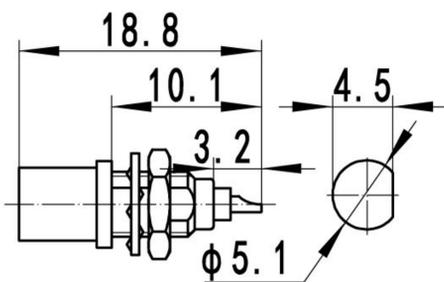


型号


备注

SMB-KY


## 6.系列内转接器




SMB-JK

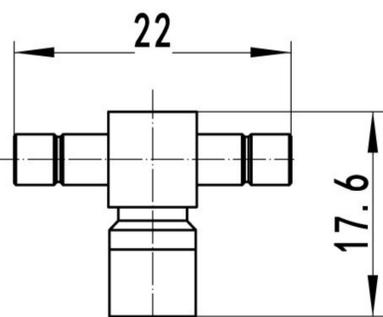

SMB-JJY1

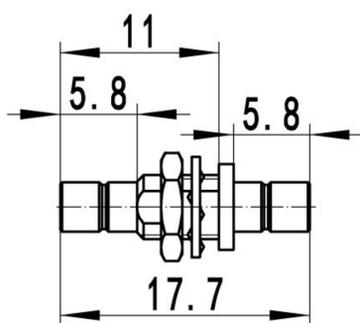


SMB-JY




SMB-KK


## 1. 软电缆连接器

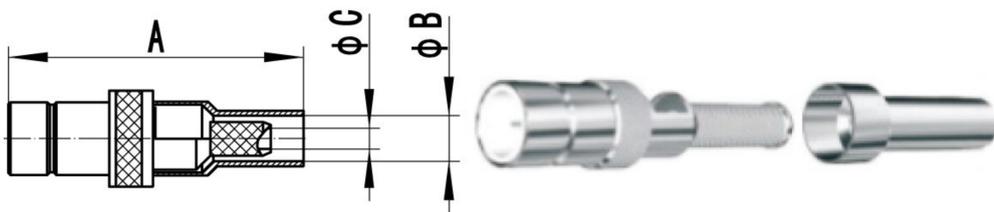


型号	电缆组别	备注
SMB-75J2C	2/75S	A=26, B=2.5, C=1.0
SMB-75J2.5C	2.6/75S	A=26.5, C=2.9, C=1.6
SMB-75J4HC	4/75S	A=29.5, B=4.0, C=2.3
SMB-75J6.5C	7/75S	A=26.5, B=6.8, C=3.8

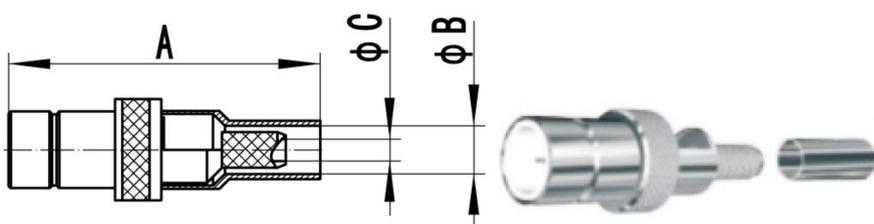

SMB-75J3A	3/75S	A=23.7, B=3.1, C=1.6
SMB-75J4A	4/75S	A=26.2, B=4.0, C=2.1
SMB-75J4HB1	4/75S	A=26.5, B=4.0, C=2.1
SMB-75J5A	5/75S	A=28.5, B=5.2, C=3.1
SMB-75J7A	7/75S	A=30, B=7.2, C=4.6

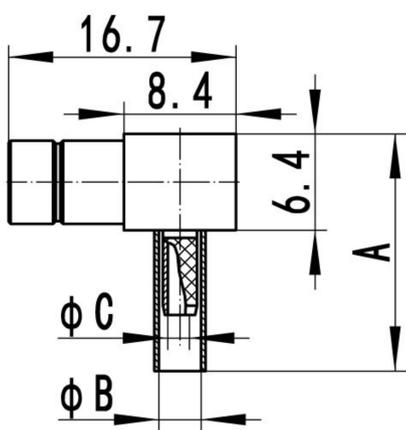


SMB-75JW2.5	2.6/75S	A=16.9, B=2.8, C=1.6
SMB-75JW3	3/75S	A=21.4, B=3.1, C=1.6
SMB-75JW4	4/75S	A=22.4, B=4.2, C=2.1
SMB-75JW5	5/75S	A=23.4, B=5.2, C=3.1

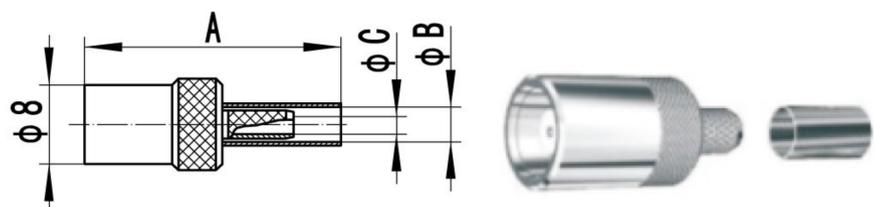


SMB-75K3	3/75S	A=21, B=3.1, C=1.6
SMB-75K4	4/75S	A=22, B=4.0, C=2.1
SMB-75K5	5/75S	A=24, B=5.2, C=3.1
SMB-75K4D	4/75D	A=22, B=4.3, C=2.1
SMB-75K5D	5/75D	A=27, B=5.7, C=3.1
SMB-75K3D	3/75D	A=21, B=3.5, C=1.6


## 1. 软电缆连接器

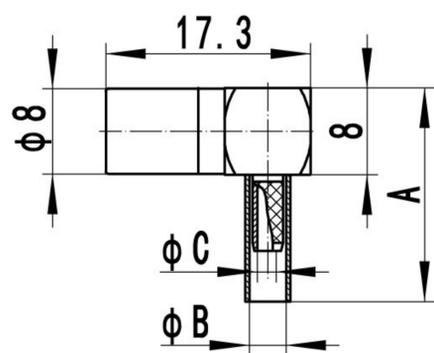

型号	电缆组别	备注
SMB-75KW2	2/75S	A=16.5, B=2.5, C=1.0
SMB-75KW2.5	2.6/75S	A=18.5, B=2.8, C=1.6
SMB-75KW3	3/75S	A=18, B=3.1, C=1.6
SMB-75KW4	4/75S	A=19, B=4.0, C=2.1
SMB-75KW4D	4/75D	A=19, B=4.3, C=2.1
SMB-75KW5	5/75S	A=21, B=5.2, C=3.1
SMB-75KW5D	5/75D	A=24, B=5.7, C=3.1
SMB-75KW6.5D	6.5/75D	A=21.2, B=7, C=4.6

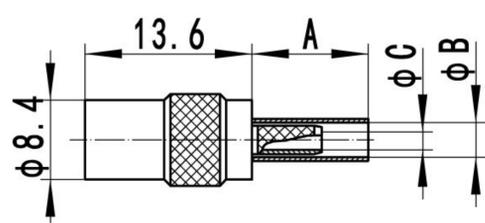


SMB-75K2.5A	2.6/75S	A=23.1, B=2.8, C=1.6
SMB-75K3A	3/75S	A=22.6, B=3.1, C=1.6
SMB-75K3.5A	3.5/75S	A=23.6, B=3.6, C=2.1
SMB-75K4A	4/75S	A=23.6, B=4.0, C=2.1
SMB-75K5A	5/75S	A=25.6, B=5.2, C=3.1

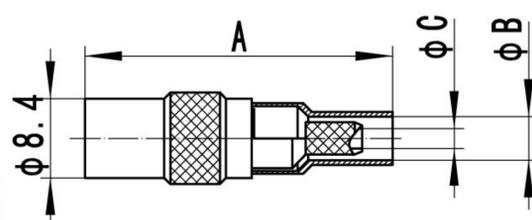


SMB-75K2C	2/75S	A=29.6, B=2.5, C=1.0
SMB-75K2.5C	2.6/75S	A=30.1, B=2.9, C=1.6
SMB-75K3C	3/75S	A=27.3, B=3.1, C=1.6
SMB-75K3.5C	3.5/75S	A=30.1, B=3.7, C=2.1
SMB-75K4C	4/75S	A=29.8, B=4.0, C=2.1
SMB-75K4CD	4/75D	A=30.1, B=4.3, C=2.1
SMB-75K5C	5/75S	A=32.1, B=5.2, C=3.0
SMB-75K6.5C	6.5/75S	A=30.1, B=6.8, C=3.8

SMB-75K6.5CD 6.5/75D A=30.1, B=7.0, C=3.8

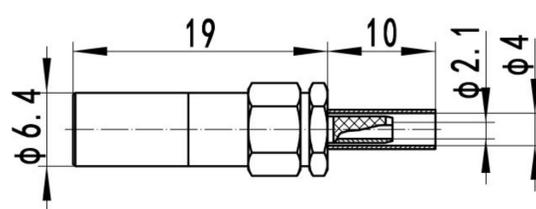

ZSMB-K4

4/75S

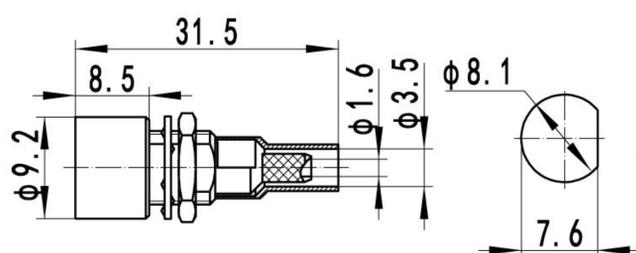

SMB-75-KY2.5HT

2.6/75S