



NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items& type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	0.7	80	-130	130	53	5.5	1iA· 2110/· 2141 (RV-01)
	3600	0.83	100	-160	160	56		
	4200	0.95	120	-170	170	60		
	5000	1.1	140	-180	170	62		

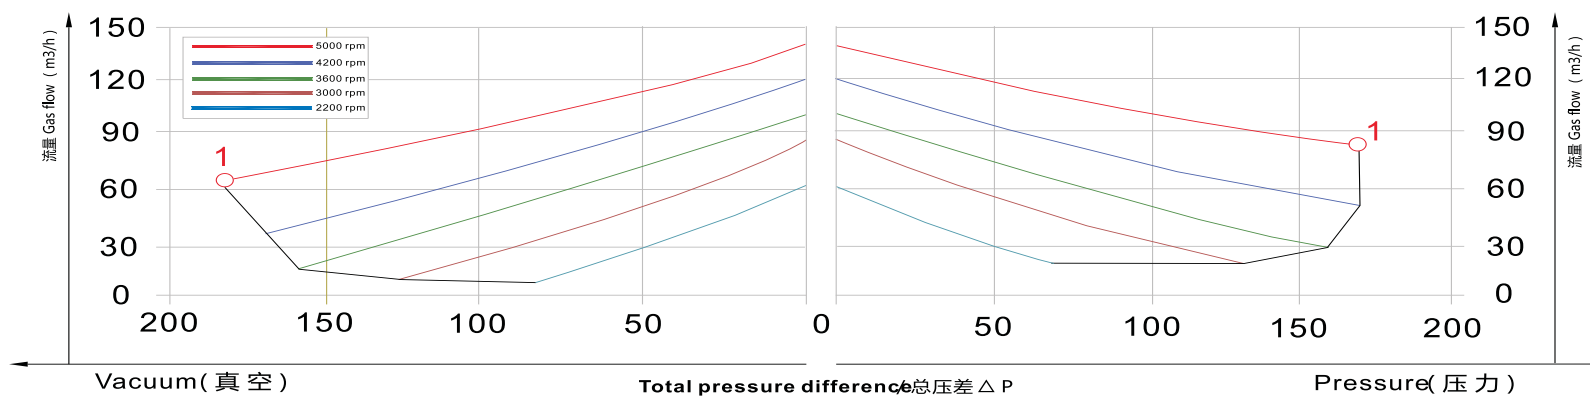


2NB 223 1HY99 参数及曲线

2NB 223 1HY99 Parameters and the curve

NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items× type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	0.7	85	-210	240	55	9	1台. 2110/. . 2141 (RV-01)
	3600	0.83	102	-260	290	61		
	4200	0.95	128	-290	280	64		
	5000	1.1	150	-220	230	66		

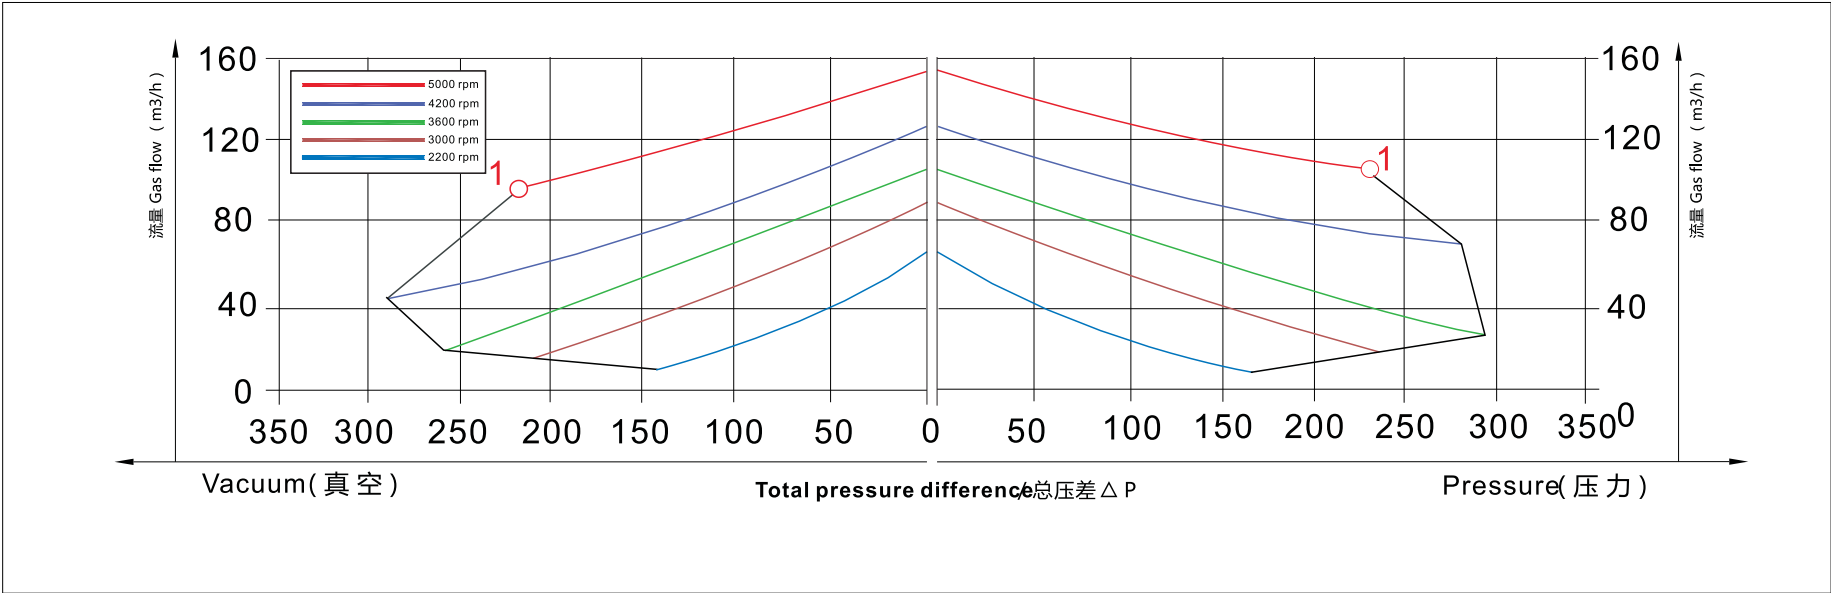


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items× type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	0.7	105	-120	140	54	7	1jÄ. 2110/. 2141 (RV-01)
	3600	0.83	120	-160	180	57		
	4200	0.95	140	-220	230	60		
	5000	1.1	170	-210	190	63		

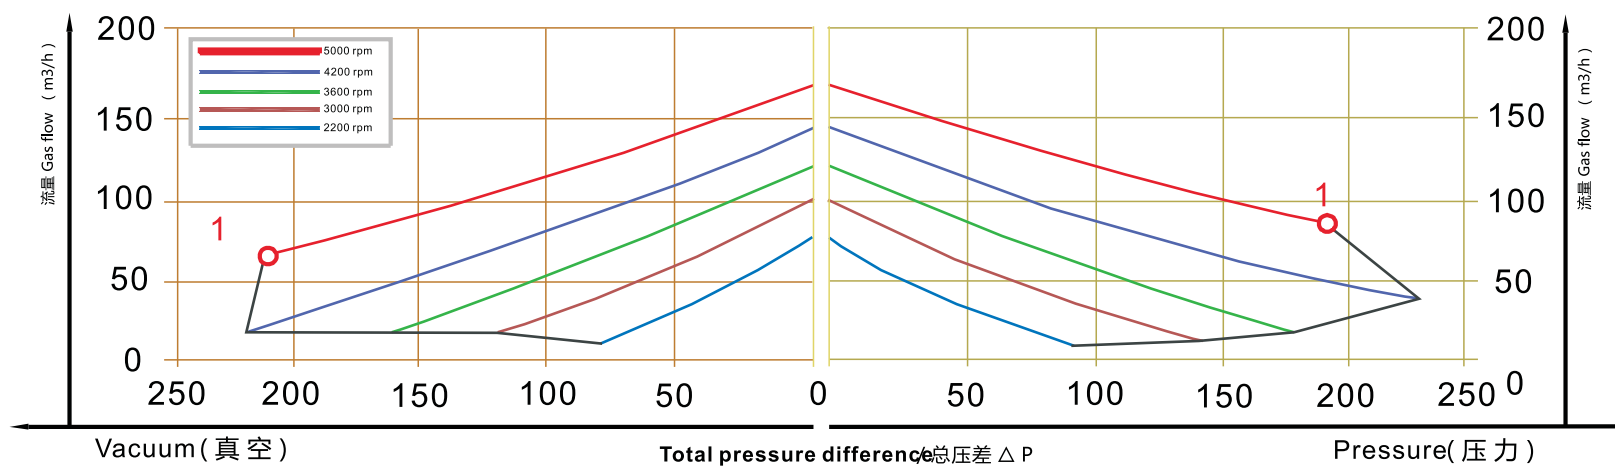


2NB 413 1HY99 参数及曲线

2NB 413 1HY99 Parameters and the curve

NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items× type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	0.85	150	-160	160	63	7.5	1 x . . 2110/. . 2141 (RV-01)
	3600	0.95	180	-160	160	64		
	4200	1.3	220	-180	180	68		
	5000	1.5	250	-140	130	74		
2	3000	1.3	150	-170	200	63		
	3600	1.5	180	-210	200	64		
	4200	1.75	220	-210	190	68		
	5000	2.1	250	-190	190	74		

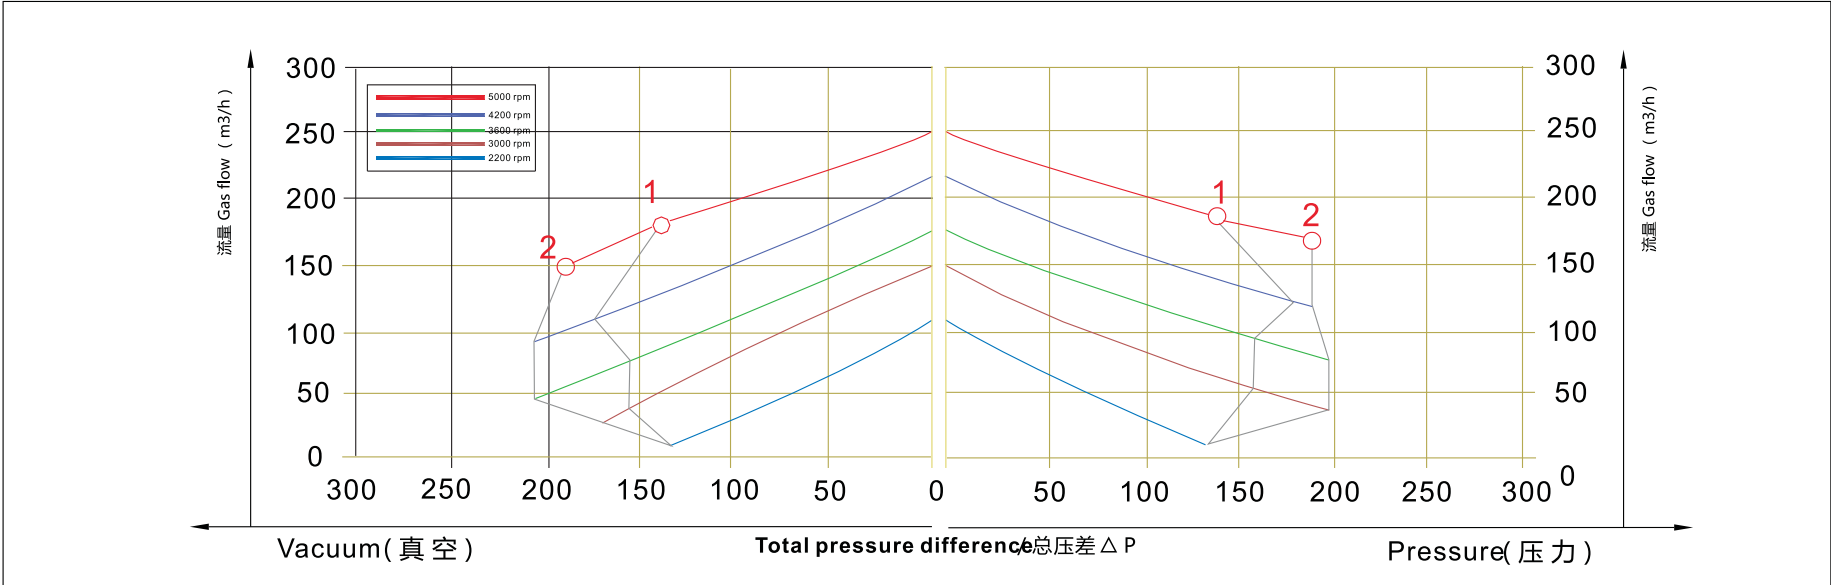


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items× type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	2.2	160	-330	440	66	13.5	1x. . .2110/. . .2142 (RV-02)
	3600	2.55	190	-350	420	69		
	4200	3.0	230	-420	400	72		
	5000	3.8	260	-380	330	77		

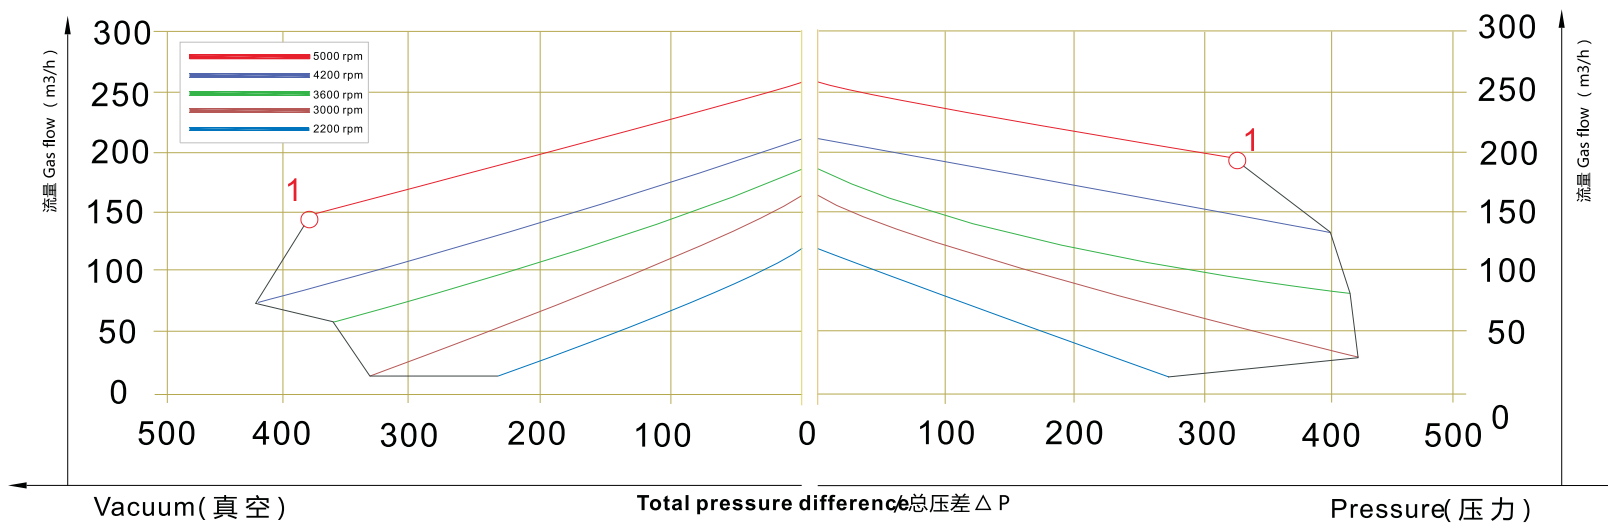


2NB 433 1HY99 参数及曲线

2NB 433 1HY99 Parameters and the curve


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	1.3	180	-180	200	64	8.5	1x. . .2110/. . .2141 (RV-01)
	3600	1.5	210	-210	240	65		
	4200	1.75	255	-240	230	69		
	5000	2.1	300	-180	170	75		

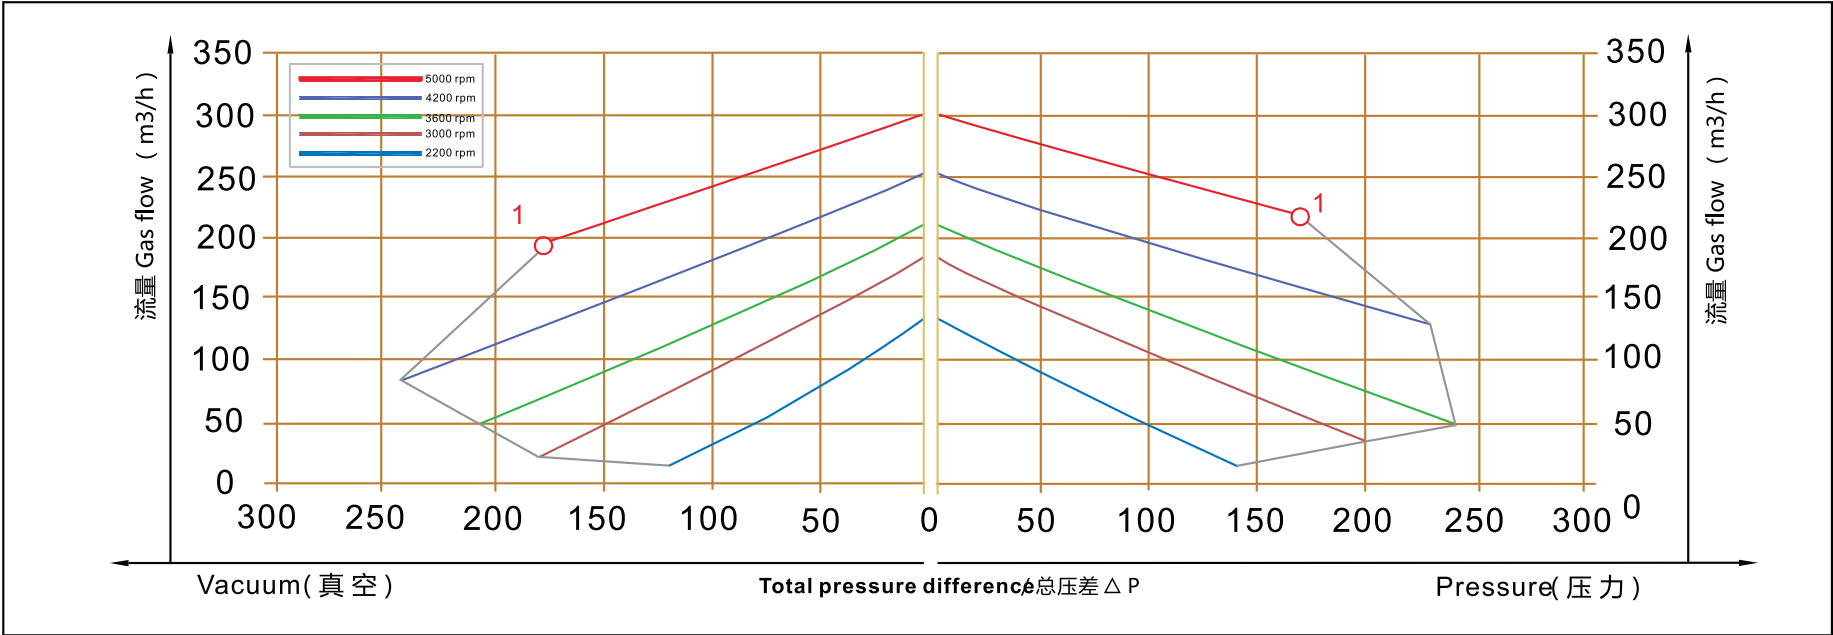


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	Maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	1.3	210	-170	170	64	11	1x. . .2110/. . .2141 (RV-01)
	3600	1.5	255	-150	140	70		
	4200	1.75	300	-130	100	72		
	5000	2.1	350	-70	60	75		
2	3000	1.6	210	-200	190	64		
	3600	2.05	255	-220	210	70		
	4200	2.3	300	-180	170	72		
	5000	2.6	350	-130	120	75		
3	3000	2.2	210	-220	270	64		
	3600	2.55	255	-260	290	70		
	4200	3.0	300	-300	270	72		
	5000	3.8	350	-270	240	75		

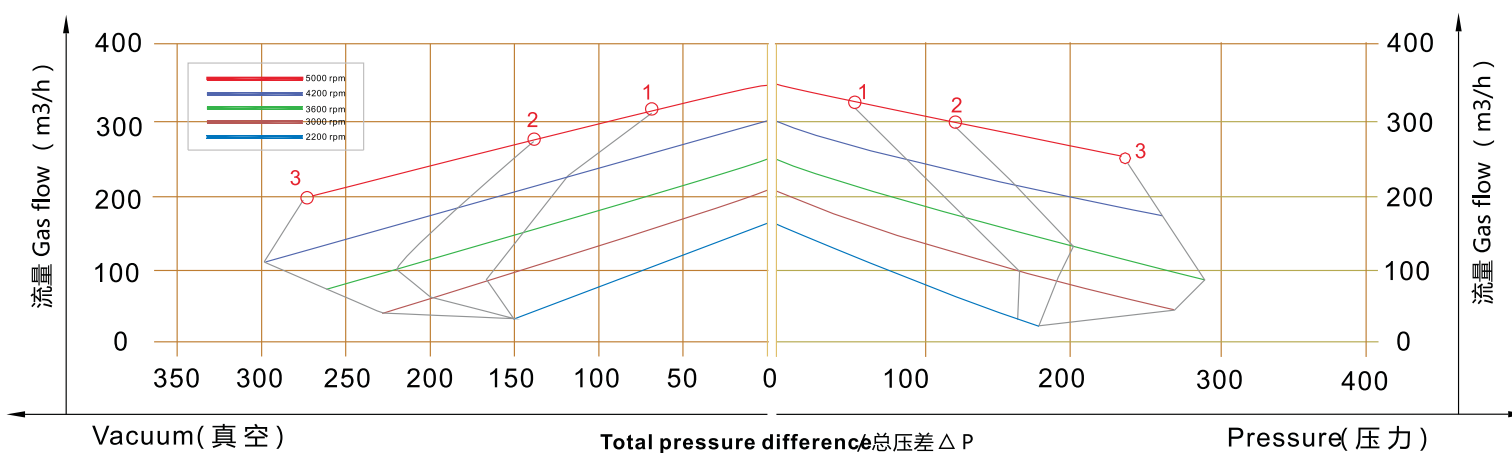

2NB 523 1HY99 参数及曲线					2NB 523 1HY99 Parameters and the curve			
NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	3.0	230	-340	410	72	21	1x. . .2110/. . .2142 (RV-02)
	3600	3.45	275	-380	360	74		
	4200	4.3	320	-340	300	78		
	5000	5.0	380	-300	240	83		
2	3000	4.0	230	-390	440	72		
	3600	4.6	275	-410	480	74		
	4200	6.0	320	-440	480	78		
	5000	6.9	380	-460	410	83		

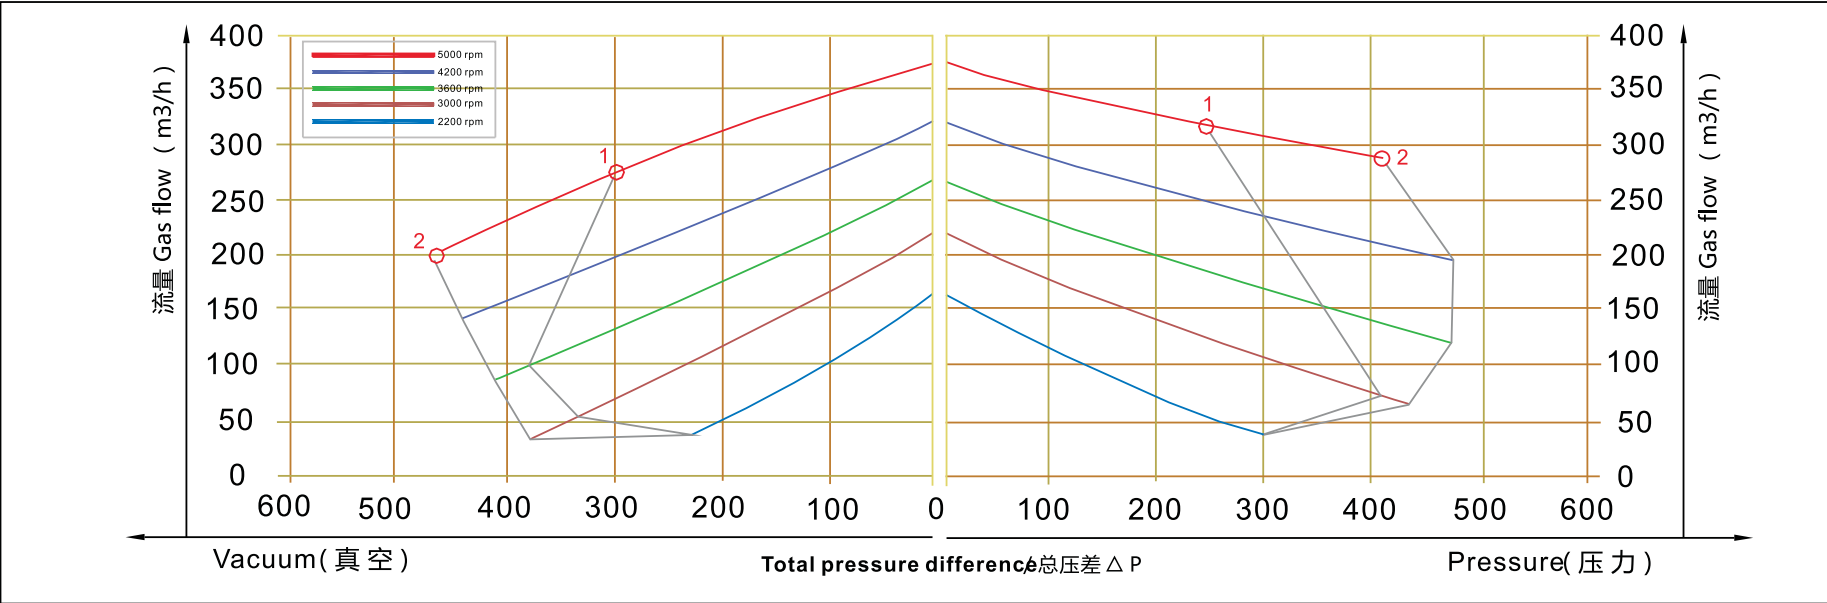


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	2.2	270	-220	230	65	12	2x. . .2110/. . .2141 (RV-01)
	3600	2.55	330	-260	250	71		
	4200	3.0	390	-270	250	73		
	5000	3.8	460	-230	220	76		

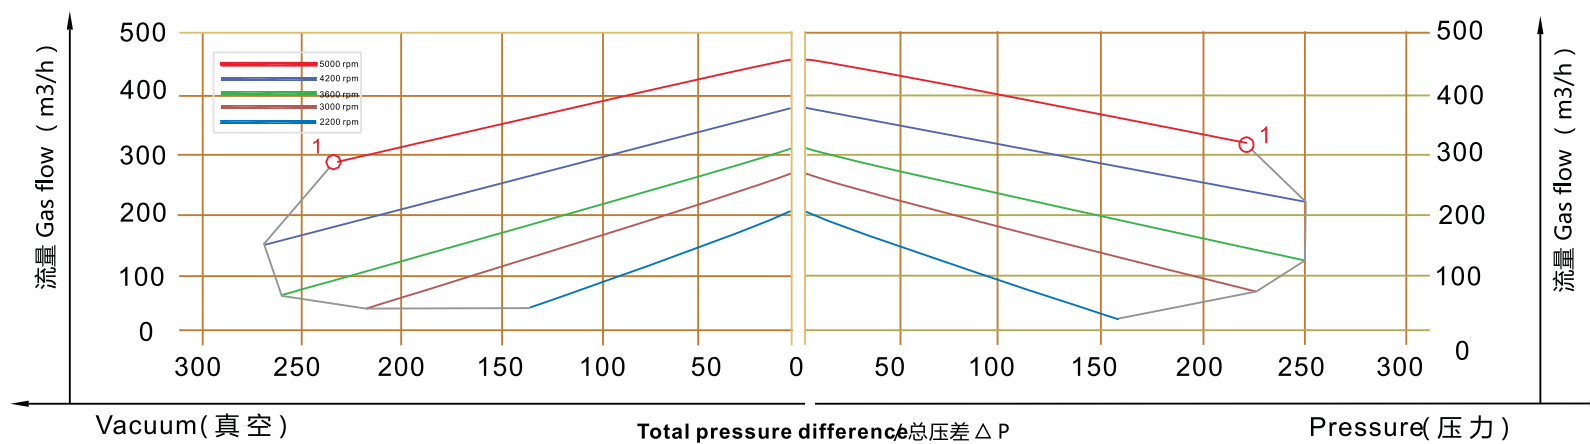

2NB 613 1HY99 参数及曲线

2NB 613 1HY99 Parameters and the curve


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	2.2	265	-220	220	65	14	1x . 2110/. 2145 (RV-01)
	3600	2.55	315	-250	240	71		
	4200	3.0	400	-240	250	73		
	5000	3.8	480	-180	190	76		
2	3000	3.0	265	-260	250	64		
	3600	3.45	315	-280	280	70		
	4200	4.3	400	-270	280	72		
	5000	5.0	480	-220	220	75		

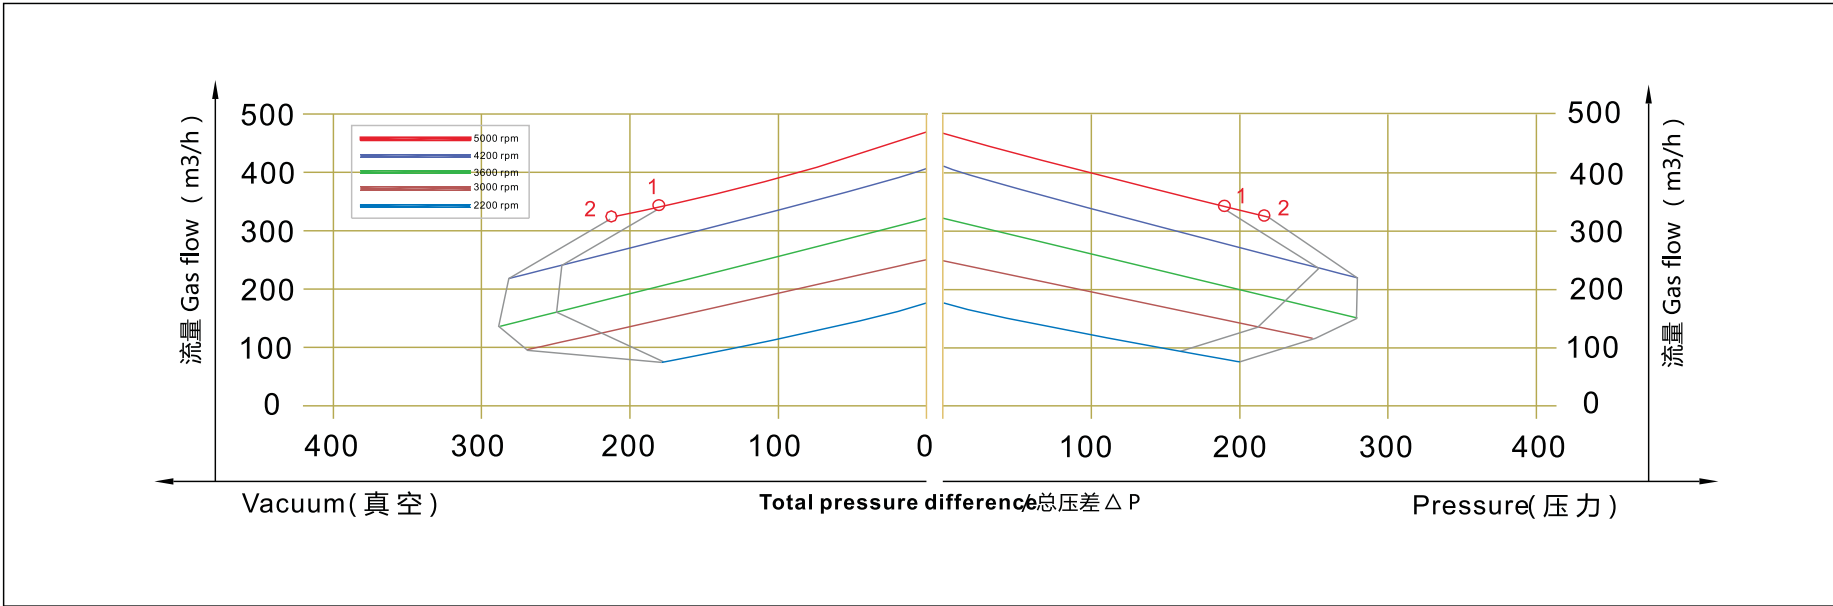

2NB 713 1HY99 参数及曲线

2NB 713 1HY99 Parameters and the curve


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	2.2	320	-190	190	69	16	1x . . 2110/. . 2145
	3600	2.55	380	-190	190	72		
	4200	3.0	440	-160	160	75		
	5000	3.8	530	-130	130	80		
2	3000	3.0	320	-260	270	64		
	3600	3.45	380	-240	230	70		
	4200	4.3	440	-270	220	72		
	5000	5.0	530	-220	210	75		
3	3000	4.0	320	-290	360	64		
	3600	4.6	380	-320	310	70		
	4200	6.0	440	-340	300	72		
	5000	6.9	530	-300	270	75		

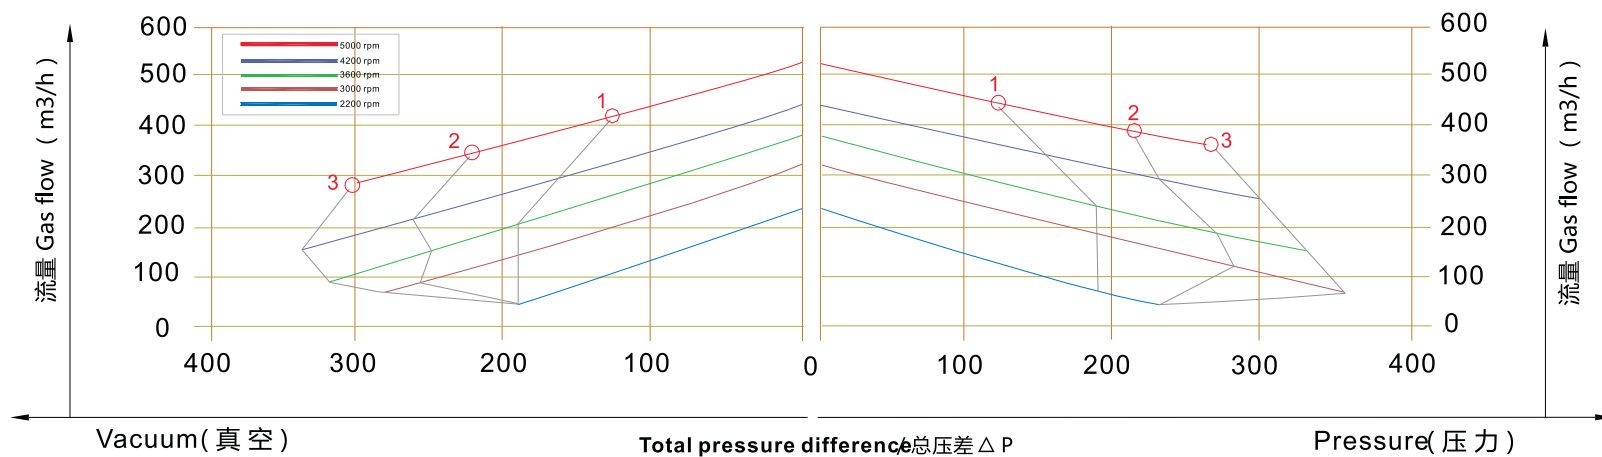


2NB 723 1HY99 参数及曲线

2NB 723 1HY99 Parameters and the curve

NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	4.3	320	-360	380	73	29	1x. . 2110/. . 2145
	3600	4.8	380	-350	320	75		
	4200	6.3	440	-310	300	78		
	5000	6.9	530	-240	200	84		
2	3000	5.5	320	-420	500	73		
	3600	6.3	380	-440	500	75		
	4200	7.5	440	-440	420	78		
	5000	8.8	530	-440	350	84		
3	3000	7.5	320	-440	570	73		
	3600	8.6	380	-460	660	75		
	4200	10.0	440	-460	600	78		
	5000	12.0	530	-440	410	84		

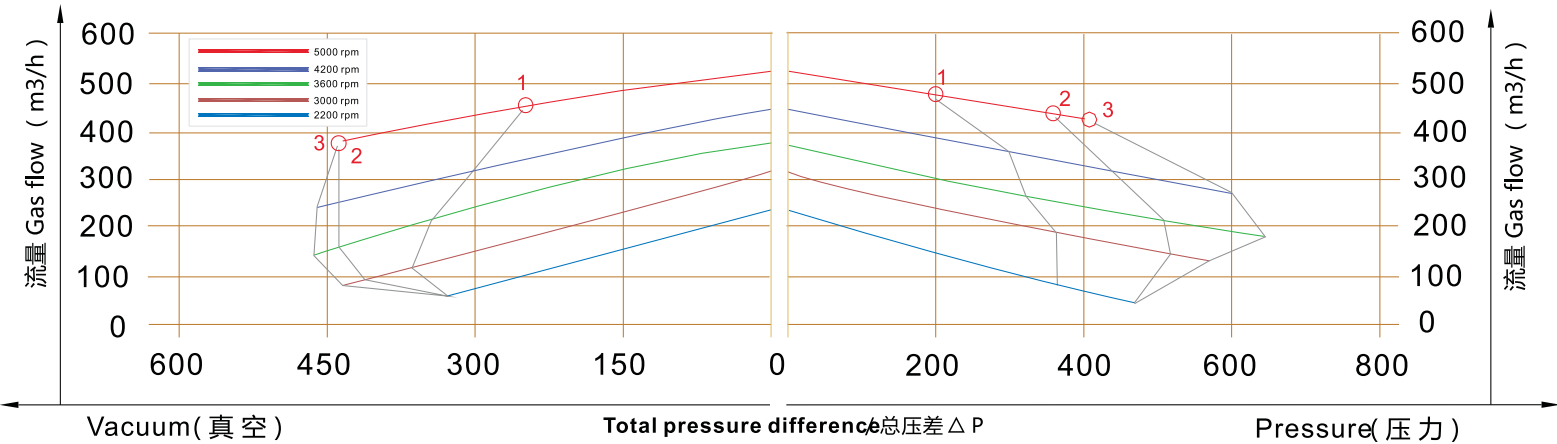


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	ItemsXtype
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	2.2	420	-180	170	70	18	2x. . 2110/. . 2145
	3600	2.55	500	-160	150	73		
	4200	3.0	580	-140	130	76		
	5000	3.8	660	-120	120	81		
2	3000	3.0	420	-220	200	70		
	3600	3.45	500	-200	170	73		
	4200	4.3	580	-180	170	76		
	5000	5.0	660	-150	150	81		
3	3000	4.0	420	-260	290	70		
	3600	4.6	500	-260	260	73		
	4200	6.0	580	-260	260	76		
	5000	6.9	660	-260	240	81		

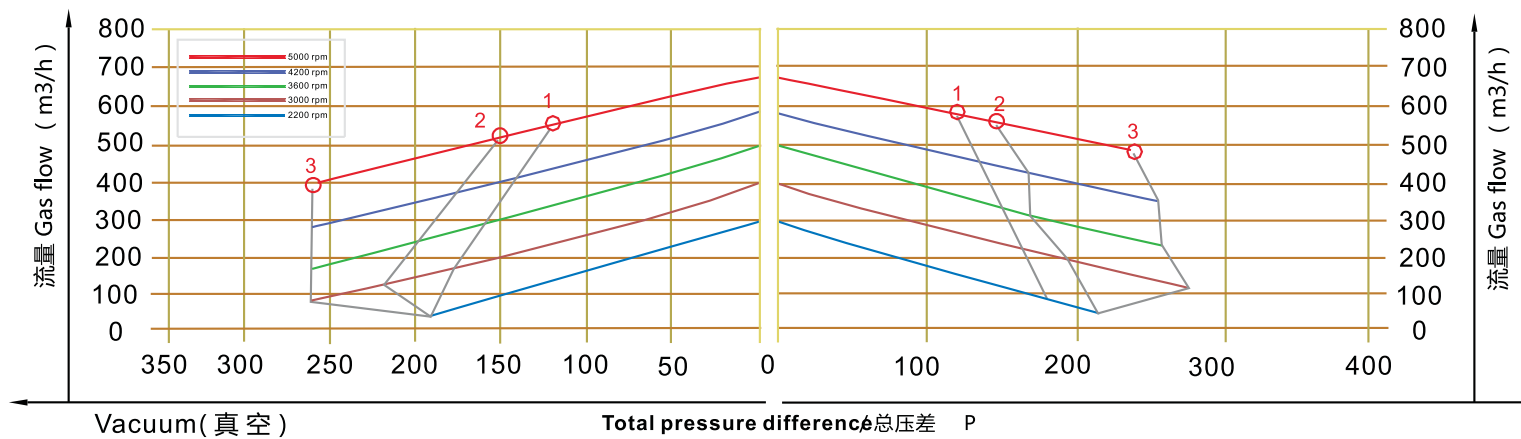

2NB 743 1HY99 参数及曲线


2NB 743 1HY99 Parameters and the curve

NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	5.5	500	-240	260	74	31	2x. . 2110/. . 2145
	3600	6.3	600	-210	200	78		
	4200	7.5	700	-140	120	80		
	5000	8.8	800	-50	30	84		
2	3000	7.5	500	-240	320	73		
	3600	8.6	600	-270	300	75		
	4200	10.0	700	-200	200	78		
	5000	12.0	800	-110	80	84		

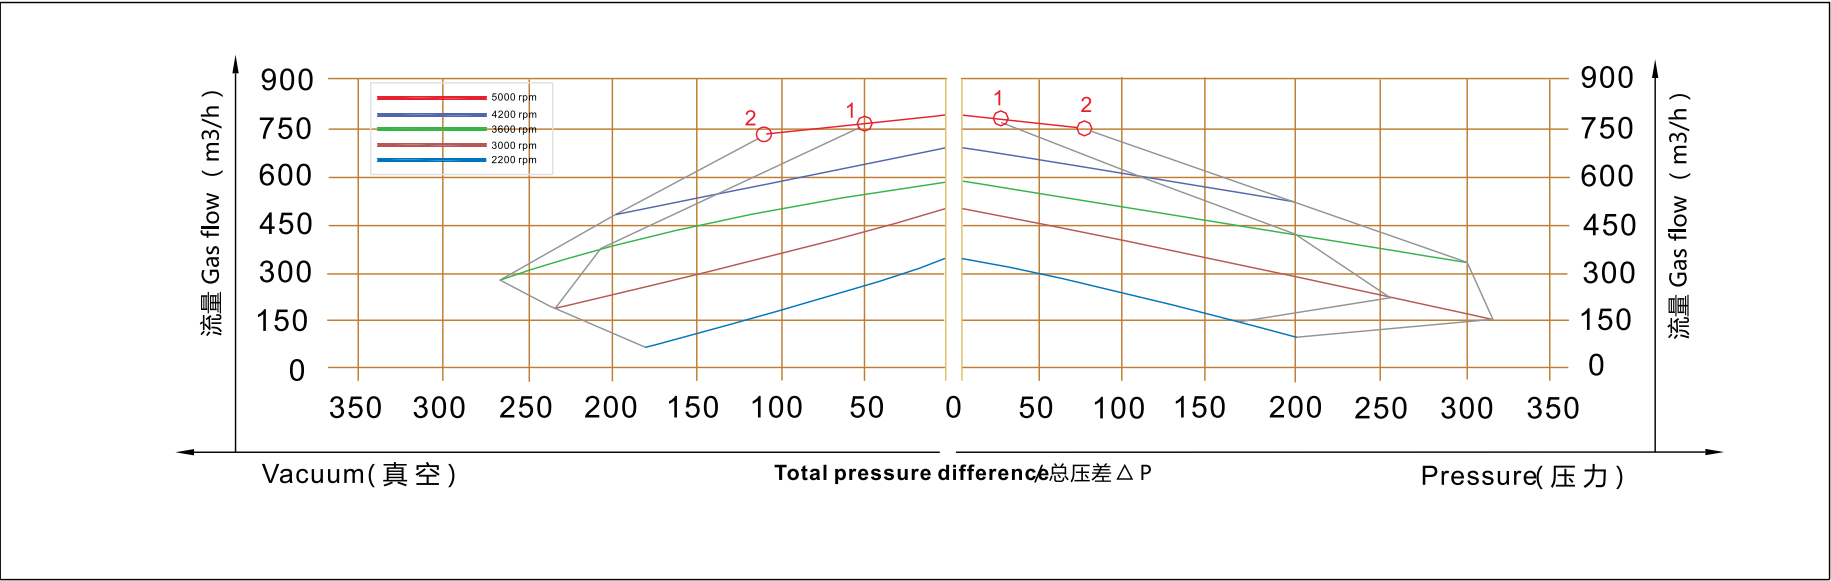




NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	4.0	530	-200	200	73	38	1x. .4740/ .4840
	3600	4.6	620	-160	160	75		
	4200	6.0	720	-150	150	78		
	5000	6.9	830	-140	140	84		
	3000	5.5	530	-300	300	73		
2	3600	6.3	620	-300	280	75		
	4200	7.5	720	-280	260	78		
	5000	8.8	830	-220	210	84		
	3000	7.5	420	-320	430	73		
	3600	8.6	620	-350	400	75		
3	4200	10.0	720	-320	370	78		
	5000	12.0	830	-270	330	84		

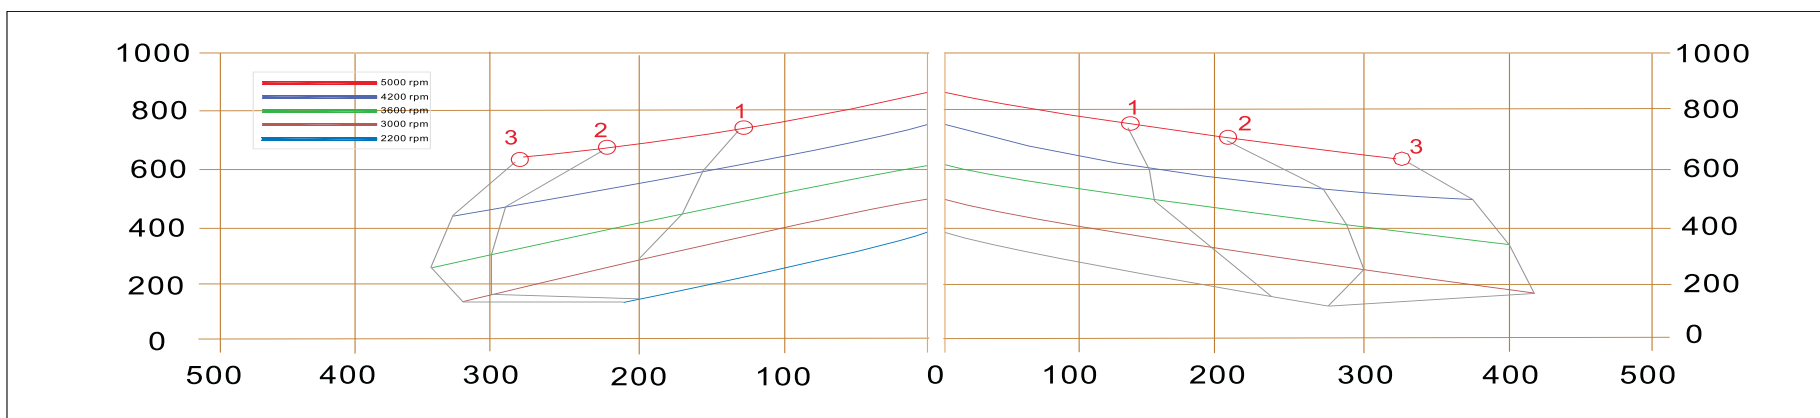


2NB 823 1HY99 参数及曲线

2NB 823 1HY99 Parameters and the curve

NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	7.5	520	-400	400	74	64	1x. . 4740/ . . 4840
	3600	8.6	620	-360	330	78		
	4200	10.0	730	-240	220	81		
	5000	12.0	860	-100	80	84		
2	3000	11.0	520	-430	600	74		
	3600	12.6	620	-460	600	78		
	4200	14.5	730	-480	360	81		
	5000	17.6	860	-440	290	84		
3	3000	15.0	520	-460	670	74		
	3600	17.3	620	-490	750	78		
	4200	21.1	730	-480	680	81		
	5000	24.0	860	-440	520	84		




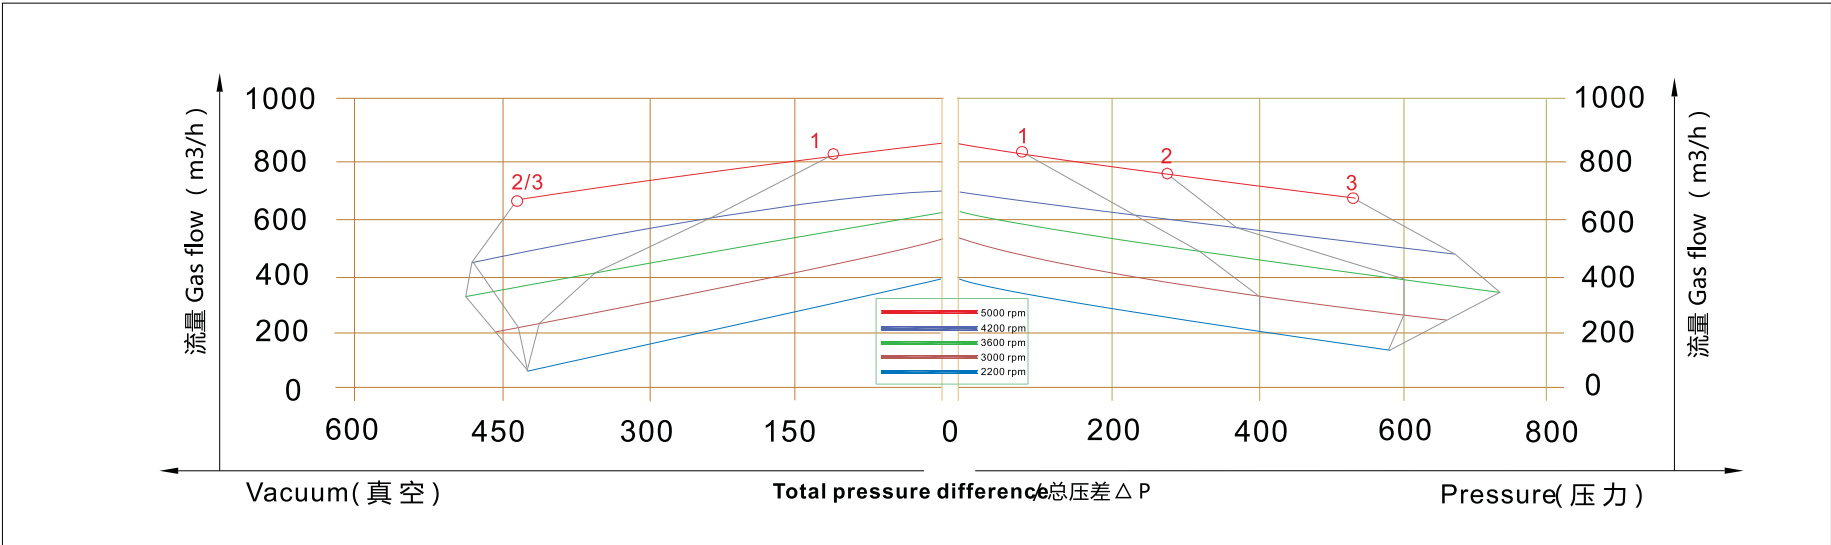


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	5.5	700	-200	190	73	42	1x. . .4740/ . .4840
	3600	6.3	840	-180	180	75		
	4200	7.5	980	-110	90	78		
	5000	8.8	1140	-10	10	84		
2	3000	7.5	700	-270	260	73		
	3600	8.6	840	-270	260	75		
	4200	10.0	980	-250	220	78		
	5000	12.0	1140	-240	180	84		

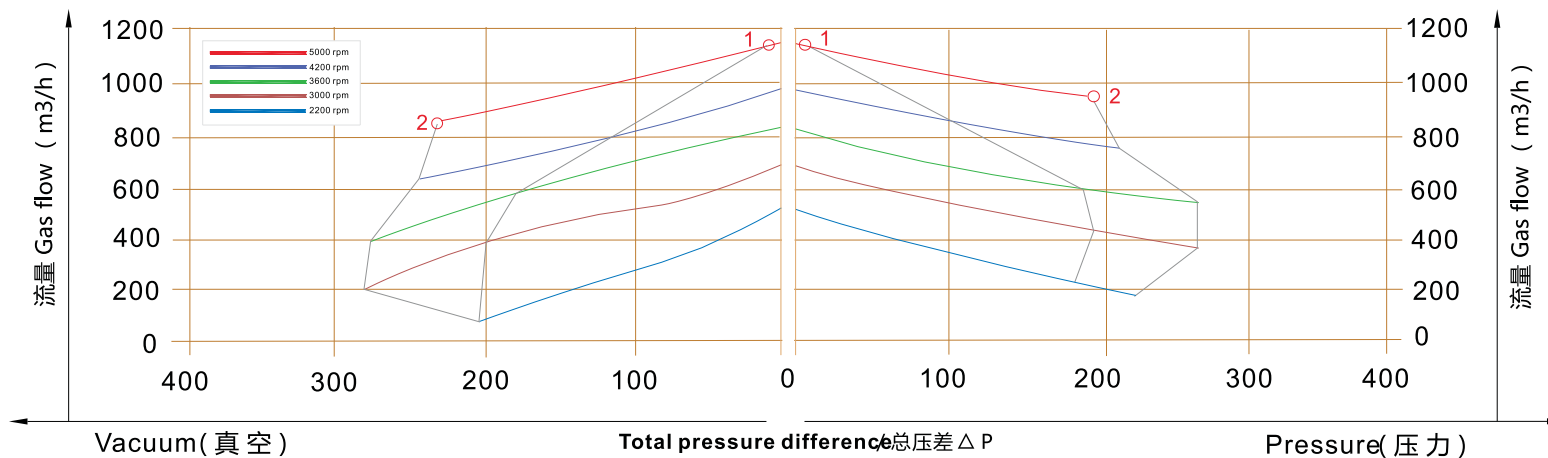


2NB 913 1HY99 参数及曲线


2NB 913 1HY99 Parameters and the curve



NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items× type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	8.5	1050	-190	190	74	72	1;A. 750...860
	3600	9.8	1250	-150	140	79		
	4200	12.0	1400	-60	80	82		
2	3000	12.5	1050	-290	280	74		
	3600	14.5	1250	-270	260	79		
	4200	17.5	1400	-250	240	82		
3	3000	18.5	1050	-360	460	74		
	3600	21.3	1250	-380	420	79		
	4200	26.0	1400	-400	400	82		

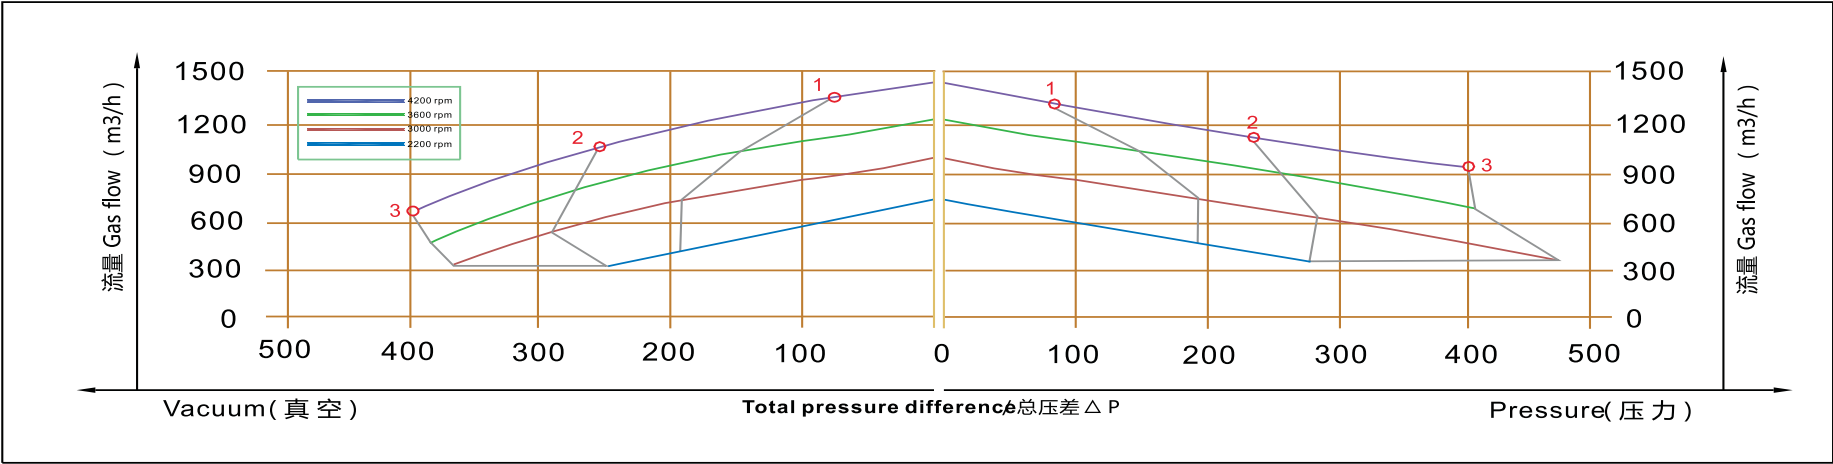


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items×type
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	12.5	1110	-300	270	74	110	2x. .750/ .860
	3600	14.5	1310	-220	200	84		
	4200	17.5	1600	-150	130	87		
2	3000	16.5	1110	-410	370	74		
	3600	19.0	1310	-340	300	84		
	4200	21.0	1600	-270	240	87		
3	3000	20.0	1110	-440	500	74		
	3600	23.0	1310	-440	430	84		
	4200	28.0	1600	-440	340	87		
4	3000	25.0	1110	-440	590	74		
	3600	29.0	1310	-440	540	84		
	4200	35.0	1600	-460	460	87		

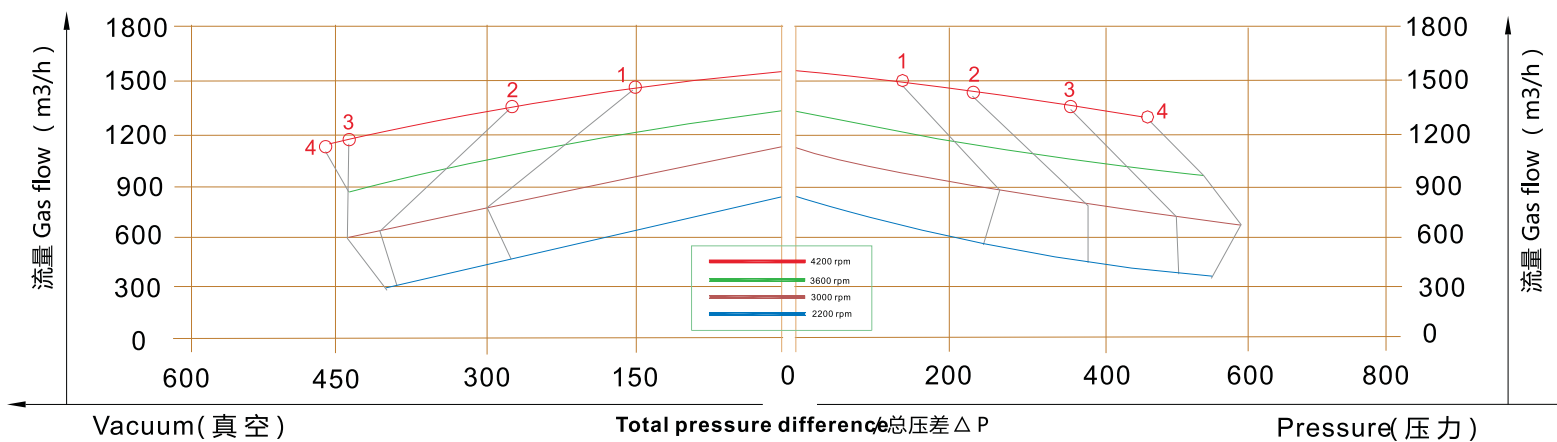


2NB 933 1HY99 参数及曲线

2NB 933 1HY99 Parameters and the curve

NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Itemsxtype
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	12.5	1370	-190	190	75	76	2x. . .750. . .860
	3600	14.5	1600	-150	150	80		
	4200	17.5	1850	-130	120	82		
2	3000	15.0	1370	-280	260	75		
	3600	17.5	1600	-240	220	80		
	4200	21.6	1850	-210	190	82		
3	3000	18.5	1370	-310	320	75		
	3600	21.3	1600	-300	280	80		
	4200	26.0	1850	-260	250	82		

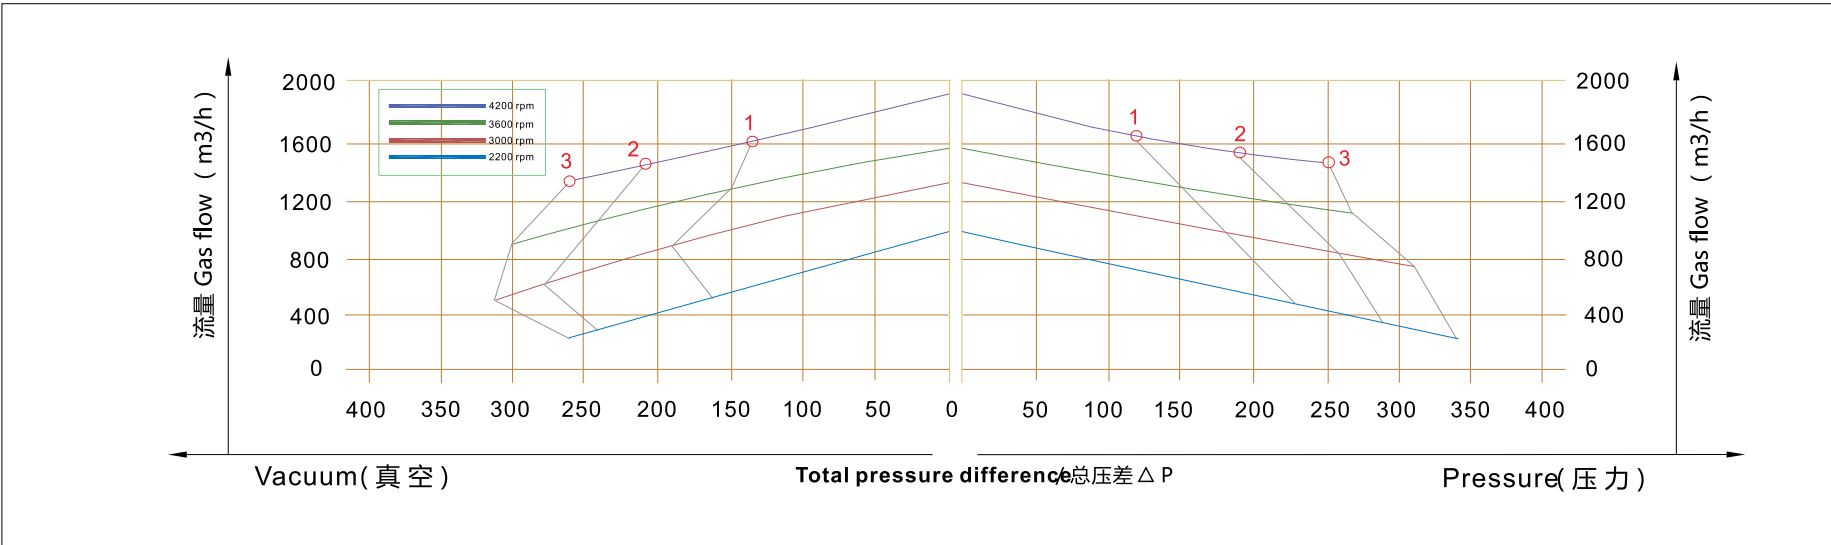


NO	Rated Speed	Rated power	Maximim Air flow	Maximim vacuum	maximim pressure	Sound-level	Weight approx	Vacuum rellet
序号	转速	配置功率	最大流量	最大真空	最大压力	噪音	重量	Items;Átype
	RPM	KW	m3/h	mbar	mbar	dB(A)	Kg	2BX
1	3000	20.0	1940	-220	200	75	118	2;Á. .750/ . .860
	3600	23.0	2300	-160	130	84		
	4200	28.0	2700	-90	80	87		
2	3000	25.0	1940	-300	300	75		
	3600	29.0	2300	-280	250	84		
	4200	35.0	2700	-200	150	87		

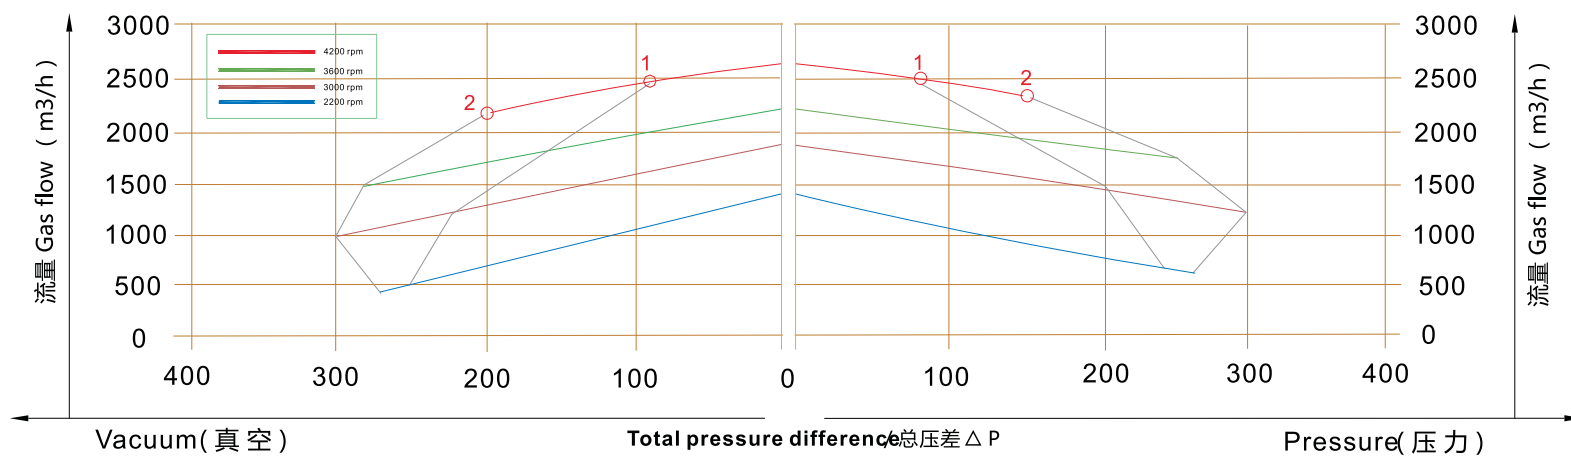


2NB拖泵单级 安装尺寸

Diemensions for belt drive side channel blower

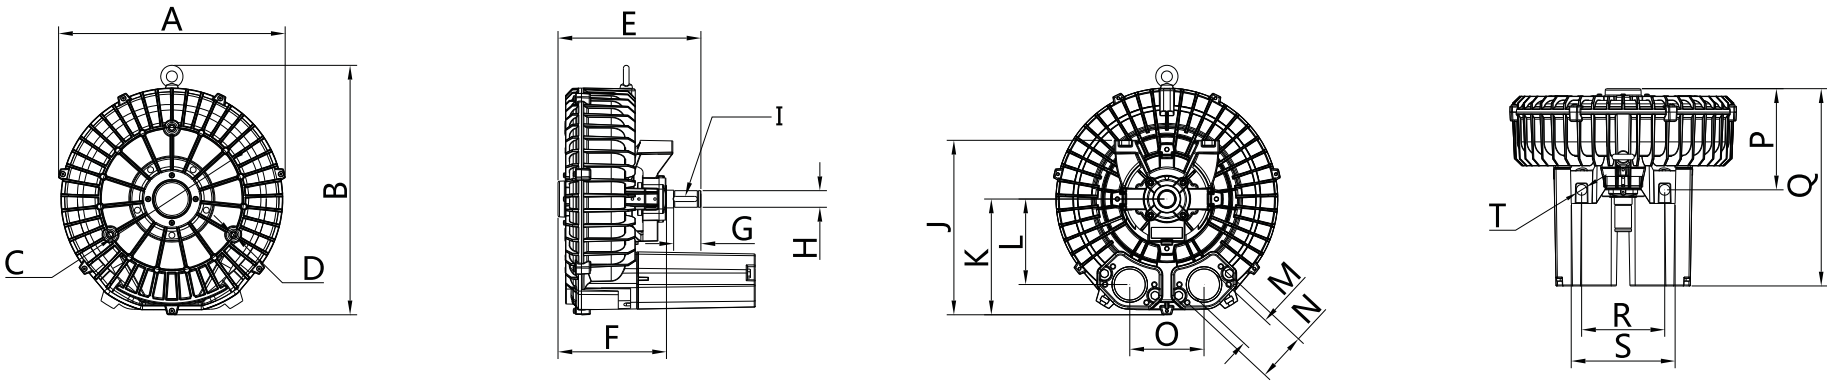


型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
2NB 213 1HY99	246	240	140	M6X15	191	140	43	24	40X8X7	211	125	89	G1 1/4	64	90	129	230	125	157	14
2NB 233 1HY99	246	240	140	M6X15	202	151	43	24	40X8X7	211	125	89	G1 1/4	64	90	138	241	125	157	14
2NB 413 1HY99	286	300	174	M6X15	196	143	43	24	40X8X7	233	148	108	G1 1/2	72	115	131	240	125	157	14
2NB 433 1HY99	286	300	174	M6X15	212	159	43	24	40X8X7	233	148	108	G1 1/2	72	115	146	256	125	157	14
2NB 513 1HY99	334	324	200	M8X15	229	169	44	28	40X8X7	268	169	127	G2	83	120	154	297	140	177	18
2NB 533 1HY99	334	324	200	M8X15	248	188	44	28	40X8X7	268	169	127	G2	83	120	176	316	140	177	18
2NB 613 1HY99	360	358	226	M8X15	235	175	44	28	40X8X7	281	183	135	G2	83	122	165	318	140	177	18
2NB 633 1HY99	360	358	226	M8X15	253	193	44	28	40X8X7	281	183	135	G2	83	122	183	336	140	177	18
2NB 713 1HY99	382	382	240	M10X20	242	182	44	28	40X8X7	292	194	144	G2	83	125	171	333	140	177	18
2NB 733 1HY99	382	382	240	M10X20	252	192	44	28	40X8X7	292	194	144	G2	83	125	180	343	140	177	18


2NB拖泵双级 安装尺寸 Dimensions for belt drive side channel blower

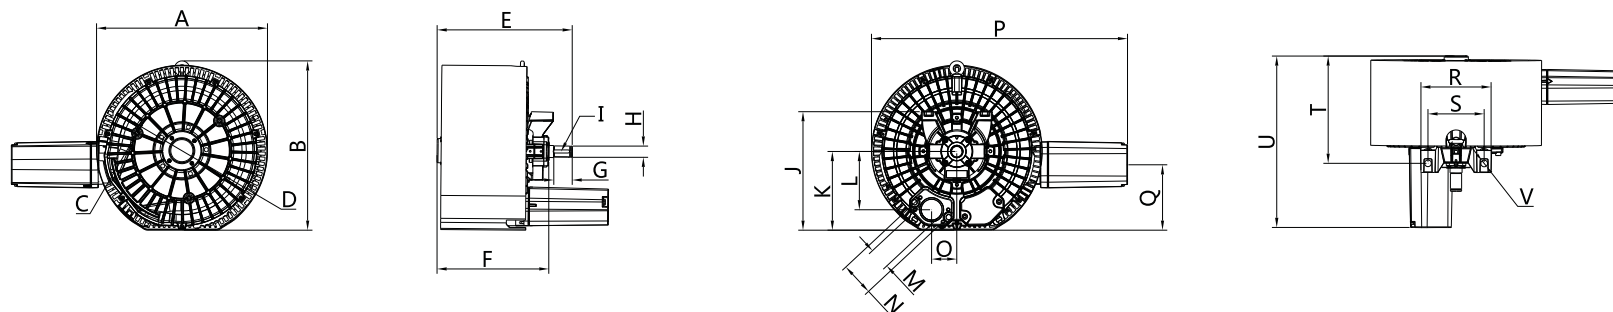


型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V
2NB 223 1HY99	285	270	140	M6X15	250	199	43	24	40X8X7	211	125	89	G1 _{1/4}	64	45	459	106	125	157	186	290	14
2NB 423 1HY99	322	315	174	M6X15	272	219	43	24	40X8X7	233	148	108	G1 _{1/2}	72	57	482	153	125	157	207	316	14
2NB 523 1HY99	371	361	200	M8X15	355	255	44	28	40X8X7	268	169	127	G2	83	60	597	145	140	177	241	382	18
2NB 723 1HY99	426	421	240	M8X15	328	278	44	28	40X8X7	281	183	135	G2	83	60	638	162	140	177	265	428	18

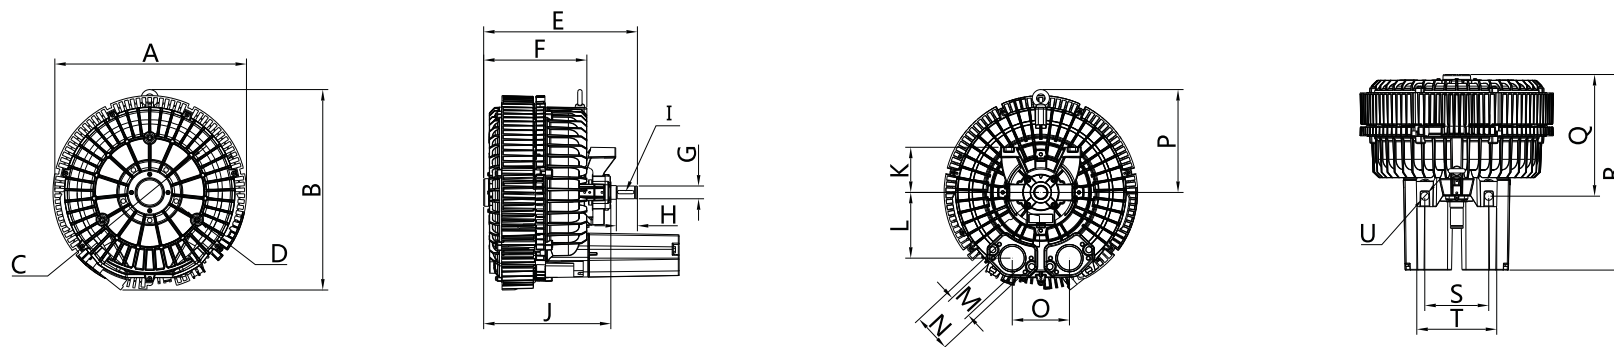

型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
2NB 743 1HY99	420	439	240	M8X15	337	226	28	43	40X8X7	279	99	144	G2	83	125	225	266	428	177	140	18

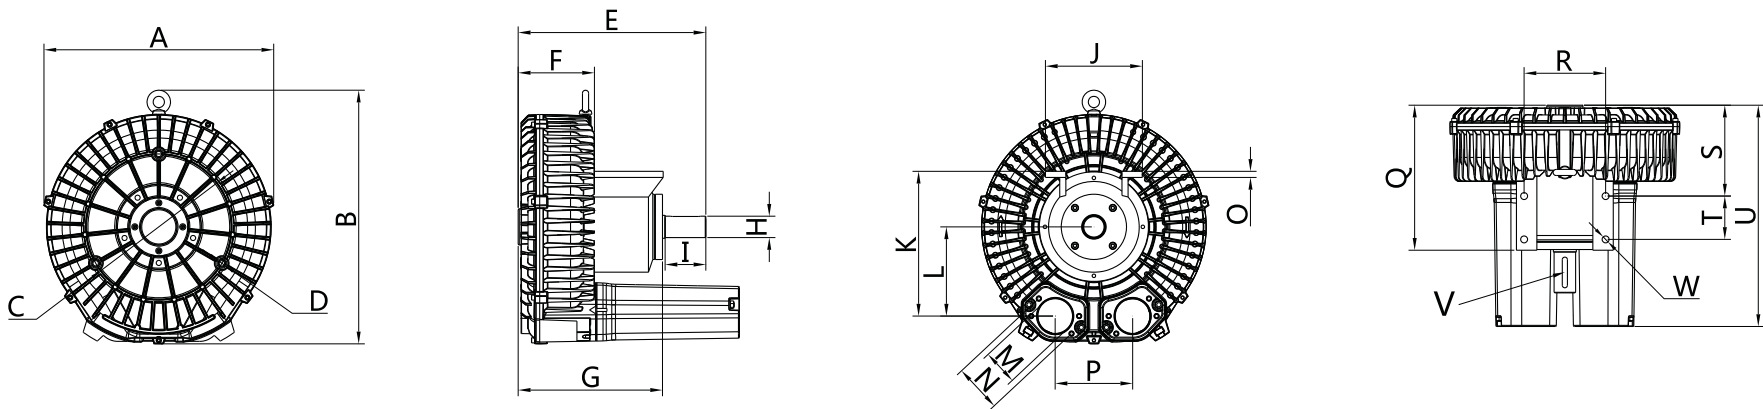


型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
2NB 813 1HY99	451	497	286	M12X15	368	150	283	42	80	190	284	175	G2 ¹ / ₂	94	12	152	285	160	178	85	290	60X10X8	14
2NB 833 1HY99	451	497	286	M12X15	382	164	294	42	80	190	284	175	G2 ¹ / ₂	94	12	152	399	160	192	85	304	60X10X8	14

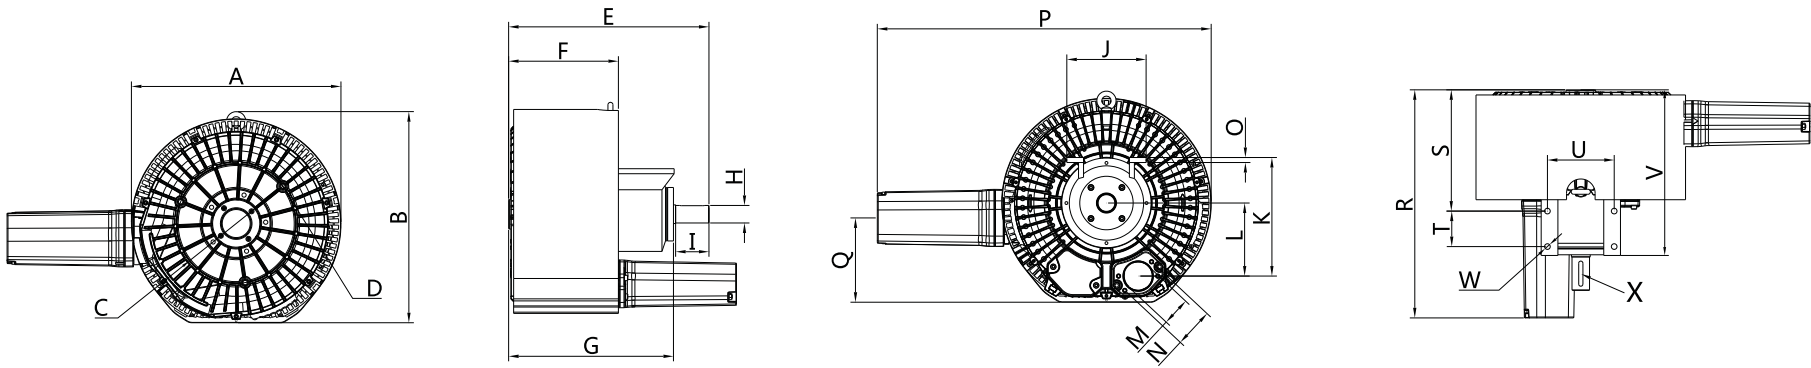

型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X
2NB 823 1HY99	502	506	286	M12X15	480	263	395	42	80	190	284	175	G2 ¹ / ₂	94	12	800	202	546	290	85	160	396	14	60X10X8

2NB843拖泵 安装尺寸


Dimensions for belt drive side channel blower

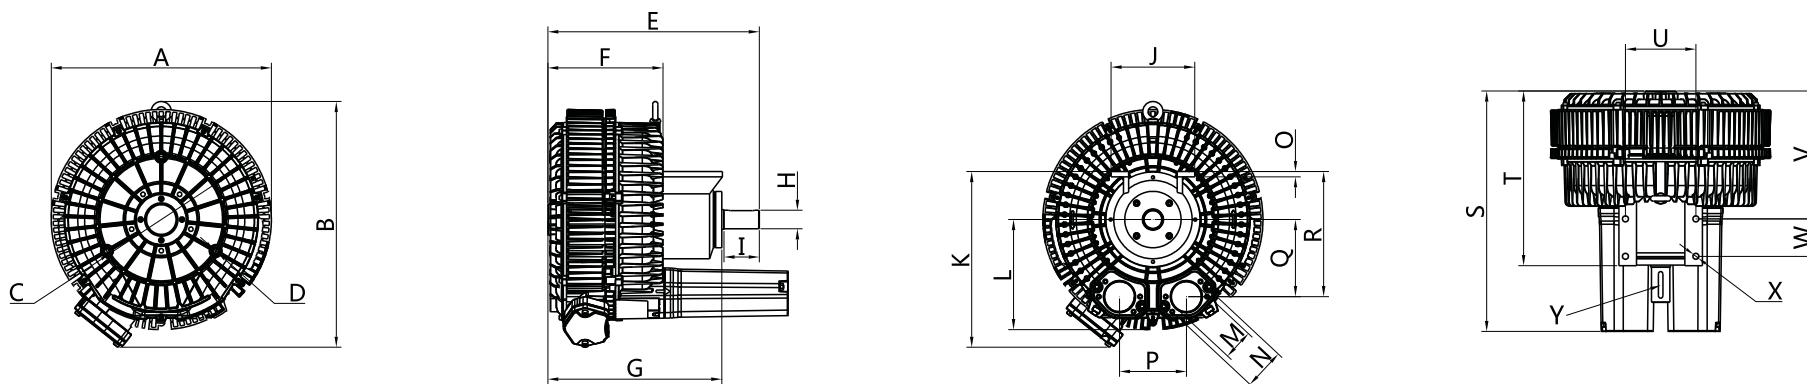


型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
2NB 843 1HY99	502	558	286	M12X15	480	263	395	42	80	190	290	252	G2 _{1/2}	94	12	152	175	284	546	396	160	290	85	14	60X10X8

2NB9拖泵 安装尺寸

Diemensions for belt drive side channel blower

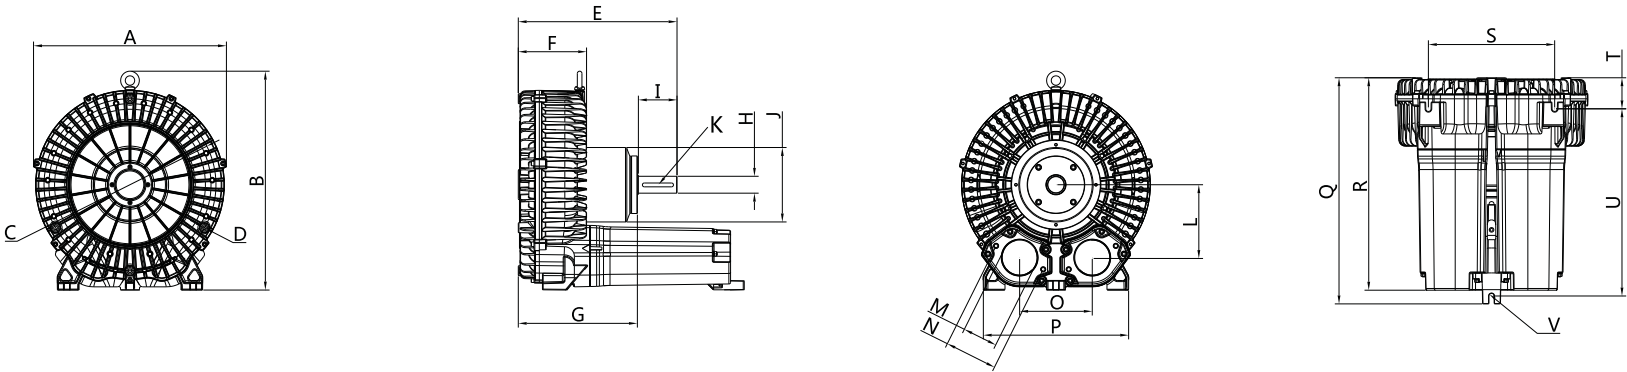


型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V
2NB 913 1HY99	550	623	490	M12X15	452	195	339	48	110	212	90X14X9	210	G4	150	207	414	644	605	360	88	533	15
2NB 933 1HY99	550	623	490	M12X15	490	433	377	48	110	212	90X14X9	210	G4	150	207	414	682	643	360	126	533	15

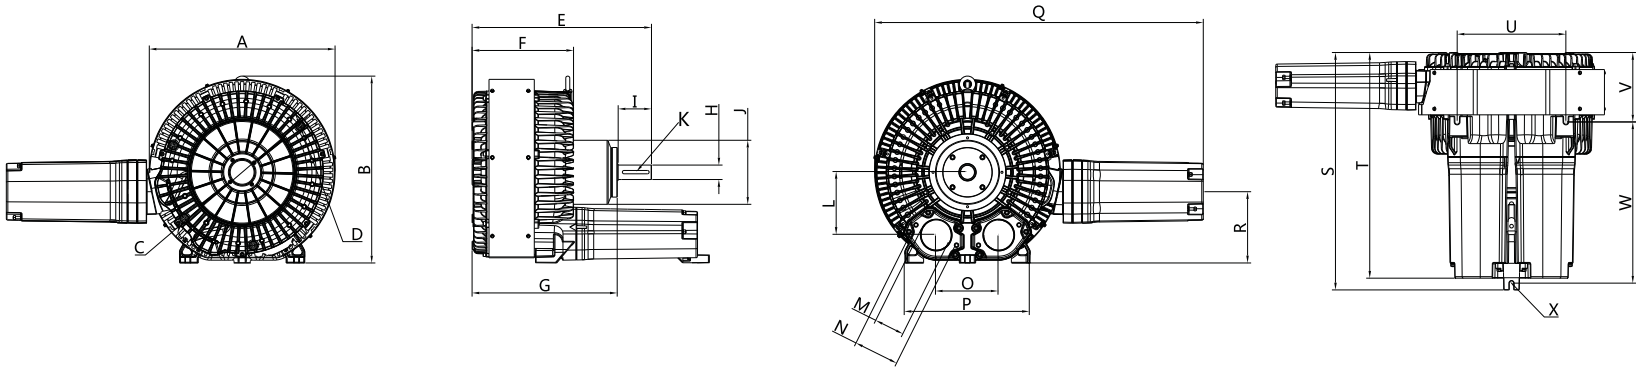

型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X
2NB 923 1HY99	615	618	490	M12X15	594	336	480	48	110	212	90X14X9	207	G4	150	207	414	1088	236	785	746	360	229	533	15

2NB943 拖泵安装尺寸

Dimensions for belt drive side channel blower

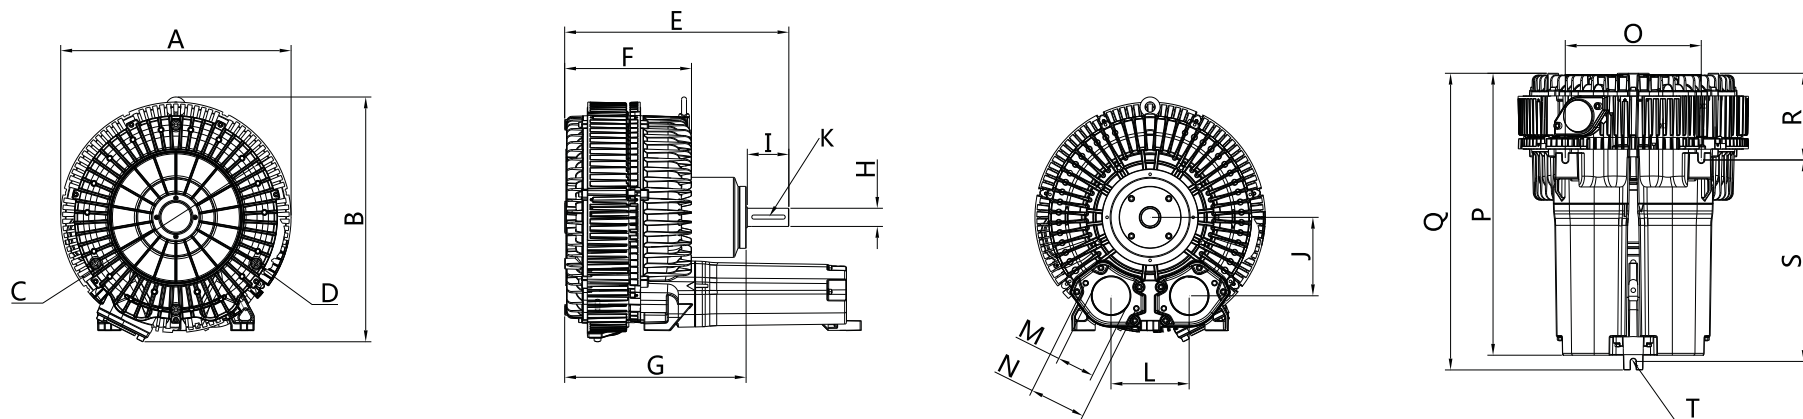

型号 Model	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	Q	R	S	T
2NB 943 1HY99	610	648	490	M12X15	594	336	480	48	110	90X14X9	207	G4	150	360	746	785	229	533	15