



Finshed Bore AK/BK V pulleys

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com


电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com



V-pulleys

SA

Steel Sheaves

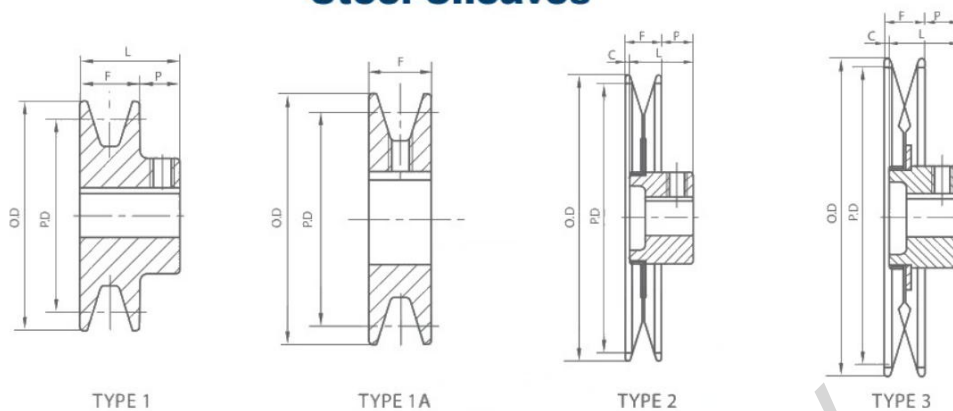

Catalog Number	Diameter		Type					Dimensions					Lbs
	OD	PD A		F	L	P	C	1/2	5/8	3/4	7/8	1"	
SA15	1.50	1.25	1	5/8	11/16	7/16	-	•					0.2
SA17	1.75	1.50	1	5/8	11/16	7/16	-	•	•	•			0.3
SA20	2.00	1.80	1A	5/8	-	-	-	•	•	•			0.3
SA21	2.10	1.90	1A	5/8	-	-	-	•	•	•			0.3
SA22	2.20	2.00	1A	5/8	-	-	-	•	•	•			0.4
SA23	2.30	2.10	1A	5/8	-	-	-	•	•	•	•		0.4
SA25	2.50	2.30	1A	5/8	-	-	-	•	•	•	•		0.5
SA26	2.60	2.40	1A	5/8	-	-	-	•	•	•	•		0.5
SA27	2.70	2.50	1A	5/8	-	-	-	•	•	•	•		0.6
SA28	2.80	2.60	1A	5/8	-	-	-	•	•	•	•		0.6
SA30	3.05	2.80	1A	5/8	-	-	-	•	•	•	•	•	0.8
SA32	3.25	3.00	1A	5/8	-	-	-	•	•	•	•	•	0.9
SA34	3.45	3.20	1A	5/8	-	-	-	•	•	•	•	•	1.0
SA39	4.04	3.50	2	15/16	13/16	9/16	5/16	•	•	•	•	•	0.9
SA44	4.54	4.00	2	15/16	13/16	9/16	5/16	•	•	•	•	•	1.0
SA49	5.04	4.50	2	15/16	13/16	9/16	5/16	•	•	•	•	•	1.1
SA54	5.43	5.00	2	15/16	13/16	9/16	5/16	•	•	•	•	•	1.3
SA64	6.54	6.00	2	15/16	13/16	9/16	5/16	•	•	•	•	•	1.6
SA74	7.54	7.00	2	15/16	13/16	9/16	5/16	•	•	•	•	•	1.8
*SA84	8.54	8.00	2	15/16	13/16	17/32	9/32	•	•	•	•	•	2.6
*SA94	9.50	9.00	3	15/16	13/16	17/32	9/32	•	•	•	•	•	2.9
*SA104	10.50	10.00	3	15/16	13/16	17/32	9/32	•	•	•	•	•	3.4
*SA114	11.50	11.00	3	15/16	13/16	17/32	9/32	•	•	•	•	•	3.8
*SA124	12.50	12.00	3	15/16	13/16	17/32	9/32	•	•	•	•	•	4.5




Hangzhou Ocean Industry CO., LTD.




V-pulleys

SB


Steel Sheaves




TYPE 1



TYPE 1A



TYPE 2



TYPE 3


Catalog Number	Diameter			Type	Dimensions				Stock Bores -wt-										Lbs
	OD	PD A	PD B		F	L	P	C	1/2 *	5/8 *	3/4*	7/8 *	1 *	11/8 *	13/8 *	14 1	7n16		
SB24A	2.40	1.80	2.20	1A	3/4	-	-	-	•									0.4	
SB24	2.40	1.80	2.20	1	3/4	13/16	7/16	-	•	•	•							0.5	
SB25A	2.50	1.90	2.30	1A	3/4	-	-	-	•									0.5	
SB25	2.50	1.90	2.30	1	3/4	13/16	7/16	-	-	•	•	•						0.7	
SB26A	2.60	2.00	2.40	1A	3/4	-	-	-	•									0.5	
SB26	2.60	2.00	2.40	1	3/4	13/16	7/16	-		•	•	•						0.7	
SB27A	2.70	2.10	2.50	1A	3/4	-	-	-	•		•							0.6	
SB27	2.70	2.10	2.50	1	3/4	13/16	7/16	-				•						0.8	
SB28A	2.96	2.20	2.60	1A	3/4	-	-	-	•	•	•	•						0.8	
SB28	2.96	2.20	2.60	1	3/4	13/16	7/16	-					•					0.8	
SB30A	3.16	2.4	2.8	1A	3/4	-	-	-	•	•	•	•	•					1.0	
SB32A	3.36	2.6	3	1A	3/4	-	-	-	•	•	•	•	•					1.1	
SB34	3.57	2.80	3.20	2	11/16	13/16	7/16	5/16	•	•	•	•	•					0.8	
SB36	3.77	3.00	3.40	2	11/16	13/16	7/16	5/16	•	•	•	•	•					0.8	
SB40	3.97	3.2	3.60	2	11/16	13/16	7/16	5/16	•	•	•	•	•					0.9	
SB45	4.27	3.50	3.90	2	11/16	13/16	7/16	5/16	•	•	•	•	•					1.1	
SB50	4.77	4.00	4.4	2	11/16	13/16	7/16	5/16	•	•	•	•	•					1.1	
SB55	5.27	4.50	4.9	2	11/16	13/16	7/16	5/16	•	•	•	•	•					1.3	
SB60	5.77	5.00	5.4	2	11/16	13/16	7/16	5/16	•	•	•	•	•					1.4	
SB70	6.94	6	6.40	2	11/8	13/16	7/16	3/8	•	•	•	•	•					1.5	
SB80	7.94	7.00	7.40	2	11/8	13/16	7/16	3/8	•	•	•	•	•					2.1	
SB90	8.94	8.00	8.40	2	11/8	13/16	7/16	3/8		•	•	•	•				•	2.5	
SB100	9.93	9.00	9.40	3	11/8	13/16	7/16	3/8		•	•	•	•					3.3	
SB110	10.93	10.00	10.40	3	11/8	13/16	7/16	3/8		•	•	•	•					3.6	
SB120	11.93	11.00	11.40	3	11/8	13/16	7/16	3/8			•	•	•					4.0	
SB130	12.93	12.00	12.40	3	11/8	13/16	7/16	3/8			•	•	•					4.0	
SB160	15.93	15.00	15.40	3	11/8	13/16	7/16	3/8				•	•					7.8	
SB190	18/93	18.00	18.40	3	11/8	13/16	7/16	3/8					•	•	•			10.0	



V-pulleys

CAK

Cast Iron Sheaves

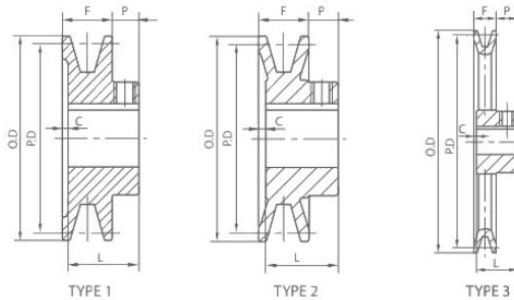

"3L" Belts may be used with
These Sheaves as Indicated in
Table Below

Catalog Number	Diameter			Type	Dimensions				Stock Bores -wt													Lbs
	OD	PD A	PD 3L		F	L	P	C	1/2	5/8	3/4	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 7/8			
CAK17	1.75	1.50	1.16	1	21/32	15/16	7/16	5/32	•	•	•										0.2	
CAK20	2.00	1.80	1.46	1	21/32	15/16	7/16	5/32	•	•	•										0.3	
CAK21	2.10	1.90	1.56	1	21/32	15/16	7/16	5/32	•	•	•										0.4	
CAK22	2.20	2.00	1.66	1	21/32	15/16	7/16	5/32	•	•	•										0.5	
CAK23	2.30	2.10	1.76	1	21/32	15/16	7/16	5/32	•	•	•										0.5	
CAK25	2.50	2.30	1.96	2	21/32	15/16	7/16	5/32	•	•	•										0.6	
CAK26	2.60	2.40	2.06	2	21/32	15/16	7/16	5/32	•	•	•										0.6	
CAK27	2.70	2.50	2.16	2	21/32	15/16	7/16	5/32	•	•	•										0.6	
CAK28	2.80	2.60	2.26	2	21/32	15/16	7/16	5/32	•	•	•										0.7	
CAK30	3.05	2.80	2.46	2	21/32	15/16	7/16	5/32	•	•	•										0.7	
CAK32	3.25	3.00	2.66	2	21/32	15/16	7/16	5/32	•	•	•										0.8	
CAK34	3.45	3.20	2.86	2	21/32	15/16	7/16	5/32	•	•	•										0.9	
CAK39	3.75	3.50	3.16	2	3/4	15/32	15/32	1/16	•	•	•										1.4	
CAK41	3.95	3.70	3.36	2	3/4	15/32	15/32	1/16	•	•	•										1.5	
CAK44	4.25	4.00	3.66	3	3/4	15/32	15/32	1/16	•	•	•										1.5	
CAK46	4.45	4.20	3.86	3	3/4	15/32	15/32	1/16	•	•	•										1.6	
CAK49	4.75	4.50	4.16	3	3/4	15/32	15/32	1/16	•	•	•										1.7	
CAK51	4.95	4.70	4.36	3	3/4	15/32	15/32	1/16	•	•	•										1.7	
CAK54	5.25	5.00	4.66	3	3/4	15/32	15/32	1/16	•	•	•										1.8	
CAK56	5.45	5.20	4.86	3	3/4	15/32	15/32	1/16	•	•	•										1.9	
CAK59	5.75	5.50	5.16	3	3/4	15/32	15/32	1/16	•	•	•										2.0	
CAK61	5.95	5.70	5.36	3	3/4	15/32	15/32	1/16	•	•	•										2.1	
CAK64	6.25	5.00	5.66	3	3/4	15/32	15/32	1/16	•	•	•										2.2	
CAK66	6.45	6.20	5.86	3	3/4	15/32	15/32	1/16	•	•	•										2.3	
CAK69	6.75	6.50	6.16	3	3/4	15/32	15/32	-	•	•	•										3.5	
CAK71	6.95	6.70	6.36	3	3/4	115/32	23/32	-	•	•	•										3.8	
CAK74	7.25	7.00	6.66	3	3/4	115/32	23/32*	-	•	•	•										3.9	
CAK79	7.79	7.50	7.16	3	3/4	115/32	23/32	-	•	•	•										4.0	
CAK84	8.25	8.00	7.66	3	3/4	115/32	23/32*	-	•	•	•										4.2	
CAK89	8.75	8.50	8.16	3	3/4	115/32	23/32	-	•	•	•										4.3	
CAK94	9.25	9.00	8.66	3	3/4	115/32	23/32*	-	•	•	•										4.5	
CAK99	9.75	9.50	9.16	3	3/4	115/32	23/32	-	•	•	•										5.3	
CAK104	10.25	10.00	9.66	3	3/4	115/32	23/32*	-	•	•	•										5.7	
CAK109	10.75	10.50	10.16	3	3/4	115/32	23/32	-	•	•	•										5.8	
CAK114	11.25	11.00	10.66	3	3/4	115/32	23/32*	-	•	•	•										5.9	
CAK124	12.25	12.00	11.66	3	3/4	115/32	23/32*	-	•	•	•										6.5	
CAK134	13.25	13.00	12.66	3	3/4	115/32	23/32	-	•	•	•										7.5	
CAK144	14.25	14.00	13.66	3	3/4	115/32	23/32*	-	•	•	•										8.5	
CAK154	15.25	15.00	14.66	3	3/4	115/32	23/32	-	•	•	•										9.8	
CAK184	18.25	18.00	17.66	3	3/4	115/32	23/33*	-	•	•	•										12.1	




Hangzhou Ocean Industry CO., LTD.



V-pulleys

2CAK

Cast Iron Sheaves

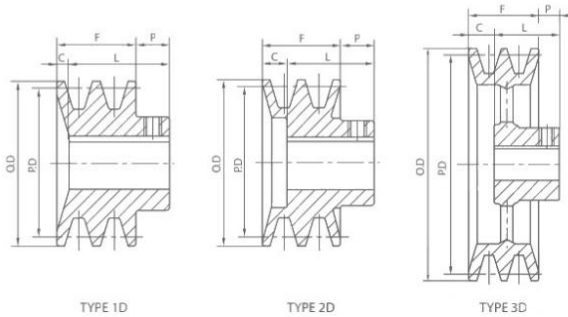

"3L" Belts may be used with
These Sheaves as Indicated in
Table Below

Catalog Number	Diameter			Type	Dimensions				Stock Bores - wt-												Lbs
	OD	PD A	PD 3L		F	L	P	C	1/2	5/8	3/4	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 7/16		
2CAK20	2.00	1.80	1.46	1D	13/8	121/32	15/32	3/16	●	●	●									0.8	
2CAK21	2.15	1.90	1.56	1D	13/8	121/32	15/32	3/16		●	●	●								0.9	
2CAK22	2.25	2.00	1.66	1D	13/8	121/32	15/32	3/16	●	●	●	●								1.0	
2CAK23	2.35	2.10	1.76	1D	13/8	121/32	15/32	3/16		●	●	●		●						1.1	
2CAK25	2.55	2.30	1.96	1D	13/8	121/32	15/32	3/16		●	●	●		●						1.3	
2CAK26	2.65	2.40	2.06	1D	13/8	121/32	15/32	3/16		●	●	●		●						1.4	
2CAK27	2.75	2.50	2.16	1D	13/8	121/32	15/32	3/16		●	●	●		●						1.5	
2CAK28	2.85	2.60	2.26	1D	13/8	121/32	15/32	3/16		●	●	●		●						1.8	
2CAK30	3.05	2.80	2.46	1D	13/8	121/32	15/32	3/16	●	●	●	●		●	●					1.9	
2CAK32	3.25	3.00	2.66	1D	13/8	121/32	15/32	3/16		●	●	●		●						2.1	
2CAK34	3.45	3.20	2.86	1D	13/8	121/32	15/32	3/16		●	●	●		●	●					2.3	
2CAK39	3.75	3.50	3.16	2D	13/8	111/32	15/32	1/2		●	●	●		●	●					2.6	
2CAK41	3.95	3.70	3.36	2D	13/8	111/32	15/32	1/2		●	●	●		●	●					2.9	
2CAK44	4.25	4.00	3.66	2D	13/8	111/32	15/32	1/2		●	●	●		●	●					3.0	
2CAK46	4.45	4.20	3.86	2D	13/8	111/32	15/32	1/2		●	●	●		●	●					3.1	
2CAK49	4.75	4.50	4.16	2D	13/8	111/32	15/32	1/2			●	●		●	●			●		3.6	
2CAK51	4.95	4.70	4.36	2D	13/8	111/32	15/32	1/2			●	●		●	●			●		3.8	
2CAK54	5.25	5.00	4.66	3D	13/8	111/32	15/32	1/2		●	●	●		●	●			●		3.3	
2CAK56	5.45	5.20	4.86	3D	13/8	111/32	15/32	1/2		●	●	●		●	●			●		3.4	
2CAK59	5.75	5.50	5.16	3D	13/8	111/32	15/32	1/2			●	●		●	●			●		3.5	
2CAK61	5.95	5.70	5.36	3D	13/8	111/32	15/32	1/8			●	●		●	●			●		3.6	
2CAK64	6.25	5.00	5.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	4.8	
2CAK74	7.25	7.00	6.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	5.6	
2CAK84	8.25	8.00	7.66	3D	13/8	119/32	11/32	1/8			●	●	●	●	●	●		●	●	6.4	
2CAK94	9.25	9.00	8.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	7.3	
2CAK104	10.25	10.00	9.66	3D	13/8	119/32	11/32	1/8			●	●		●	●			●	●	8.1	
2CAK114	11.25	11.00	10.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	9.0	
2CAK124	12.25	12.00	11.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	9.8	
2CAK134	13.25	13.00	12.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	12.3	
2CAK144	14.25	14.00	13.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	13.9	
2CAK154	15.25	15.00	14.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	14.3	
2CAK184	18.25	18.00	17.66	3D	13/8	119/32	11/32	1/8			●	●		●	●	●		●	●	17.4	




Hangzhou Ocean Industry CO., LTD.




V-pulleys

CBK


Cast Iron Sheaves



TYPE 1



TYPE 2



TYPE 3


Catalog Number	Diameter			Type	Dimensions				Stock Bores													wt
	OD	PDA	PDB		F	L	P	C	1/2	5/8	3/4	7/8	15/16	1	1 1/8	1 3/16	1 1/4	1 3/8	1 7/16	Lbs		
CBK24	2.40	1.80	2.20	1	13/16	11/16	13/32	5/32	●	●	●	●									0.4	
CBK25	2.50	1.90	2.30	1	13/16	11/16	13/32	5/32	●	●	●	●									0.5	
CBK26	2.60	2.00	2.40	1	13/16	11/16	13/32	5/32	●	●	●	●									0.6	
CBK27	2.70	2.10	2.50	2	13/16	11/16	13/32	5/32	●	●	●	●									0.7	
CBK28	2.95	2.20	2.60	2	13/16	11/16	13/32	5/32	●	●	●	●									0.8	
CBK30	3.15	2.40	2.80	2	13/16	11/16	13/32	5/32	●	●	●	●									0.9	
CBK32	3.35	2.60	3.00	2	13/16	11/16	13/32	5/32	●	●	●	●									1.0	
CBK34	3.55	2.80	3.20	2	7/8	15/32	13/32	1/8	●	●	●	●		●	●						1.3	
CBK36	3.75	3.00	3.40	2	7/8	15/32	13/32	1/8	●	●	●	●		●	●						1.5	
CBK40	3.95	3.20	3.60	2	7/8	15/32	13/32	1/8	●	●	●	●		●	●						1.6	
CBK45	4.25	3.50	3.90	2	7/8	15/32	13/32	1/8	●	●	●	●		●	●						1.8	
CBK47	4.45	3.70	4.10	2	7/8	15/32	13/32	1/8	●	●	●	●		●	●						1.9	
CBK50	4.75	4.00	4.40	3	7/8	15/32	13/32	1/8	●	●	●	●		●	●						2.0	
CBK52	4.95	4.20	4.60	3	7/8	15/32	13/32	1/8	●	●	●	●		●	●						2.1	
CBK55	5.25	4.50	4.90	3	7/8	15/32	13/32	1/8	●	●	●	●		●	●						2.2	
CBK57	5.45	4.70	5.10	3	7/8	15/32	13/32	1/8		●	●	●		●	●						2.3	
CBK60	5.75	5.00	5.40	3	7/8	15/32	13/32	1/8	●	●	●	●		●	●		●				2.4	
CBK62	5.95	5.20	5.60	3	7/8	15/32	13/32	1/8	●	●	●	●		●	●						2.5	
CBK65	6.25	5.50	5.90	3	7/8	15/32	13/32	1/8		●	●	●		●	●		●				2.7	
CBK67	6.45	5.70	6.10	3	7/8	15/32	13/32	1/8		●	●	●		●	●		●				2.8	
CBK70	6.75	6.00	6.40	3	7/8	115/32	21/32	1/16		●	●	●		●	●					●	3.3	
CBK72	6.95	6.20	6.60	3	7/8	115/32	21/32	1/16		●	●	●		●	●				●		3.9	
CBK75	7.25	6.50	6.90	3	7/8	115/32	21/32	1/16		●	●	●		●	●		●				4.0	
CBK77	7.45	6.70	7.10	3	7/8	115/32	21/32	1/16		●	●	●		●	●				●		4.1	
CBK80	7.75	7.00	7.40	3	7/8	115/32	21/32	1/16		●	●	●		●	●		●		●		4.4	
CBK85	8.25	7.50	7.90	3	7/8	115/32	21/32	1/16			●	●		●	●				●	●	5.0	
CBK90	8.75	8.00	8.40	3	7/8	115/32	21/32	1/16			●	●		●	●				●	●	5.2	
CBK95	9.25	8.50	8.90	3	7/8	115/32	21/32	1/16			●	●		●	●				●	●	5.4	
CBK100	9.75	9.00	9.40	3	7/8	115/32	21/32	1/16			●	●		●	●		●		●	●	5.6	
CBK105	10.25	9.50	9.90	3	7/8	115/32	21/32	1/16			●	●		●	●				●	●	5.8	
CBK110	10.75	10.00	10.40	3	7/8	115/32	21/32	1/16				●		●	●				●	●	6.4	
CBK115	11.25	10.50	10.90	3	7/8	115/32	21/32	1/16				●		●	●				●	●	6.9	
CBK120	11.75	11.00	11.40	3	7/8	115/32	21/32	1/16				●		●	●				●	●	7.4	
CBK130	12.75	12.00	12.40	3	7/8	115/32	21/32	1/16				●		●	●				●	●	8.4	
CBK140	13.75	13.00	13.40	3	7/8	115/32	21/32	1/16				●		●	●				●	●	9.4	
CBK160	15.75	15.00	15.40	3	7/8	115/32	21/32	1/16						●	●		●			●	12.4	
CBK190	18.75	18.00	18.40	3	7/8	115/32	21/32	1/16							●	●		●		●	13.4	




V-pulleys

2CBK


Cast Iron Sheaves



TYPE 1D



TYPE 2D



TYPE 3D


Catalog Number	Diameter			Type	Dimensions				Stock Bores												wt Lbs
	OD	PD A	PD B		F	L	P	C	1/2	5/8	3/4	7/8	15/16	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1 3/4	
2CBK25	2.50	1.90	2.30	1D	13/4	131/32	15/32	1/4	•	•	•	•	•	•	•	•	•	•	•	•	1.3
2CBK27	2.70	2.10	2.50	1D	13/4	131/32	15/32	1/4	•	•	•	•	•	•	•	•	•	•	•	•	1.6
2CBK28	2.95	2.20	2.60	1D	13/4	131/32	15/32	1/4	•	•	•	•	•	•	•	•	•	•	•	•	1.9
2CBK30	3.15	2.40	2.80	1D	13/4	131/32	15/32	1/4	•	•	•	•	•	•	•	•	•	•	•	•	2.3
2CBK32	3.35	2.60	3.00	1D	13/4	131/32	15/32	1/4	•	•	•	•	•	•	•	•	•	•	•	•	2.6
2CBK34	3.55	2.80	3.20	1D	13/4	131/32	15/32	1/4	•	•	•	•	•	•	•	•	•	•	•	•	2.8
2CBK36	3.75	3.00	3.40	1D	13/4	131/32	15/32	1/4 1/4	•	•	•	•	•	•	•	•	•	•	•	•	3.3
2CBK40	3.95	3.20	3.60	2D	13/4	115/32	15/32	3/4 3/4	•	•	•	•	•	•	•	•	•	•	•	•	3.4
2CBK45	4.25	3.50	3.90	2D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	3.6
2CBK47	4.45	3.70	4.10	2D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	3.7
2CBK50	4.75	4.00	4.40	2D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	4.1
2CBK52	4.95	4.20	4.60	2D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	4.5
2CBK55	5.25	4.50	4.90	2D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	4.8
2CBK57	5.45	4.70	5.10	2D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	5.1
2CBK60	5.75	5.00	5.40	3D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	4.9
2CBK62	5.95	5.20	5.60	3D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	4.8
2CBK65	6.25	5.50	5.90	3D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	5.0
2CBK67	6.45	5.70	6.10	3D	13/4	115/32	15/32	3/4	•	•	•	•	•	•	•	•	•	•	•	•	5.5
2CBK70	6.75	6.00	6.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	6.0
2CBK80	7.75	7.00	7.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	7.2
2CBK90	8.75	8.00	8.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	8.4
2CBK100	9.75	9.00	9.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	9.4
2CBK110	10.75	10.00	10.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	10.4
2CBK120	11.75	11.00	11.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	11.8
2CBK130	12.75	12.00	12.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	14.9
2CBK140	13.75	13.00	13.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	16.3
2CBK160	15.75	15.00	15.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	18.0
2CBK190	18.75	18.00	18.40	3D	13/4	119/32	11/32	1/2	•	•	•	•	•	•	•	•	•	•	•	•	23.3



V-pulleys

3CBK

Cast Iron Sheaves



TYPE 3T



Catalog Number	Diameter			Type	Dimensions			Stock Bores				wt Lbs
	OD	PD A	PD B		F	L	P	5/8"	7/8"	1	1 1/8	
3CBK25	2.50	1.90	2.30	3T	2 1/2	3	1/2	•	•	•	•	1.7
3CBK27	2.70	2.10	2.50	3T	2 1/2	3	1/2	•	•	•	•	2.1
3CBK28	2.95	2.20	2.60	3T	2 1/2	3	1/2	•	•	•	•	2.5
3CBK30	3.15	2.40	2.80	3T	2 1/2	3	1/2	•	•	•	•	3.0
3CBK32	3.35	2.60	3.00	3T	2 1/2	3	1/2	•	•	•	•	3.4
3CBK34	3.55	2.80	3.20	3T	2 1/2	3	1/2	•	•	•	•	3.8
3CBK36	3.75	3.00	3.40	3T	2 1/2	3	1/2	•	•	•	•	4.3
3CBK40	3.95	3.20	3.60	3T	2 1/2	3	1/2	•	•	•	•	4.7