




GEM Type Couplings

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com


DIN GEM Type-Couplings 图纸

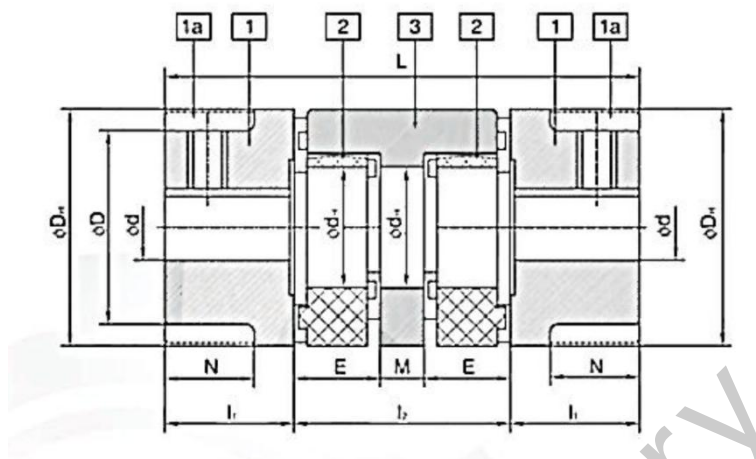

DIN GEM Type-Coupling

Catalog.	Part	Rating. Moment ft-lbs		I	E	M	I2	L	Dh	dh		Max Displacement at n=1500 rpm		Max Axial Displacement	Moment of Inertia Lbin ²	Wt Lbs
		Rating	Max									Radial	Angular			
GEM-19	3	7.375	14.75	0.98	0.63	3/8	1.65	35/8	19/16	11/16	The rest dimensions see GE Couplings	0.025	1.5*	0.043	0.085	0.15
GEM-24	3	25.810	51.63	11/8	0.71	5/8	2.05	43/8	23/16	11/16		0.035		0.055	0.205	0.30
GEM-28	3	70.060	140.13	1.38	0.79	11/16	2.28	5.00	29/16	13/16		0.039		0.059	0.443	0.47
GEM-38	3	140.100	280.25	1.77	0.95	13/16	2.68	61/4	318	11/2		0.045		0.071	1.194	0.75
GEM-42	3	195.400	390.88	1.97	1.02	7/8	2.91	67/8	33/4	17/8		0.050		0.079	2.387	1.09
GEM-48	3	228.600	457.30	2.20	1.10	15/16	3.15	79/16	41/8	2		0.054		0.083	3.410	1.44
GEM-55	3	302.400	604.80	2.56	1.18	11/8	3.46	89/16	43/4	23/8		0.060		0.086	6.820	2.08
GEM-65	3	460.900	921.90	2.95	1.3/8	11/4	4.02	9.15	55/16	211/16		0.069		0.102	13.640	3.06
GEM-75	3	944.000	1888.00	3.35	1.57	17/16	4.57	111/4	61/4	33/16		0.079		0.118	30.690	4.71
GEM-90	3	1770.000	3540.00	3.94	1.77	19/16	5.12	13.0	7/8	315/16		0.098		0.134	85.250	8.50

ANSI GEM Type-Couplings 图纸

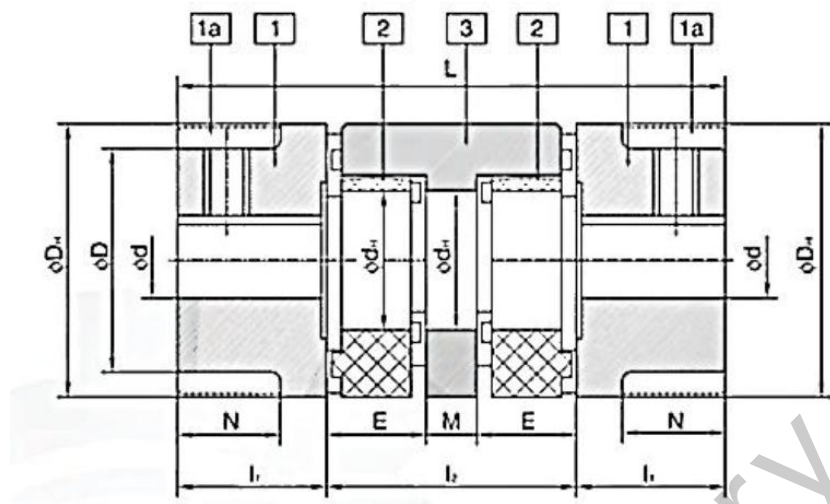

ANSI GEM Type-Coupling

Catalog	Part	Rating Moment ft-lbs		I	E	M	I2	L	Dh	dh		Max Displacement aln=1500 rpm		MaxAcial Dsplacement	Moment of Inertia Lbin ²	Wt Lbs
		Rating	Max									Radial	Angular			
GEM-19	3	7.375	14.75	0.98	0.63	3/8	1.65	35/8	19/16	11/16	The rest dimensions see GE Couplings	0.025	1.5*	0.043	0.085	0.15
GEM-24	3	25.810	51.63	11/8	0.71	5/8	2.05	43/8	23/16	11/16		0.035		0.055	0.205	0.30
GEM-28	3	70.060	140.13	1.38	0.79	11/16	2.28	5.00	29/16	13/16		0.039		0.059	0.443	0.47
GEM-38	3	140.100	280.25	1.77	0.95	13/16	2.68	61/4	31/8	11/2		0.045		0.071	1.194	0.75
GEM-42	3	195.400	390.88	1.97	1.02	7/8	2.91	67/8	33/4	17/8		0.050		0.079	2.387	1.09
GEM-48	3	228.600	457.30	2.20	1.10	15/16	3.15	79/16	41/8	2		0.054		0.083	3.410	1.44
GEM-55	3	302.400	604.80	2.56	1.18	11/8	3.46	89/16	43/4	23/8		0.060		0.086	6.820	2.08
GEM-65	3	460.900	921.90	2.95	1.3/8	11/4	4.02	9.15	55/16	211/16		0.069		0.102	13.640	3.06
GEM-75	3	944.000	1888.00	3.35	1.57	17/16	4.57	111/4	61/4	33/16		0.079		0.118	30.690	4.71
GEM-90	3	1770.000	3540.00	3.94	1.77	19/16	5.12	13.0	7/8	315/16		0.098		0.134	85.250	8.50