



STL Double Single Sprockets

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.


Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

Double Single

STL

Sprockets

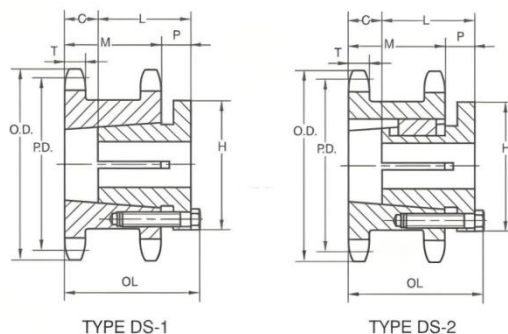

Catalog No.	Diameter		Bush ing	T y p e	Dimensions								wt Less Bush ing
	O.D.	P.D.			T	M	OL	L	C	H	G	E	
DS40-STL For 1-2" PITCH													
DS40H19	3.28	3.038	H	1	0.284	113/32	21/32	11/4	19/32	21/2	7/16	3/16	1.5
DS40H21	3.62	3.355	H	1	0.284	113/32	21/32	11/4	19/32	21/2	7/16	3/16	2.0
DS40P23	3.94	3.672	P1	2	0.284	113/32	29/32	115/16	3/32	3	5/8	1/4	2.3
DS40P24	4.10	3.831	P1	2	0.284	113/32	29/32	115/16	3/32	3	5/8	1/4	2.5
DS50-STL For 5/8" PITCH													
DS50H17	3.72	3.401	H	1	0.343	121/32	29/32	11/4	27/32	21/2	7/16	3/16	2.3
DS50P19	4.12	3.797	P1	2	0.343	121/32	217/32	115/16	11/32	3	5/8	1/4	2.8
DS50P21	4.52	4.194	P1	2	0.343	121/32	217/32	115/16	11/32	3	5/8	1/4	3.8
DS50P23	4.92	4.590	P1	2	0.343	121/32	217/32	115/16	11/32	3	5/8	1/4	4.6
DS50P24	5.12	4.788	P1	2	0.343	121/32	217/32	115/16	11/32	3	5/8	1/4	5.0

DS60-STL For 3/4" PITCH

DS60P17	4.46	4.082	P1	2	0.459	161/64	263/64	115/16	41/64	3	5/8	1/4	3.9
DS60P19	4.95	4.557	P1	2	0.459	161/64	263/64	115/16	41/64	3	5/8	1/4	5.3
DS60Q21	5.43	5.032	Q1	2	0.459	161/64	263/64	21/2	13/64	41/8	3/4	9/32	5.4
DS60Q22	5.67	5.270	Q1	2	0.459	161/64	263/64	21/2	13/64	41/8	3/4	9/32	6.2
DS60Q23	5.91	5.508	Q1	2	0.459	161/64	263/64	21/2	13/64	41/8	3/4	9/32	6.9
DS60Q24	6.15	5.746	Q1	2	0.459	161/64	263/64	21/2	13/64	41/8	3/4	9/32	7.6

DS80-STL For 1" PITCH

DS80Q17	5.95	5.442	Q1	2	0.575	213/64	315/64	21/2	29/64	41/8	3/4	9/32	7.2
DS80Q19	6.59	6.076	Q1	2	0.575	213/64	315/64	21/2	29/64	41/8	3/4	9/32	10.5
DS80Q20	6.91	6.392	Q1	2	0.575	213/64	315/64	21/2	29/64	41/8	3/4	9/32	12.2
DS80R21	7.24	6.710	R1	2	0.575	213/64	323/64	27/8	13/64	53/8	7/8	9/32	10.3
DS80R23	7.88	7.344	R1	2	0.575	213/64	323/64	27/8	13/64	53/8	7/8	9/32	13.2

DS100-STL For 1 1/4" PITCH

DS100R17	7.44	6.803	R1	2	0.692	211/16	327/32	27/8	11/16	53/8	7/8	9/32	12.5
DS100R19	8.24	7.595	R1	2	0.692	211/16	327/32	27/8	11/16	53/8	7/8	9/32	18.8
DS100R21	9.04	8.387	R1	2	0.692	211/16	327/32	27/8	11/16	53/8	7/8	9/32	23.1