



BTL Double Single Sprockets

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.


Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

Double Single

BTL

Sprockets

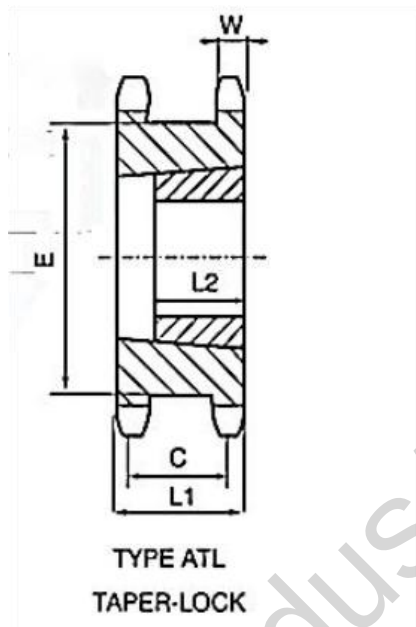

DS40-BTL For 1/2" PITCH

Z	O.D	E	Bushing		L1	C	w	wt. with Bush
			Type	Max Bore				
19	3.300	21/2	1215	11/4	113/32	11/8	0.284	1.1
20	3.460	25/8	1215	11/4	113/32	11/8	0.284	1.3
21	3.620	225/32	1615	15/8	113/32	11/8	0.284	1.3
22	3.780	215/16	1615	15/8	113/32	11/8	0.284	1.4
23	3.940	33/32	1615	15/8	113/32	11/8	0.284	1.5
24	4.100	317/64	1615	15/8	113/32	11/8	0.284	1.7

DS50-BTL For 5/8" PITCH

Z	O.D	E	Bushing		L1	C	w	wt. with Bush
			Type	Max Bore				
17	3.72	211/16	1615	15/8	121/32	15/16	0.343	1.8
18	3.920	257/14	1615	15/8	121/32	15/16	0.343	2.2
19	4.120	35/64	1615	15/8	121/32	15/16	0.343	2.7
21	4.520	315/16	2012	2	121/32	15/16	0.343	3.3
22	4.720	311/16	2012	2	121/32	15/16	0.343	3.5
23	4.920	357/64	2012	2	121/32	15/16	0.343	3.7
24	5.120	45/64	2012	2	121/32	15/16	0.343	4.1

Double Single

BTL

Sprockets

DS60-BTL For 3/4" PITCH

Z	O.D	E	Bushing		L1	C	W	wt with Bush
			Type	Max Bore				
17	4.460	37/32	1615	15/8	115/16	131/64	0.459	4.5
18	4.700	315/32	2012	2	115/16	131/64	0.459	5.0
19	4.950	345/64	2012	2	115/16	131/64	0.459	5.8
20	5.190	361/64	2517	21/2	115/16	131/64	0.459	5.6
21	5.430	43/16	2517	21/2	115/16	131/64	0.459	6.4
23	5.910	443/64	2517	21/2	115/16	131/64	0.459	7.3
24	6.150	429/32	2517	21/2	115/16	131/64	0.459	8.2

DS80-BTL For 1" PITCH

Z	O.D	E	Bushing		L1	C	w	wt with Bush
			Type	Max Bore				
17	5.95	45/16	2517	21/2	23/16	15/8	0.575	7.6
18	6.27	43/4	2517	21/2	23/16	15/8	0.575	8.7
19	6.59	461/64	3020	3	23/16	15/8	0.575	9.7
20	6.910	59/32	3020	3	23/16	15/8	0.575	10.
21	7.240	519/32	3020	3	23/16	15/8	0.575	12.
22	7.560	515/16	3020	3	23/16	15/8	0.575	13.
23	7.88	615/64	3020	3	23/16	15/8	0.575	14.5

Double Single

BTL

Sprockets

DS100-BTL For 1 1/4" PITCH

Z	O.D	E	Bushing		L1	C	W	wt with Bush
			Type	Max Bore				
16	7.03	5	2517	21/2	211/16	2	0.692	13
17	7.44	513/25	3020	3	211/16	2	0.692	14
18	7.84	551/64	3020	3	211/16	2	0.692	16
19	8.240	613/64	3020	3	211/16	2	0.692	20
20	8.640	639/64	3020	3	211/16	2	0.692	24
21	9.040	7	3020	3	211/16	2	0.692	27.5