




KC Chain Couplings

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com


SB-KC

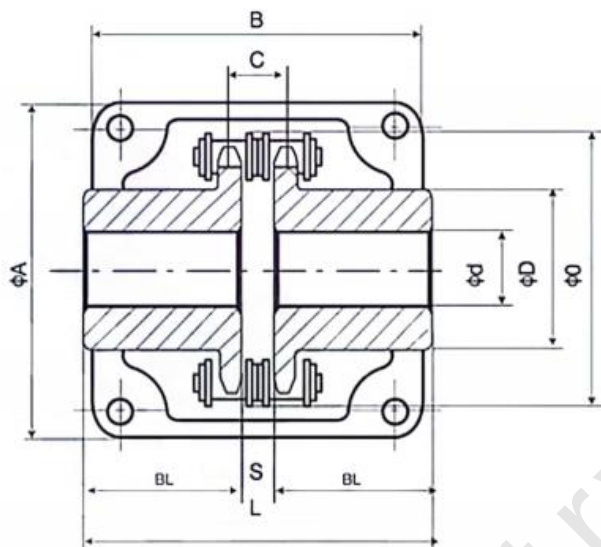

Coupling Type	Chain Type	Bore		Dimension						Rated Torque (lb-in)	Wt L bs	Dia. of Cover		
		Min	Max	L	BL	S	d	0	C			A	B	Wt Lbs
KC-3012	06B-2X12	1/2	5/8	29/16	13/16	0.204	13/8	125/32	0.402	4.66	0.8	223/32	21/2	0.62
KC-4012	40-2X12	1/2	7/8	31/8	17/16	0.291	13/8	27/16	0.567	20.40	1.6	31/32	227/32	0.62
KC-4014	40-2X14	1/2	11/8	31/8	17/16	0.291	121/32	223/32	0.567	38.48	2.2	35/16	231/32	0.82
KC-4016	40-2X16	9/16	11/4	37/16	19/16	0.291	131/32	31/32	0.567	65.70	2.8	35/8	231/32	0.82
KC-5014	50-2X14	9/16	13/8	315/16	125/32	0.382	21/8	3/8	0.713	120.20	4.51	4	311/32	1.0
KC-5016	50-2X16	5/8	19/16	315/16	125/32	0.382	27/16	321/32	0.713	194.40	5.5	411/32	311/32	1.2
KC-5018	50-2X18	5/8	13/4	315/16	125/32	0.382	23/4	43/16	0.713	308.40	7.8	413/16	311/32	1.6
KC-6018	60-2X18	3/4	23/16	47/8	23/16	0.453	311/32	5	0.898	804.20	12.7	519/32	41/8	2.5
KC-6020	60-2X20	3/4	23/8	47/8	23/16	0.453	315/16	515/32	0.898	1257.4	16.0	61/4	41/8	3.3
KC-6022	60-2X22	3/4	225/32	47/8	23/16	0.453	411/32	531/32	0.898	1869.0	21.4	65/8	419/32	3.7
KC-8018	80-2X18	3/4	31/8	59/16	21/2	0.598	411/32	621/32	1.154	2840.6	26.1	71/2	51/16	5.2
KC-8020	80-2X20	3/4	31/2	523/32	29/16	0.598	411/16	79/32	1.154	4098.0	33.0	81/4	513/32	5.9
KC-8022	80-2X22	3/4	315/16	61/8	225/32	0.598	51/2	731/32	1.154	6823.4	41.6	87/8	513/32	7.4
KC-10020	100-2X20	1	45/16	71/32	31/8	0.740	63/8	93/16	1.409	12925	68.0	111/16	61/32	9.5
KC-12018	120-2X18	13/8	5	8	317/32	0.894	611/16	101/16	1.787	21514	96.9	121/32	71/8	12.8
KC-12022	120-2X22	13/8	51/2	825/32	315/16	0.894	81/4	1131/32	1.787	4.9090	148.4	141/32	71/8	16.5




FB-KC

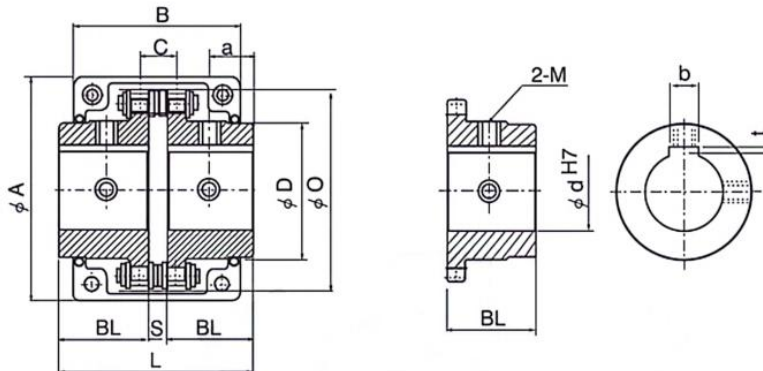


Coupling	L	BL	S	BO	0	C	Finished Bore
FB-KC-3012	29/16	13/16	0.204	13/8	125/32	0.402	9/16 5/8
FB-KC-4012	31/8	17/16	0.291	13/8	27/16	0.567	9/16 5/8 11/16 3/4 13/16 7/8
FB-KC-4014	31/8	17/16	0.291	121/32	223/32	0.567	11/16 3/4 13/16 7/8 15/16 1" 11/8
FB-KC-4016	37/16	19/16	0.291	131/32	31/32	0.567	3/4 13/16 7/8 15/16 1" 11/8 3/16 1/4
FB-KC-5014	315/16	125/32	0.382	21/8	33/8	0.713	13/16 7/8 15/16 1" 11/8 11/4 13/8
FB-KC-5016	315/16	125/32	0.382	27/16	321/32	0.713	7/8 15/16 1" 11/8 13/16 11/4 13/8 11/2 19/16
FB-KC-5018	315/16	125/32	0.382	23/4	43/16	0.713	13/16 11/4 13/8 11/2 19/16 15/8 13/4
FB-KC-6018	47/8	23/16	0.453	311/32	5	0.898	19/16 15/8 13/4 2" 21/4
FB-KC-6020	47/8	23/16	0.453	315/16	515/32	0.898	5/8 13/4 2" 21/4 23/8
FB-KC-6022	47/8	23/16	0.453	411/32	531/32	0.898	17/8 2" 21/4 23/8 21/2

SB-MC

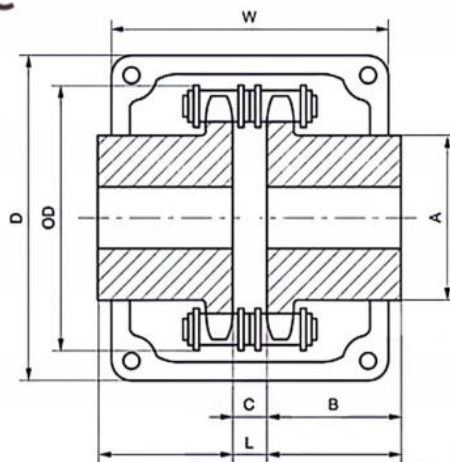


Coupling Number	Bore	Dimension							Dia. of Cover		
	Min	Max	A	B	C	L	0.D	Wt Lbs	D	W	Wt Lbs
MC4012	1/2	3/4	113/32	11/8	9/32	217/32	213/32	0.4	4	2	0.78
MC4016	5/8	11/4	131/32	11/8	9/32	217/32	31/32	0.8	4	2	0.92
MC5016	3/4	15/8	21/2	17/16	3/8	31/4	325/32	1.6	51/8	23/8	1.3
MC5018	3/4	115/16	231/32	111/16	3/8	33/4	43/16	2.4	51/8	23/8	1.3
MC6018	1	27/16	312	17/8	7/16	43/16	5	4.8	63/8	215/16	2.44
MC6020	1/8	25/8	37/8	2	7/16	47/16	51/2	5.2	63/8	215/16	2.44
MC6022	11/8	27/8	41/2	21/8	7/16	411/16	561/64	7.8	83/16	4	4.88
MC8018	11/8	215/16	49/16	23/8	37/64	521/64	621/32	9.5	83/16	4	4.88
MC8020	11/2	37/16	53/8	25/8	37/64	533/64	719/64	13.4	83/16	4	4.88
MC10018	11/2	37/16	511/16	23/4	23/32	67/32	821/64	18.2	93/8	515/16	8.76
MC10020	2	315/16	623/32	31/8	23/32	631/32	91/8	25.0	101/8	51/4	12.66
MC12018	37/16	47/16	63/4	31/2	55/64	77/8	10	28.0	113/8	73/8	16.40
MC12022	43/8	415/16	83/4	4	55/64	87/8	1157/64	55.0	131/4	715/16	19.50

BTL-MC

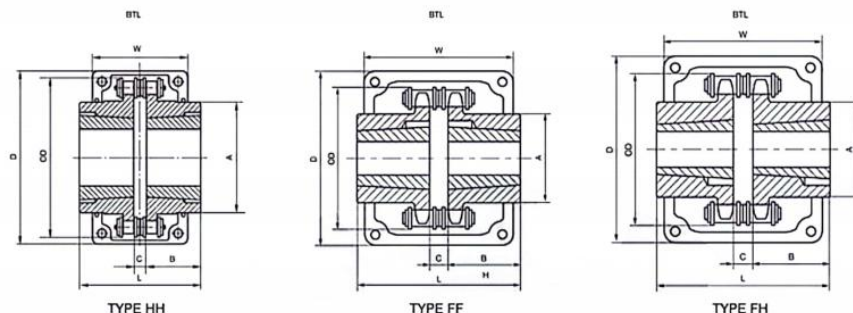


Coupling Number	Bushing			Dimension							
	Bushing	Boro Max	Bore Min	A	B	C	J*	K	L	O.D	Wt L bs
MC4016TB	1108	11/8	1/2	131/32	7/8	9/32	5/8	3/4	21/32	31/32	0.9
MC5018TB	1610	15/8	1/2	231/32	1	3/8	13/16	11/16	23/8	43/16	1.1
MC6020TB	2012	2	1/2	37/8	11/4	7/16	15/16	13/8	215/16	51/2	2.7
MC8020TB	3020	3	15/16	53/8	2	37/64	13/16	21/16	437/64	719/64	6.1
MC10020TB	3535	3 1/2	13/16	623/32	31/2	23/32	2	25/8	723/32	91/8	19

QTL-MC

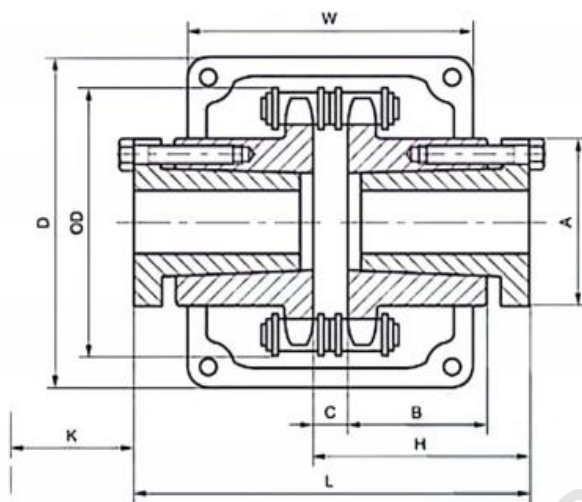


Couplings Number	Bushing	Bore Max*	Dimension							
			A	B	H	C	L	0.D	K	wt Lbs
MC4016JA	JA	1	2	7/8	15/16	9/32	229/32	31/32	11/4	0.9
MC5018SH	SH	13/8	231/32	1	11/2	3/8	33/8	43/16	13/4	1.3
MC6020SK	SK	821/8	37/8	11/4	17/8	7/16	43/16	51/2	21/4	2.5
MC8018SF	SF	25/16	49/16	13/4	23/8	37/64	521/64	621/32	21/4	5.3

FB-BC

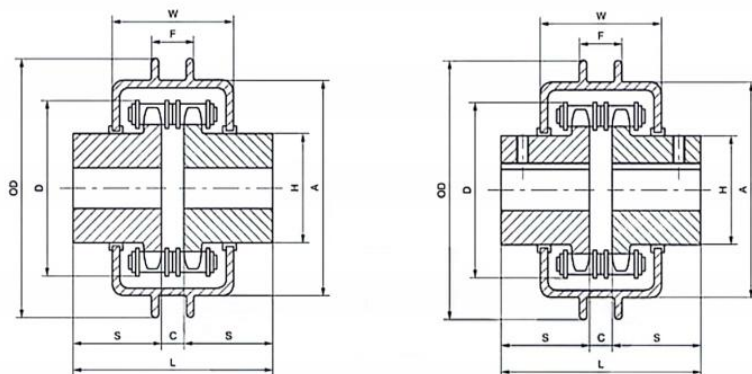


Coupling Number	Dimension						Dia. of cover				
	D	L	H	S	C	wt L.bs	O.D	A	W	F	wt L.bs
BC4012	23/8	211/16	13/8	13/16	5/16	0.3	3/8	211/16	111/16	9/16	0.7
BC4016	3	211/16	2	13/16	5/16	0.8	4	35/16	111/16	9/16	0.9
BC5016	33/4	3	21/2	15/16	3/8	1.8	43/4	41/16	2	9/16	1.3
BC5018	41/8	35/8	3	15/8	3/8	2.0	55/8	411/16	23/16	7/8	2.7
BC6018	5	49/16	35/8	21/16	7/16	5.2	615/16	513/16	213/16	11/8	5.1

STL-BC

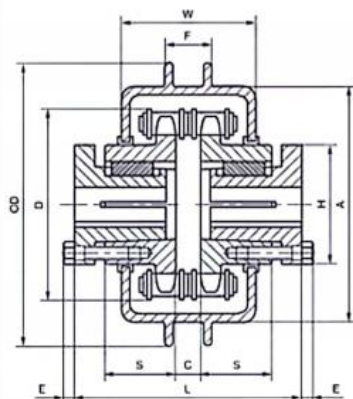

**Bushed Type
G and H Couplings**

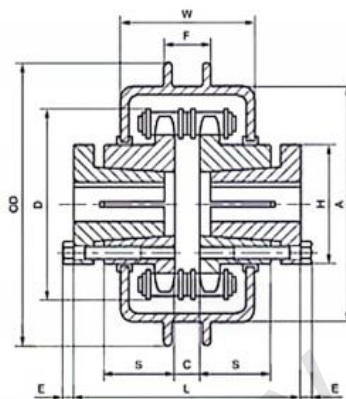

**Bushed Type
P1, Q1 and R1 Couplings**

Coupling Number	Bushing		Dimension							Dia. of cover					
	Size	Bore	D	L	H	S	C	E	wt Lbs	0.D	A	W	F	wt Lbs	
BC3520G	G	3/8-1	23/4	23/4	2	13/16	1/4	3/16	0.5	33/4	31/16	13/8	9/16	0.7	
BC3524H	H	3/8-11/2	33/16	31/8	21/2	-	1/4	3/16	0.9	43/16	31/2	13/8	9/16	0.8	
BC4020H	H	3/8-11/2	35/8	33/16	21/2	1	5/16	3/16	1.0	45/8	315/16	11/16	9/16	1.1	
BC4022P	P1	1/2-13/4	315/16	47/16	3	17/16	5/16	1/4	1.3	57/16	41/2	17/8	7/8	1.5	
BC5016H	H	3/8-11/2	33/4	31/8	21/2	15/16	3/8	3/16	1.4	43/4	41/16	2	9/16	2.5	
BC5018P	P1	1/2-13/4	41/8	47/16	3	113/32	3/8	1/4	1.8	55/8	411/16	23/16	7/8	2.7	
BC6016P	P1	1/2-13/4	41/2	47/16	3	13/8	7/16	1/4	1.9	6	51/16	211/16	7/8	3.5	
BC6020Q	Q1	3/4-211/16	51/2	59/16	41/8	113/16	7/16	5/16	3.5	75/16	63/16	213/16	11/8	5.5	
BC8016Q	Q1	3/4-211/16	61/16	59/16	41/8	13/4	9/16	5/16	3.8	7/8	63/4	33/8	11/8	7.0	
BC10018R	R1	1 1/8-33/4	83/8	61/2	53/8	2	3/4	5/16	8.0	101/8	9	315/16	11/8	11.2	