



L Type Couplings


杭州四海传动件有限公司

Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

FB-BL

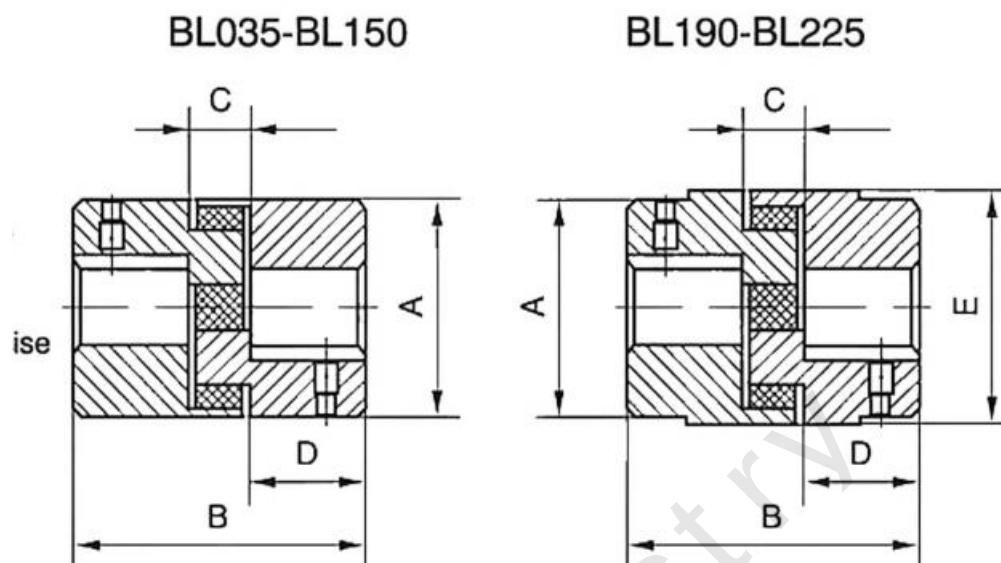


Catalog	Dimension					Wt-Lbs		Torque In.-L .bs	Maximum RPM	Bore	
	A	B	C	D	E	Min Bore	Max Bore			Min	Max
BL 035	5/8	13/16	9/32	17/64		0.01	0.01	3.52	31000	1/8	3/8
BL 050	15/64	123/32	15/32	5/8		0.29	0.24	25.8	18000	1/4	5/8
BL 070	123/64	2	1/2	3/4		0.59	0.54	44.1	14000	1/4	3/4
BL 075	13/4	21/8	1/2	13/16		1.00	0.86	88.2	11000	1/4	7/8
BL 090	27/64	21/8	1/2	13/16		1.48	1.32	145	9000	1/4	1
BL 095	27/64	21/2	1/2	1		1.75	1.52	189	9000	7/16	11/8
BL 099	217/32	27/8	3/4	11/16		2.50	2.17	315	7000	7/16	13/16
BL 100	217/32	31/2	3/4	13/8		3.42	2.92	415	7000	7/16	13/8
BL 110	35/16	41/4	7/8	111/16		6.45	5.61	788	5000	5/8	15/8
BL 150	33/4	41/2	1	13/4		8.95	7.73	1260	5000	5/8	17/8
BL 190	4	51/4	1	21/8	41/2	8.83	7.04	1702	5000	3/4	21/8
BL 225	41/4	6	1	21/2	5	12.28	9.60	2332	4000	3/4	23/8

CL

CL035-CL150

CL190-CL276

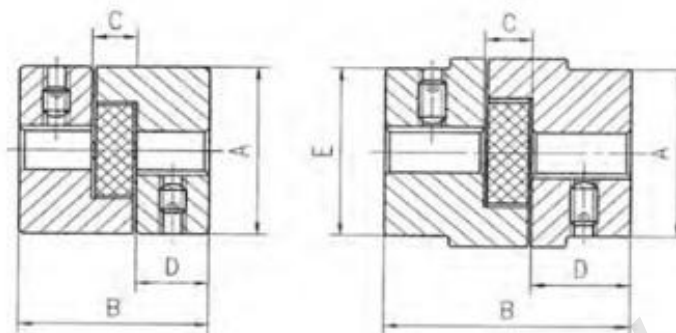

Catalog	Fundamental dimensions					torque needed nm	rotational speed rpm	Bore max mm	stock bore sizes of the couplings	Mass kg
	A	B	C	D	E					
CL035	16	20.2	7.8	6.5	-	0.5	30.000	9	8.9	0.03
CL050	28	43	12	15.5	-	3	17.000	16	10.12.14.16	0.13
CL070	35	50.7	12.7	19	-	5	13.000	19	10.12.14.16.18.19	0.24
CL075	45	55	12.7	20.5	-	10	10.000	24	12.14.16.18.19.20.22.24	0.40
CL090	54	55	12.7	21	-	16	9.000	25	14.16.18.19.20.22.24.25	0.68
CL095	54	64	12.7	25.5	-	22	9.000	29	14.16.18.19.20.22.24.25.28	0.71
CL099	65	73	19	27	-	45	7.000	35	20.22.24.25.28.30.32.35	1.22
CL100	65	89	19	35	-	50	7.000	35	20.22.24.25.28.30.32.35	1.40
CL110	84	108	22	43	-	90	5.000	42	25.28.30.32.35.38.40.42	3.0
CL150	96	115.4	25.4	45	80	150	5.000	48	30.32.35.38.40.42.45.48	5.0
CL190	115	133.4	25.4	54	102	200	5.000	54	35.38.40.42.45.48.50	7.6
CL225	127	153.4	25.4	64	108	300	4.200	67	38.40.42.45.48.50.55.60.65	9.0
CL276	157	200	41	79	127	542	4.200	73	45.48.50.55.60.65.70	21.0