




GEH Type Couplings

杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com

DIN GEH Type Couplings 图纸

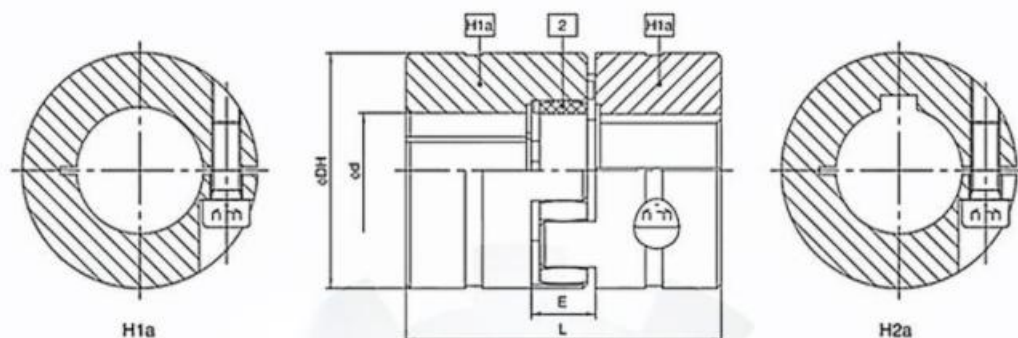

DIN GEH Type Couplings

Material: Steel, aluminium													
Catalog	part	Basic dimensions			Shaft hole diameter		Rated torque of hexagon socket screw(N.m)				Maximum speed (rpm)	Moment of inertia (kg.cm ²)	weight (kg)
		L	DH	E	min	max	specifications	TA(N.m)	SHA92	SHA96			
GEH-19	H1a	66	40	16	8	20	M6	14	10	17	11600	0.53	0.25
	H2a												
GEH-24	H1a	78	55	18	10	28	M6	14	35	60	8500	2.23	0.55
	H2a												
GEH-28	H1a	90	65	20	14	38	M8	35	95	160	7100	4.99	0.88
	H2a												
GEH-38	H1a	114	80	24	15	42	M8	35	190	325	5900	12.7	1.17
	H2a												
GEH-42	H1a	126	95	26	20	50	M10	69	265	450	5000	30	1.88
	H2a												
GEH-48	H1a	140	105	28	20	55	M12	120	310	525	4500	49.56	2.55
	H2a												
GEH-55	H1a	160	120	30	32	65	M12	120	410	685	3900	94.56	5.2
	H2a												
GEH-65	H1a	185	135	35	35	70	M12	120	625	940	3500	190	5.85
	H2a												
GEH-75	H1a	210	160	40	42	80	M16	295	1280	1920	2980	400	9.06
	H2a												
GEH-90	H1a	245	200	45	42	90	M20	580	2400	3600	2380	1170	17
	H2a												

Note: The shaft hole and keyway can be selected according to DIN6885, JIS B1310, UNI6604, GB1095 standards.