



GL Type Couplings


杭州四海传动件有限公司 Hangzhou Ocean Industry CO. Ltd.

Tel:0086-571-88842852
Fax:0086-571-88844378
E-mail:oceanindustry@vip.163.com

电话:0086-571-88842852
传真:0086-571-88844378
邮箱:oceanindustry@vip.163.com


GL Type Couplings

DIN

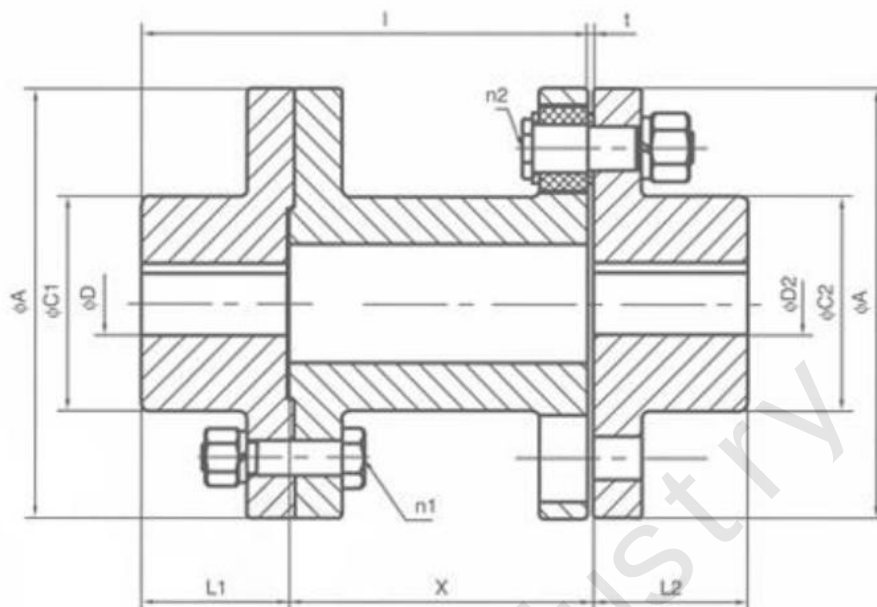

Catalog AxX	Fundamental dimensions						Bore		n1	n2	Max Torque (Nm)	Max Revolution (rpm)	Moment of Inertia (kg.cm)	G (kg)
	L	L1	L2	C1	C2	t	poilot	max						
GL-112x100	134	37	40	50	50	3	11	28	4	4	33	4000	79	5.53
GL-125x100	139	42	45	56	56	3	11	32	4	4	73	4000	140	7.47
GL-140x100	144	47	50	71	71	3	11	38	6	6	130	4000	220	9.9
GL-140x140	184	47	50	71	71	3	11	38	6	6	130	4000	230	10.5
GL-160x100	150	53	56	80	80	3	11	45	8	8	200	4000	380	12.8
GL-160x140	190	53	56	80	80	3	11	45	8	8	200	4000	390	13.6
GL-180x100	157	60	63	90	90	3	11	50	8	8	230	3500	620	16.6
GL-180x140	197	60	63	90	90	3	11	50	8	8	230	3500	630	17.5
GL-180x180	237	60	63	90	90	3	11	50	8	8	230	3500	640	18.4
GL-200x140	203	67	71	100	100	4	18	56	8	8	440	3200	1200	26.7
GL-200x180	243	67	71	100	100	4	18	56	8	8	440	3200	1300	27.8
GL-200x220	283	67	71	100	100	4	18	56	8	8	440	3200	1300	28.9
GL-224x140	212	76	80	112	112	4	18	63	8	8	510	2850	2000	33.9
GL-224x180	252	76	80	112	112	4	18	63	8	8	510	2850	2000	35.3
GL-224x220	292	76	80	112	112	4	18	63	8	8	510	2850	2000	36.7
GL-250x140	222	86	90	125	125	4	20	71	8	8	850	2550	3600	49.6
GL-250x180	262	86	90	125	125	4	20	71	8	8	850	2550	3700	51.5
GL-250x220	302	86	90	125	125	4	20	71	8	8	850	2550	3700	53.4
GL-250x260	342	86	90	125	125	4	20	71	8	8	850	2550	3800	55.3
GL-280x180	272	96	100	140	140	4	30	80	8	8	1500	2300	6200	69.4
GL-280x220	312	96	100	140	140	4	30	80	8	8	1500	2300	6300	71.8
GL-280x260	352	96	100	140	140	4	30	80	8	8	1500	2300	6400	74.2
GL-280x300	392	96	100	140	140	4	30	80	8	8	1500	2300	6500	76.6
GL-315x180	284	108	112	160	160	4	32	90	10	10	2200	2050	10000	90.6
GL-315x220	324	108	112	160	160	4	32	90	10	10	2200	2050	10000	93.7
GL-315x260	364	108	112	160	160	4	32	90	10	10	2200	2050	11000	96.8
GL-315x300	404	108	112	160	160	4	32	90	10	10	2200	2050	11000	99.8

ANSI

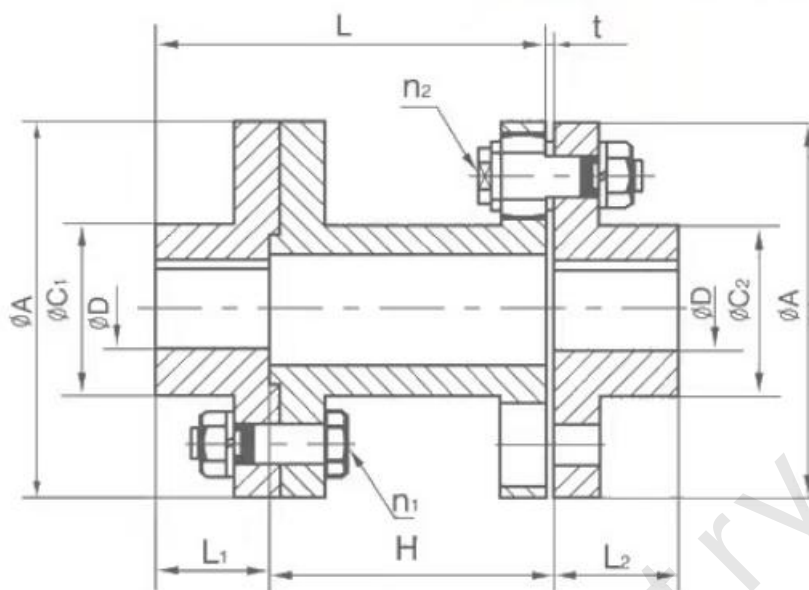

Catalog AXH	Fundamental Dimensions						Bore		n		Max Torque (In-Lb)	Max Revolution (rPm)	wt Lbs
	L	L1	C1	L2	C2	t	pilot	Max	M1	n2			
GL 44x40	51/4	17/16	2	19/16	2	0.118	-	11/8	4	4	292	4000	11.4
GL 50x40	57/16	15/8	23/16	13/4	23/16	0.118	-	11/4	4	4	646	4000	15.4
GL 55x40	511/16	17/8	213/16	2	213/16	0.118	-	11/2	6	6	1150	4000	20.4
GL 55x55	71/4	17/8	213/16	2	213/16	0.118	-	11/2	6	6	1150	4000	21.6
GL 63x40	515/16	21/16	31/8	23/16	31/8	0.118	-	13/4	8	8	1770	4000	26.4
GL 63x55	71/2	21/16	31/8	23/16	31/8	0.118	-	13/4	8	8	1770	4000	28.0
GL 71x40	63/16	23/8	31/2	21/2	31/2	0.118	-	2	8	8	2036	3500	34.2
GL 71x55	73/4	23/8	31/2	21/2	31/2	0.118	-	2	8	8	2036	3500	36.1
GL 71x63	95/16	23/8	31/2	21/2	31/2	0.118	-	2	8	8	2036	3500	37.9
GL 79x55	8	25/8	4	213/16	4	0.157	11/16	23/16	8	8	3894	3200	55.1
GL 79x71	99/16	25/8	4	213/16	4	0.157	11/16	23/16	8	8	3894	3200	57.3
GL 79x79	113/16	25/8	4	213/16	4	0.157	11/16	23/16	8	8	3894	3200	59.6
GL 88x55	83/8	3	43/8	31/8	43/8	0.157	11/16	21/2	8	8	4524	2850	69.9
GL 88x71	915/16	3	43/8	31/8	43/8	0.157	11/16	21/2	8	8	4524	2850	72.8
GL 88x87	111/2	3	43/8	31/8	43/8	0.157	11/16	21/2	8	8	4524	2550	75.7
GL 100x55	83/4	33/8	5	31/2	5	0.157	3/4	23/4	8	8	7523	2550	102
GL 100x71	105/16	33/8	5	31/2	5	0.157	3/4	23/4	8	8	7523	2550	106
GL 100x87	117/8	33/8	5	31/2	5	0.157	3/4	23/4	8	8	7523	2550	110
GL 100x100	137/16	33/8	5	31/2	5	0.157	3/4	23/4	8	8	7523	2550	114
GL 110x71	1011/16	33/4	51/2	4	51/2	0.157	13/16	31/8	8	8	13275	2300	143
GL 110x87	121/4	33/4	51/2	4	51/2	0.157	13/16	31/8	8	8	13275	2300	148
GL 110x100	137/8	33/4	51/2	4	51/2	0.157	13/16	31/8	8	8	13275	2300	153
GL 110x118	157/16	33/4	51/2	4	51/2	0.157	13/16	31/8	8	8	13275	2300	158
GL 124x71	113/16	41/4	61/4	43/8	61/4	0.157	11/4	31/2	10	10	19470	2050	186
GL 124x87	123/4	41/4	61/4	43/8	61/4	0.157	11/4	31/2	10	10	19470	2050	193
GL 124x100	143/8	41/4	61/4	43/8	61/4	0.157	11/4	31/2	10	10	19470	2050	200
GL 124x118	1529/32	41/4	61/4	43/8	61/4	0.157	11/4	31/2	10	10	19470	2050	200