



SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-3SPW1-11P

88m-3.6m³/h-440V-600W


600W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	3.6	3.4	3.1	2.8	2.4	1.9	1.5	1.1	0.6	0.0
L/min	60	57	52	47	40	32	25	18	10	0
H(m)	0	10	20	30	40	50	60	70	80	88

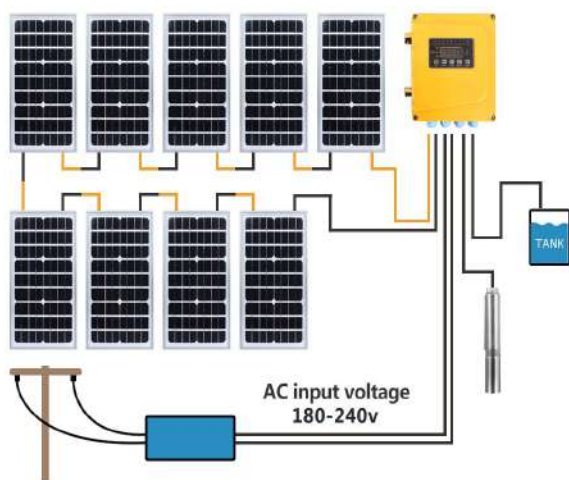

☑ 340w*2pcs

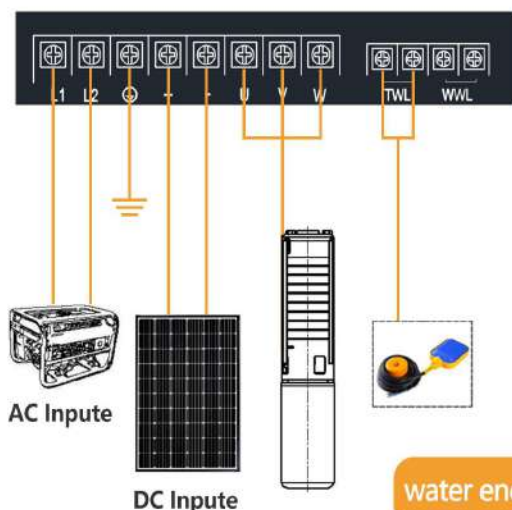

H.Max
88m

DC input
60-440V

Outlet
1.5"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-3SPW3-5P

38m-7.6m³/h-440V-600W


600W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	7.6	7.1	6.5	5.7	5.1	4.1	3.3	2.2	0.0
L/min	127	118	108	95	85	68	55	37	0
H(m)	0	5	10	15	20	25	30	35	38

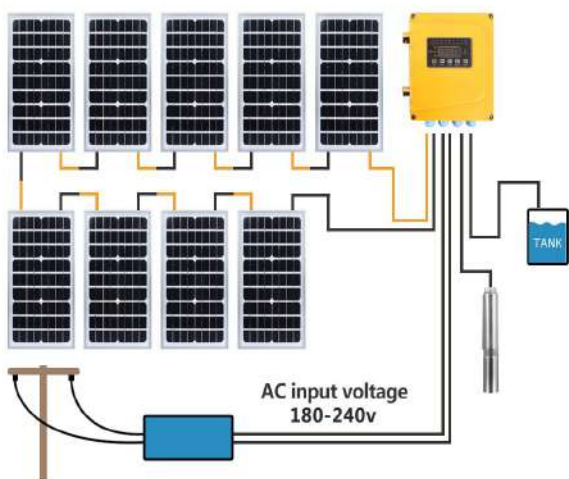

☑ 340w*2pcs

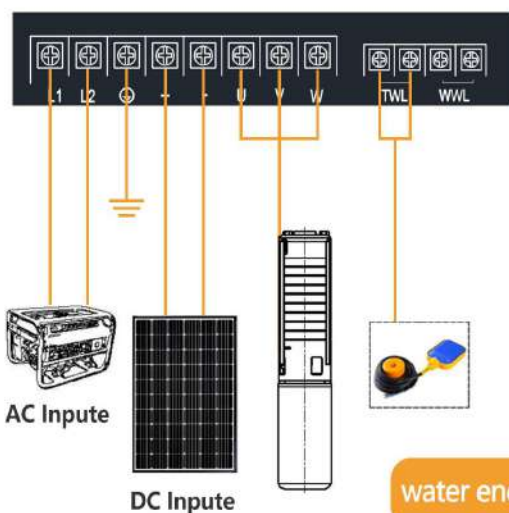

H.Max
38m

DC input
60-440V

Outlet
1.5"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid



A/D-4SPW2-5P


54m-5.2m³/h-440V-600W

600W


m ³ /h	5.2	4.9	4.6	4.3	3.9	3.5	3.0	2.5	2.1	1.3	0.0
L/min	87	82	77	72	65	58	50	42	35	22	0
H(m)	0	10	15	20	25	30	35	40	45	50	54

Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

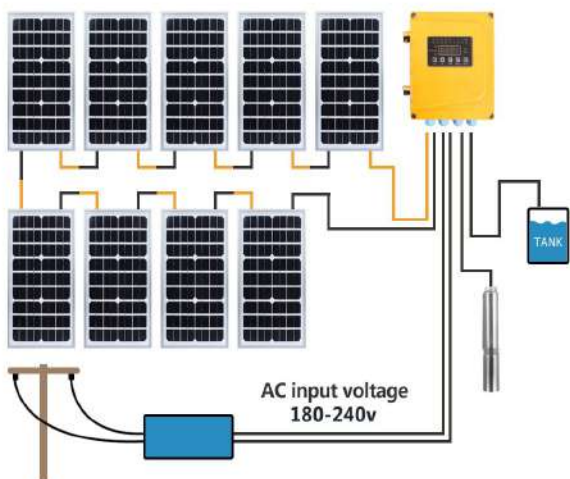

✓ 340w*2pcs

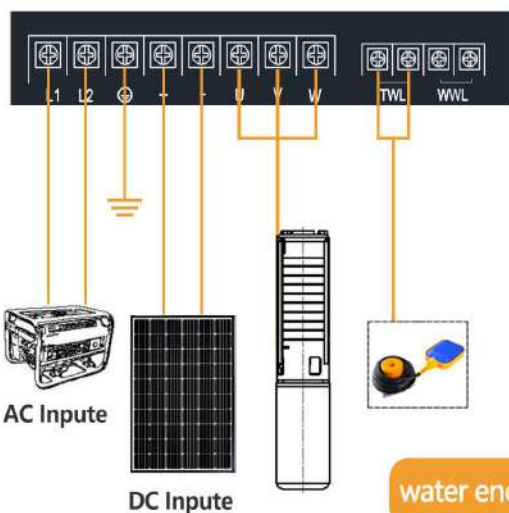

H.Max
54m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid



A/D-4SPW3-4P


55m-5.9m³/h-440V-600W

600W


m ³ /h	5.9	5.0	4.4	3.4	3.0	2.5	2.0	1.5	1.1	0.0
L/min	98	83	73	57	50	42	33	25	18	0
H(m)	0	10	18	27	30	36	40	47	49	55

Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

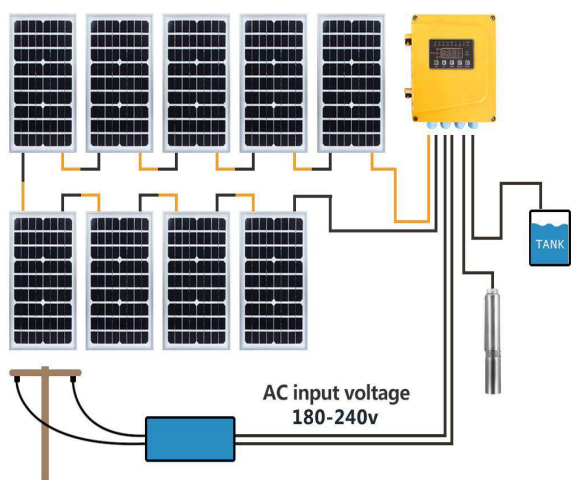

☑ 340w*2pcs

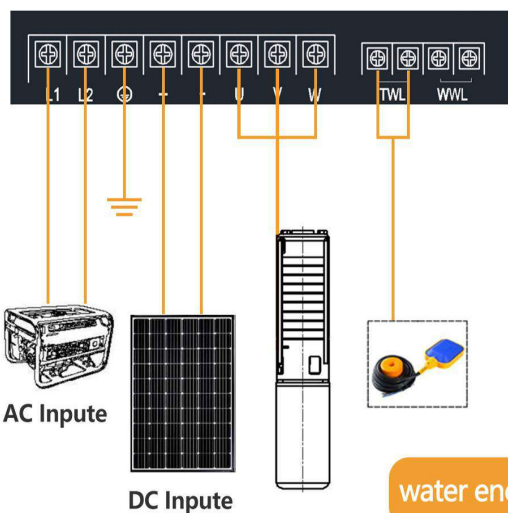


H.Max
55m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid



A/D-4SPW4-3P


43m-8.1m³/h-440V-600W

600W


m ³ /h	8.1	7.6	7.0	6.3	5.6	4.8	4.0	3.2	2.1	0.0
L/min	135	127	117	105	93	80	67	53	35	0
H(m)	0	5	10	15	20	25	30	35	40	43

Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

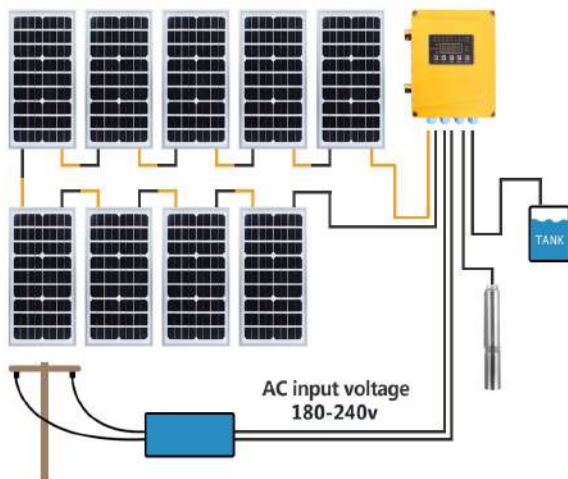

☑ 340w*2pcs

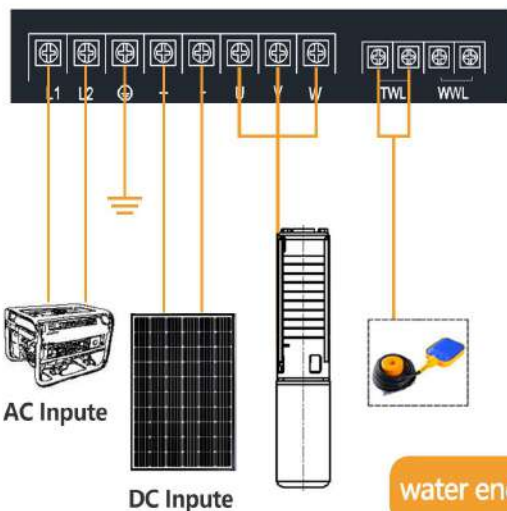

H.Max
43m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW8-2P

21m-15.1/h-440V-600W


600W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	15	13	9.2	5.5	2.9	0.0
L/min	252	208	153	92	48	0
H(m)	0	5	10	15	20	21

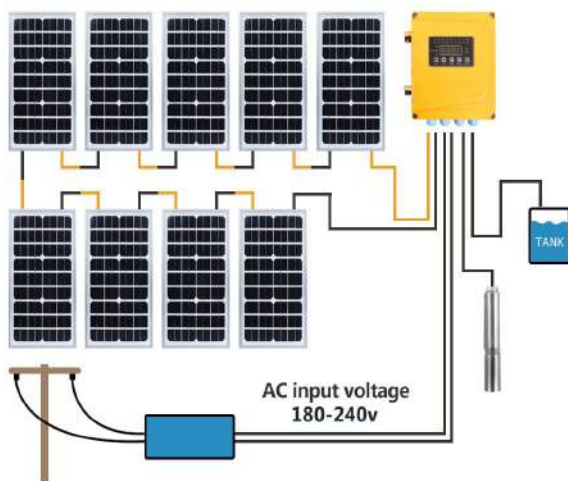

☑ 340w*2pcs

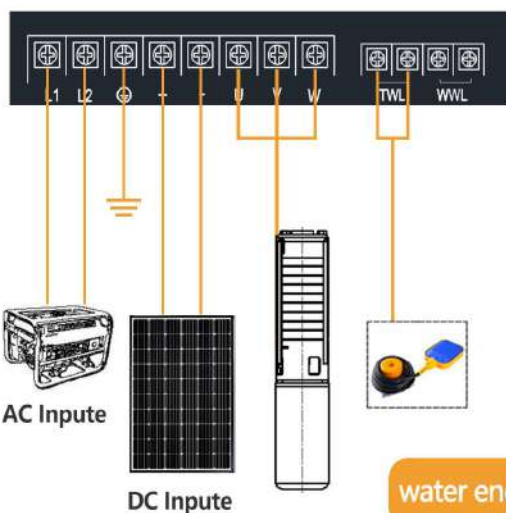

H.Max
21m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-3SPW1-12P

100m-4.0m³/h-440V-1000W


1000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	4.0	3.7	3.4	3.1	2.8	2.3	2.1	1.7	1.4	1.1	0.0
L/min	67	62	57	52	47	38	35	28	23	18	0
H(m)	0	10	20	30	40	50	60	70	80	90	100

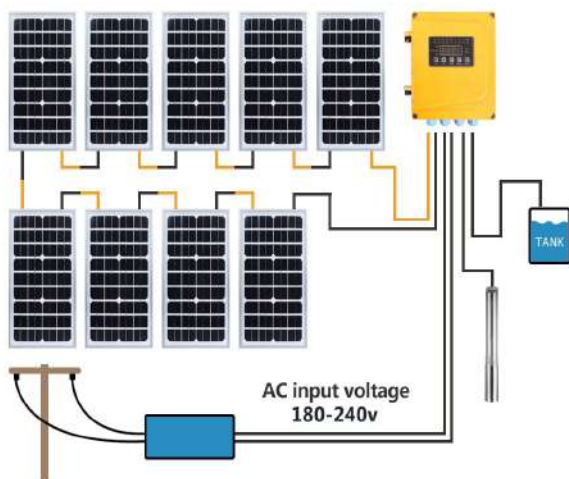

☑ 340w*2pcs ☑ 340w*3pcs

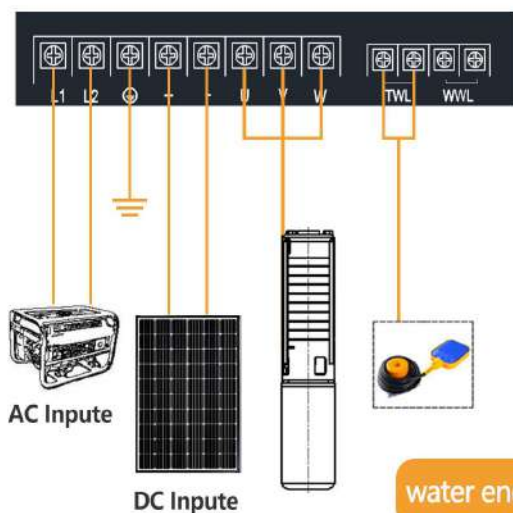

H.Max
100m

DC input
60-440V

Outlet
1.5"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-3SPW3-7P

54m-7.4m³/h-440V-1000W


1000W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	7.4	6.9	6.0	5.1	4.2	3.0	2.6	2.0	1.6	0.0
L/min	123	115	100	85	70	50	43	33	27	0
H(m)	0	6	10	25	35	43	45	50	52	54

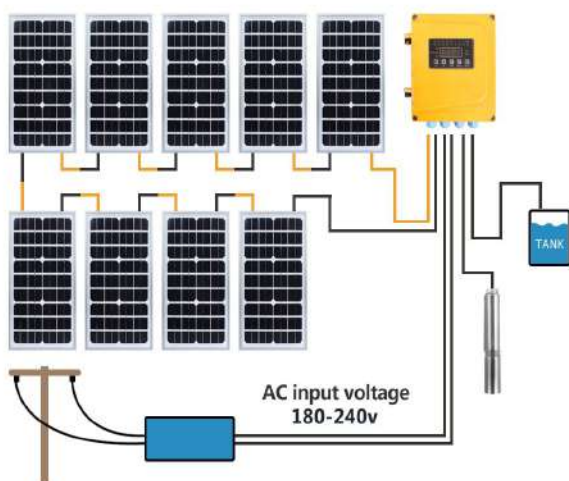


☑ 340w*2pcs ☑ 340w*3pcs



AC Inpute



DC Inpute



water encapsulated motor



H.Max
54m

DC input
60-440V

Outlet
1.5"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW2-7P

82m-4.9m³/h-440V-1000W


1000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	4.9	4.5	4.0	3.5	2.9	2.2	1.4	0.6	0.0
L/min	82	75	67	58	48	37	23	10	0
H(m)	0	10	20	30	40	50	60	70	82

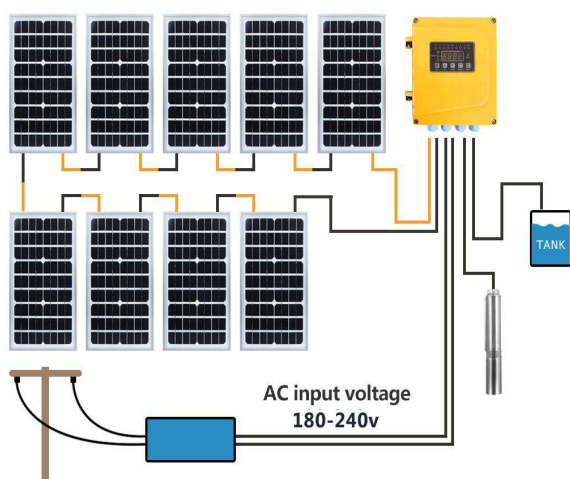

☑ 340w*2pcs ☑ 340w*3pcs

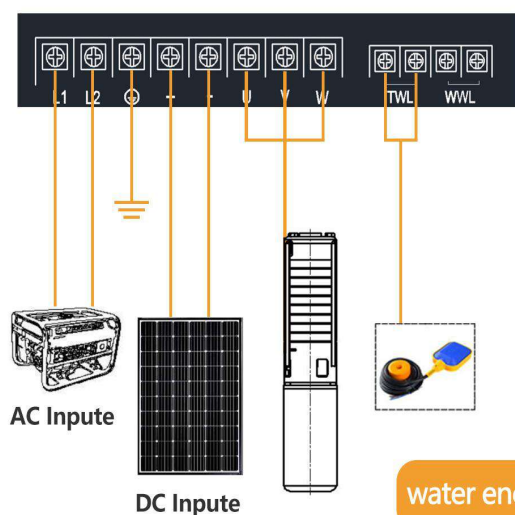


H.Max
82m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW3-5P

72m-6.5m³/h-440V-1000W


1000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	6.5	6.3	5.9	5.7	4.9	4.0	3.0	2.0	0.5	0.0
L/min	108	105	98	95	82	67	50	33	8	0
H(m)	0	5	10	15	25	35	45	55	65	72

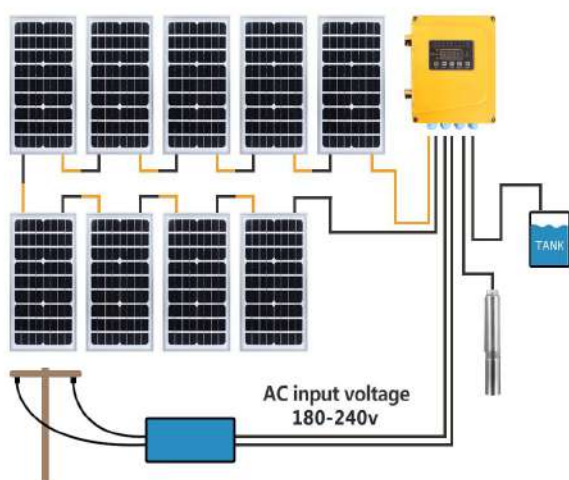

☑ 340w*2pcs ☑ 340w*3pcs

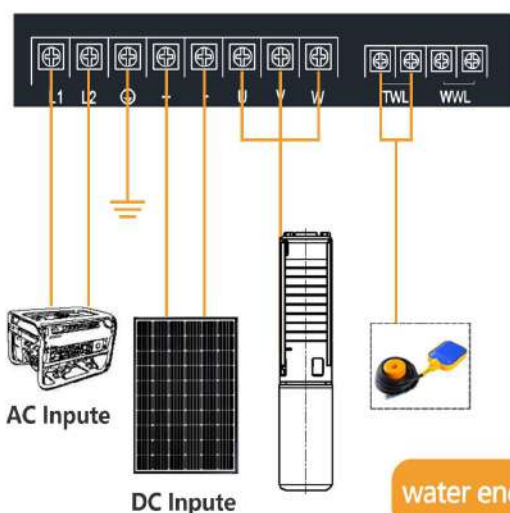

H.Max
72m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor



SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW4-3P

47m-9.3m³/h-440V-1000W


1000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	9.3	9.2	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0	0.0
L/min	155	153	150	133	117	100	83	67	50	33	17	0
H(m)	0	5	7	15	25	31	38	40	43	44	46	47

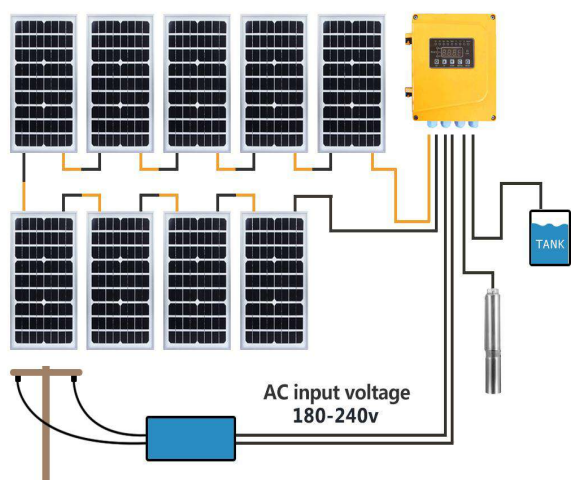

✓ 340w*2pcs ✓ 340w*3pcs

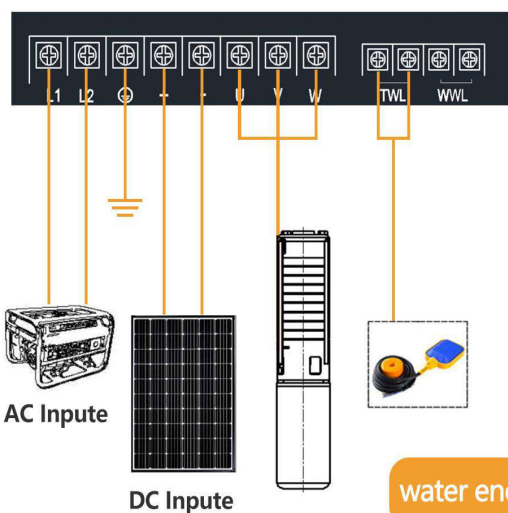

H.Max
47m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW6-3P

38m-13.1m³/h-440V-1000W


1000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	13	12	10	8.6	7.1	5.7	3.6	2.1	0.0
L/min	218	195	170	143	118	95	60	35	0
H(m)	0	5	10	15	20	25	30	35	38

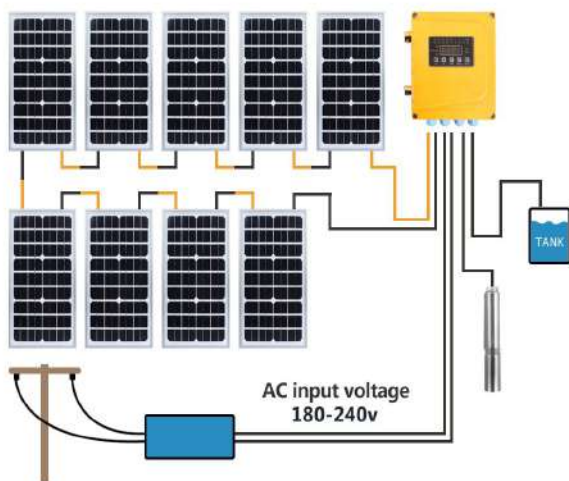

☑ 340w*2pcs ☑ 340w*3pcs

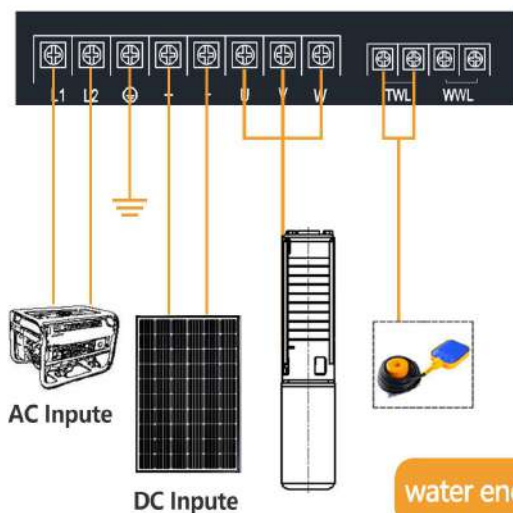

H.Max
38m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW8-3P

30m-15.6m³/h-440V-1000W


1000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	15.6	13.2	11.0	7.4	5.2	2.8	0.0
L/min	260	220	183	123	87	47	0
H(m)	0	5	10	15	20	25	30

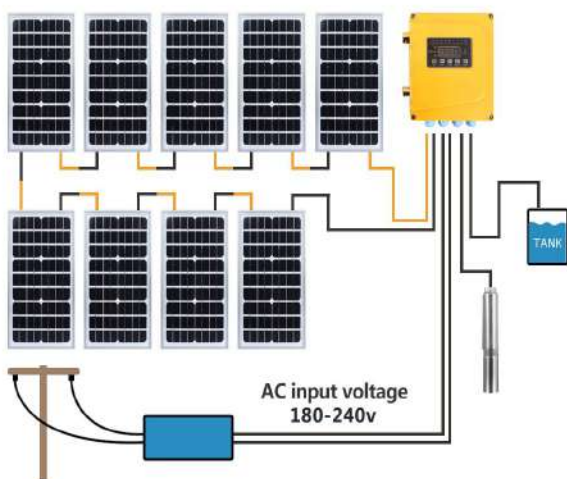

☑ 340w*2pcs ☑ 340w*3pcs

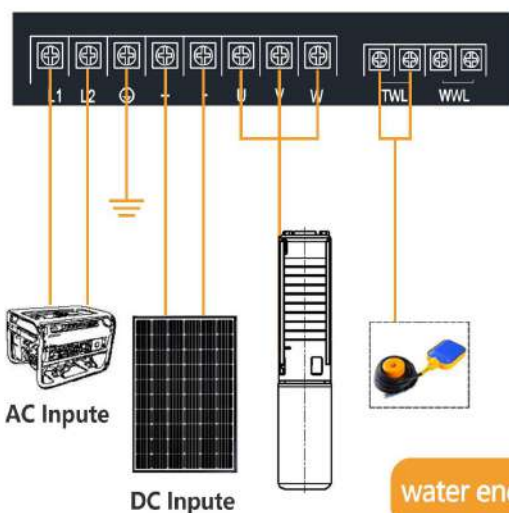

H.Max
30m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-3SPW1-14P

120m-4.0m³/h-440V-1200W


1200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	4.0	3.8	3.7	3.5	3.0	2.4	1.8	1.5	1.3	0.0
L/min	67	63	62	58	50	40	30	25	22	0
H(m)	0	10	20	30	50	70	90	100	110	120

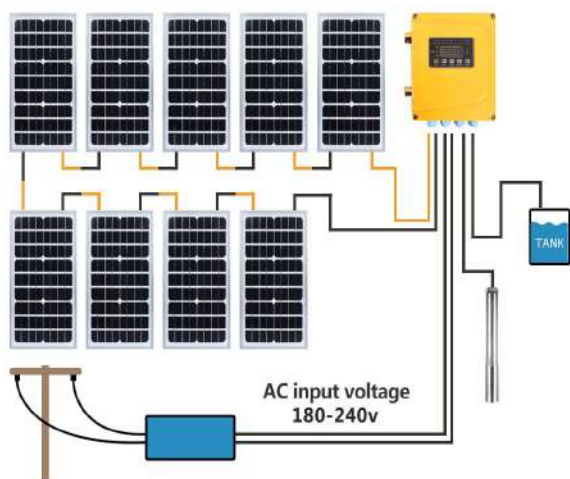

☑ 340w*3pcs ☑ 340w*4pcs

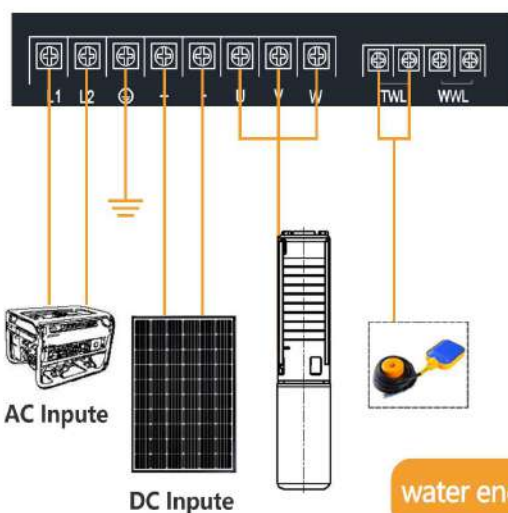

H.Max
120m

DC input
60-440V

Outlet
1.5"



ISO9001
ISO14001
TUV



water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-3SPW3-8P

61m-7.8m³/h-440V-1200W


1200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	7.8	7.4	6.5	5.6	4.8	3.8	2.3	0.0
L/min	130	123	108	93	80	63	38	0
H(m)	0	10	20	30	40	50	60	61

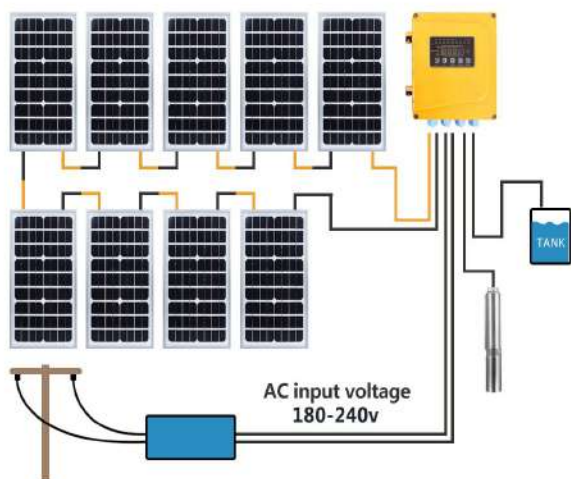

☑ 340w*3pcs ☑ 340w*4pcs



AC Inpute



DC Inpute



water encapsulated motor



H.Max
61m

DC input
60-440V

Outlet
1.5"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW2-9P

112m-5.0m³/h-440V-1200W


1200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	5.0	4.8	4.4	4.0	3.6	3.1	2.7	2.2	1.6	1.2	0.7	0.0
L/min	84	80	73	67	60	52	45	37	27	20	12	0
H(m)	0	10	20	30	40	50	60	70	80	90	100	112

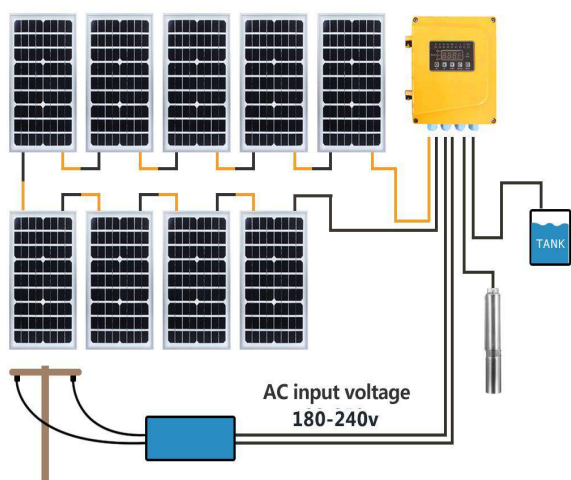

✓ 340w*3pcs ✓ 340w*4pcs

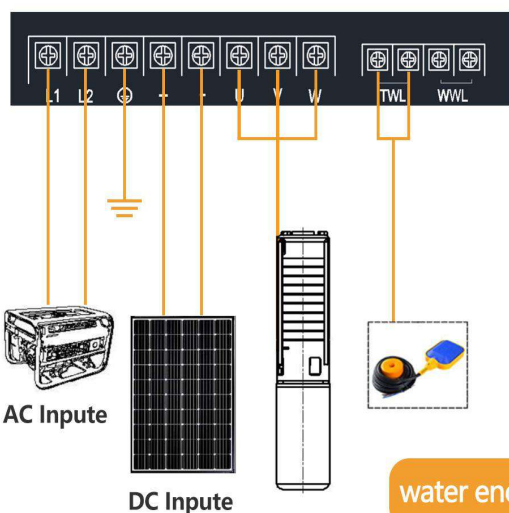

H.Max
112m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW3-8P

92m-5.9m³/h-440V-1200W


1200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	5.9	4.9	4.1	3.1	2.0	1.0	0.0
L/min	99	82	68	52	33	17	0
H(m)	0	24	39	51	70	80	92

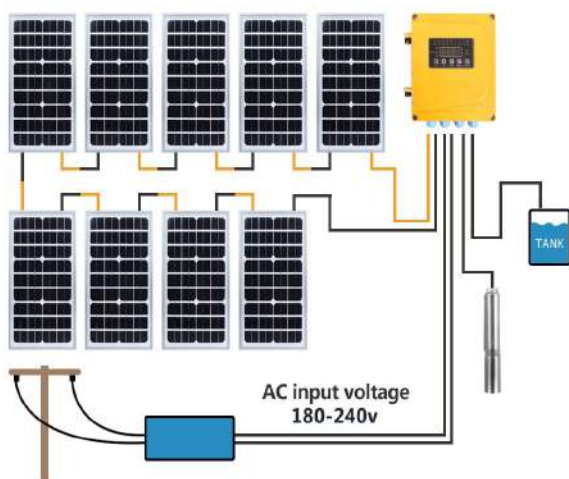

☑ 340w*3pcs ☑ 340w*4pcs

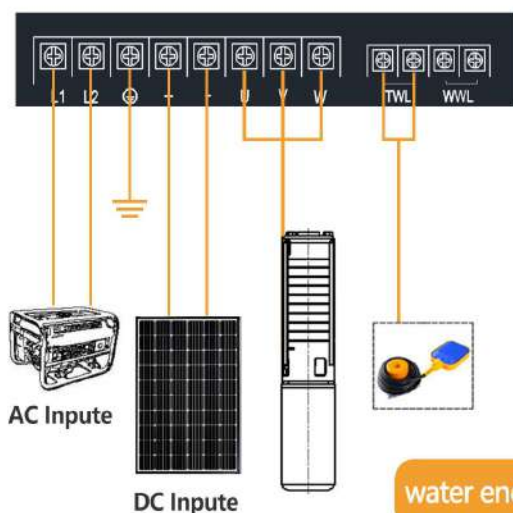

H.Max
92m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW4-4P

61m-9.0m³/h-440V-1200W


1200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	9.0	8.6	8.1	7.0	6.1	5.1	4.0	3.0	2.0	1.0	0.0
L/min	150	143	135	117	102	85	67	50	33	17	0
H(m)	0	5	11	23	32	41	52	55	57	59	61

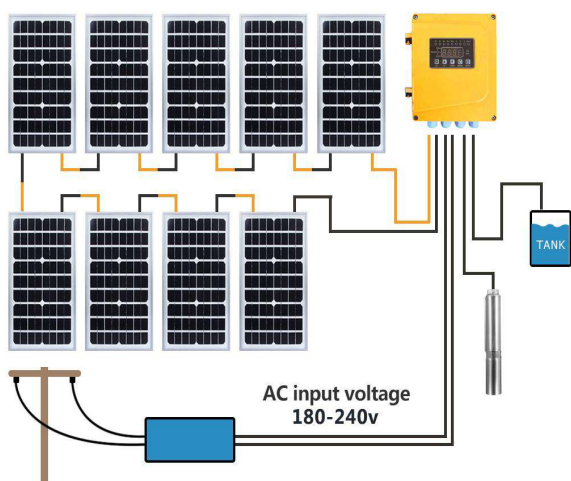

☑ 340w*3pcs ☑ 340w*4pcs

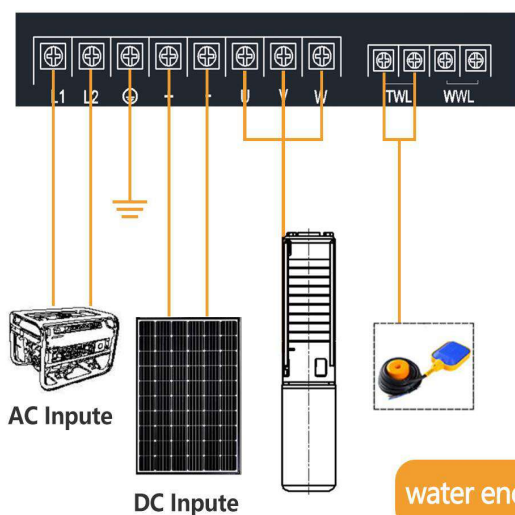

H.Max
61m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor



SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW6-4P

52m-10.8m³/h-440V-1200W


1200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	11	10	8.2	6.2	3.4	0.3	0.0
L/min	180	168	137	103	57	5	0
H(m)	0	10	20	30	40	50	52

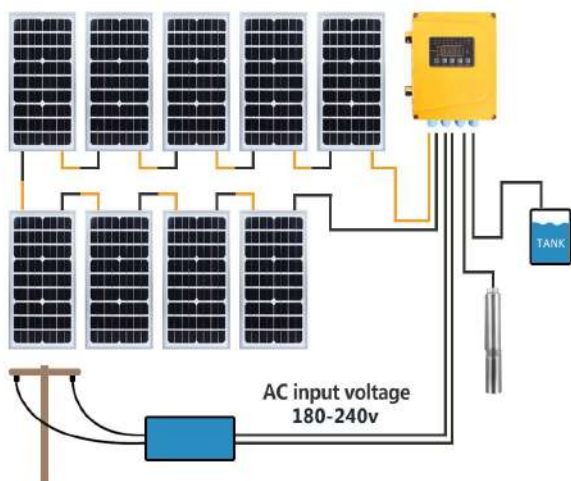

☑ 340w*3pcs ☑ 340w*4pcs

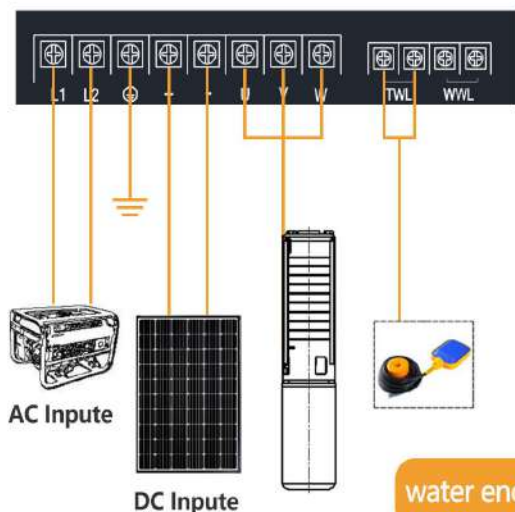

water encapsulated motor

H.Max
52m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW8-4P

47m-14.8m³/h-440V-1200W


1200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	15	14	12	10	8.0	6.1	4.1	2.1	0.0
L/min	247	232	201	168	133	102	68	35	0
H(m)	0	4	10	16	20	26	33	44	47

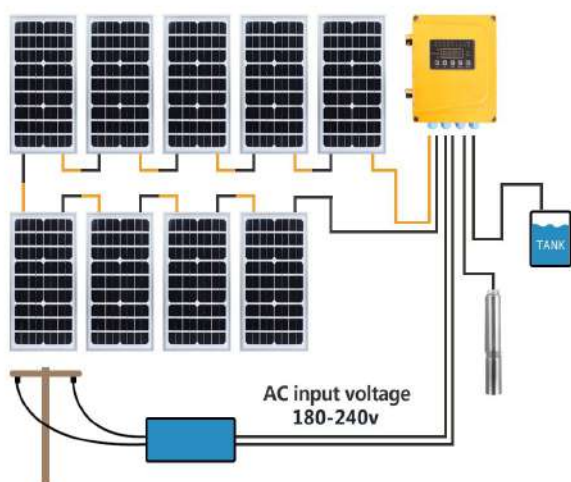

☑ 340w*3pcs ☑ 340w*4pcs



AC Inpute



DC Inpute



water encapsulated motor

H.Max
47m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW12-2P

23m-18.8m³/h-440V-1200W


1200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	18.8	16.7	13.3	9.5	5.5	0.0
L/min	313	278	221	158	92	0
H(m)	0	5	10	15	20	23

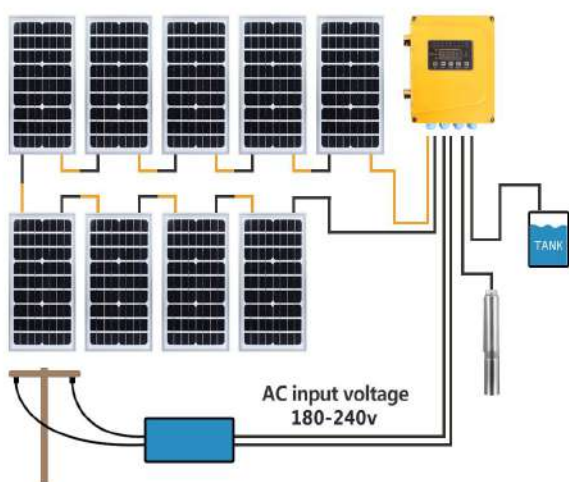

☑ 340w*3pcs ☑ 340w*4pcs

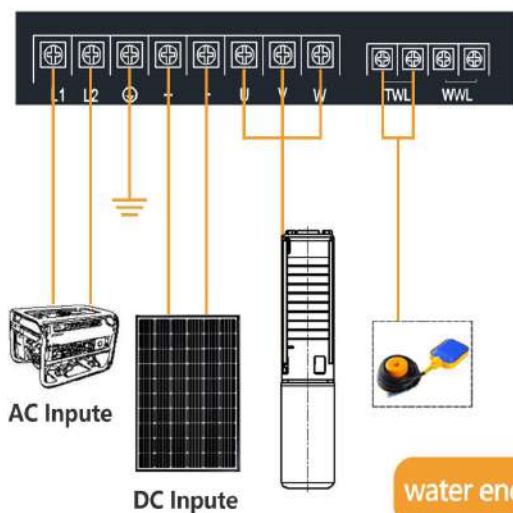

H.Max
23m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW1-16P

220m-3.5m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	3.5	3.2	2.8	2.5	2.2	1.8	1.4	1.1	0.9	0.8	0.5	0.0
L/min	58	53	47	42	37	30	23	18	15	13	8	0
H(m)	0	20	40	60	80	100	120	140	160	180	200	220

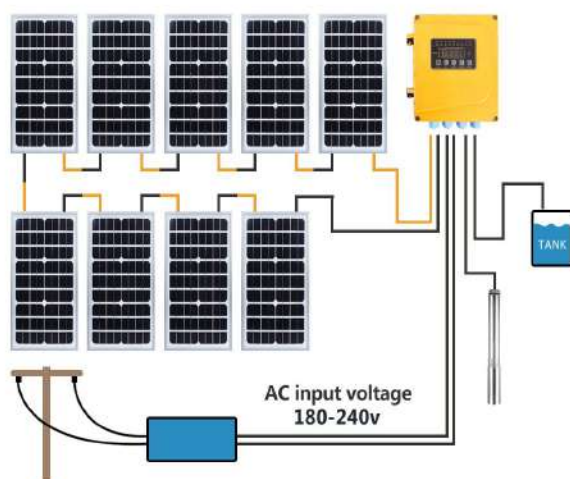

- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor



H.Max
220m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW2-9P

142m-5.6m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	5.6	5.5	5.4	5.1	4.6	3.9	2.9	2.6	2.0	1.5	0.9	0.0
L/min	93	92	90	85	77	65	48	43	33	25	15	0
H(m)	0	10	20	30	50	70	90	100	110	120	130	142

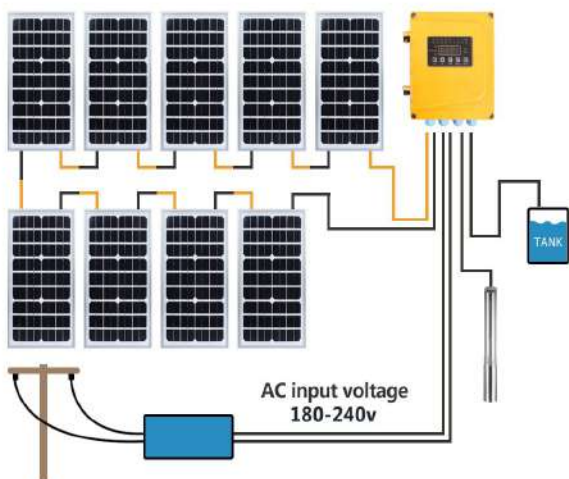

- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Inpute



DC Inpute



water encapsulated motor

H.Max
142m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW3-8P

126m-7.2m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	7.2	6.9	6.7	6.2	5.8	4.8	3.7	2.5	0.6	0.0
L/min	120	115	112	103	97	80	62	42	10	0
H(m)	0	10	20	30	40	60	80	100	120	126

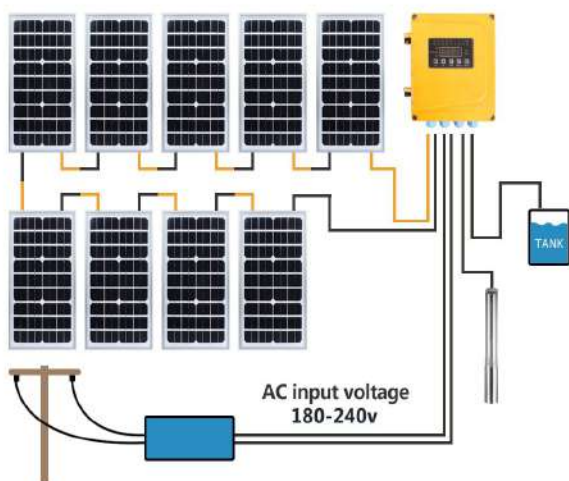

- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor



H.Max
126m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW6-5P

76m-13.9m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	14	13	11	9.6	7.7	5.7	3.4	0.8	0.0
L/min	232	210	188	160	128	95	57	13	0
H(m)	0	10	20	30	40	50	60	70	76

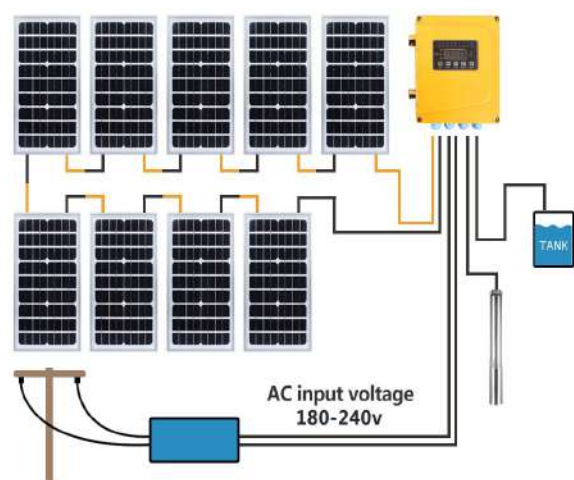


- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor



H.Max
76m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW8-5P

67m-17.0m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	17.0	16	15	14	13	12	9.1	7.1	5.3	3.5	1.6	0.0
L/min	283	272	257	237	214	191	152	118	88	58	27	0
H(m)	0	5	10	15	20	25	30	35	40	50	60	67

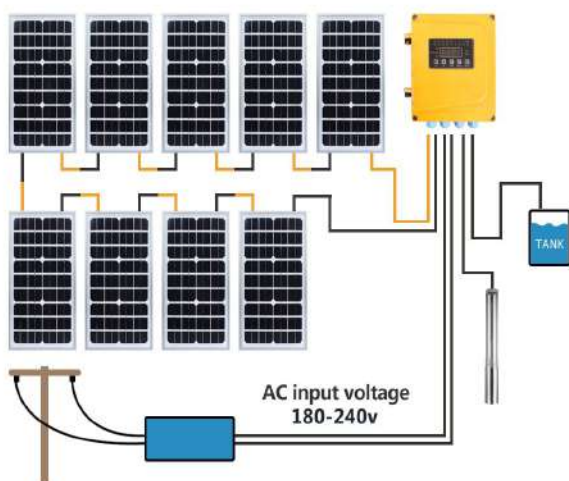


- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor



H.Max 67m

DC input 60-440V

Outlet 2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW12-3P

47m-22.5m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	22.5	20.7	18.7	16.9	14.3	10.9	7.7	5.0	2.5	0.0
L/min	375	345	312	282	238	182	128	83	42	0
H(m)	2	5	10	15	20	25	30	35	40	47

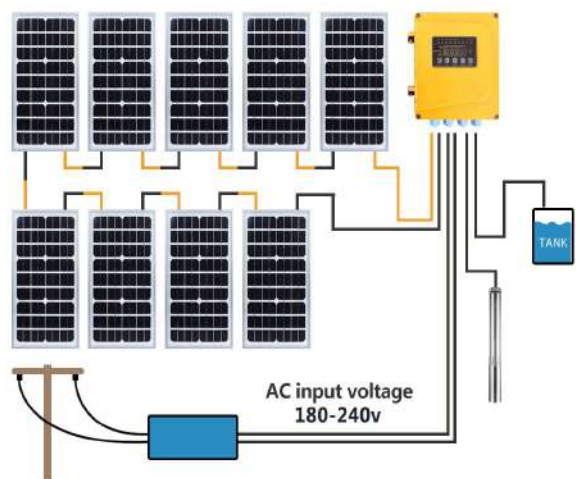


- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Inpute



DC Inpute



water encapsulated motor

H.Max
47m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW16-2P

21m-27.8m³/h-440V-1800W


1800W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	28	24	17	9.4	2.1	0.0
L/min	463	400	288	157	35	0
H(m)	2	5	10	15	20	21

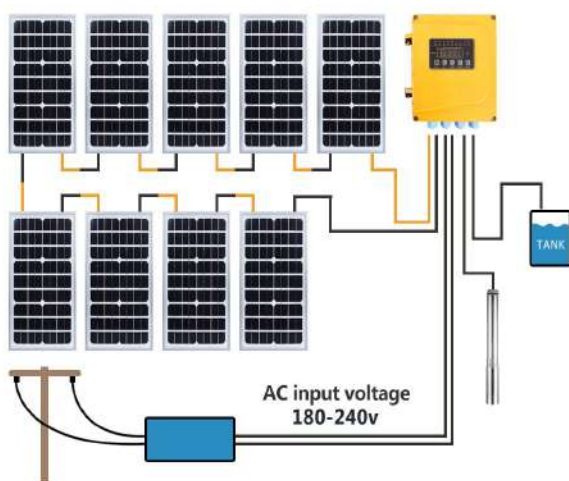

- ✓ 410w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor

H.Max
21m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW1-21P

280m-3.5m³/h-440V-2200W


2200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	3.5	3.3	2.7	2.3	1.7	1.4	1.1	1.0	0.8	0.7	0.5	0.0
L/min	58	55	45	38	28	23	18	17	13	12	8	0
H(m)	0	20	60	100	140	160	180	200	220	240	260	280

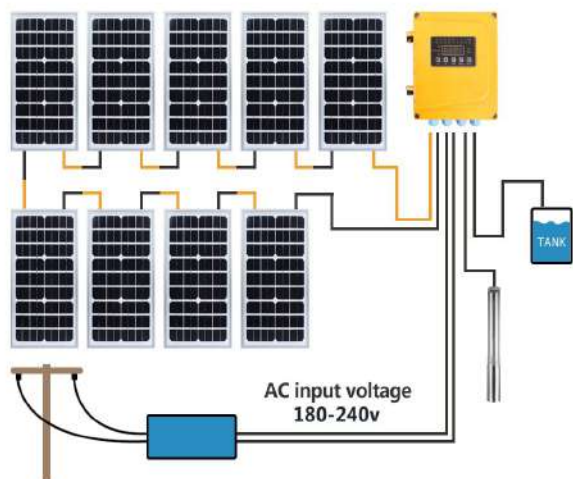

- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Inpute



DC Inpute



water encapsulated motor



H.Max
280m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW2-13P

198m-5.7m³/h-440V-2200W


2200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	5.7	5.6	5.0	4.7	4.1	3.5	2.7	1.9	1.3	0.6	0.0
L/min	95	93	83	78	68	58	45	32	22	10	0
H(m)	0	20	40	60	80	100	120	140	160	180	198

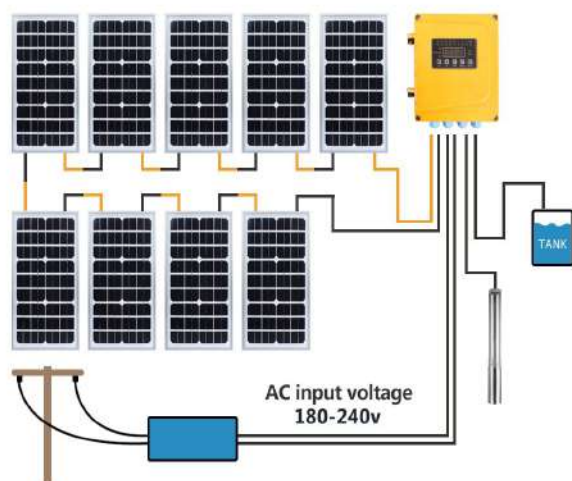

- ☑ 450w*3pcs
- ☑ 340w*4pcs
- ☑ 340w*5pcs
- ☑ 340w*6pcs
- ☑ 340w*7pcs
- ☑ 340w*8pcs

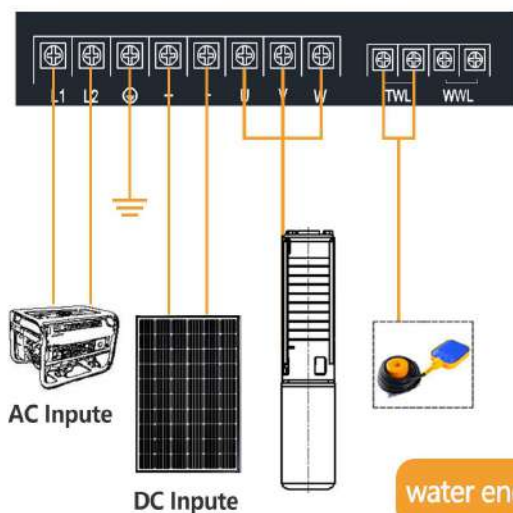

H.Max
198m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW3-9P

160m-7.4m³/h-440V-2200W


2200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	7.4	7.2	7.0	6.6	5.9	5.6	4.8	3.9	2.9	1.4	0.0
L/min	123	120	117	110	98	93	80	65	48	23	0
H(m)	0	10	20	30	50	70	90	110	130	150	160

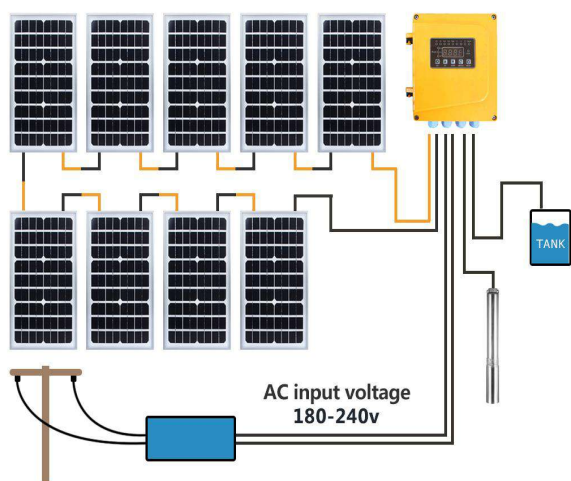


- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Inpute



DC Inpute




water encapsulated motor



H.Max
160m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW4-8P

142m-9.4m³/h-440V-2200W


2200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	9.4	9.1	8.6	7.6	6.8	5.6	4.6	3.5	2.8	0.8	0.0
L/min	157	152	143	127	113	93	77	58	47	13	0
H(m)	0	10	20	40	60	80	100	120	130	140	142

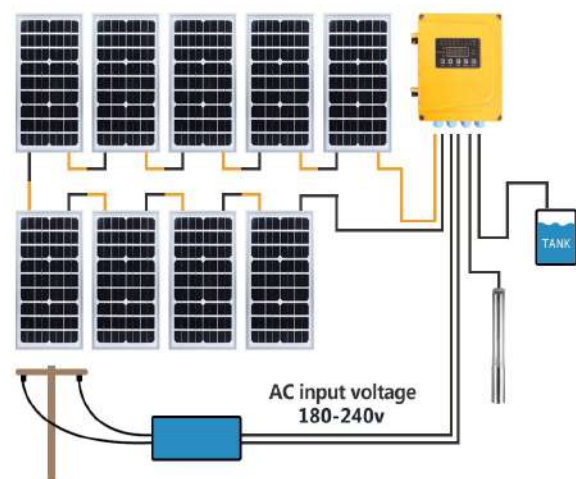

- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor



H.Max
142m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW6-6P

104m-15.1m³/h-440V-2200W


2200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	15	14	13.0	10	7.9	4.1	1.5	0.1	0.0
L/min	252	237	217	172	132	68	25	2	0
H(m)	0	10	20	40	60	80	90	100	104

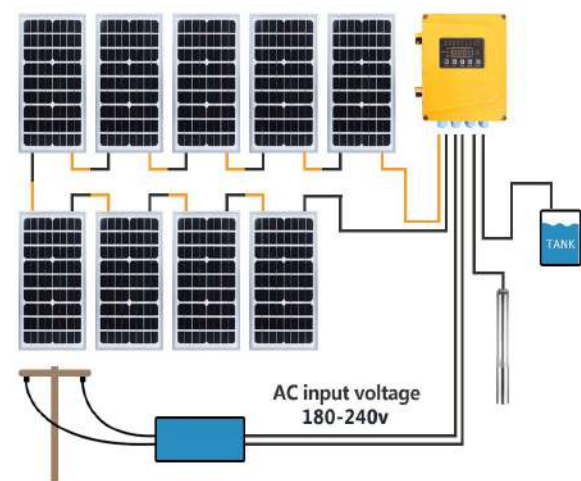

- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Inpute



DC Inpute



water encapsulated motor

H.Max
104m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

4SPW8-7P

100m-17.3m³/h-440V-2200W


2200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	17.3	15.6	13.8	11.5	8.3	5.9	4.5	3.1	2.1	1.4	0.0
L/min	288	260	230	191	138	98	75	52	35	23	0
H(m)	0	10	20	30	40	50	60	70	80	90	100

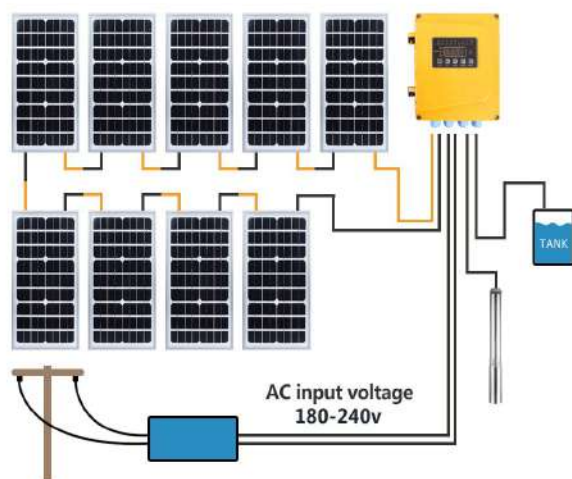

- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Input



DC Input



water encapsulated motor

H.Max
100m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW12-5P

62m-23.7m³/h-440V-2200W


2200W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	23.7	22.3	20.6	18.6	13.7	8.6	6.4	4.6	3.2	1.8	0.0
L/min	395	372	343	310	228	143	107	77	53	30	0
H(m)	0	5	10	15	25	35	40	45	50	55	62

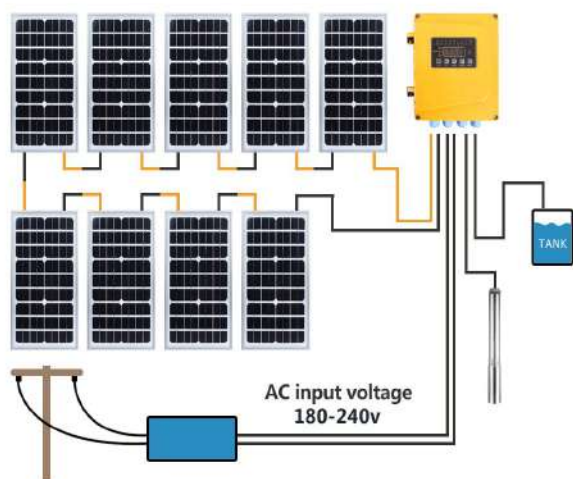



- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs



AC Inpute



DC Inpute



water encapsulated motor

H.Max
62m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW16-3P

33m-31.3m³/h-440V-2200W


2200W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	31	29	26	21	18	10	4.5	0.0
L/min	522	490	426	356	292	171	75	0
H(m)	2	5	10	15	20	25	30	33

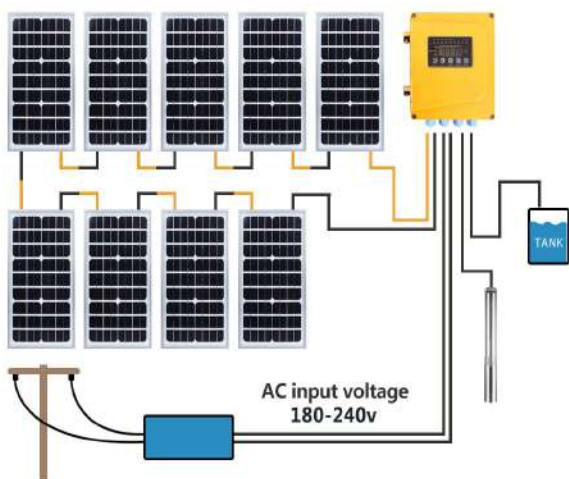

- ✓ 450w*3pcs
- ✓ 340w*4pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs

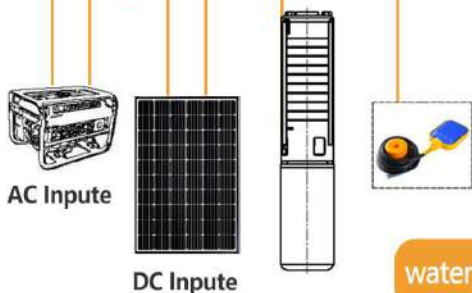

H.Max
33m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW1-26P

357m-3.6m³/h-440V-3000W


3000W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	3.6	3.3	2.9	2.3	1.9	1.4	1.0	0.9	0.8	0.7	0.5	0.3	0.0
L/min	60	55	48	38	32	23	17	15	13	12	8	5	0
H(m)	0	20	60	120	160	200	240	260	280	300	320	340	357

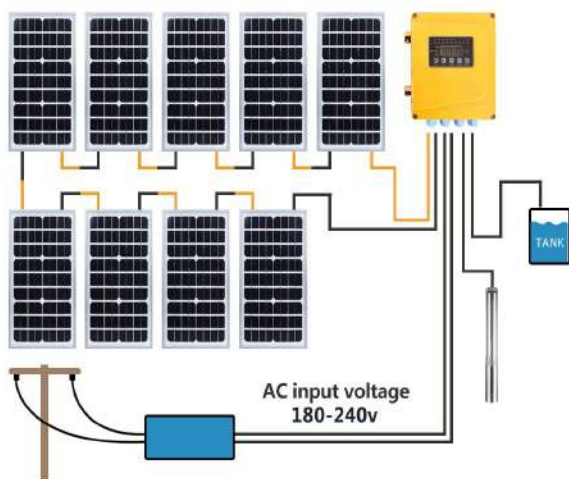

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs



AC Input



DC Input



water encapsulated motor



H.Max
357m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

WhatsApp
@



www.samkingpump.com

Facebook Page: @SamkingSolarPump



SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW2-17P

260m-5.6m³/h-440V-3000W


3000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	5.6	5.5	5.0	4.4	3.6	3.1	2.6	2.0	1.5	0.8	0.0
L/min	93	92	83	73	60	52	43	33	25	13	0
H(m)	0	20	60	100	140	160	180	200	220	240	260

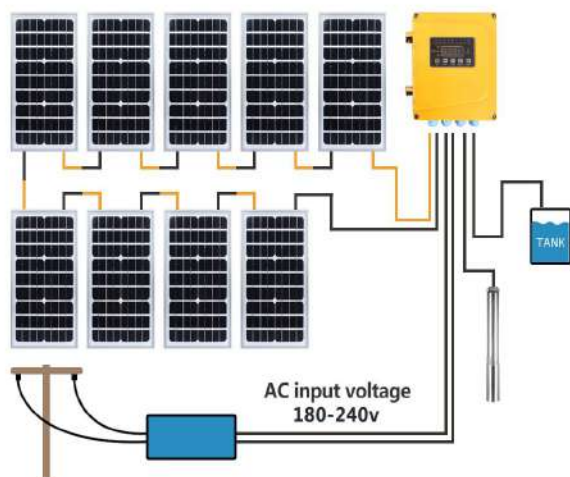

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs

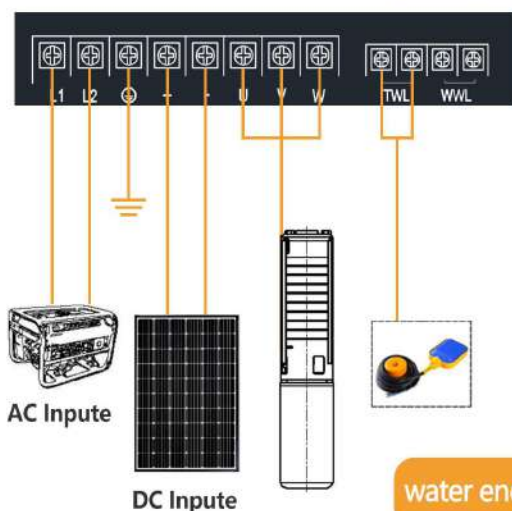

H.Max
260m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW4-13P

222m-8.7m³/h-440V-3000W


3000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	8.7	8.3	7.7	7.2	6.7	5.9	5.1	4.5	3.8	2.8	1.6	1.0	0.0
L/min	145	138	128	119	112	98	85	75	63	46	26	17	0
H(m)	0	10	30	50	70	90	110	130	150	170	190	200	222

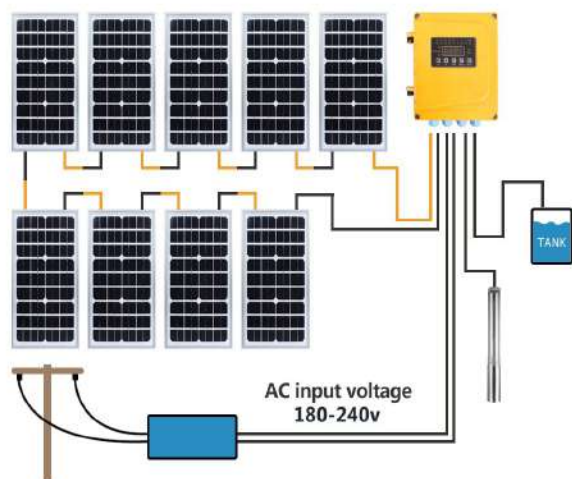

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs

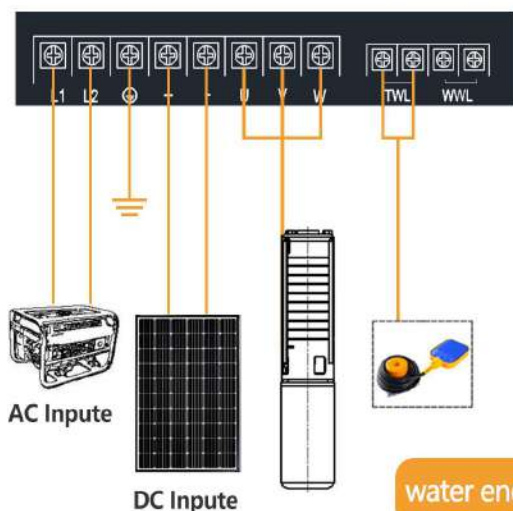

H.Max
222m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW4-13P

222m-8.7m³/h-440V-3000W


3000W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V.
DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	8.7	8.3	7.7	7.2	6.7	5.9	5.1	4.5	3.8	2.8	1.6	1.0	0.0
L/min	145	138	128	119	112	98	85	75	63	46	26	17	0
H(m)	0	10	30	50	70	90	110	130	150	170	190	200	222

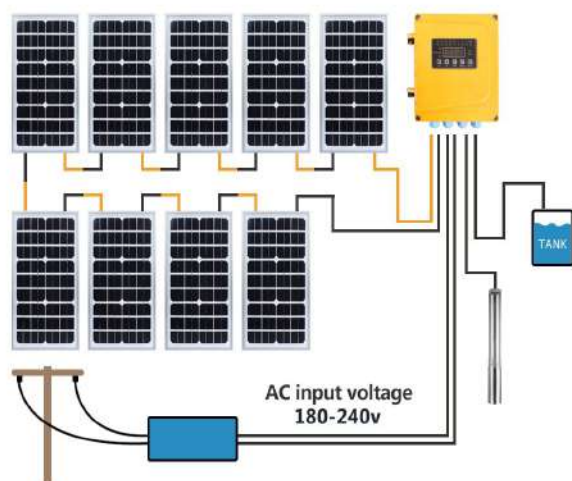

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs



AC Input



DC Input



water encapsulated motor



H.Max
222m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW6-8P

135m-14.3m³/h-440V-3000W


3000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	14	14	12.8	11	9.3	7.4	5.1	2.0	0.5	0.0
L/min	238	227	213	187	155	123	85	33	8	0
H(m)	0	10	20	40	60	80	100	120	130	135

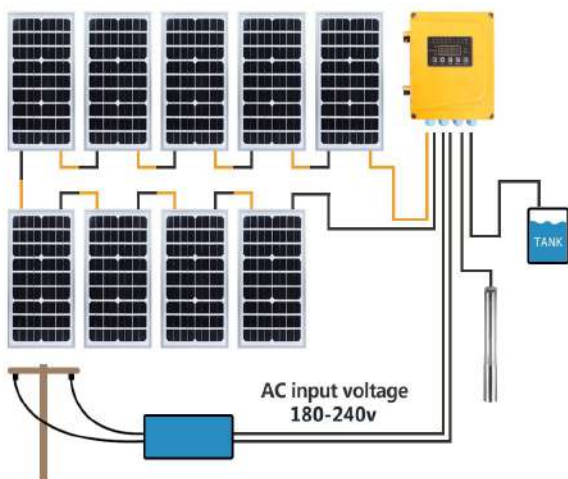

- ☑ 450w*3pcs
- ☑ 340w*5pcs
- ☑ 340w*6pcs
- ☑ 340w*7pcs
- ☑ 340w*8pcs
- ☑ 340w*9pcs

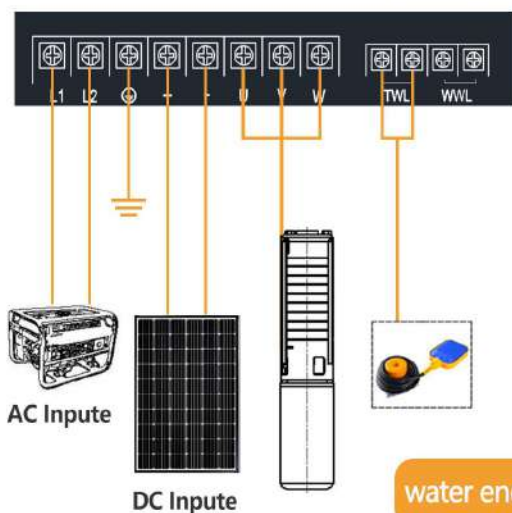

H.Max
135m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

water encapsulated motor





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW8-8P

116m-17.6m³/h-440V-3000W


3000W



Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	18	17	15	13	8.9	4.5	3.4	2.2	1.0	0.0
L/min	293	277	255	212	148	75	57	37	17	0
H(m)	1	10	20	40	60	80	90	100	110	116

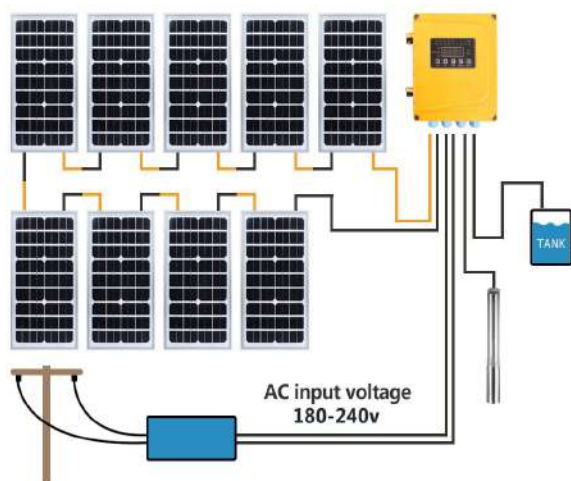

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs



AC Inpute



DC Inpute



water encapsulated motor



H.Max
116m

DC input
60-440V

Outlet
2"



ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW12-5P

70m-26.7m³/h-440V-3000W


3000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	27	25	24	21	18	13	8.3	4.7	2.9	0.0
L/min	445	418	393	353	295	213	138	78	48	0
H(m)	2	5	10	20	30	40	50	60	65	70

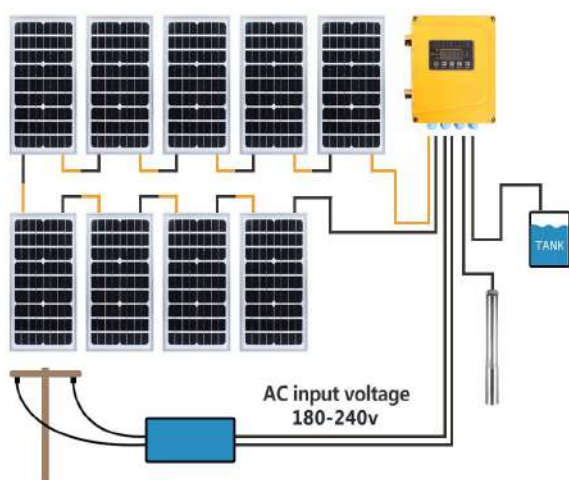

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs

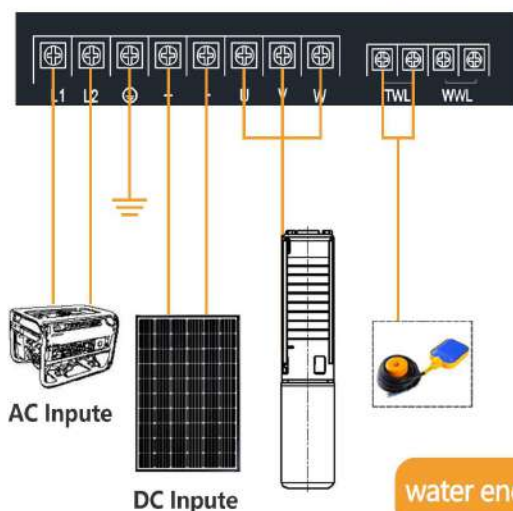

H.Max
70m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV





SAMKING

SOLAR PUMP

AC/DC Hybrid

A/D-4SPW16-4P

48m-33.0m³/h-440V-3000W


3000W




Key Features

- Hybrid AC/DC. AC Voltage:180-240V. DC Voltage:60-440V
- Dry-running auto protection
- Franklin motor standard
- Accurate delivery, fast delivery, prompt delivery
- Thicker material, More durable, More power

m ³ /h	33.0	32	29	26	22.0	19	16	11	7.2	2.8	0.0
L/min	550	525	475	428	367	322	260	188	120	47	0
H(m)	2	5	10	15	20	25	30	35	40	45	48

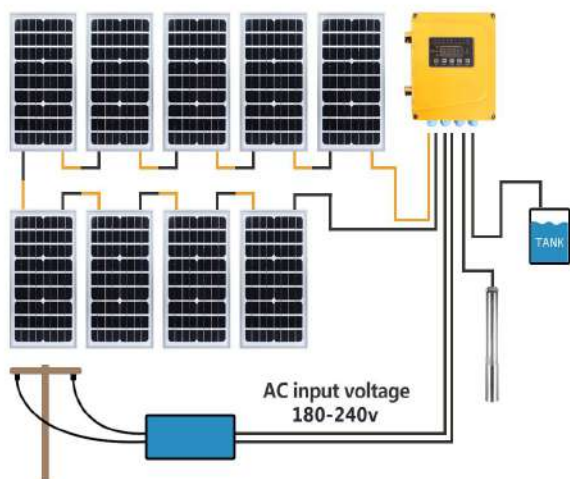

- ✓ 450w*3pcs
- ✓ 340w*5pcs
- ✓ 340w*6pcs
- ✓ 340w*7pcs
- ✓ 340w*8pcs
- ✓ 340w*9pcs

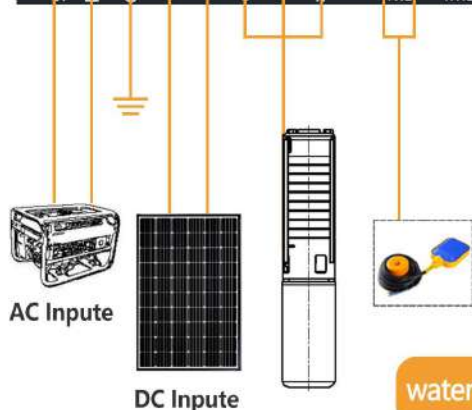

H.Max
48m

DC input
60-440V

Outlet
2"

ISO9001
ISO14001
TUV

