

Axial direction Metallized Polypropylene Film Capacitor - ZZEC

CBB20(MKP) FEATURES

- Metallized polypropylene film, axial lead, coated with high temperature adhesive tape, the epoxy potting.
- Flat circular or cylindrical, low noise.
- Low dissipation factor.
- Good self-healing property, good stability and reliability.


APPLICATIONS

Widely used in various AC and DC pulse high current circuit.

SPECIFICATIONS

Climatic Category	40/85/21
Rated Voltage	250V、400V、630
Capacitance Range	0.010Mf ~47μF
Capacitance Tolerance	±5%(J), ±10%(K),
Voltage Proof	1.75U _R
Insulation resistance	≥30000MΩ, CR≤0.33μF(20℃、1min) ≥10 000S, CR>0.33 μ F (20℃, 1min)
Tangent of loss angle	CR>1 μ F, ≤0.0015(23℃、1KHZ) CR≤0.33 μ F, ≤0.0008(23℃、1KHZ)

DRAWING: (mm)

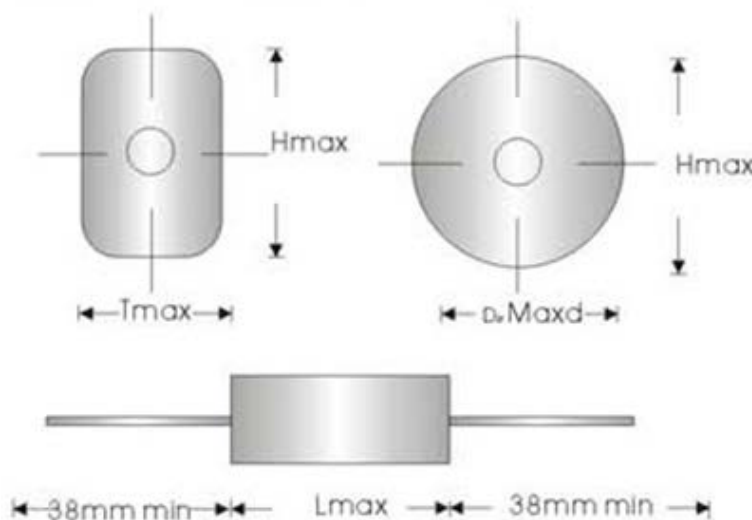

Axial direction Metallized Polypropylene Film Capacitor -ZZEC

STANDARD SIZE

Dimensions(mm) and special specifications can product according to your demand.

CAP (uF)	Cylindrical						Flat Circular								
	250V		400V		630V		250V			400V			630V		
	D	W	D	W	D	W	W	H	T	W	H	T	W	H	T
0.01	5	14	5	14	6	14									
0.022	7	14	7	14	8	14									
0.033	7	14	7	14	9	14									
0.047	7	14	7	14	10.5	14									
0.068	7.5	14	10.5	14	9.5	19									
0.1	6	14	8	19	10	25	14	5	8	19	7	10.5	25	6.5	13
0.22	7.5	19	9.5	25	13	25	19	5	9	25	6.5	12.5	25	10	17
0.33	9	19	11	25	16	25	19	8.5	13	25	8.5	14	25	12.5	19
0.47	9	25	13	25	19	25	25	6.5	11	25	10	16.5	25	15	21
0.68	10	25	15	25	19	36	25	8	11.5	31	9.5	16	36	15	23
1	10.5	31	16	31	19.5	40	31	8.5	12	31	13	18	40	17	23
2.2	15	31	20	36	23	56	31	11	17.5	46	14.5	21	56	19.5	27.5
3.3	17	31	21	46	28	56	31	13.5	19.5	46	18	25	56	25	33
4	19	31	23	46	30.5	56	31	16.5	22.5	46	22	29	56	29.5	37
4.7	20	31	25	46	33.5	56	31	16	23	46	24	32	56	33	40.5
5.6	21.5	31	27	46	36	56	36	15.5	22	46	26	34	56	36	44
6.8	23	31	30	46	40	56	46	16.5	23.5	46	29	37	56	40	48
8.2	21	46	32.5	46	43	56	46	18.5	25	56	29	37	65	40	48
10	23	46	32	56	43	65	46	21	27.5	56	38	46			
15	24.5	56	41	56			56	24.5	30						
22	28.5	61					56	28	35						
30	32	61					56	30	35.5						
33	34	61					61	36.5	41						
47	40.5	61					61								

Please visit our website to get more update data, those data & specification are subject to change without notice.

