



## FCC TEST REPORT

On Behalf of

Shenzhen Huayaoxing Technology Co.,Ltd

Video Brochure / Video Module / Video Boxes

Model No.: VB-24C02, VB-04C02, VB-43C02, VB-05C02, VB-07C02,  
VB-10C02

Prepared for : Shenzhen Huayaoxing Technology Co.,Ltd  
Address : 6<sup>th</sup> Floor, Baiyi Rui'an Building, Xinzhuang Community, Matian Street,  
Guangming District, Shenzhen, 518000, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2404110-C01-R01  
Date of Receipt : September 29, 2018  
Date of Test : September 30, 2018- October 10, 2018  
Date of Report : April 19, 2024  
Version Number : V0  
Test Result : Pass

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: [service@a-lab.cn](mailto:service@a-lab.cn) Tel: 400-8300-895 Website: <http://www.a-lab.cn>

## TABLE OF CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>5</b>
1.1. Description of Device (EUT) .....	5
1.2. Accessories of Device (EUT).....	5
1.3. Tested Supporting System Details. ....	6
1.4. Block Diagram of connection between EUT and simulators .....	6
<b>2. Summary Of Standards And Results .....</b>	<b>7</b>
2.1. Description of Standards and Results .....	7
2.2. Test Mode Description.....	7
2.3. Test Equipment List.....	8
2.4. Test Facility .....	9
2.5. Measurement Uncertainty .....	9
<b>3. Power Line Conducted Emission Test .....</b>	<b>10</b>
3.1. Test Limits .....	10
3.2. Block Diagram of Test Setup.....	10
3.3. Configuration of EUT on Test.....	11
3.4. Operating Condition of EUT .....	11
3.5. Test Procedure .....	11
3.6. Test Results.....	12
<b>4. Radiated Emission Test .....</b>	<b>15</b>
4.1. Test Limit .....	15
4.2. Block Diagram of Test Setup.....	16
4.3. Configuration of EUT on Test.....	17
4.4. Operating Condition of EUT .....	17
4.5. Test Procedure .....	17
4.6. Test Results.....	18
<b>5. Photograph .....</b>	<b>24</b>
5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber).....	24
5.2. Photo of Conducted Emission Test .....	24
<b>6. Photos Of The EUT .....</b>	<b>25</b>

### TEST REPORT DECLARATION

Applicant : Shenzhen Huayaoxing Technology Co.,Ltd  
 Address : 6<sup>th</sup> Floor, Baiyi Rui'an Building, Xinzhuang Community, Matian Street,  
 Guangming District, Shenzhen, 518000, China  
 Manufacturer : Shenzhen Huayaoxing Technology Co.,Ltd  
 Address : 6<sup>th</sup> Floor, Baiyi Rui'an Building, Xinzhuang Community, Matian Street,  
 Guangming District, Shenzhen, 518000, China  
 EUT Description : Video Brochure / Video Module / Video Boxes  
 (A) Model No. : VB-24C02, VB-04C02, VB-43C02, VB-05C02,  
 VB-07C02, VB-10C02  
 (B) Trademark : N/A

Measurement Standard Used:

#### FCC Rules and Regulations Part 15 Subpart B Class B 2017, ANSI C63.4:2014

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Ben Sun  
 Project Engineer

Approved by (name + signature).....: Reak Yang  
 Project Manager

Date of issue.....: April 19, 2024



**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	April 19, 2024	Initial released Issue	Ben Sun

## 1. General Information

### 1.1. Description of Device (EUT)

Product Name	:	Video Brochure / Video Module / Video Boxes
Model Number	:	VB-24C02, VB-04C02, VB-43C02, VB-05C02, VB-07C02, VB-10C02
Diff	:	There is no difference except the name of the model.
Highest Frequency	:	More than 108MHz DC 5V From DC Power
Test Voltage	:	DC 5V From PC DC 3.7V From battery
EUT information	:	N/A
Trademark	:	N/A
Software version	:	N/A
Hardware version	:	N/A
Note	:	This Co-license is based on report T1881563 02, the new models VB-24C02, VB-04C02, VB-43C02, VB-05C02, VB-07C02, VB-10C02 in Co-license are the same as original models VGC7.0 mentioned in test report T1881563 02 respectively except for product name "Video Brochure / Video Module / Video Boxes" license holder "Shenzhen Huayaoxing Technology Co.,Ltd", no further test need. This report all test information, test data, test photos and EUT photos refer to original report T1881563 02.
Sample Type	:	Prototype production

### 1.2. Accessories of Device (EUT)


Power Source	:	N/A
--------------	---	-----

### 1.3. Tested Supporting System Details.


No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	Personal Computer	DELL	D11M	CN-0LV772-C0887-378-H8UR	DOC
2	Monitor	DELL	E2014Hf	CN-011HFV-72872-397-CHEM	DOC
3	USB Keyboard	ACER	SK-9625	KBUSB1580500037E0100	DOC
4	USB Mouse	ACER	MS.11200.014	M-UAY-ACR2	DOC
5	DC Power	JUNKE	JK12010S	20140927-6	DOC

### 1.4. Block Diagram of connection between EUT and simulators


Mode : Data transmitting

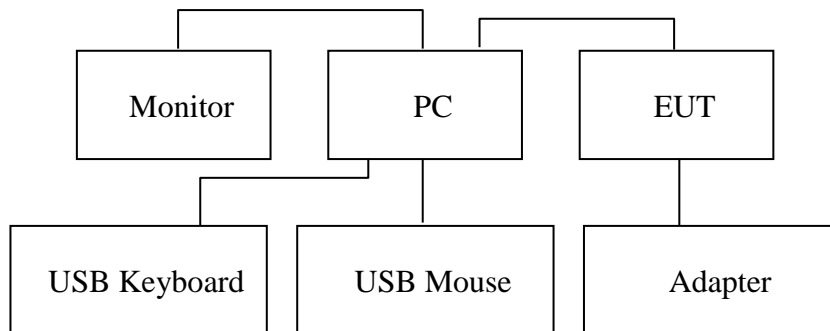

Mode : Charging and Playing



Mode : Playing



#### Signal Cable Description of the above Support Units

No.	Port Name	Cable	Length	Shielded (Yes or No)	Detachable (Yes or No)
/	/	/	/	/	/
/	/	/	/	/	/

## 2. Summary Of Standards And Results

### 2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15:2017 ANSI C63.4:2014	Class B	P
Radiated Emission Test	FCC Part 15:2017 ANSI C63.4:2014	Class B	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

### 2.2. Test Mode Description

Mode No.	Test Mode	Test Voltage
1.	Playing	DC 3.7V From battery
2.	Charging and Playing	DC 5V From DC Power
3.	Data transmitting	DC 5V From PC
Note: ※3 is worst case mode, and this report only reflected the worst case mode.		

### 2.3. Test Equipment List

For Power Line Conducted Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2018.09.21	1 Year
2.	L.I.S.N.#1	Schwarz beck	NSLK8126	8126466	2018.09.21	1 Year
3.	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2018.09.21	1 Year
4.	Pulse Limiter	Schwarz beck	9516F	9618	2018.09.21	1 Year

For Frequency Range 30MHz~1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESR	1316.3003K03-102082-Wa	2018.09.21	1 Year
3	Bilog Antenna	Schwarz beck	VULB 9168	9168-627	2018.04.13	2 Year

For Frequency Range above 1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2018.09.21	1 Year
2	Horn Antenna	Schwarz beck	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2 Year
3	Amplifier	Agilent	8449B	3008A02664	2018.09.21	1 Year



## 2.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

## 2.5. Measurement Uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.74dB
Uncertainty for Radiation Emission test (<1G)	3.77 dB (Distance: 3m Polarize: V)
	3.80 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test (>1G)	4.13 dB (Distance: 3m Polarize: V)
	4.16 dB (Distance: 3m Polarize: H)
(95% confidence levels, k=2)	


### 3. Power Line Conducted Emission Test

#### 3.1. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamplifier factor + Cable loss
  2. \* Decreasing linearly with logarithm of frequency.
  3. The lower limit shall apply at the transition frequencies.

#### 3.2. Block Diagram of Test Setup

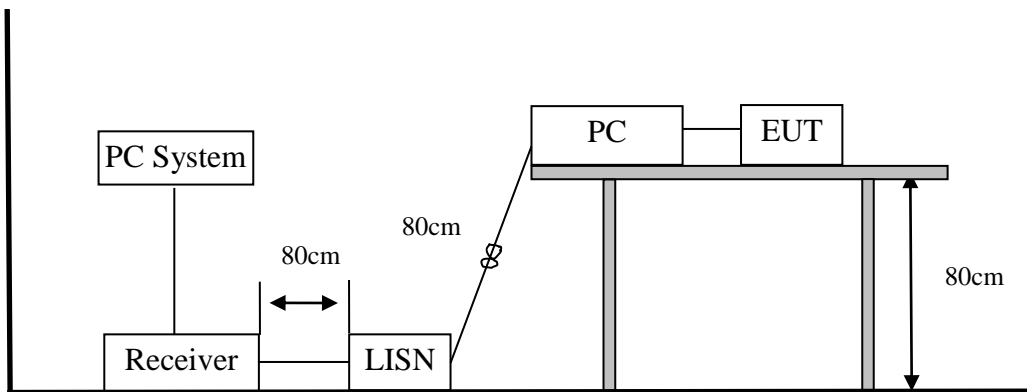

### 3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.


### 3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.

### 3.6. Test Results

Test Date : 2018.10.09	Temperature : 24.2°C
Test Engineer : Ben Sun	Humidity : 50%
Test Mode : Data transmitting	
Test Results : <b>PASS</b>	
<p>Note:</p> <ol style="list-style-type: none"><li>1. The test results are listed in next pages.</li><li>2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.</li><li>3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</li></ol>	

Antenna Polarity: L

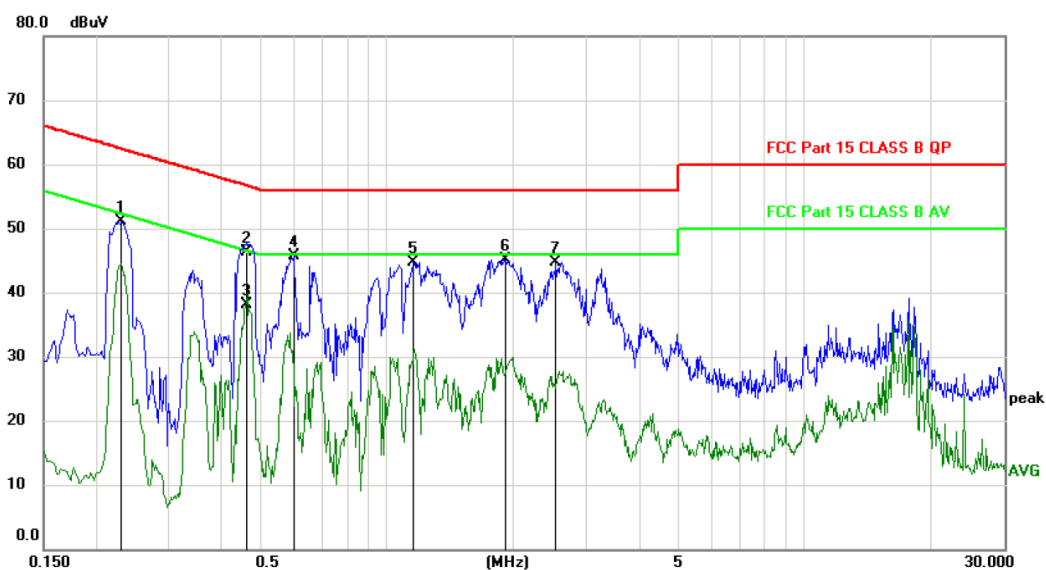


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2310	41.36	9.75	51.11	62.41	-11.30	peak	
2		0.4590	36.52	9.78	46.30	56.71	-10.41	QP	
3	*	0.4590	28.34	9.78	38.12	46.71	-8.59	AVG	
4		0.5970	35.87	9.79	45.66	56.00	-10.34	peak	
5		1.1580	34.88	9.84	44.72	56.00	-11.28	peak	
6		1.9110	35.27	9.91	45.18	56.00	-10.82	peak	
7		2.5320	34.71	9.98	44.69	56.00	-11.31	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Antenna Polarity: N

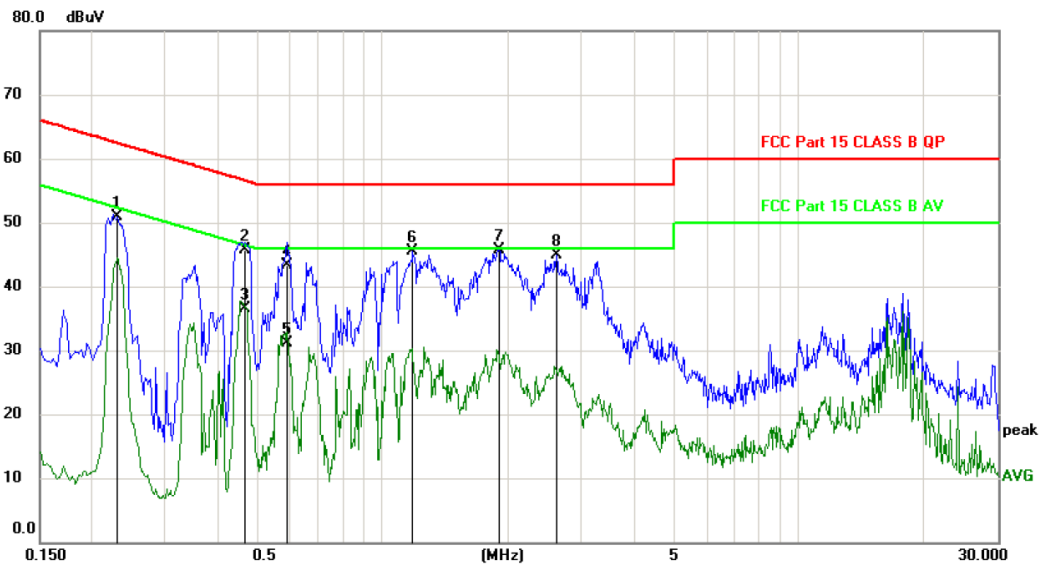

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2310	41.07	9.75	50.82	62.41	-11.59	peak	
2	0.4680	35.94	9.78	45.72	56.55	-10.83	QP	
3 *	0.4680	26.77	9.78	36.55	46.55	-10.00	AVG	
4	0.5910	33.56	9.79	43.35	56.00	-12.65	QP	
5	0.5910	21.30	9.79	31.09	46.00	-14.91	AVG	
6	1.1790	35.57	9.85	45.42	56.00	-10.58	peak	
7	1.8990	35.86	9.91	45.77	56.00	-10.23	peak	
8	2.6220	34.87	10.01	44.88	56.00	-11.12	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

## 4. RADIATED EMISSION TEST

### 4.1. Test Limit


Frequency MHz			Distance (Meters)	Distance (Meters)
30	~	88	3	40.0
88	~	216	3	43.5
216	~	960	3	46.0
960	~	1000	3	54.0
Above 1GHz			3	74(Peak) 54(Average)

- Notes:
1. The smaller limit shall apply at the cross point between two frequency bands.
  2. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  3. Frequency range of radiated measurements:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 4.2. Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

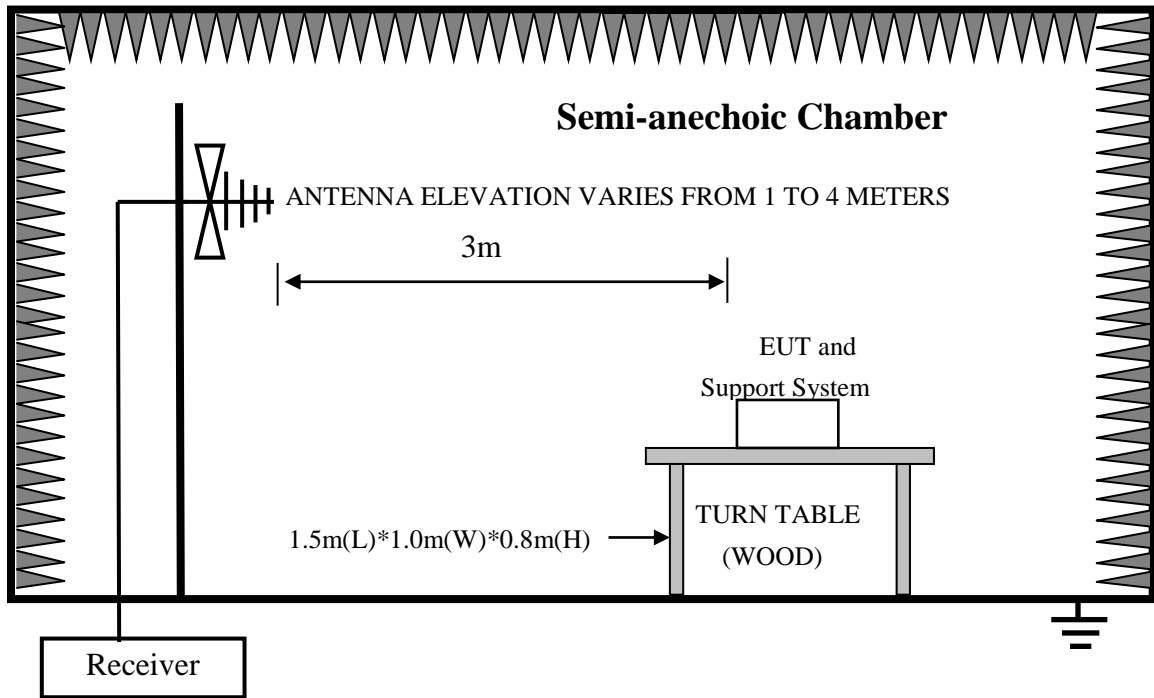

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

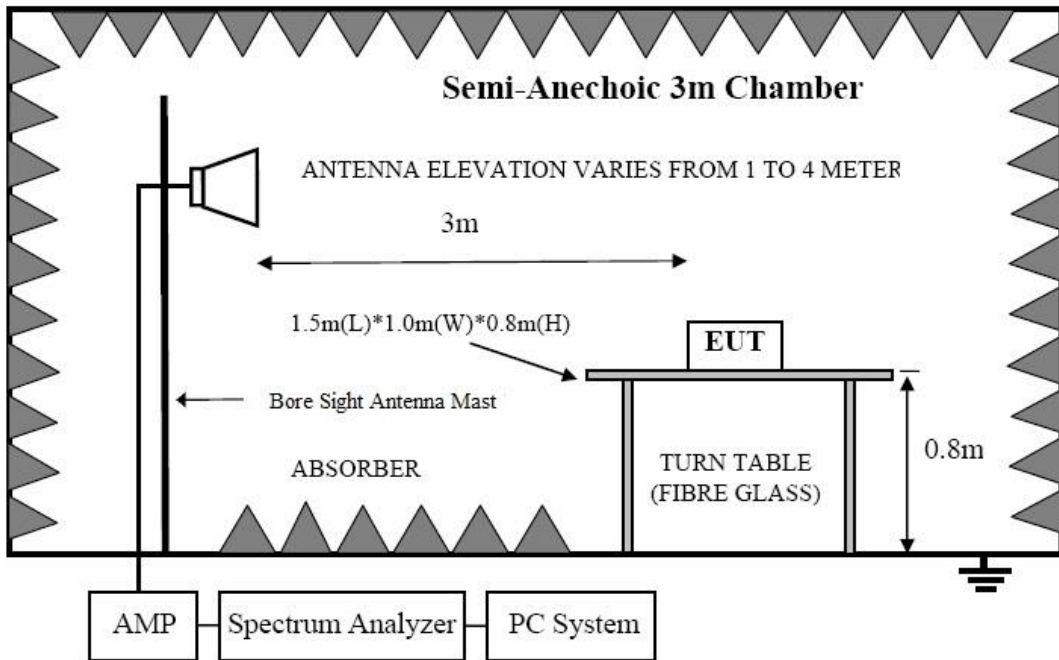



### 4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

### 4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.


### 4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 120kHz.
- (4) The frequency range from above 1GHz is checked, the bandwidth of spectrum analyzer (Spectrum Analyzer FSU) is set at 1MHz.
- (5) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (6) The test results are reported on Section 4.7.

#### 4.6. Test Results

Frequency Range	: <b>30MHz~1000MHz</b>		
Test Date	: 2018.10.09	Temperature	: 22.6°C
Test Engineer	: Ben Sun	Humidity	: 56%
Test Mode	: Data transmitting		
Test Results	: <b>PASS</b>		
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.		

Antenna polarity: Vertical

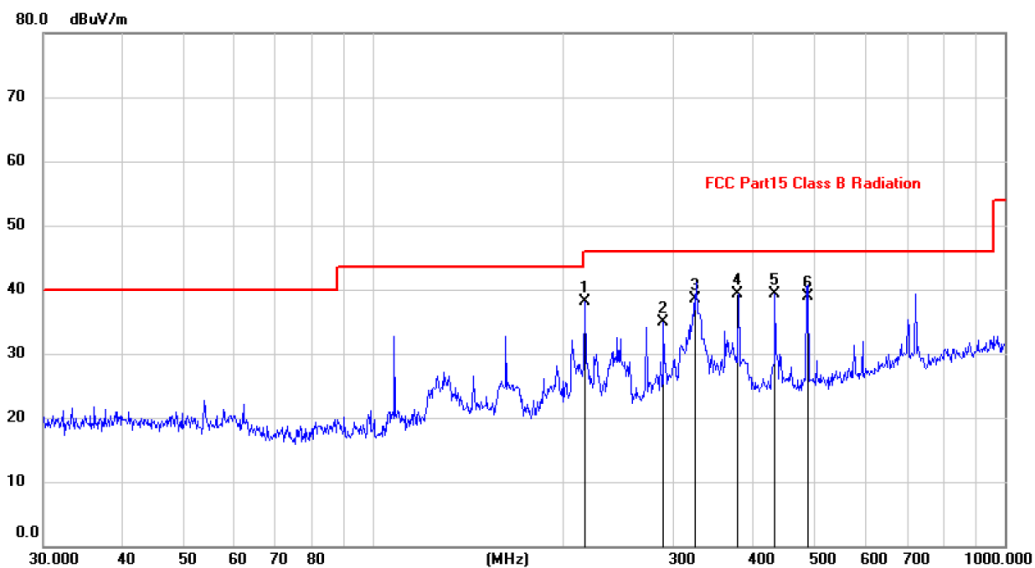


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		216.0240	26.96	11.06	38.02	46.00	-7.98			peak
2		287.9904	21.85	13.09	34.94	46.00	-11.06			peak
3		324.4560	24.38	14.05	38.43	46.00	-7.57			QP
4	*	378.5842	23.98	15.36	39.34	46.00	-6.66			peak
5		434.0649	22.94	16.37	39.31	46.00	-6.69			peak
6		489.0267	21.50	17.37	38.87	46.00	-7.13			QP

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Horizontal

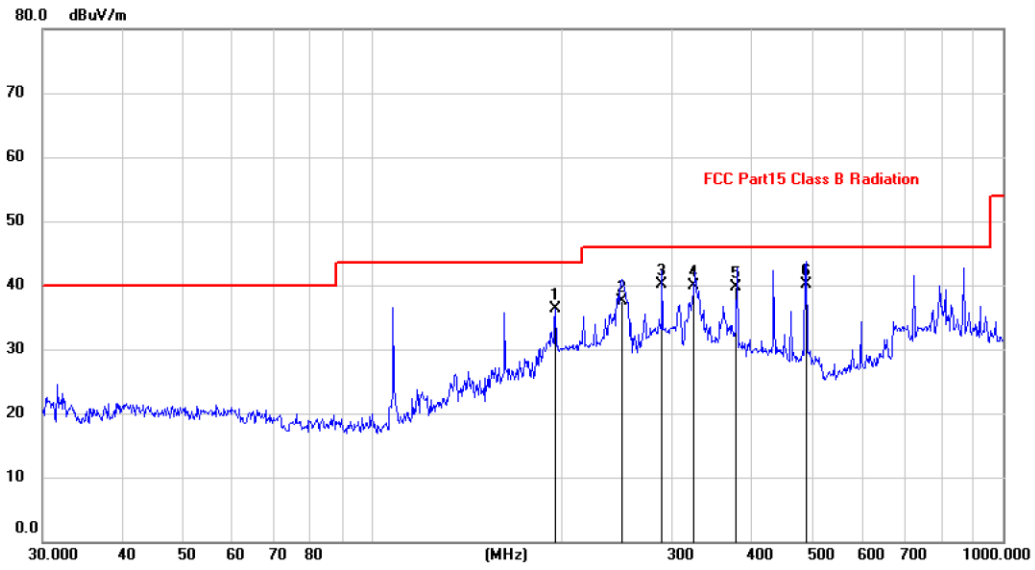


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		195.8217	25.70	10.58	36.28	43.50	-7.22	peak		
2		248.5517	25.41	12.04	37.45	46.00	-8.55	QP		
3		287.9904	26.92	13.09	40.01	46.00	-5.99	QP		
4		324.4560	25.78	14.05	39.83	46.00	-6.17	QP		
5		378.5842	24.28	15.36	39.64	46.00	-6.36	QP		
6	*	489.0267	22.70	17.37	40.07	46.00	-5.93	QP		

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range	:	<b>Above 1GHz</b>			
Test Date	:	2018.10.09	Temperature	:	22.6°C
Test Engineer	:	Ben Sun	Humidity	:	56%
Test Mode	:	Data transmitting			
Test Results	:	<b>PASS</b>			
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.				

Antenna polarity: Vertical

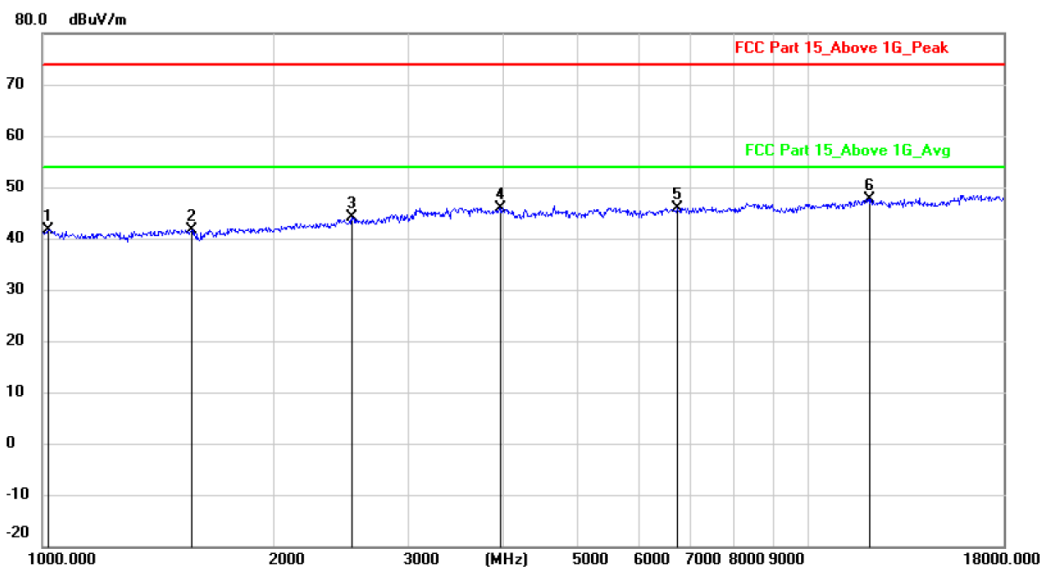


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1017.494	50.35	-8.64	41.71	74.00	-32.29			peak
2		1565.190	48.51	-6.89	41.62	74.00	-32.38			peak
3		2536.283	47.45	-3.29	44.16	74.00	-29.84			peak
4		3958.309	51.16	-5.19	45.97	74.00	-28.03			peak
5		6756.708	44.82	1.13	45.95	74.00	-28.05			peak
6	*	12044.52	42.13	5.59	47.72	74.00	-26.28			peak

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Horizontal

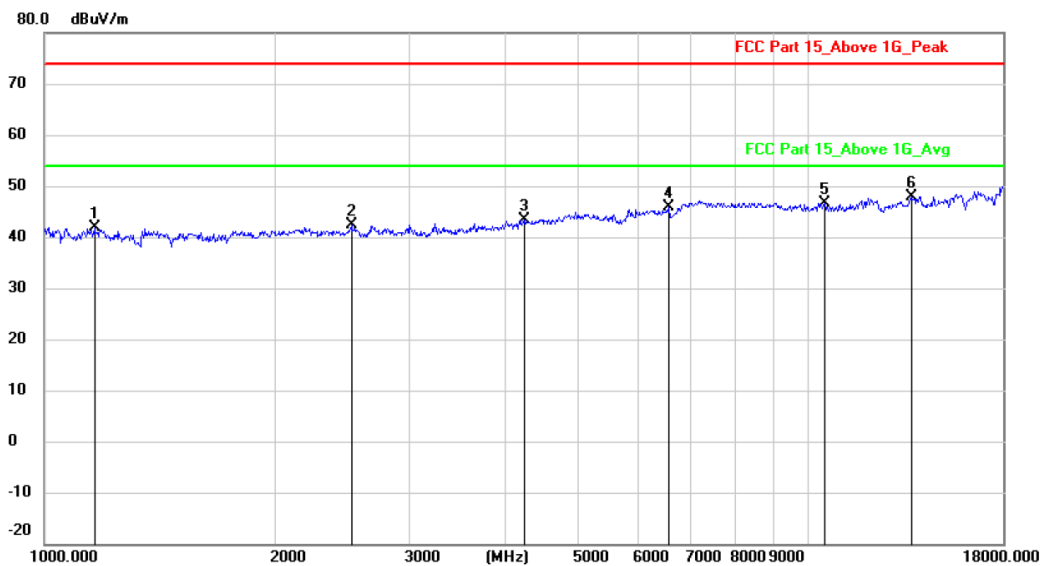

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1162.182	50.22	-8.36	41.86	74.00	-32.14			peak
2		2521.664	45.67	-3.32	42.35	74.00	-31.65			peak
3		4242.641	47.89	-4.52	43.37	74.00	-30.63			peak
4		6564.209	45.18	0.75	45.93	74.00	-28.07			peak
5		10514.57	41.42	5.20	46.62	74.00	-27.38			peak
6	*	13677.96	41.49	6.43	47.92	74.00	-26.08			peak


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

## 5. PHOTOGRAPH

### 5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber)

30-1000MHz

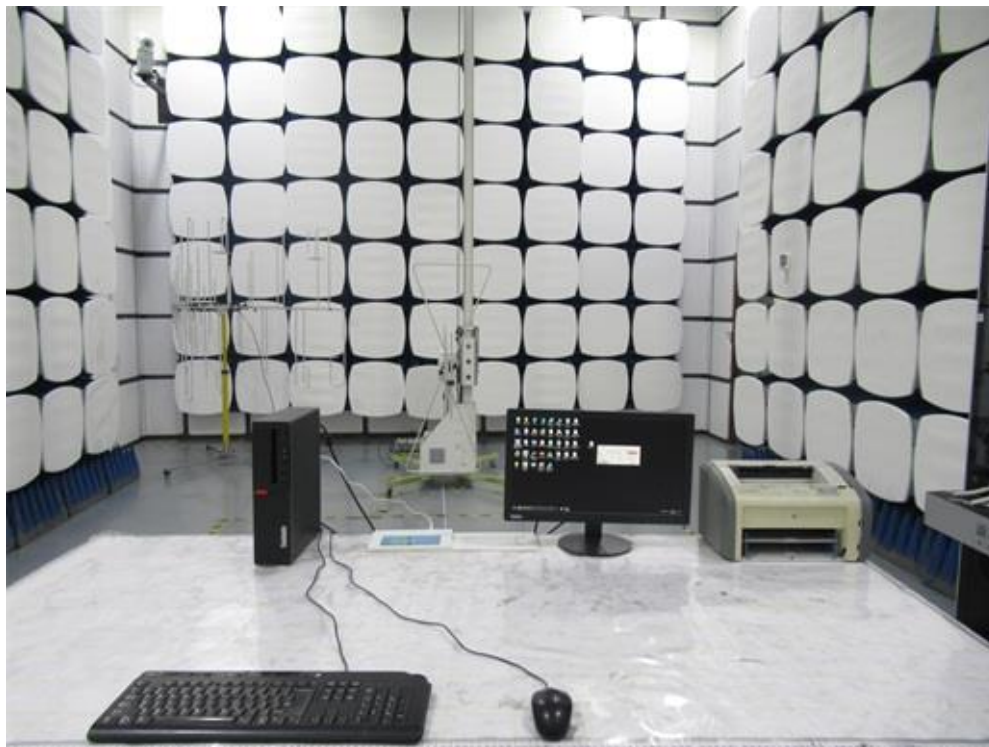


### 5.2. Photo of Conducted Emission Test







## 6. Photos Of The EUT

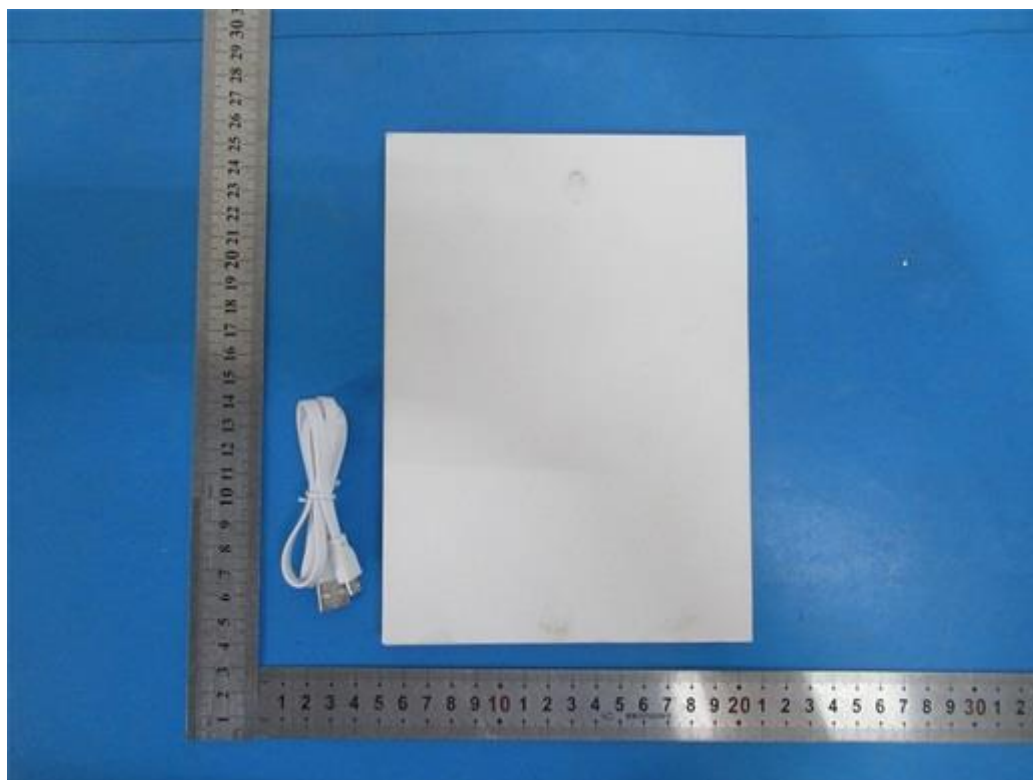


EUT View

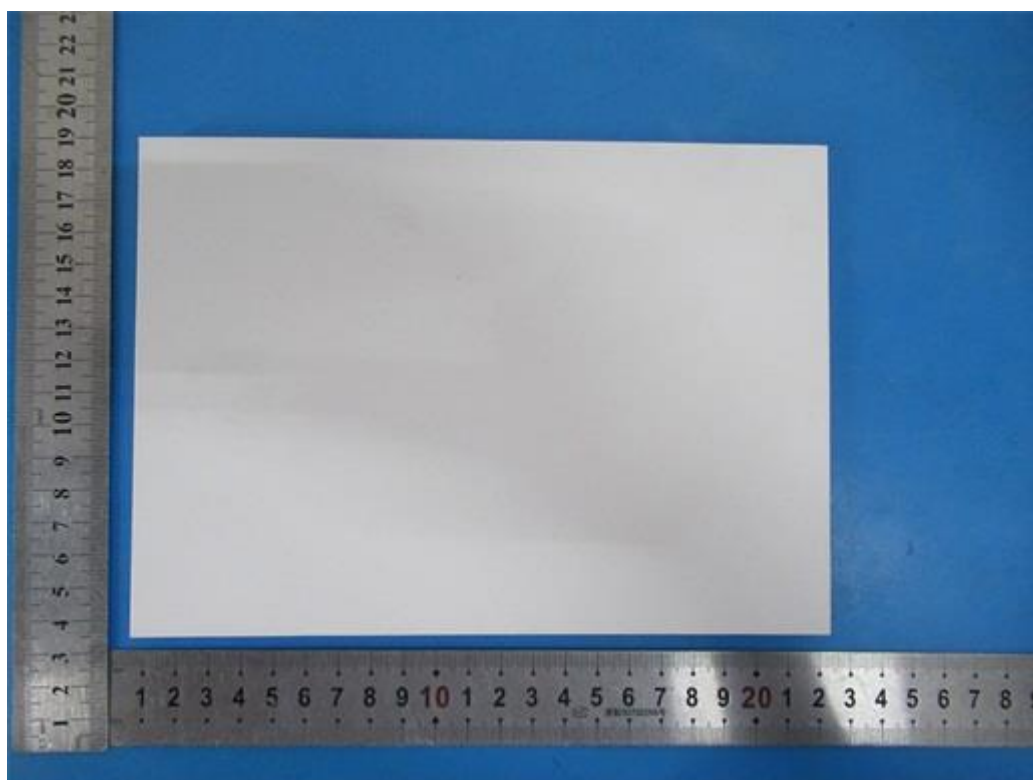


EUT View

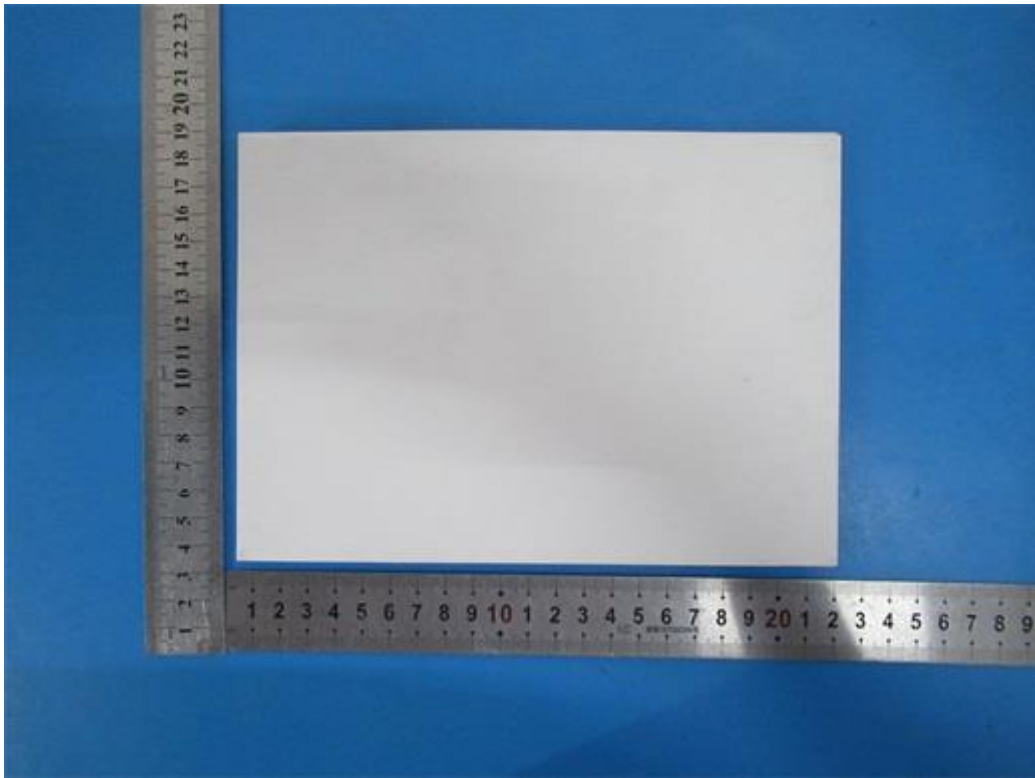


EUT View

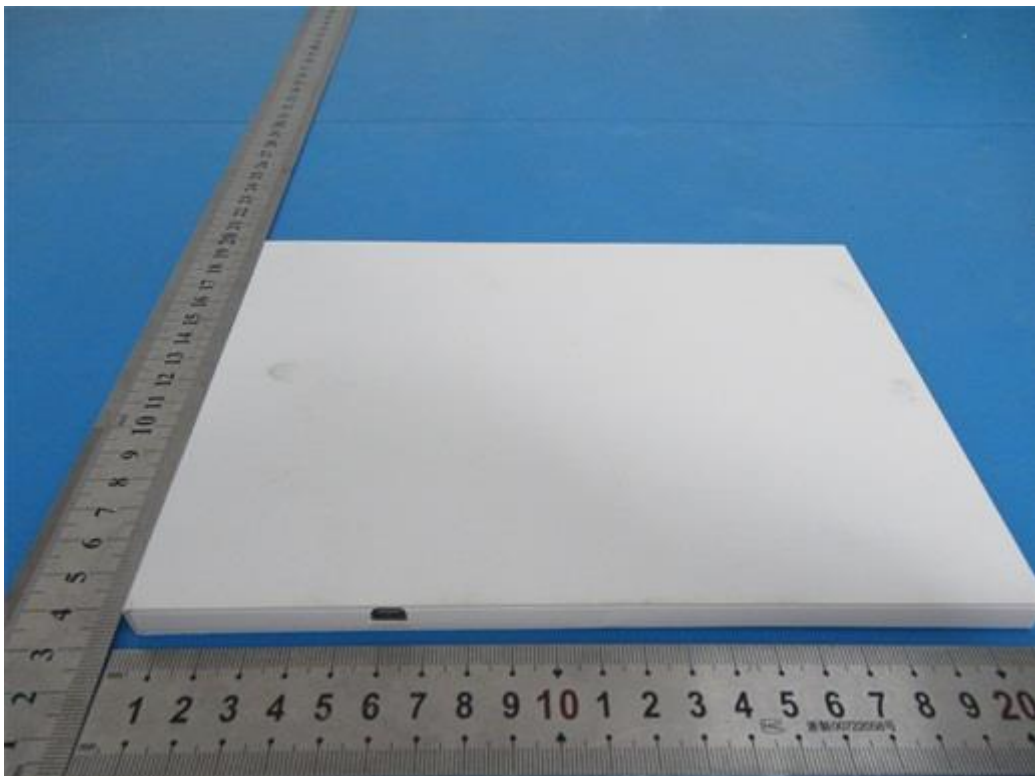


EUT View

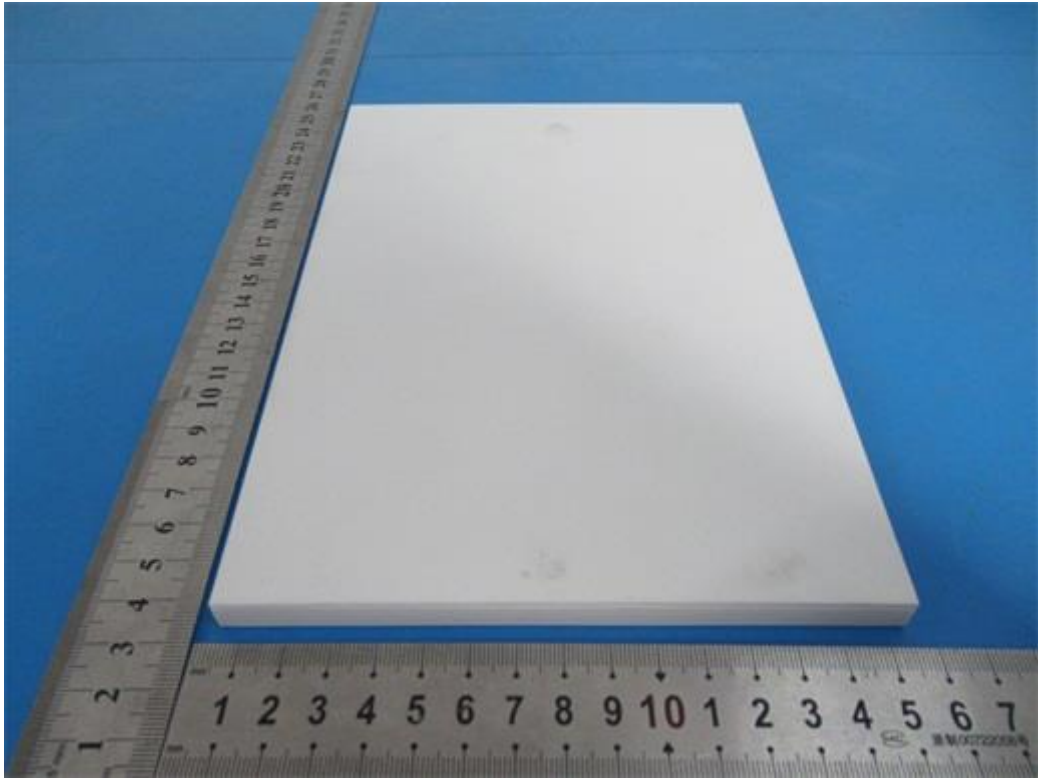


EUT View

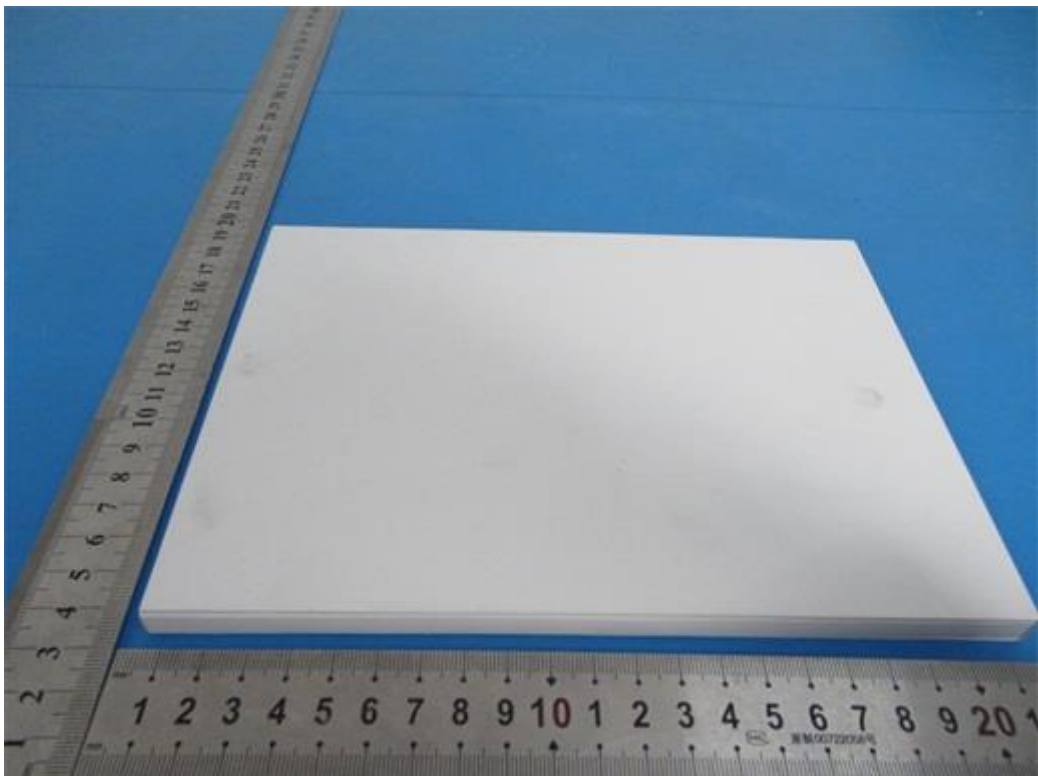


EUT View

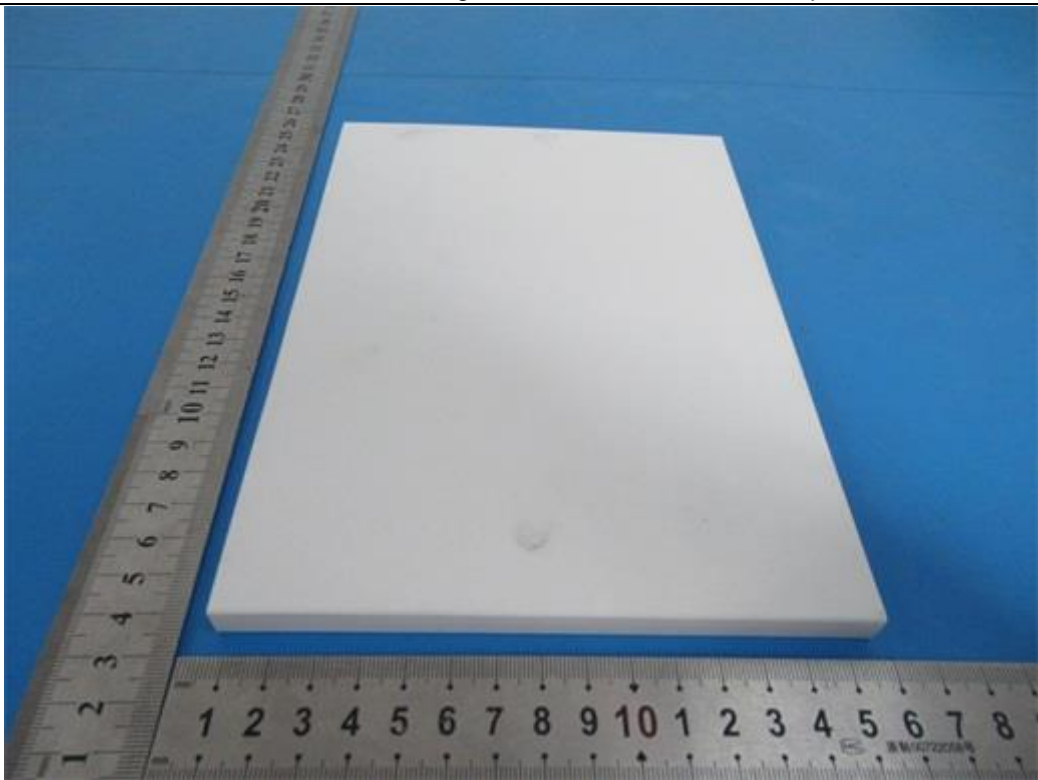

EUT View

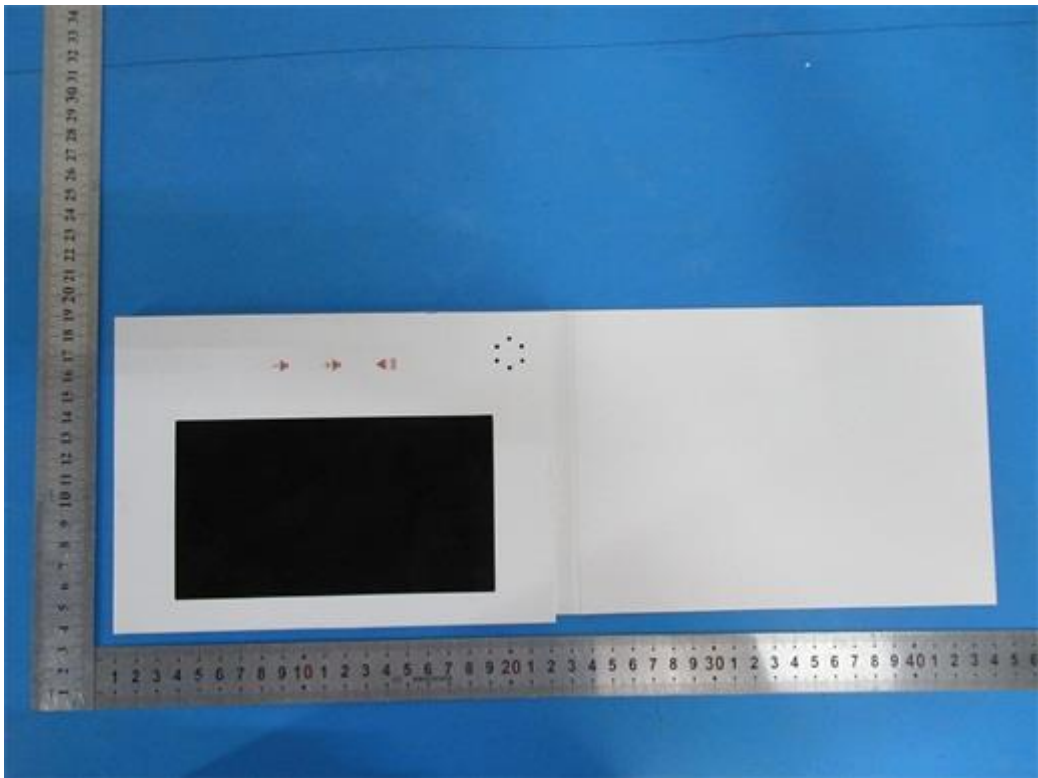


EUT View

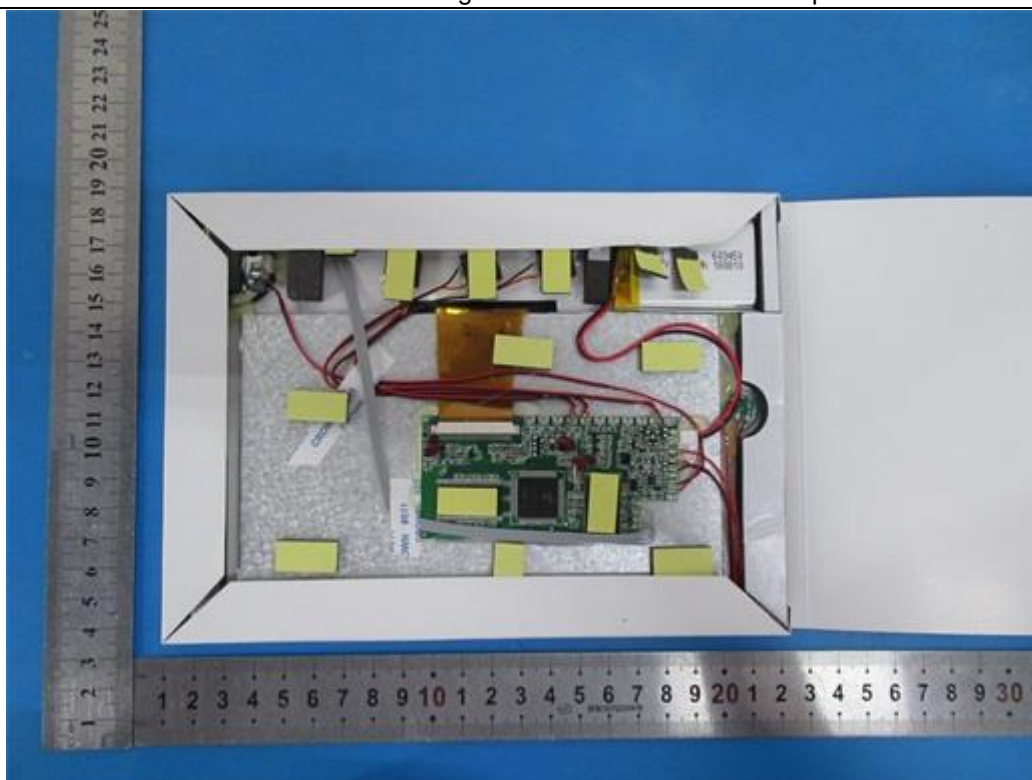


EUT View



EUT View

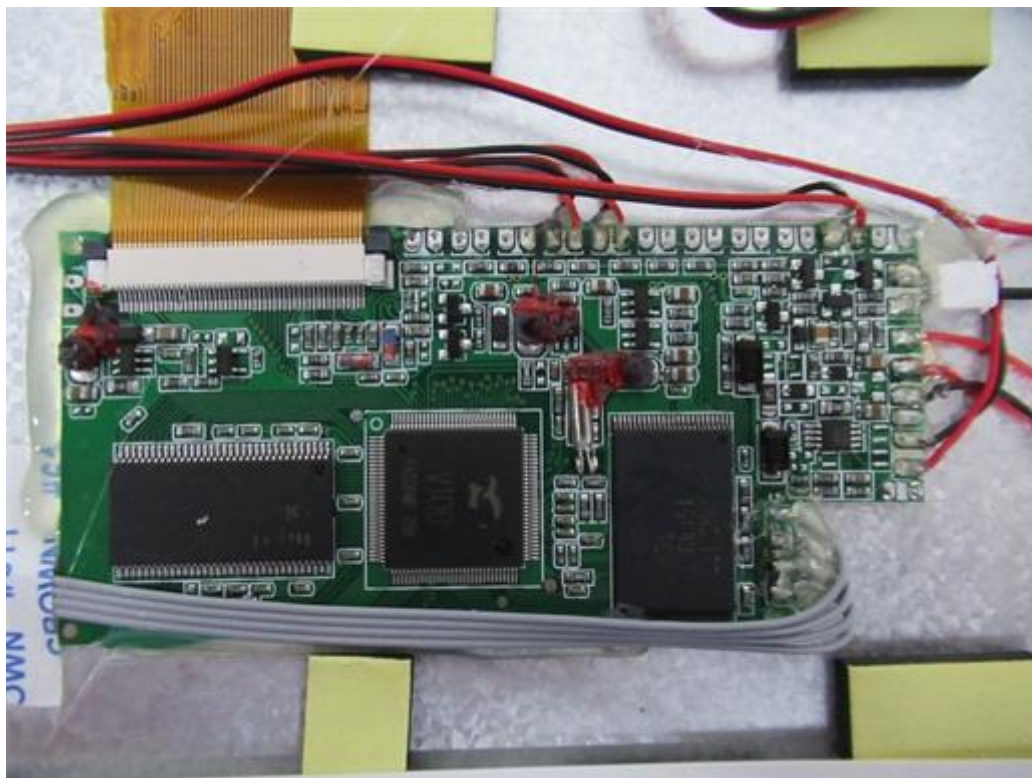

EUT View

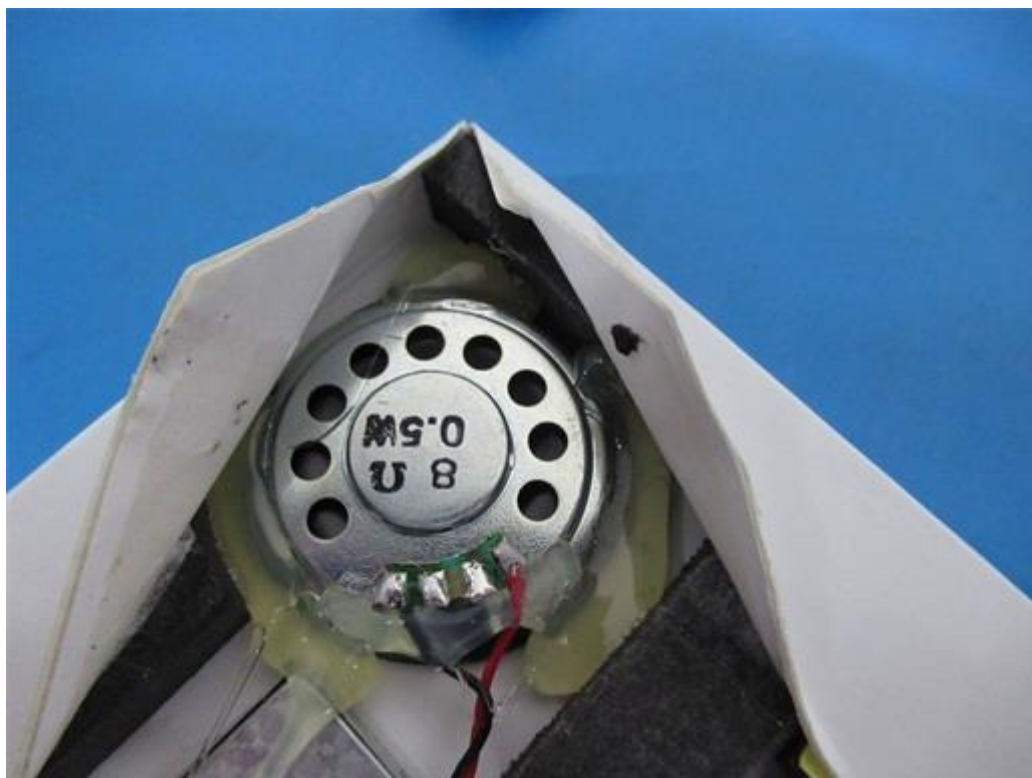

EUT View

----END OF REPORT----