

丰顺县泰雅达实业有限公司
FENGSHUN COUNTY TAIYADA INDUSTRIES.,LTD




Taiyada 泰雅达脚轮



让您全方位选择最适用的脚轮
Let You To Choose The Most Suitable Casters

- IN 2017** 成为梅州市知识产权保护重点企业
 Become the Key enterprise of intellectual property protection in Meizhou City
- IN 2018** 被评为梅州工程中心
 Be awarded as Meizhou Engineering Center
- IN 2020** 获评高新技术企业
 Be awarded as New High-tech Enterprise
- IN 2021** 建立广东省泰雅达博士站
 Establish a Guangdong TAIYADA Doctoral Station
- IN 2019-至今** 被评为**"专精特新中小企业"**
 Be awarded as "Specializing in new small and medium-sized enterprises"



丰顺县泰雅达实业有限公司是一家集研发、设计、制造于一体的工业级脚轮专业生产商，公司始创于2008年，经过15年多的持续不断的发展，已经成为中国脚轮行业领军企业之一。

泰雅达实业位于广东省梅州市，注册资本3000万元，自公司成立以来，经过多年努力开拓与创新，本公司拥有了自己的工厂园区和生产团队，工厂园区占地面积6万平方米，20多条全自动生产线和300多名员工；具备了稳定的生产能力，汇聚了产品研发设计、品质管理、企业管理、市场管理等各方面的专业人才。将“稳定性”、“实用性”“可观性”应用于脚轮上的每个细节。经过不懈的努力，我们以专业技术成功的做到“延长产品的使用寿命，降低使用者的劳动强度”，因此在业界创立了良好的信誉与口碑。感谢每位客户的信赖与支持，我们将继续秉承“为员工、为社会履行社会责任”的使命，持续创新，精益求精。

热忱欢迎新老客户的业务洽谈，让我们携手合作，共创未来！

Fengshun County Taiyada Industrial Co., Ltd. is a professional manufacturer of industrial casters, which integrates R & D, design and manufacture. Founded in 2008, after more than 15 years of continuous development, the company has become one of the leading enterprises in China's caster industry.

Taiyada Industry is located in Meizhou City, Guangdong Province, with a registered capital of 30 million RMB. Since its establishment, Taiyada Industry has made great efforts to develop and innovate for many years. The company has its own factory park and production team, the factory park covers an area of 60000 square meters. More than 20 fully automatic production lines and more than 300 employees; It brings together professionals in product development and design, quality management, enterprise management, market management and other fields. It has a stable production capacity. Apply "stability," "practicality," and "observability" to every detail on the caster. Through unremitting efforts, we have successfully achieved the goal of "prolonging the service life of products" with professional technology. Reduce the labor intensity of users, so it has created a good reputation and reputation in the industry. Thanks to every customer's trust and support, our company will continue to uphold the mission of "fulfilling social responsibility for employees and society". Continuous innovation and excellence.

Warmly welcome new and old customers to negotiate business, let us work together to create the future!

专业，源自对细节的执着追求

PROFESSIONAL,

FROM THE PERSISTENT PURSUIT OF EVERY DETAILS.

泰雅达质量测试和控制中心

我们十分重视用户的使用体验，我们致力于实现“为员工、为社会履行社会责任”的核心使命，进行严格的产品研发、制造、服务等全过程质量控制。我们希望通过严格的品质检测来实现我们的承诺，让使用者获得更好的工业级高品质脚轮。

TAIYADA QUALITY TEST AND CONTROL CENTRAL

WE ATTACH GREAT IMPORTANCE TO THE USER EXPERIENCE, WE ARE COMMITTED TO ACHIEVING THE CORE MISSION OF "FULFILLING SOCIAL RESPONSIBILITY FOR EMPLOYEES AND SOCIETY", AND CARRY OUT STRICT QUALITY CONTROL OF THE WHOLE PROCESS OF PRODUCT DEVELOPMENT, MANUFACTURING AND SERVICE. WE HOPE TO ACHIEVE OUR COMMITMENT THROUGH STRICT QUALITY TESTING, SO THAT USERS CAN GET BETTER INDUSTRIAL HIGH-QUALITY CASTERS.



组装流水线
ASSEMBLY WORKSHOP



冲压车间
STAMPING WORKSHOP



注塑车间
INJECTION WORKSHOP




电泳车间
ELECTROPHORESIS WORKSHOP



盐雾测试
CORROSION TEST MACHINE



负重行走测试
DYNAMIC LOAD TESTER

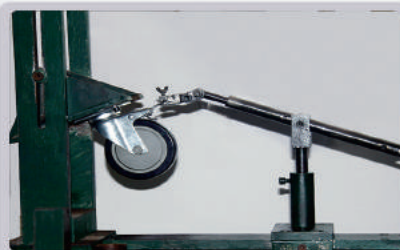

刹车测试
BRAKE TESTING MACHINE



底板晃动测试
BASE SHAKING TEST



高低温测试
HIGH-LOW TEMPERATURE TEST

一直坚持自主创新，结合科学设计原理


ALWAYS ADHERE TO INDEPENDENT INNOVATION,
COMBINED WITH SCIENTIFIC DESIGN PRINCIPLES.

作为一家工业级脚轮专业生产商，泰雅达脚轮始终十分重视自身的创新研发与设备升级，持续保持在产品研发、生产实力和团队培养等方面的行业领先地位。

泰雅达脚轮于2021年建立了泰雅达广东省博士站，汇聚了大量行业内顶尖的技术研发人员，拥有自主知识产权的专利技术20余项。同时我们与国内多所一流高校及科研学术机构开展了广泛的交流合作，在工业设计、材料力学等领域取得了长足的进步。

As a professional manufacturer of industrial casters, Taiyada casters always attaches great importance to its own innovative research and development and equipment upgrading, and continues to maintain its leading position in product research and development, production strength and team training.

Taiyada Caster established Taiyada Guangdong Doctor Station in 2021, which brings together a large number of top R & D personnel in the industry and has more than 20 patented technologies with independent intellectual property rights. At the same time, we have carried out extensive exchanges and cooperation with many first-class universities and scientific research and academic institutions in China, and have made great progress in industrial design, material mechanics and other fields.

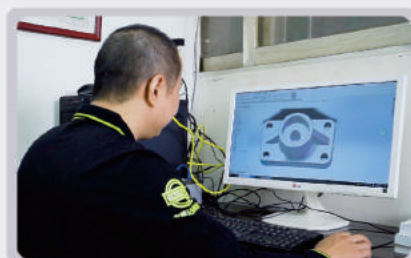

中国技术 全球视野

BASED ON THE CHINESE TECHNOLOGY
AND WORLD WIDE PERSPECTIVE


得益于对产品品质的执着专注，对服务细节的不懈追求，
经过15年的发展，我们已经建立了遍布全球的营销网络。

我们的产品覆盖中国大陆各省市地区；

同时出口美国、巴西、哥伦比亚、埃及、委内瑞拉、英国、沙特、泰国等26个
国家和地区，我们的产品得以被全球广泛的用户所青睐，
客户的认同与信赖将是激励我们不断前行的动力源泉。

泰雅达实业的全球化战略蓝图已徐徐展开。

Benefit from the persistent focus on product quality, on details of our services,
We are proud of the sales-net in the world wide based on the hard works for the past 15 years.
Our products enjoys the most market of canton provinces and the relative cities;
Exporting to more than 26 countries including:
American, Brazil, Colombia, Egypt, Venezuela, United Kingdom, Saudi Arabia, Thailand, Ect...
Recognition and trust of customers will inspires us to continue to move on the power source.

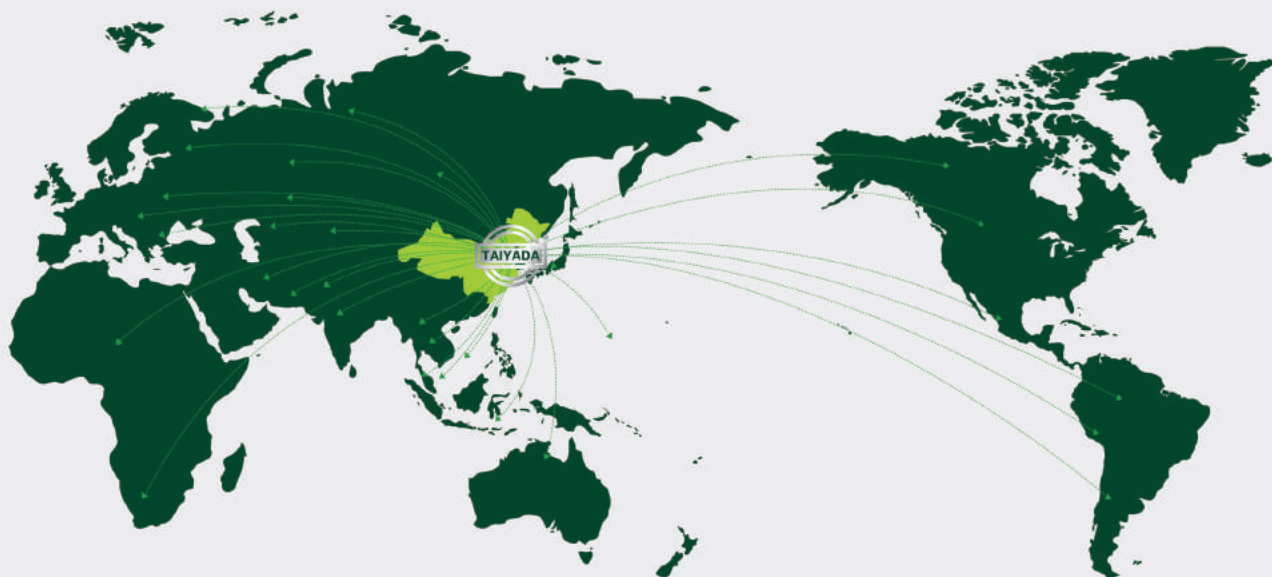



01

产品编号说明
ARTICLE NO. INSTRUCTION

P 01-03

02

支架安装方式配置
INSTALLATION ALLOCATION

P 04-06

03



轻型金钻双轴脚轮
LIGHT DUTY DOUBLE BALL BEARING CASTER

P 07-08

04



轻型脚轮系列
LIGHT DUTY CASTER SERIES

P 09-12

05



轻型TPR脚轮系列
LIGHT DUTY TPR CASTER SERIES

P 13-22

06



工业脚轮系列—双轴
INDUSTRIAL CASTER SERIES—BALL BEARING

P 23-26

07



工业脚轮系列—单轴
INDUSTRIAL CASTER SERIES—SINGLE BALL BEARING

P 27

08



中轻型灰胶轮系列
MID/LIGHT GERY PVC CASTER SERIES

P 28-29

09



透明轮系列
TRANSPARENT CASTER SERIES

P 30-31

10



透明轮系列—双轴
TRANSPARENT CASTER SERIES—BALL BEARING

P 32

11



透明轮系列—班椅轮
TRANSPARENT CASTER SERIES—OFFICE CHAIR

P 33

12

P




泰雅达实业
TAYADA

产品编号说明

Article NO. Instruction


1.5寸金钻轮丝杆双刹M8*25(Double Ball Bearing PVC Caster Double brake 2-inch Thread brake 8*25)

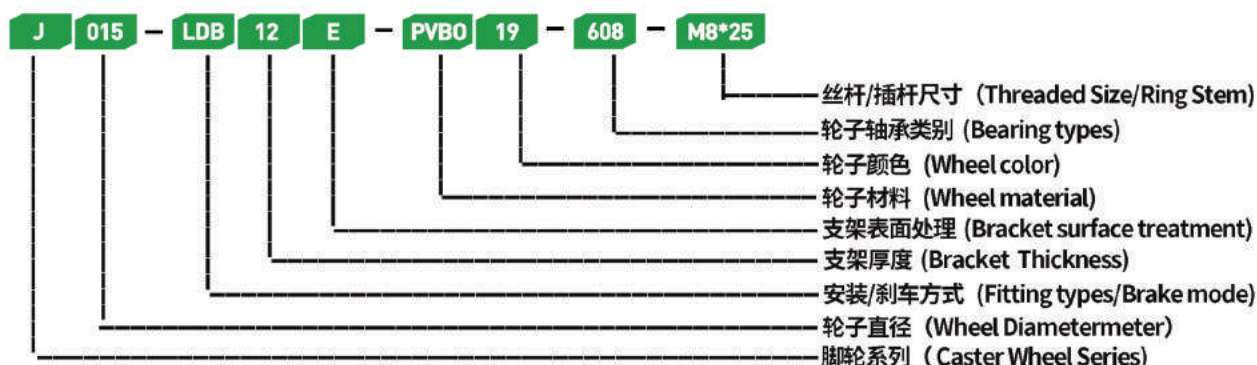

脚轮款式 Caster Type	单轮尺寸 Wheel Size	安装方式 Installation Method	安装方式 Installation Method	支架厚度 Bracket Thickness
L 轻型轮 (Light Duty Caster)	1寸轮子—01 1" Caster—01	F 固定(Fixed)	LSB 丝杆边刹 (Lead Screw Side Brake)	1.2—12
J 金钻轮 (Blak Diamond Caster)	1.5寸轮子—015 1.5" Caster—015	S 活动(Swivel)	LDB 丝杆双刹 (Lead Screw Double Brake)	1.5—15
M 中型轮 (Medium Duty Caster)	2寸轮子—02 2" Caster—02	SB 边刹 (Side Brake)	LRB 丝杆后刹 (Lead Screw Rear Brake)	1.8—18
G 灰胶轮 (Grey PVC Caster)	2.5寸轮子—025 2.5" Caster—025	DB 双刹(Double Brake)	PS 插杆活动 (Plug Swivel)	2.0—20
T 透明轮 (Transparent Caster)	3寸轮子—03 3" Caster—03	RB 后刹 (Rear Brake)	PSB 插杆边刹 (Plug Side Brake)	2.3—23
	4寸轮子—04 4" Caster—04	L 丝杆(Lead)	PDB 插杆双刹 (Plug Side Brake)	1.2—12
	5寸轮子—05 5" Caster—05	P 插杆(Plug)	HS 孔顶活动 (Hole Swivel)	
	6寸轮子—06 6" Caster—06	P 插杆(Plug)	HSB 孔顶边刹 (Hole Side Brake)	
		H 孔顶(Hole)	HDB 孔顶双刹 (Hold Double Brake)	
		LR L型(L-Shaped Right angle)	LRF L型直角固定 (L-shape Right Angle Fixed)	
		FS 平底活动 (Flat Swivel)	LRS L型直角万向 (L-shape Right Angle Swivel)	
		FSB 平底边刹 (Flat Side Brake)	LRB L型直角刹车 (L-shape Right Angle Brake)	
		FDB 平底双刹 (Flat Double Brake)	SW 单轮 (Single Wheel)	
		FRB 平底后刹 (Flat Rear Brake)	LS 丝杆活动 (Lead Screw Swivel)	



1.5寸金钻轮丝杆双刹M8*25(Double Ball Bearing PVC Caster Double brake 2-inch Thread brake 8*25)

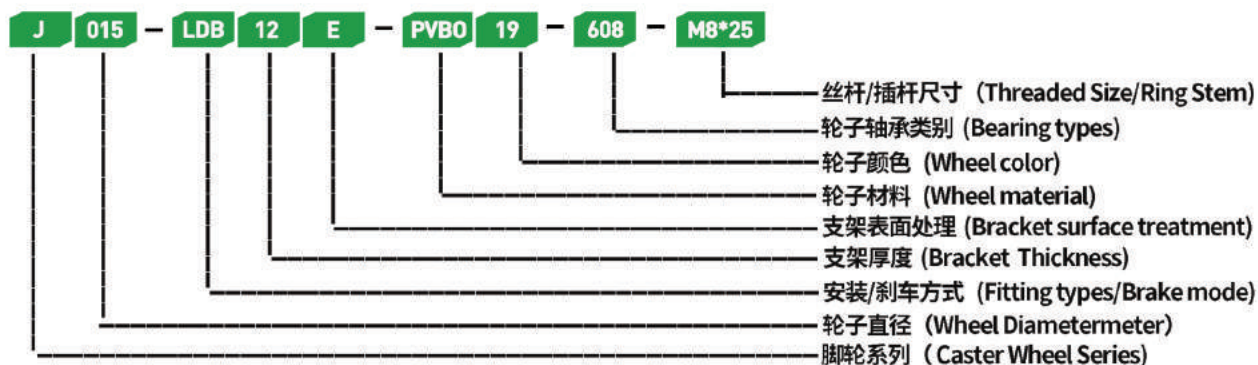

支架表面工艺 Bracket Surface Treatment	轮面材质 Wheel Material	轮芯材质 Wheel Core	轮芯材质 Wheel Core	轴承类型 Bearing
E 电泳黑	PP—P	PP—P	PP+TPR单轴方边—PTRAF	606—606
Z 镀锌	橡胶—R	橡胶—R	PP+TPR单轴圆边—PTRAO	608—608
C 镀铬	灰胶—GR	灰胶—GR	PP+TPR双轴—PTRB	6001—6001
S 喷粉黑	PVC—V	PP+PVC—PV	PP+PU单轴圆边—PUAO	6202—6202
Y 镀黄锌	PU—U	PP+PU—PU	PP+PU单轴方边—PUAF	铆钉—MD
G 镀金	TPR—TR	PP+PVC实心—PVS	PP+PU双轴通花—PUBH	子母钉—ZMD
	双轴—B	PP+TPR—PTR	PP+PU双轴圆边—PUBO	螺杆—LD
	单轴—A	PC+PU—CU	橡胶防静电轮—RJD	中管+挡盖—MG
	圆边—O	PP+PVC双轴圆边—PVBO	TPR防静电轮—TPJD	中管—M
	通花—H	PP+PVC双轴通花—PVBH		
	方边—F	PP+PVC单轴圆边—PVAO		
	防静电—JD	PP+PVC单轴方边—PVAF		




泰雅达实业
TAYADA

产品编号说明

Article NO. Instruction

1.5寸金钻轮丝杆双刹M8*25(Double Ball Bearing PVC Caster Double brake 2-inch Thread brake 8*25)

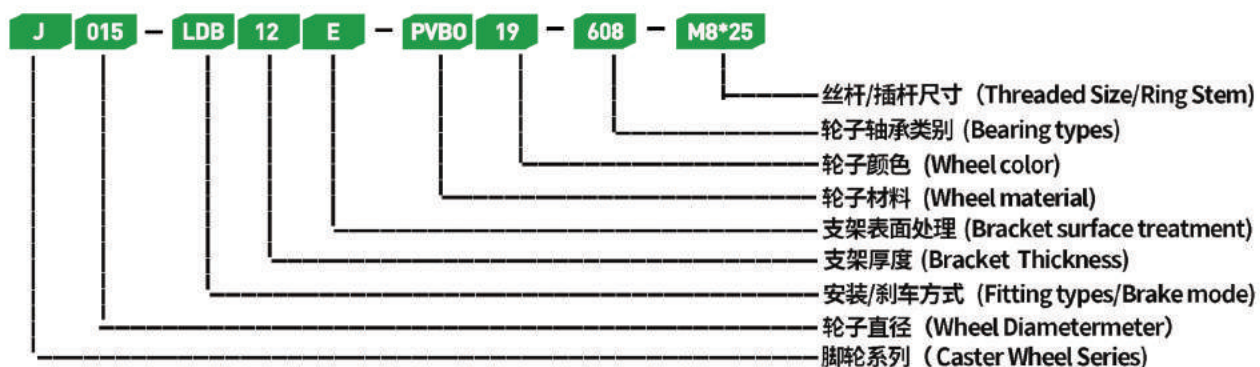

单轮颜色 Wheel Color	单轮颜色 Wheel Color	丝杆尺寸 Threaded Size	丝杆尺寸 Threaded Size	
透明色—0	内白外橘红—13	M6X8	M10X15	
白色—1	内白外蓝—16	M6X15	M10X20	
红色—2	内白外橙—14	M8X8	M10X25	
橘红色—3	内白外灰—18	M8X10	M10X30	
橙色—4	内黑外橙—94	M8X12	M10X35	
黄色—5	内黑外橘红—93	M8X15	M10X38	
蓝色—6	内灰外红—82	M8X20	M10X40	
棕色—7	内灰外灰—88	M8X25	M12X20	
灰色—8		M8X30	M12X25	
黑色—9		M8X35	M12X30	
透明蓝色—06		M8X40	M12X40	
内白外黑—19		M8X45	M12X50	
内白外红—12		M10X10	M12X60	
			M11X21	



泰雅达实业
TAYADA

支架安装方式配置 Installation Allocation


轻型系列产品

Light DutyCaster Combination



金钻轮系列产品

Black DiamondCaster Combination

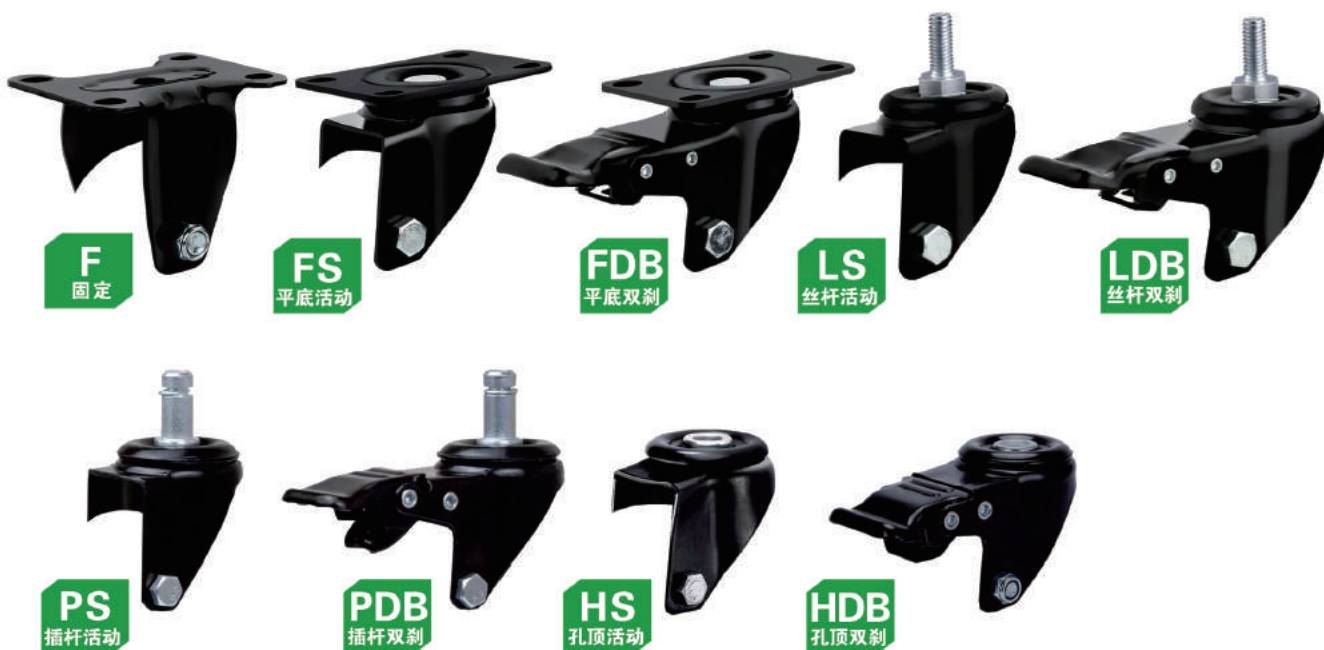



泰雅达实业
Taiyada

支架安装方式配置 Installation Allocation

中型系列产品

Medium DutyCaster Combination



灰胶轮系列产品

Grey PVC Caster Combination





泰雅达实业
TAYADA

支架安装方式配置 Installation Allocation

透明轮系列产品

Transparent Caster Combination



支架表面处理 Bracket Surface Treatment





泰雅达实业
TAYADA

中轻型金钻双轴脚轮

Mid/Light Duty Double Ball Bearing Caster



单轮选配
Caster Combination



PVBO19



PVBO94



PVBO12



PBO1



PTRB88



支架表面处理
Surface Coating



E
电泳



Z
镀锌



S
喷粉



G
镀金

07



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
J015-F12E-PVBO19-608	PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	40
J02-F18E-PVBO19-608	PVC	50(2")	25	72	20	70X51	52X35	8.5	50
J025-F23E-PVBO19-6001	PVC	63(2.5")	32	92	35	93X62	72X45	9	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
J015-FS12E-PVBO19-608	PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	40
J02-FS18E-PVBO19-608	PVC	50(2")	25	72	20	70X51	52X35	8.5	50
J025-FS23E-PVBO19-6001	PVC	63(2.5")	32	92	35	93X62	72X45	9	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
J015-FDB12E-PVBO19-608	PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	40
J02-FDB18E-PVBO19-608	PVC	50(2")	25	72	20	70X51	52X35	8.5	50
J025-FDB23E-PVBO19-6001	PVC	63(2.5")	32	92	35	93X62	72X45	9	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
J015-LS12E-PVBO19-608-M8*25	PVC	40(1.5")	21	62	20.5	M8/10x25	40
J02-LS18E-PVBO19-608-M8*25	PVC	50(2")	25	72	20	M8/10x25	50
J025-LS23E-PVBO19-6001-M12*30	PVC	63(2.5")	32	92	35	M12x30	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
J015-LDB12E-PVBO19-608-M8*25	PVC	40(1.5")	21	62	20.5	M8/10x25	40
J02-LDB18E-PVBO19-608-M8*25	PVC	50(2")	25	72	20	M8/10x25	50
J025-LDB23E-PVBO19-6001-M12*30	PVC	63(2.5")	32	92	35	M12x30	60

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAYADA

中轻型金钻双轴脚轮

Mid/Light Duty Double Ball Bearing Caster



单轮选配
Caster Combination



PVBO19



PVBO94



PVBO12



PBO1



PTRB88



支架表面处理
Surface Coating



E
电泳



Z
镀锌



S
喷粉



G
镀金

08



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
J015-F12E-PVBO19-608	PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	40
J02-F18E-PVBO19-608	PVC	50(2")	25	72	20	70X51	52X35	8.5	50
J025-F23E-PVBO19-6001	PVC	63(2.5")	32	92	35	93X62	72X45	9	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
J015-FS12E-PVBO19-608	PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	40
J02-FS18E-PVBO19-608	PVC	50(2")	25	72	20	70X51	52X35	8.5	50
J025-FS23E-PVBO19-6001	PVC	63(2.5")	32	92	35	93X62	72X45	9	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
J015-FDB12E-PVBO19-608	PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	40
J02-FDB18E-PVBO19-608	PVC	50(2")	25	72	20	70X51	52X35	8.5	50
J025-FDB23E-PVBO19-6001	PVC	63(2.5")	32	92	35	93X62	72X45	9	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
J015-LS12E-PVBO19-608-M8*25	PVC	40(1.5")	21	62	20.5	M8/10x25	40
J02-LS18E-PVBO19-608-M8*25	PVC	50(2")	25	72	20	M8/10x25	50
J025-LS23E-PVBO19-6001-M12*30	PVC	63(2.5")	32	92	35	M12x30	60



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
J015-LDB12E-PVBO19-608-M8*25	PVC	40(1.5")	21	62	20.5	M8/10x25	40
J02-LDB18E-PVBO19-608-M8*25	PVC	50(2")	25	72	20	M8/10x25	50
J025-LDB23E-PVBO19-6001-M12*30	PVC	63(2.5")	32	92	35	M12x30	60

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAIYADA

轻型PVC脚轮 Light Duty PVC Caster



单轮选配
Caster Combination



PVS12



PVS19



PVS16



支架表面处理
Surface Coating



E
电泳



Z
镀锌

09



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
L015-F12Z-PVS12-MD	PVC	38(1.5")	17	50	16	45X38	38X27	5	20
L02-F12Z-PVS12-MD	PVC	50(2")	22	65.5	19	58X46	45X34	6	35
L025-F12Z-PVS12-MD	PVC	63(2.5")	25	80	24	70X58	55X42	8	45
L03-F12Z-PVS12-MD	PVC	75(3")	25	99	30	70X58	55X42	8	50

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
L015-FS12Z-PVS12-MD	PVC	38(1.5")	17	50	16	45X38	38X27	5	20
L02-FS15Z-PVS12-MD	PVC	50(2")	22	65.5	19	58X46	45X34	6	35
L025-FS18Z-PVS12-MD	PVC	63(2.5")	25	80	24	70X58	55X42	8	40
L03-FS18Z-PVS12-MD	PVC	75(3")	25	99	30	70X58	55X42	8	50

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
L015-FDB12Z-PVS12-MD	PVC	38(1.5")	17	50	16	45X38	38X27	5	20
L02-FDB15Z-PVS12-MD	PVC	50(2")	22	65.5	19	58X46	45X34	6	35
L025-FDB18Z-PVS12-MD	PVC	63(2.5")	25	80	24	70X58	55X42	8	40
L03-FDB18Z-PVS12-MD	PVC	75(3")	25	99	30	70X58	55X42	8	50

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
L015-LS12Z-PVS12-MD-M8*25	PVC	38(1.5")	17	51	16	M8X25	20
L02-LS15Z-PVS12-MD-M8*25	PVC	50(2")	22	65	19	M8X25	35
L025-LS18Z-PVS12-MD-M12*30	PVC	63(2.5")	25	80	24	M8X25	40
L03-LS18Z-PVS12-MD-M12*30	PVC	75(3")	25	99	30	M8X25	50

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
L015-LDB12Z-PVS12-MD-M8*25	PVC	38(1.5")	17	51	16	M8X25	20
L02-LDB15Z-PVS12-MD-M8*25	PVC	50(2")	22	65	19	M8X25	35
L025-LDB18Z-PVS12-MD-M12*30	PVC	63(2.5")	25	80	24	M8X25	40
L03-LDB18Z-PVS12-MD-M12*30	PVC	75(3")	25	99	30	M8X25	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。1.5"及2"丝杆可选M10X15，2.5"及3"丝杆可选M10X15/25。



泰雅达实业
TAIYADA

轻型PVC脚轮 Light Duty PVC Caster



单轮选配
Caster Combination



PVS12



PVS19



PVS16



支架表面处理
Surface Coating



E 电泳



Z 镀锌



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L01-F12Z-PVS12-MD	PVC	25(1")	14	35	15	38x19	30	4.5	10
L0125-F12Z-PVS12-MD	PVC	30(1.25")	14	38	15	38X19	30	4.5	15

10



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L01-FS12Z-PVS12-MD	PVC	25(1")	14	35	15	38x33	30x24	4.5	10
L0125-FS15Z-PVS12-MD	PVC	30(1.25")	14	38	15	38x33	30x24	4.5	15



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L01-FDB12Z-PVS12-MD	PVC	25(1")	14	35	15	38X33	30x24	4.5	10
L0125-FDB15Z-PVS12-MD	PVC	30(1.25")	14	38	15	38x33	30x24	4.5	15



NO.							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L01-LS12Z-PVS12-MD-M8*15	PVC	25(1")	14	35	15	M8X15	10
L0125-LS15Z-PVS12-MD-M8*15	PVC	30(1.25")	14	38	15	M8X15	15



NO.							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L01-LDB12Z-PVS12-MD-M8*15	PVC	25(1")	14	35	15	M8X15	10
L0125-LDB15Z-PVS12-MD-M8*15	PVC	30(1.25")	14	38	15	M8X15	15

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。1.5"及2"丝杆可选M10X15，2.5"及3"丝杆可选M10X15/25。



泰雅达实业
TAIYADA

轻型PP脚轮 Light Duty PP Caster



单轮选配
Caster Combination



P9



P1



支架表面处理
Surface Coating



E
电泳



Z
镀锌

11



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-F12Z-P1-MD	PP	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-F12Z-P1-MD	PP	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-F12Z-P1-MD	PP	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-F12Z-P1-MD	PP	75(3")	25	99	30	70X58	55X42	8.4	50



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FS12Z-P1-MD	PP	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-FS15Z-P1-MD	PP	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-FS18Z-P1-MD	PP	63(2.5")	25	80	24	70X58	55X42	8.4	40
L03-FS18Z-P1-MD	PP	75(3")	25	99	30	70X58	55X42	8.4	50



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FDB12Z-P1-MD	PP	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-FDB15Z-P1-MD	PP	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-FDB18Z-P1-MD	PP	63(2.5")	25	80	24	70X58	55X42	8.4	40
L03-FDB18Z-P1-MD	PP	75(3")	25	99	30	70X58	55X42	8.4	50



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LS12Z-P1-MD-M8*25	PP	38(1.5")	17	50	16	M8X25	20
L02-LS15Z-P1-MD-M8*25	PP	50(2")	22	65.5	19	M8X25	35
L025-LS18Z-P1-MD-M12*30	PP	63(2.5")	25	80	24	M12X30	40
L03-LS18Z-P1-MD-M12*30	PP	75(3")	25	99	30	M12X30	50



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LDB12Z-P1-MD-M8*25	PP	38(1.5")	17	50	16	M8X25	20
L02-LDB15Z-P1-MD-M8*25	PP	50(2")	22	65.5	19	M8X25	35
L025-LDB18Z-P1-MD-M12*30	PP	63(2.5")	25	80	24	M12X30	40
L03-LDB18Z-P1-MD-M12*30	PP	75(3")	25	99	30	M12X30	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。1.5"及2"丝杆可选M10X15，2.5"及3"丝杆可选M10X15/25。



泰雅达实业
TAIYADA

轻型软/硬橡胶轮

Light Duty Soft/Hard Rubber Caster



单轮选配
Caster Combination



R9



支架表面处理
Surface Coating



E
电泳



Z
镀锌

12



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	L015-F12Z-R9-MD	SR/HR	38(1.5")	17	50	16	45X38	38X27	5.2	20
	L02-F12Z-R9-MD	SR/HR	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
	L025-F12Z-R9-MD	SR/HR	63(2.5")	25	80	24	70X58	55X42	8.4	45
	L03-F12Z-R9-MD	SR/HR	75(3")	25	99	30	70X58	55X42	8.4	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	L015-FS12Z-R9-MD	SR/HR	38(1.5")	17	50	16	45X38	38X27	5.2	20
	L02-FS15Z-R9-MD	SR/HR	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
	L025-FS18Z-R9-MD	SR/HR	63(2.5")	25	80	24	70X58	55X42	8.4	45
	L03-FS18Z-R9-MD	SR/HR	75(3")	25	99	30	70X58	55X42	8.4	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	L015-FDB12Z-R9-MD	SR/HR	38(1.5")	17	50	16	45X38	38X27	5.2	20
	L02-FDB15Z-R9-MD	SR/HR	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
	L025-FDB18Z-R9-MD	SR/HR	63(2.5")	25	80	24	70X58	55X42	8.4	45
	L03-FDB18Z-R9-MD	SR/HR	75(3")	25	99	30	70X58	55X42	8.4	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	L015-LS12Z-R9-MD-M8*25	SR/HR	38(1.5")	17	50	16	M8X25	20
	L02-LS15Z-R9-MD-M8*25	SR/HR	50(2")	22	65.5	19	M8X25	35
	L025-LS18Z-R9-MD-M12*30	SR/HR	63(2.5")	25	80	24	M12X30	40
	L03-LS18Z-R9-MD-M12*30	SR/HR	75(3")	25	99	30	M12X30	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	L015-LDB12Z-R9-MD-M8*25	SR/HR	38(1.5")	17	50	16	M8X25	20
	L02-LDB15Z-R9-MD-M8*25	SR/HR	50(2")	22	65.5	19	M8X25	35
	L025-LDB18Z-R9-MD-M12*30	SR/HR	63(2.5")	25	80	24	M12X30	40
	L03-LDB18Z-R9-MD-M12*30	SR/HR	75(3")	25	99	30	M12X30	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。1.5"及2"丝杆可选M10X15，2.5"及3"丝杆可选M10X15/25。



泰雅达实业
Taiyada

轻型单刹款静音轮TPR系列 LIGHT SINGLE BRAKE SILENT WHEEL TPR SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



固定系列 Fixed series



NO.	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Hole Spacing 孔距 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)
Model 型号							
1寸固定 1-inch fixed	25	13	10	38	29*21	38*30	4.2
1.25寸固定 1.25-inch fixed	32	13	15	43	30*23	39*33	4.2
1.5寸固定 1.5-inch fixed	38	17	20	53	36*28	46*40	5.2
单刹款2寸固定 Single brake 2-inch fixed	50	18	25	64	36*28	46*40	5.2

活动系列 Swivel series



NO.	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Hole Spacing 孔距 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)
Model 型号								
1寸平底活动 1-inch top plate swivel	25	13	10	38	29*21	38*30	4.2	28
1.25寸平底活动 1.25-inch top plate swivel	32	13	15	43	30*23	39*33	4.2	32
1.5寸平底活动 1.5-inch top plate swivel	38	17	20	53	36*28	46*40	5.2	40
单刹款2寸平底活动 Single brake 2-inch top plate swivel	50	18	25	64	36*28	46*40	5.2	48

刹车系列 Brake series



NO.	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Hole Spacing 孔距 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)
Model 型号								
1寸平底刹车 1-inch top plate brake	25	13	10	38	29*21	38*30	4.2	51
1.25寸平底刹车 1.25-inch top plate brake	32	13	15	43	30*23	39*33	4.2	53
1.5寸平底刹车 1.5-inch top plate brake	38	17	20	53	36*28	46*40	5.2	61
单刹款2寸平底刹车 Single brake 2-inch top plate brake	50	18	25	64	36*28	46*40	5.2	64

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型双刹款静音轮TPR系列 LIGHT DOUBLE BRAKE SILENT WHEEL TPR SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



固定系列 Fixed series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Hole Spacing 孔距 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)
双刹款2寸固定 Double brake 2-inch fixed	50	20	35	75	45*33	61*50	6.2
2.5寸固定 2.5-inch fixed	63	22	55	90	52*33	70*52	6.2
3寸固定 3-inch fixed	75	25	65	103	54*39	73*60	8.2
4寸固定TPR 4-inch fixed TPR	100	25	75	129	54*39	73*60	8.2

活动系列 Swivel series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Hole Spacing 孔距 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)
双刹款2寸平底活动 Double brake 2-inch top plate swivel	50	20	35	75	45*33	61*50	6.2	53
2.5寸平底活动 2.5-inch top plate swivel	63	22	55	90	52*33	70*52	6.2	65
3寸平底活动 3-inch top plate swivel	75	25	65	103	54*39	73*60	8.2	75
4寸平底活动TPR 4-inch top plate swivel TPR	100	25	75	129	54*39	73*60	8.2	85

刹车系列 Brake series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Hole Spacing 孔距 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)
双刹款2寸平底刹车 Double brake 2-inch top plate brake	50	20	35	75	45*33	61*50	6.2	87
2.5寸平底刹车 2.5-inch top plate brake	63	22	55	90	52*33	70*52	6.2	87
3寸平底刹车 3-inch top plate brake	75	25	65	103	54*39	73*60	8.2	100
4寸平底刹车TPR 4-inch top plate brake TPR	100	25	75	129	54*39	73*60	8.2	109

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型静音TPR插杆系列 TPR LIGHT DUTY CASTOR STEM SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



15



活动系列 Swivel series

NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Ring Stem 卡簧尺寸 (mm)
1寸插杆活动 1-inch stem swivel	25	13	10	38	28	11*22
1.25寸插杆活动 1.25-inch stem swivel	32	13	15	43	32	
1.5寸插杆活动 1.5-inch stem swivel	38	17	20	53	40	
单刹车2寸插杆活动 Single brake 2-inch stem swivel	50	18	25	64	48	11*22/11*38
双刹车2寸插杆活动 Double brake 2-inch stem swivel	50	20	35	75	53	
2.5寸插杆活动 2.5-inch stem swivel	63	22	55	90	65	
3寸插杆活动 3-inch stem swivel	75	25	65	103	75	
4寸插杆活动 4-inch stem swivel	100	32	75	133	86	



刹车系列 Brake series

NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Ring Stem 卡簧尺寸 (mm)
1寸插杆刹车 1-inch stem brake	25	13	10	38	51	11*22
1.25寸插杆刹车 1.25-inch stem brake	32	13	15	43	53	
1.5寸插杆刹车 1.5-inch stem brake	38	17	20	53	61	
单刹车2寸插杆刹车 Single brake 2-inch stem brake	50	18	25	64	64	11*22/11*38
双刹车2寸插杆刹车 Double brake 2-inch stem brake	50	20	35	75	87	
2.5寸插杆刹车 2.5-inch stem brake	63	22	55	90	87	
3寸插杆刹车 3-inch stem brake	75	25	65	103	100	
4寸插杆刹车 4-inch stem brake	100	32	75	133	111	

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型静音TPR丝杆系列 TPR LIGHT DUTY CASTOR THREAD SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



16



活动系列 Swivel series

NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)
1寸丝杆活动 1-inch Thread swivel	25	13	10	38	28	M6*15/M8*15
1.25寸丝杆活动 1.25-inch Thread swivel	32	13	15	43	32	
1.5寸丝杆活动 1.5-inch Thread swivel	38	17	20	53	40	M8*15 M8*20 M10*25
单刹款2寸丝杆活动 Single brake 2-inch Thread swivel	50	18	25	64	48	
双刹款2寸丝杆活动 Double brake 2-inch Thread swivel	50	20	35	75	53	M10*25/M12*25
2.5寸丝杆活动 2.5-inch Thread swivel	63	22	55	90	65	
3寸丝杆活动 3-inch Thread swivel	75	25	65	103	75	
4寸丝杆活动 4-inch Thread swivel	100	32	75	133	86	



刹车系列 Brake series

NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)
1寸丝杆刹车 1-inch Thread brake	25	13	10	38	51	M6*15/M8*15
1.25寸丝杆刹车 1.25-inch Thread brake	32	13	15	43	53	
1.5寸丝杆刹车 1.5-inch Thread brake	38	17	20	53	61	M8*15 M8*20 M10*25
单刹款2寸丝杆刹车 Single brake 2-inch Thread brake	50	18	25	64	64	
双刹款2寸丝杆刹车 Double brake 2-inch Thread brake	50	20	35	75	87	M10*25/M12*25
2.5寸丝杆刹车 2.5-inch Thread brake	63	22	55	90	87	
3寸丝杆刹车 3-inch Thread brake	75	25	65	103	100	
4寸丝杆刹车 4-inch Thread brake	100	32	75	133	111	

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

单轴TPR静音双轮款系列 TPR WITH SINGLE BEARING SILENT MODEL



单轮选配
Caster Combination



支架表面处理
Surface Coating



固定系列 Fixed series



Product 产品	NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Hole Spacing 孔距 (mm)
双轮款 Twin wheel	1.5寸双轮固定 (挂铬) 1.5-inch twin wheel fixed (Chrome)	38	17	60	62	52*35	71*55	8.4
	2寸双轮固定 (挂铬) 2-inch twin wheel fixed (Chrome)	50	18	80	73	52*35	71*55	8.4

活动系列 Swivel series



Product 产品	NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Hole Spacing 孔距 (mm)
双轮款 Twin wheel	1.5寸双轮平底活动 (挂铬) 1.5-inch twin wheel top plate swivel (Chrome)	38	17	60	62	52*35	72*51	8.4
	2寸双轮平底活动 (挂铬) 2-inch twin wheel top plate swivel (Chrome)	50	18	80	73	52*35	72*51	8.4

刹车系列 Brake series



Product 产品	NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Hole Spacing 孔距 (mm)
双轮款 Twin wheel	1.5寸双轮平底刹车 (挂铬) 1.5-inch twin wheel top plate brake (Chrome)	38	17	60	62	52*35	72*51	8.4
	2寸双轮平底刹车 (挂铬) 2-inch twin wheel top plate brake (Chrome)	50	18	80	73	52*35	72*51	8.4

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型家具双轮丝杆系列 TWIN WHEEL LIGHT DUTY CASTOR THREAD SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



18

活动系列 Swivel series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)
双轮1.5寸丝杆活动 twin wheel 1.5-inch Thread swivel	38	17	60	62	28	M12*25/10*25
双轮2寸丝杆活动 twin wheel 2-inch Thread swivel	50	18	80	72	32	

刹车系列 Brake series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)
双轮1.5寸丝杆刹车 twin wheel 1.5-inch Thread brake	38	17	60	62	51	M12*25/10*25
双轮2寸丝杆刹车 twin wheel 2-inch Thread brake	50	18	80	72	53	

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型家具双轮插杆系列 TWIN WHEEL LIGHT DUTY CASTOR STEM SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



19

活动系列 Swivel series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Ring Stem 卡簧尺寸 (mm)
1.5寸插杆活动 1.5-inch stem swivel	38	17	60	62	28	11*22
2寸插杆活动 2-inch stem swivel	50	18	80	73	32	

刹车系列 Brake series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Ring Stem 卡簧尺寸 (mm)
1.5寸插杆刹车 1.5-inch stem brake	38	17	60	62	51	11*22
2寸插杆刹车 2-inch stem brake	50	18	80	73	53	

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型单刹款家具TPR夹板系列 LIGHT SINGLE BRAKE FURNITURE TPR SPLINT SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



20

L型活动系列 L-shaped swivel series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)
1寸L型活动 1-inch L-shaped swivel	25	13	10	38	32*24	4.2	28
1.25寸L型活动 1.25-inch L-shaped swivel	32	13	15	43	32*24	4.2	32
1.5寸L型活动 1.5-inch L-shaped swivel	38	17	20	53	42*34	5.2	40
单刹款2寸L型活动 Single brake 2-inch L-shaped swivel	50	18	25	64	42*34	5.2	48

L型刹车系列 L-type brake series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)
1寸L型刹车 1-inch L-shaped brake	25	13	10	38	32*24	4.2	51
1.25寸L型刹车 1.25-inch L-shaped brake	32	13	15	43	32*24	4.2	53
1.5寸L型刹车 1.5-inch L-shaped brake	38	17	20	53	42*34	5.2	61
单刹款2寸L型刹车 Single brake 2-inch L-type brake	50	18	25	64	42*34	5.2	64

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型单刹款家具TPR夹板系列 LIGHT SINGLE BRAKE FURNITURE TPR SPLINT SERIES



单轮选配
Caster Combination



支架表面处理
Surface Coating



21

U型活动系列 U-shaped swivel series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)	Internal Diameter 内径 (mm)
1寸U型活动 1-inch U-shaped swivel	25	13	10	38	32*27	5.2	28	17
1.25寸U型活动 1.25-inch U-shaped swivel	32	13	15	43	32*27	5.2	32	17
1.5寸U型活动 1.5-inch U-shaped swivel	38	17	20	53	40*31	5.2	40	16/18/20/22/25
单刹款2寸U型活动 Single brake 2-inch U-shaped swivel	50	18	25	64	40*31	5.2	48	16/18/20/22/25

U型刹车系列 U-type brake



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)	Internal Diameter 内径 (mm)
1寸U型刹车 1-inch U-shaped brake	25	13	10	38	32*27	5.2	51	17
1.25寸U型刹车 1.25-inch U-shaped brake	32	13	15	43	32*27	5.2	53	17
1.5寸U型刹车 1.5-inch U-shaped brake	38	17	20	53	40*31	5.2	61	16/18/20/22/25
单刹款2寸U型刹车 Single brake 2-inch U-shaped brake	50	18	25	64	40*31	5.2	64	16/18/20/22/25

J型活动系列 J-type swivel series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)	Internal Diameter 内径 (mm)
1.5寸J型活动 1.5-inch J-type swivel	38	17	20	53	49*21	5.2	40	20
单刹款2寸J型活动 Single brake 2-inch J-type swivel	50	18	25	64	49*21	5.2	48	20

J型刹车系列 J-type brake series



NO. Model 型号	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Load Capacity 承重 (kg)	Overall Height 安装高度 (mm)	Plate Size 底板尺寸 (mm)	Hole Size 孔径 (mm)	Swivel Radius 转动半径 (mm)	Internal Diameter 内径 (mm)
1.5寸J型刹车 1.5-inch J-type brake	38	17	20	53	49*21	5.2	61	20
单刹款2寸J型刹车 Single brake 2-inch J-type brake	50	18	25	64	49*21	5.2	64	20

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
Taiyada

轻型抽屉轮系列 LIGHT DRAWER WHEEL SERIES



22

固定系列 Fixed series



Product 产品	NO. Model 型号	 Wheel Dia 轮径 (mm)	 Wheel Width 轮宽 (mm)	 Load Capacity 承重 (kg)	 Overall Height 安装高度 (mm)	 Hole Spacing 孔距 (mm)	 Plate Size 底板尺寸 (mm)	 Hole Size 孔径 (mm)
抽屉轮 Drawer wheel	1寸固定 1-inch fixed	25	12	8	28	32	42*20	4.2
	1.25寸固定 1.25-inch fixed	32	12	12	35	46	53*20	5.2
	1.5寸固定 1.5-inch fixed	38	16	15	46	54	68*25	6.2
	2寸固定 2-inch fixed	50	17	20	52	54	68*25	6.2

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，具体以实物为准。



泰雅达实业
TAYADA

中型双轴通花脚轮

Medium Duty Double Ball Bearing Caster



单轮选配
Caster Combination



支架表面处理
Surface Coating



PVBOH94



PVBOH9



PVBOH19



PVBOH12



PVBOH88



E
电泳



Z
镀锌



S
喷粉



G
镀金

23



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
M03-F23Z-PVBOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
M04-F23Z-PVBOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
M05-F23Z-PVBOH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
M03-FS23Z-PVBOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
M04-FS23Z-PVBOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
M05-FS23Z-PVBOH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
M03-FDB23Z-PVBOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
M04-FDB23Z-PVBOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
M05-FDB23Z-PVBOH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
M03-LS23Z-PVBOH94-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
M04-LS23Z-PVBOH94-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
M05-LS23Z-PVBOH94-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
M03-LDB23Z-PVBOH94-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
M04-LDB23Z-PVBOH94-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
M05-LDB23Z-PVBOH94-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAYADA

中型双轴通花脚轮

Medium Duty Double Ball Bearing Caster



单轮选配
Caster Combination



PVBOH94



PVBOH9



PVBOH19



PVBOH12



PVBOH88



支架表面处理
Surface Coating



E
电泳



Z
镀锌



S
喷粉



G
镀金

24



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-F23Z-PVBOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
	M04-F23Z-PVBOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
	M05-F23Z-PVBOH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FS23Z-PVBOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
	M04-FS23Z-PVBOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
	M05-FS23Z-PVBOH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FDB23Z-PVBOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
	M04-FDB23Z-PVBOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
	M05-FDB23Z-PVBOH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LS23Z-PVBOH94-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
	M04-LS23Z-PVBOH94-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
	M05-LS23Z-PVBOH94-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LDB23Z-PVBOH94-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
	M04-LDB23Z-PVBOH94-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
	M05-LDB23Z-PVBOH94-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAYADA

中型双轴工业脚轮

Medium Duty Double Ball Bearing Industry Caster



单轮选配
Caster Combination



支架表面处理
Surface Coating



PBO1



PVBO82



TPRJD96



PTRB96



PTRB88



E
电泳



Z
镀锌



S
喷粉



G
镀金

25



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
M03-F23Z-PBO1-6001	PP	75(3")	32	105	36	93x62	72X45	8.5	70
M04-F23Z-PBO1-6001	PP	100(4")	32	130	35	93X62	72X45	8.5	80
M05-F23Z-PBO1-6001	PP	125(5")	32	158	34.5	93X62	72X45	8.5	100

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
M03-FS23Z-PBO1-6001	PP	75(3")	32	105	36	93x62	72X45	8.5	70
M04-FS23Z-PBO1-6001	PP	100(4")	32	130	35	93X62	72X45	8.5	80
M05-FS23Z-PBO1-6001	PP	125(5")	32	158	34.5	93X62	72X45	8.5	100

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
Model 型号									
M03-FDB23Z-PBO1-6001	PP	75(3")	32	105	36	93x62	72X45	8.5	70
M04-FDB23Z-PBO1-6001	PP	100(4")	32	130	35	93X62	72X45	8.5	80
M05-FDB23Z-PBO1-6001	PP	125(5")	32	158	34.5	93X62	72X45	8.5	100

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
M03-LS23Z-PBO1-6001-M12*30	PP	75(3")	32	105	36	M12x30	70
M04-LS23Z-PBO1-6001-M12*30	PP	100(4")	32	130	35	M12x30	80
M05-LS23Z-PBO1-6001-M12*30	PP	125(5")	32	158	34.5	M12x30	100

NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
Model 型号							
M03-LDB23Z-PBO1-6001-M12*30	PP	75(3")	32	105	36	M12x30	70
M04-LDB23Z-PBO1-6001-M12*30	PP	100(4")	32	130	35	M12x30	80
M05-LDB23Z-PBO1-6001-M12*30	PP	125(5")	32	158	34.5	M12x30	100

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAYADA

中型双轴工业脚轮

Medium Duty Double Ball Bearing Industry Caster



单轮选配
Caster Combination



PBO1



PVBO82



TPRJD96



PTRB96



PTRB88



支架表面处理
Surface Coating



E
电泳



Z
镀锌



S
喷粉



G
镀金

26



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-F23Z-PBO1-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
	M04-F23Z-PBO1-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
	M05-F23Z-PBO1-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FS23Z-PBO1-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
	M04-FS23Z-PBO1-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
	M05-FS23Z-PBO1-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FDB23Z-PBO1-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
	M04-FDB23Z-PBO1-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
	M05-FDB23Z-PBO1-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LS23Z-PBO1-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
	M04-LS23Z-PBO1-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
	M05-LS23Z-PBO1-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LDB23Z-PBO1-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
	M04-LDB23Z-PBO1-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
	M05-LDB23Z-PBO1-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAIYADA

中型单轴PVC脚轮

Medium Duty Single Ball Bearing pvc Caster



单轮选配
Caster Combination



支架表面处理
Surface Coating



PVAOH94



PVAOH9



PVAOH19



PVAOH12



PVAOH88



E
电泳



Z
镀锌



S
喷粉



G
镀金

27



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
M03-F23Z-PVAOH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
M04-F23Z-PVAOH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
M05-F23Z-PVABH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100

NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
M03-FS23Z-PVABH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
M04-FS23Z-PVABH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
M05-FS23Z-PVABH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100

NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
M03-FDB23Z-PVABH94-6001	PVC	75(3")	32	105	36	93x62	72X45	8.5	70
M04-FDB23Z-PVABH94-6001	PVC	100(4")	32	130	35	93X62	72X45	8.5	80
M05-FDB23Z-PVABH94-6001	PVC	125(5")	32	158	34.5	93X62	72X45	8.5	100

							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承 重 (kg)
M03-LS23Z-PVABH94-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
M04-LS23Z-PVABH94-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
M05-LS23Z-PVABH94-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100

NO.							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承 重 (kg)
M03-LDB23Z-PVABH94-6001-M12*30	PVC	75(3")	32	105	36	M12x30	70
M04-LDB23Z-PVABH94-6001-M12*30	PVC	100(4")	32	130	35	M12x30	80
M05-LDB23Z-PVABH94-6001-M12*30	PVC	125(5")	32	158	34.5	M12x30	100

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAYADA

中轻型灰胶轮

Mid/Light Duty Gray Rubber Caster



单轮选配
Caster Combination



PVA88



PVA86



PVA99



PVA98



PVA94



支架表面处理
Surface Coating



E
电泳



Z
镀锌



E
喷粉



G
镀金

28



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	G02-F23Z-PVAF86-MG	PVC	50(2")	17	68	20	65x48	46X26.5	6.5	30
	G025-F23Z-PVAF86-MG	PVC	63(2.5")	21	90	25	65x48	46X26.5	6.5	40
	G03-F23Z-PVAF86-MG	PVC	75(3")	21	99	30	100X58	72X31.5	6.5	50
	G04-F23Z-PVAF86-MG	PVC	100(4")	25	130	32	100X58	72X31.5	8.5	60
	G05-F23Z-PVAF86-MG	PVC	125(5")	25	153	32	100X58	72X31.5	8.5	70



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	G02-FS23Z-PVAF86-MG	PVC	50(2")	17	68	20	50X50	35X35	6.5	30
	G025-FS23Z-PVAF86-MG	PVC	63(2.5")	21	90	25	65X65	45X45	6.5	40
	G03-FS23Z-PVAF86-MG	PVC	75(3")	21	99	30	65X65	45X45	8.5	50
	G04-FS23Z-PVAF86-MG	PVC	100(4")	25	130	32	76X76	55X55	8.5	60
	G05-FS23Z-PVAF86-MG	PVC	125(5")	25	153	32	76X76	55X55	8.5	70



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	G02-FDB23Z-PVAF86-MG	PVC	50(2")	17	68	20	50X50	35X35	6.5	30
	G025-FDB23Z-PVAF86-MG	PVC	63(2.5")	21	90	25	65X65	45X45	6.5	40
	G03-FDB23Z-PVAF86-MG	PVC	75(3")	21	99	30	65X65	45X45	6.5	50
	G04-FDB23Z-PVAF86-MG	PVC	100(4")	27	130	32	76X76	57X57	8.5	60
	G05-FDB23Z-PVAF86-MG	PVC	125(5")	27	153	32	76X76	57X57	8.5	70

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
taiyada

中轻型灰胶轮

Mid/Light Duty Gray Rubber Caster



单轮选配
Caster Combination



PVAF88



PVAF86



PVAF99



PVAF98



PVAF94



支架表面处理
Surface Coating



E
电泳



Z
镀锌



E
喷粉



G
镀金

29



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
G02-LS23Z-PVAF86-MG-M12*30	PVC	50(2")	17	68	20	M10x25	30
G025-LS23Z-PVAF86-MG-M12*30	PVC	63(2.5")	21	90	25	M10x25	40
G03-LS23Z-PVAF86-MG-M12*30	PVC	75(3")	21	99	30	M12x30	50
G04-LS23Z-PVAF86-MG-M12*30	PVC	100(4")	25	130	32	M12x30	60
G05-LS23Z-PVAF86-MG-M12*30	PVC	125(5")	25	153	32	M12x30	70



NO. Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
G02-LDB23Z-PVAF86-MG-M12*30	PVC	50(2")	17	68	20	M10x25	30
G025-LDB23Z-PVAF86-MG-M12*30	PVC	63(2.5")	21	90	25	M10x25	40
G03-LDB23Z-PVAF86-MG-M12*30	PVC	75(3")	21	99	30	M12x30	50
G04-LDB23Z-PVAF86-MG-M12*30	PVC	100(4")	25	130	32	M12x30	60
G05-LDB23Z-PVAF86-MG-M12*30	PVC	125(5")	25	153	32	M12x30	70

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAIYADA

透明脚轮 Transparent Caster



单轮选配
Caster Combination



CU0



支架表面处理
Surface Coating



E
电泳



Z
镀锌



C
镀铬



S
喷粉



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-F12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	54X40	30X15	4.5	25
	T02-F12Z-CU0-ZMD	PU+PC	50(2")	21	64	25	58X45	39X19	4.5	30

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-FS12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
	T02-FS15Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
	T03-FS18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
	T04-FS18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-FDB12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
	T02-FDB15Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
	T03-FDB18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
	T04-FDB18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	T015-LS12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
	T02-LS15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
	T03-LS18Z-CU0-ZMD-M10*25	PU+PC	75(3")	22	96.5	28	M10X25/30	45
	T04-LS18Z-CU0-ZMD-M10*25	PU+PC	100(4")	27	125	32	M10X25/30	50

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	T015-LDB12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
	T02-LDB15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
	T03-LDB18Z-CU0-ZMD-M10*25	PU+PC	75(3")	22	96.5	28	M10X25/30	45
	T04-LDB18Z-CU0-ZMD-M10*25	PU+PC	100(4")	27	125	32	M10X25/30	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAIYADA

透明脚轮 Transparent Caster



单轮选配
Caster Combination



CU0



CUBF0



支架表面处理
Surface Coating



E
电泳



Z
镀锌



C
镀铬



S
喷粉



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-F12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	54X40	30x15	4.5	25
	T02-F12Z-CU0-ZMD	PU+PC	50(2")	21	64	25	56x45	39x19	4.5	30

31



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-FS12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
	T02-FS15Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
	T03-FS18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
	T04-FS18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-FDB12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
	T02-FDB15Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
	T03-FDB18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
	T04-FDB18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	T015-LS12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
	T02-LS15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
	T03-LS18Z-CU0-ZMD-M12*30	PU+PC	75(3")	22	96.5	28	M12X30	45
	T04-LS18Z-CU0-ZMD-M12*30	PU+PC	100(4")	27	125	32	M12X30	50



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	T015-LDB12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
	T02-LDB15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
	T03-LDB18Z-CU0-ZMD-M12*30	PU+PC	75(3")	22	96.5	28	M12X30	45
	T04-LDB18Z-CU0-ZMD-M12*30	PU+PC	100(4")	27	125	32	M12X30	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
TAIYADA

双轴承透明脚轮

Double Ball Bearing Transparent Caster



单轮选配
Caster Combination



CUBF0



支架表面处理
Surface Coating



E
电泳



Z
镀锌



C
镀铬



S
喷粉



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-F12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	54x40	30x15	4.5	25
	T02-F12Z-CU0-ZMD	PU+PC	50(2")	21	64	25	56x45	39x19	4.5	30

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-FS12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
	T02-FS15Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
	T03-FS18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
	T04-FS18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	T015-FDB12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
	T02-FDB15Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
	T03-FDB18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
	T04-FDB18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	T015-LS12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
	T02-LS15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
	T03-LS18Z-CU0-ZMD-M10*25	PU+PC	75(3")	22	96.5	28	M10X25/30	45
	T04-LS18Z-CU0-ZMD-M10*25	PU+PC	100(4")	27	125	32	M10X25/30	50

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	T015-LDB12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
	T02-LDB15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
	T03-LDB18Z-CU0-ZMD-M10*25	PU+PC	75(3")	22	96.5	28	M10X25/30	45
	T04-LDB18Z-CU0-ZMD-M10*25	PU+PC	100(4")	27	125	32	M10X25/30	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。



泰雅达实业
Taiyada

双轴班椅透明轮

Double Ball Bearing Transparent Caster



单轮选配
Caster Combination



CUBO80



CUBO90



CUBO90



CUBO50



CUBO30



支架表面处理
Surface Coating



E
电泳



Z
镀锌



S
喷粉



G
镀金

33



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
T025-LS23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M12x30	45
T03-LS23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M12x30	50



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
T025-LDB23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M12x30	45
T03-LDB23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M12x30	50



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Ring Stem 卡簧尺寸 (mm)	Load Capacity 承重 (kg)
T025-PS23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M11x22	45
T03-PS23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M11x22	50



NO.	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Ring Stem 卡簧尺寸 (mm)	Load Capacity 承重 (kg)
T025-PDB23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M11x22	45
T03-PDB23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M11x22	50

注：产品尺寸都为纯手工卡尺测量，会有1-3MM偏差，仅作为参考数据，具体以实物为准。