



京澎机械设备(上海)有限公司

Jingpeng Machinery & Equipment (Shanghai) Co., Ltd.



调心滚子轴承 Spherical Roller Bearings

公司简介

COMPANY PROFILE

Jingpeng Machinery & Equipment (Shanghai) Co., Ltd. was established in 2003. The company is committed to the R&D and manufacturing of "imported bearing replacement" and is determined to completely replace imported bearings in terms of appearance, precision and service life.

The company has a professional technical and service team with a technical staff ratio of more than 30%. It can produce an inner diameter of $\Phi 15\text{mm}$ - $\Phi 2000\text{mm}$ and undertake OEM and OEM production. The company adopts fully automatic CNC production line, and at the same time establishes perfect inspection means Complete tracking, system inspection, and establishes perfect testing equipment including metallographic inspection, contour detector, roundness meter, roughness meter and high-precision measurement center. Strictly control the production process to ensure the stability and consistency of the bearing quality. And analyze the bearing usage under various environmental conditions to better meet the needs of customers. The company's partners include the world's top 500 companies, the products sell well all over the world, exported to the United States, Spain, Turkey, Italy, Austria, Brazil, etc. More than a dozen countries.

The company adheres to the quality policy of "excellence, perfection, 0.01% of the product is 100% waste!", determined to completely replace imported bearings from appearance, precision and service life. The company has its own physical and chemical laboratory and measurement and testing center. The products are strictly controlled from the first step to each step. Each batch of products has a detailed quality file with a retrospective period of up to five years.



调心滚子轴承型号目录

Spherical Roller Bearings Model Catalog

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				kN		r/min				mm				mm							
30	68	20	1	60.8	57	6000	7500	22206X1CAN	-	41	52.3	-	-	37	60	1	0.32	2.09	3.11	2.04	0.384
35	72	23	1.1	72.5	81.5	6000	7500	22207CA/W33		46	60	5.5	3	41	65	1					0.441
	82	23	0.5	86	92	6000	7500	21307X3CA/CRA9		83	69			42	75						0.652
40	90	33	1.5	143	133	4500	5600	22308CA	22308CA/W33	56	74	5.5	2.5	49	81	1.5	0.39	1.73	2.58	1.69	1.02
	90	33	1.5	143	133	4500	5600	22308CH/W33		49.9	74.3	5.5	3	49	81	1.5	0.37	1.80	2.70	1.80	1.01
	90	33	1.5	143	133	4500	5600	22308CAK	22308CAK/W33	56	74	5.5	2.5	49	81	1.5	0.39	1.73	2.58	1.69	0.993
45	85	23	1.1	96.9	95	5300	6700	22209CA	22209CA/W33	57.6	73	5.5	2	52	78	1	0.28	2.40	3.50	2.50	0.629
	100	36	1.5	174	174	3800	4800	22309CA	22309CA/W33	63	81.4	5.5	2.5	54	91	1.5	0.38	1.80	2.60	1.70	1.53
	100	36	1.5	174	174	3800	4800	22309CAK	22309CAK/W33	63	81.4	5.5	2.5	54	91	1.5	0.38	1.80	2.60	1.70	1.52
50	90	23	1.1	98.8	103	5000	6300	22210CA	22210CA/W33	62.2	81.6	5.5	2	57	83	1	0.26	2.60	3.90	2.50	0.630
	90	23	1.1	98.8	103	5000	6300	22210/W33		63	81.6	5.5	2	57	83	1	0.27	2.50	3.70	2.50	0.629
	90	23	1.1	98.8	103	5000	6300	22210CAK	22210CAK/W33	62.2	81.6	5.5	2	57	83	1	0.26	2.60	3.90	2.50	0.630
	110	27	2	148	158	3400	4300	21310CA/C3		69	92			60	100	2	0.24	2.80	4.20	2.80	1.34
	110	40	2	209	213	3400	4300	22310CA	22310CA/W33	69	90.6	5.5	2.5	60	100	2	0.38	1.80	2.60	1.70	2.17
	110	40	2	209	213	3400	4300	22310CA/W33A		69	90.6	5.5	2.5	60	100	2	0.38	1.80	2.60	1.70	2.06
	110	40	2	209	213	3400	4300	22310CAK	22310CAK/W33	69	90.6	5.5	2.5	60	100	2	0.38	1.80	2.60	1.70	2.13
55	100	25	1.5	119	126	4500	5600	22211CA	22211CA/W33	68.8	87.3	5.5	2	64	91	1.5	0.25	2.70	4.00	2.60	0.887
	100	25	1.5	119	126	4500	5600	22211CAK	22211CAK/W33	68.8	87.3	5.5	2	64	91	1.5	0.25	2.70	4.00	2.60	0.879
	100	25	1.5	101	126	4500	5600	22211/W33		70	87.3	5.5	2	64	91	1.5	0.26	2.60	3.90	2.50	0.742
	100	25	1.5	101	126	4500	5600	22211K/W33		70	87.3	5.5	2	64	91	1.5	0.26	2.60	3.90	2.50	0.724
	120	43	2	257	266	3200	4000	22311CA	22311CA/W33	75	99.5	5.5	2.5	65	110	2	0.37	1.80	2.70	1.80	2.60
	120	43	2	257	266	3200	4000	22311CA/YB2	22311CAF3	75	99.5			65	110	2	0.37	1.80	2.70	1.80	2.60
	120	43	2	257	266	3200	4000	22311CAK	22311CAK/W33	75	99.5	5.5	2.5	65	110	2	0.37	1.80	2.70	1.80	2.42
60	110	28	1.5	148	158	4000	5000	22212CA	22212CA/W33	75.2	95	5.5	2	69	101	1.5	0.24	2.80	4.20	2.80	1.01
	110	28	1.5	148	158	4000	5000	22212CAK/W33	22212CA-2RS/S0	75.2	95	5.5	2	69	101	1.5	0.24	2.80	4.20	2.80	0.982
	110	28	1.5	121	145	4000	5000	22212	22212/W33	75.5	95	5.5	2	69	101	1.5	0.27	2.50	3.70	2.50	1.09
	130	46	2.1	225	248	3000	3800	22312	22312/W33	79	108	5.5	3	72	118	2	0.40	1.68	2.50	1.64	2.93
	130	46	2.1	225	248	3000	3800	22312K	22312K/W33	79	108	5.5	3	72	118	2	0.40	1.68	2.50	1.64	2.86
	130	46	2.1	295	318	3000	3800	22312CA	22312CA/W33	81.4	108	5.5	3	72	118	2	0.37	1.80	2.70	1.80	3.33
	130	46	2.1	295	318	3000	3800	22312CA/C9-ZG		81.4	108	5.5	3	72	118	2	0.37	1.80	2.70	1.80	3.33
	130	46	2.1	295	318	3000	3800	22312CA/YB2	22312CAF3	81.4	108			72	118	2	0.37	1.80	2.70	1.80	3.33

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min				mm				mm							
-	130	46	2.1	295	318	3000	3800	22312CAK	22312CAK/W33	81.4	108	5.5	3	72	118	2	0.37	1.80	2.70	1.80	3.33
65	120	31	1.5	183	205	3800	4800	22213CA	22213CA/W33	81.5	103	5.5	2.5	74	111	1.5	0.25	2.70	4.00	2.50	1.56
	120	31	1.5	183	205	3800	4800	22213CAK	22213CAK/W33	81.5	103	5.5	2.5	74	111	1.5	0.25	2.70	4.00	2.50	1.52
	120	31	1.5	170	216	3800	4800	22213S/W33		80	106	5.5	3	74	111	1.5	0.25	2.70	4.00	2.50	1.57
	120	31	1.5	143	175	3800	4800	22213/W33		82	103	5.5	2.5	74	111	1.5	0.27	2.50	3.70	2.50	1.57
	120	31	1.5	143	175	3800	4800	22213K/W33		82	103	5.5	2.5	74	111	1.5	0.27	2.50	3.70	2.50	1.54
	140	33	2.1	224	257	2800	3600	21313CA		87.9	119			77	128	2	0.25	2.70	4.00	2.60	2.58
	140	48	2.1	262	325	2600	3400	22313CH/W33		81.6	118	8.3	4.5	77	128	2	0.35	1.90	2.90	1.80	4.92
	140	48	2.1	323	342	2600	3400	22313CA	22313CA/W33	88.6	116	5.5	3	77	128	2	0.35	1.90	2.90	1.80	4.92
	140	48	2.1	323	342	2600	3400	22313CAF3	22313CAF3	88.6	116			77	128	2	0.35	1.90	2.90	1.80	4.90
	140	48	2.1	323	342	2600	3400	22313CAK	22313CAK/W33	88.6	116	5.5	3	77	128	2	0.35	1.90	2.90	1.80	4.90
70	125	31	1.5	162	205	3600	4500	22214CA	22214CA/W33	86.8	109	6	2.5	79	116	1.5	0.24	3.00	4.60	2.80	1.83
	125	31	1.5	162	205	3600	4500	22214CAK		86.8	109			79	116	1.5	0.24	3.00	4.60	2.80	1.81
	125	31	1.5	159	200	3600	4500	22214/W33		87.2	109	6	2.5	79	116	1.5	0.26	2.60	3.90	2.50	1.66
	150	35	2.1	270	309	2400	3200	21314CA		95.4	127			82	138	2	0.25	2.70	4.00	2.60	3.02
	150	51	2.1	380	408	2200	3000	22314CA	22314CA/W33	95.8	125	8.3	4	82	138	2	0.35	1.90	2.90	1.80	5.23
	150	51	2.1	380	408	2200	3000	22314CAK	22314CAK/W33	95.8	125	8.3	4	82	138	2	0.35	1.90	2.90	1.80	5.21
	150	51	2.1	380	408	2200	3000	22314CAF3	22314CAF3	95.8	125			82	138	2	0.35	1.90	2.90	1.80	5.14
75	115	40	1.1	164	250	2900	3500	24015CA	24015CA/W33	87.5	100	5.5	3	82	106	1	0.32	2.09	3.11	2.04	1.48
	130	31	1.5	150	192	3400	4300	22215		92	114			84	121	1.5					1.73
	130	31	1.5	201	228	3400	4300	22215CA	22215CA/W33	92	114	5.5	2.5	84	121	1.5	0.24	3.00	4.60	2.80	1.71
	130	31	1.5	201	228	3400	4300	22215CAK		92	114			84	121	1.5	0.24	3.00	4.60	2.80	1.67
	160	55	2.1	418	451	2200	3000	22315CA	22315CA/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.44
	160	55	2.1	418	451	2200	3000	22315CAF3	22315CAF3/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.40
	160	55	2.1	418	451	2200	3000	22315CAK	22315CAK/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.32
80	140	33	2	165	225	3200	4000	22216CA	22216CA/W33	98.9	122	5.5	2.5	91	129	2	0.24	2.80	4.20	2.80	2.08
	140	33	2	165	225	3200	4000	22216CAK		98.9	122			91	129	2	0.24	2.80	4.20	2.80	2.03
	170	58	2.1	380	495	2000	2800	22316CA	22316CA/W33	109	142	8.3	4	92	158	2	0.34	1.99	2.96	1.94	7.47
	170	58	2.1	380	495	2000	2800	22316CA/C9-ZG		109	142	8.3	4	92	158	2	0.34	1.99	2.96	1.94	6.54
	170	58	2.1	380	495	2000	2800	22316CA/HAC9W33YA8		109	142	8.3	4	92	158	2	0.34	1.99	2.96	1.94	7.36
	170	58	2.1	380	495	2000	2800	22316CAF3		109	142			92	158	2	0.34	1.99	2.96	1.94	7.34
	170	58	2.1	380	495	2000	2800	22316CAK		109	142			92	158	2	0.34	1.99	2.96	1.94	7.40

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsm	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
82.6	170	58	2.1	380	495	2000	2800	206/82.6CA/W33	-	109	142	8.3	4	92	158	2	0.34	1.99	2.96	1.94	6.37
85	150	36	2	193	254	3000	3800	22217CA	22217CA/W33	105	132	6.5	3	96	139	2	0.24	2.80	4.20	2.80	2.69
	150	36	2	193	254	3000	3800	22217CAK		105	132			96	139	2	0.24	2.80	4.20	2.80	2.64
	180	41	3	294	360	2000	2800	21317CA	21317CA/W33	118	152			99	166	2.5	0.24	2.80	4.20	2.80	5.42
	180	60	3	391	505	1900	2600	22317CA	22317CA/W33	115	150	8.3	4	99	166	2.5	0.34	1.99	2.96	1.94	8.19
	180	60	3	390	505	1900	2600	22317ACA		115	150	8.3	4	99	166	2.5	0.34	1.99	2.96	1.94	8.19
	180	60	3	391	505	1900	2600	22317CAF3		115	150			99	166	2.5	0.34	1.99	2.96	1.94	8.12
	180	60	3	391	505	1900	2600	22317CAK	22317CAK/W33	115	150	8.3	4	99	166	2.5	0.34	1.99	2.96	1.94	8.08
	180	60	3	391	505	1900	2600	22317CAKF3	22317CAKF3/W33	115	150	8.3	4	99	166	2.5	0.34	1.99	2.96	1.94	8.01
90	140	50	1.5	233	390	2600	3400	24018CA	24018CA/W33	106	121	5.5	3	100	125	1.5	0.33	2.00	3.00	2.00	3.25
	160	40	2	269	360	2600	3400	22218CA	22218CA/W33	111	139	8.3	2.5	101	149	2	0.25	2.70	4.00	2.60	3.40
	160	40	2	269	360	2600	3400	22218CAF3		111	139			101	149	2	0.25	2.70	4.00	2.60	3.38
	160	40	2	269	360	2600	3400	22218CAK	22218CAK/W33	111	139	8.3	2.5	101	149	2	0.25	2.70	4.00	2.60	3.28
	160	52.4	2	287	415	2000	2800	23218	23218/W33	111	133	5.5	2.5	101	149	2	0.35	1.90	2.90	1.80	4.64
	160	52.4	2	287	415	2000	2800	23218K	23218K/W33	111	133	5.5	2.5	101	149	2	0.35	1.90	2.90	1.80	4.5
	160	52.4	2	287	415	2000	2800	23218F3		111	133			101	149	2	0.35	1.90	2.90	1.80	4.61
	160	52.4	2	337	475	1900	2600	23218CA	23218CA/W33	112	136	5.5	2.5	101	149	2	0.25	2.70	4.00	2.60	4.82
	160	52.4	2	369	480	1900	2600	23218CA/HAC9SOW24		112	136	5.5	2.5	101	149	2	0.25	2.70	4.00	2.60	4.72
	160	52.4	2	337	475	1900	2600	23218CAK	23218CAK/W33	112	136	5.5	2.5	101	149	2	0.25	2.70	4.00	2.60	4.55
	160	67	2	334	475	1900	2600	24218X2CA/YB2		112	136			101	149	2	0.31	2.20	3.30	2.20	5.87
	190	64	3	580	660	1800	2400	22318CA	22318CA/W33	123	159	8.3	5	104	176	2.5	0.34	1.99	2.96	1.94	11.5
	190	64	3	580	660	1800	2400	22318CAF3	22318CAF3	123	159			104	176	2.5	0.34	1.99	2.96	1.94	11.2
	190	64	3	580	660	1800	2400	22318CAK	22318CAK/W33	123	159	8.3	5	104	176	2.5	0.34	1.99	2.96	1.94	11.1
	190	64	3	580	660	1800	2400	22318ACA		123	159			104	176	2.5	0.34	1.99	2.96	1.94	9.44
	190	64	3	400	505	1800	2400	22318		121	159			104	176	2.5	0.36	1.87	2.79	1.83	8.62
	190	64	3	400	505	1800	2400	22318K	22318K/W33	121	159	8.3	5	104	176	2.5	0.36	1.87	2.79	1.83	8.43
	190	43	3	580	660	2400	3200	21318CA/W33		112	150	8.3	4.5	104	176	2.5	0.24	2.80	4.20	2.80	5.82
95	170	43	2.1	361	428	2400	3200	22219CA	22219CA/W33	119	148	8.3	3	107	158	2	0.24	2.80	4.20	2.80	4.68
	170	43	2.1	361	428	2400	3200	22219CAK	22219CAK/W33	119	148	8.3	3	107	158	2	0.24	2.80	4.20	2.80	4.48
	200	45	3	404	466	2400	3200	21319CA/W33		112	150	8.3	4.5	107	158	2	0.24	2.80	4.20	2.80	7.48
	200	67	3	637	727	1800	2400	22319		128	167			109	186	2.5					10.4
	200	67	3	637	727	1800	2400	22319CA	22319CA/W33	128	167	8.3	5	109	186	2.5	0.34	1.99	2.96	1.94	10.5
	200	67	3	637	727	1800	2400	22319CAF3	22319CAK	128	167			109	186	2.5	0.34	1.99	2.96	1.94	10.5
	200	67	3	637	727	1800	2400	22319CAKF3	22319CAKF3/W33	128	167	8.3	5	109	186	2.5	0.34	1.99	2.96	1.94	10.3

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				kN		r/min				mm				mm							
100	150	37	1.5	215	400	2400	3200	23020CA	-	116	135	-	-	110	140	1.5	0.23	2.90	4.40	2.80	2.52
	150	50	1.5	271	445	2400	3200	24020CA/W33	-	115	133	5.5	3	110	140	1.5	0.30	2.25	3.35	2.20	3.18
	165	52	2	347	510	2000	2800	23120CA	23120CA/W33	121	143	5.5	3	110	155	2	0.30	2.90	4.40	2.80	4.42
	165	52	2	347	510	2000	2800	23120CAK/W33	23120CAK/W33	121	143	5.5	3	110	155	2	0.30	2.90	4.40	2.80	4.26
	165	52	2	347	465	2000	2800	23120K/W33	23120K/W33	121	143	5.5	3	110	155	2	0.30	2.25	3.35	2.20	4.44
	180	46	2.1	404	466	2200	3000	22220	22220	126	156			112	168	2					5.24
	180	46	2.1	404	466	2200	3000	22220CA	22220CA/W33	124	156	8.3	3	112	168	2	0.24	2.80	4.20	2.80	5.18
	180	46	2.1	404	466	2200	3000	22220CAF3	22220CAF3	124	156			112	168	2	0.24	2.80	4.20	2.80	5.10
	180	46	2.1	404	466	2200	3000	22220CAK	22220CAK/W33	124	156	8.3	3	112	168	2	0.24	2.80	4.20	2.80	4.96
	180	60.3	2.1	400	570	1700	2200	23220F1/W33	23220F1/W33	125	153	9.5	4	112	168	2					6.39
	180	60.3	2.1	451	610	1700	2200	23220CA	23220CA/W33	125	153	9.5	4	112	168	2	0.33	2.00	3.00	2.00	6.52
	180	60.3	2.1	451	610	1700	2200	23220CAK/W33	23220CAK/W33	125	153	9.5	4	112	168	2	0.33	2.00	3.00	2.00	6.21
	215	47	3	385	490	1700	2200	21320CA	21320CA	138	179			114	201	2.5					8.74
	215	73	3	774	903	1700	2200	22320CA	22320CA/W33	138	179	11.1	5	114	201	2.5	0.35	1.90	2.90	1.80	13.8
	215	73	3	774	903	1700	2200	22320CAF3	22320CAF3	138	179			114	201	2.5	0.35	1.90	2.90	1.80	13.4
	215	73	3	774	903	1700	2200	22320CAK	22320CAK/W33	138	179	11.1	5	114	201	2.5	0.35	1.90	2.90	1.80	13.8
105	175	56	2	402	550	1900	2700	23121CA	23121CAL	127	151			115	165	2	0.31	2.20	3.30	2.20	5.48
	175	56	2	402	550	1900	2700	23121CA/W33	23121CA/W33	127	151	5.5	3	115	165	2	0.31	2.20	3.30	2.20	5.35
110	170	45	2	295	460	2200	3000	23022CA	23022CA/W33	128	150	7.5	3	120	160	2	0.25	2.70	4.00	2.60	3.58
	170	45	2	295	460	2200	3000	23022CAF3	23022CAF3/W33	128	150	7.5	3	120	160	2	0.25	2.70	4.00	2.60	3.54
	170	60	2	394	589	2100	2800	24022CA	24022CA/W33	128	150	5.5	3	120	160	2	0.32	2.09	3.11	2.04	4.98
	170	60	2	394	589	2100	2800	24022CA/W33A	24022CA/W33A	128	150	5.5	3	120	160	2	0.32	2.09	3.11	2.04	4.90
	180	56	2	409	580	1900	2600	23122CA	23122CAK/C3W33	132	156	5.5	3	120	170	2	0.30	2.25	3.35	2.20	5.73
	180	56	2	409	580	1900	2600	23122CAF3	23122CAF3	132	156			120	170	2	0.30	2.25	3.35	2.20	5.70
	180	56	2	409	580	1900	2600	23122CAK/W33	23122CAK/W33	132	156	5.5	3	120	170	2	0.30	2.25	3.35	2.20	5.51
	180	82	3	510	870	1000	1400	24122X2TN1/YA6	24122X2TN1/YA6	123	148										7.56
	180	69	2	494	750	1000	1400	24122F1/W33	24122F1/W33	131	153	5.5	2.5	120	170	2					6.91
	180	69	2	494	750	1000	1400	24122CA	24122CA/W33	131	153	5.5	2.5	120	170	2	0.35	1.90	2.90	1.80	6.92
	200	53	2.1	530	610	2000	2800	22222CA	22222CA/W33	139	173	8.3	4	122	188	2	0.26	2.60	3.90	2.50	7.43
	200	53	2.1	530	610	2000	2800	22222CAF3	22222CAF3	139	173			122	188	2	0.26	2.60	3.90	2.50	7.37
	200	53	2.1	530	610	2000	2800	22222CAK	22222CAK/W33	139	173	8.3	4	122	188	2	0.26	2.60	3.90	2.50	7.25
	200	69.8	2.1	570	727	1600	2000	23222CA	23222CA/W33	138	168	12	5	122	188	2	0.34	1.99	2.96	1.94	10.1
	200	69.8	2.1	570	727	1600	2000	23222CAF3	23222CAF3/W33	138	168	12	5	122	188	2	0.34	1.99	2.96	1.94	9.79
	200	69.8	2.1	570	727	1600	2000	23222CAK	23222CAK/W33	138	168	12	5	122	188	2	0.34	1.99	2.96	1.94	9.83
	200	69.8	2.1	570	727	1600	2000	23222CAF3	23222CAF3	138	168			122	188	2	0.34	1.99	2.96	1.94	9.77

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	200	69.8	2.1	490	740	1700	2200	23222/W33	-	139	168	12	5	122	188	2	0.35	1.90	2.90	2.90	9.54
	240	80	3	900	1060	1600	2000	22322CA	22322CA/W33	151	197	13.9	6	122	188	2.5	0.31	2.20	3.30	3.30	18.9
	240	80	3	900	1060	1600	2000	22322CAF3	22322CAF3	151	197			122	188	2.5	0.31	2.20	3.30	3.30	18.7
	240	80	3	900	1060	1600	2000	22322CAK	22322CAK/W33	151	197	13.9	6	122	188	2.5	0.31	2.20	3.30	3.30	18.5
	240	50	3	420	490	1600	2000	21322CA/W33		150	202	7.5	3								11.7
120	180	46	2	340	495	2000	2800	23024CA	23024CA/W33	139	162	5.5	3	130	170	2	0.23	2.90	4.40	4.40	4.44
	180	46	2	340	495	2000	2800	23024CAK		139	162			130	170	2	0.23	2.90	4.40	4.40	4.42
	180	46	2	340	495	2000	2800	23024CAF3/W33		139	162	5.5	3	130	170	2	0.23	2.90	4.40	4.40	4.34
	180	46	2	340	495	2000	2800	23024ACA/W33A		139	162	7	4	130	170	2					4.39
	180	60	2	410	660	1600	2000	24024CA	24024CA/W33	139	158	5.5	4	130	170	2	0.31	2.20	3.30	3.30	5.83
	180	60	2	410	660	1600	2000	24024CA/W513		139	158	5.5	4	130	170	2	0.31	2.20	3.30	3.30	5.79
	180	60	2	410	660	1600	2000	24024F1/W33		139	158	5.5	4	130	170	2					5.5
	200	62	2	490	715	1800	2400	23124CA/W33	23124CAK/W33	146	174	5.5	3	130	190	2	0.30	2.30	3.40	3.40	12.2
	200	62	2	430	715	1900	2600	23124/W33		146	174	5.5	3	130	190	2	0.31	2.20	3.30	3.30	7.97
	200	62	2	430	715	1900	2600	23124K		146	174	5.5	3	130	190	2	0.31	2.20	3.30	3.30	7.73
	200	80	2	620	925	1400	1800	24124CA	24124CA/W33	146	167	5.5	3	130	190	2	0.30	2.30	3.40	3.40	10
	200	80	2	620	925	1400	1800	24124CAF3		146	167			130	190	2	0.30	2.30	3.40	3.40	9.95
	200	80	2	620	925	1400	1800	24124CAK30/W33		146	167	5.5	3	130	190	2	0.30	2.30	3.40	3.40	9.88
	215	58	2.1	600	730	1900	2600	22224CA	22224CAF3	149	187			132	203	2	0.26	2.60	3.90	3.90	9.87
	215	58	2.1	600	730	1900	2600	22224CA/W33		149	187	11.1	4	132	203	2	0.26	2.60	3.90	3.90	9.53
	215	58	2.1	600	730	1900	2600	22224CAK	22224CAK/W33	149	187	11.1	4	132	203	2	0.26	2.60	3.90	3.90	9.76
	215	58	2.1	600	730	1900	2600	22224CAF3	22224CAF3/W33	149	187	11.1	4	132	203	2	0.26	2.60	3.90	3.90	9.68
	215	76	2.1	660	940	1500	1900	23224CA	23224CA/W33	150	182	8.3	5	132	203	2	0.35	1.90	2.90	2.90	12.1
	215	76	2.1	660	940	1500	1900	23224CAF3/W33		150	182	8.3	5	132	203	2	0.35	1.90	2.90	2.90	12.0
	215	76	2.1	660	940	1500	1900	23224CAK/W33	23224CAK/W33	150	182	8.3	5	132	203	2	0.35	1.90	2.90	2.90	11.9
	240	100	2	570	925	1500	1900	24124X3CA/C9WN33		146	167			130	190	2	0.38	1.80	2.60	2.60	21.3
	260	86	3	920	1060	1400	1800	22324	22324/W33	157	218			134	246	2.5					21.7
	260	86	3	920	1060	1400	1800	22324K	22324K/W33	157	218			134	246	2.5					21.3
	260	86	3	920	1060	1400	1800	22324KF3	22324KF3/W33	157	218			134	246	2.5					21.1
	260	86	3	920	1060	1400	1800	22324F3	22324F3/W33	157	218			134	246	2.5					21.2
	260	86	3	920	1100	1400	1800	22324CA	22324CA/W33	165	215	13.9	6	134	246	2.5	0.34	1.99	2.96	2.96	23.3
	260	86	3	920	1100	1400	1800	22324CAN/W33		165	215	13.9	6	134	246	2.5	0.34	1.99	2.96	2.96	23.1
	260	86	3	920	1100	1400	1800	22324CAF3	22324CAK	165	215			134	246	2.5	0.34	1.99	2.96	2.96	23.1
	260	86	3	920	1100	1400	1800	22324CAK/W33	22324CAK/W33	165	215	13.9	6	134	246	2.5	0.34	1.99	2.96	2.96	22.8
	260	86	3	920	1100	1400	1800	22324ACA		165	215			134	246	2.5	0.34	1.99	2.96	2.96	22.8

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
130	200	52	2	410	580	1900	2600	23026CA	23026CA/W33	153	179	9.5	4	140	190	2	0.24	2.80	4.20	2.80	7.04
	200	52	2	410	580	1900	2600	23026CAF3	23026CAF3/W33	153	179	9.5	4	140	190	2	0.24	2.80	4.20	2.80	6.75
	200	52	2	410	580	1900	2600	23026CAK		153	179			140	190	2	0.24	2.80	4.20	2.80	6.68
	200	52	2	410	580	1900	2600	23026CAKF3	23026CAKF3/W33	153	179	9.5	4	140	190	2	0.24	2.80	4.20	2.80	6.57
	200	52	2	370	670	1900	2600	23026NR		153	176			140	190	2					6.38
	200	69	2	510	810	1800	2400	24026CA/W33	24026CA/W513	151	175	5.5	3	140	190	2	0.32	2.09	3.11	2.04	7.76
	200	69	2	510	820	1800	2400	24026F1/W33		151	175	5.5	3	140	190	2					7.72
	210	64	2	530	790	1700	2200	23126CA	23126CA/W33	156	183	8.3	4	140	200	2	0.28	2.40	3.50	2.50	10.7
	210	64	2	530	790	1700	2200	23126CAKF3/W33		156	183	8.3	4	140	200	2	0.28	2.40	3.50	2.50	10.1
	210	80	2	650	980	1700	2200	24126CA	24126CA/W33	153	180	8.3	4	140	200	2	0.35	1.90	2.90	1.80	10.6
	210	80	2	650	980	1700	2200	24126CAK/W33		153	180	8.3	4	140	200	2	0.35	1.90	2.90	1.80	10.2
	210	80	2	650	980	1700	2200	24126CAK30/W33		153	180	8.3	4	140	200	2	0.35	1.90	2.90	1.80	10.4
	220	73	3	740	1000	1700	2200	23226X3CAQ1/HG2R63		157	188			140	210	2	0.32	2.09	3.11	2.04	11.3
	230	64	3	700	880	1800	2400	22226CA	22226CA/W33	162	200	10	5	144	216	2.5	0.27	2.50	3.70	2.50	12.4
	230	64	3	700	880	1800	2400	22226CAK	22226CAK/W33	162	200	10	5	144	216	2.5	0.27	2.50	3.70	2.50	12.2
	230	64	3	700	880	1800	2400	22226CAKF3		162	200			144	216	2.5	0.27	2.50	3.70	2.50	12.1
	230	80	3	580	910	1400	1800	23226/W33		164	194	12	5	144	216	2.5	0.34	1.99	2.96	1.94	14.9
	230	80	3	740	1020	1300	1700	23226CA	23226CA/W33	161	194	12	5	144	216	2.5	0.33	2.00	3.00	2.00	15.9
	230	80	3	740	1020	1300	1700	23226CAF3	23226CAF3/W33	161	194	12	5	144	216	2.5	0.33	2.00	3.00	2.00	15.8
	230	80	3	740	1020	1300	1700	23226CAF3/HAC9SQW20X		161	194	12	5	144	216	2.5	0.33	2.00	3.00	2.00	15.8
	230	80	3	740	1020	1300	1700	23226CAK	23226CAKF3	161	194			144	216	2.5	0.33	2.00	3.00	2.00	15.9
	280	93	4	810	1250	1300	1700	22326	22326/W33	176	235	16.7	6	148	262	3					27.2
	280	93	4	810	1250	1300	1700	22326K	22326K/W33	176	235	16.7	6	148	262	3					26.6
	280	93	4	810	1250	1300	1700	22326F3		176	235			148	262	3					27.1
	280	93	4	810	1250	1300	1700	22326KF3		176	235			148	262	3					26.5
	280	93	4	1060	1300	1300	1700	22326CA	22326CA/W33	178	232	16.7	6	148	262	3	0.34	1.99	2.96	1.94	28.9
	280	93	4	1060	1300	1300	1700	22326CAF3	22326CAF3/W33	178	232	16.7	6	148	262	3	0.34	1.99	2.96	1.94	28.4
	280	93	4	1060	1300	1300	1700	22326CAK	22326CAK/W33	178	232	16.7	6	148	262	3	0.34	1.99	2.96	1.94	26.3
280	93	4	1060	1300	1300	1700	22326ACA		178	232			148	262	3	0.34	1.99	2.96	1.94	28.9	
280	93	4	1060	1300	1300	1700	22326CAQ1/HA		178	232			148	262	3	0.34	1.99	2.96	1.94	28.9	
140	210	53	2	440	655	1800	2400	23028	23028/W33	162	187	8.3	4	150	200	2					6.8
	210	53	2	440	655	1800	2400	23028K	23028K/W33	162	187	8.3	4	150	200	2					6.36
	210	53	2	440	655	1800	2400	23028F3	23028F3/W33	162	187	8.3	4	150	200	2					6.73
	210	53	2	440	655	1800	2400	23028KF3	23028KF3/W33	162	187	8.3	4	150	200	2					6.29
	210	53	2	440	706	1800	2400	23028CA	23028CA/W33	162	188	8.3	4.5	150	200	2	0.23	2.90	4.40	2.80	6.70
	210	53	2	440	706	1800	2400	23028CAF3		162	188			150	200	2	0.23	2.90	4.40	2.80	6.68

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	210	53	2	440	706	1800	2400	23028CAK	23028CAKF3	162	188	-	-	150	200	2	0.23	2.90	4.40	2.80	6.50
	210	69	2	540	960	1800	2400	24028CA	24028CA/W33	162	185	5.5	3	150	200	2	0.30	2.30	3.40	2.20	8.31
	210	69	2	540	960	1800	2400	24028CAK30/W33		162	185	5.5	3	150	200	2	0.30	2.30	3.40	2.20	8.17
	211.5	69	2	540	960	1800	2400	24028CAX1/W33		162	183	5.5	3	150	200	2	0.30	2.30	3.40	2.20	8.58
	225	68	2.1	550	865	1600	2000	23128	23128/W33	166	196			152	213	2					10.9
	225	68	2.1	550	865	1600	2000	23128K	23128K/W33	166	196	8.3	5	152	213	2					10.9
	225	68	2.1	550	865	1600	2000	23128F3		166	196			152	213	2					10.8
	225	68	2.1	550	865	1600	2000	23128KF3		166	196			152	213	2					10.7
	225	68	2.1	550	865	1600	2000	23128N		166	196			152	213	2					10.9
	225	68	2.1	600	935	1600	2000	23128CA	23128CA/W33	166	196	8.3	5	152	213	2	0.29	2.30	3.50	2.40	10.9
	225	68	2.1	600	935	1600	2000	23128CAN		166	196	8.3	5	152	213	2	0.29	2.30	3.50	2.40	10.9
	225	85	2.1	730	1150	850	1100	24128CA	24128CA/W33	165	192	8.3	4.5	152	213	2	0.37	1.80	2.70	1.80	13.5
	225	85	2.1	730	1150	850	1100	24128CAF3		165	192			152	213	2	0.37	1.80	2.70	1.80	13.5
	225	85	2.1	730	1150	850	1100	24128CAK30/W33		165	192	8.3	4.5	152	213	2	0.37	1.80	2.70	1.80	13.2
	250	68	3	680	1000	1700	2200	22228CA	22228CA/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	16.2
	250	68	3	680	1000	1700	2200	22228CAF3	22228CAF3/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	15.6
	250	68	3	680	1000	1700	2200	22228CAK	22228CAK/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	15.0
	250	68	3	680	1000	1700	2200	22228CAKF3/W33		176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	14.8
	250	88	3	770	1095	1300	1700	23228K/W33		172	215	15	6	154	236	2.5	0.36	1.87	2.79	1.83	18.3
	250	88	3	910	1365	1200	1600	23228CA/W33	23228CAF3/W33	173	215	15	6	154	236	2.5	0.33	2.00	3.00	2.00	19.7
	250	88	3	910	1365	1200	1600	23228CAK/W33		173	215	15	6	154	236	2.5	0.33	2.00	3.00	2.00	19.3
	300	102	4	1230	1950	1100	1500	22328CA	22328CA/W33	191	249	16.7	7	158	282	3	0.35	1.90	2.90	1.80	36.0
	300	102	4	1230	1950	1100	1500	22328CAF3	22328CAQ1/HA	191	249			158	282	3	0.35	1.90	2.90	1.80	35.9
	300	102	4	1230	1950	1100	1500	22328CAK	22328CAK/W33	191	249	16.7	7	158	282	3	0.35	1.90	2.90	1.80	36.2
	300	102	4	1230	1950	1100	1500	22328CAN/W33		191	249	16.7	7	158	282	3					36.0
	300	102	4	1230	1950	1100	1500	22328CAQ1/HA		191	249	16.7	7	158	282	3					36.2
	300	118	4	1230	1950	1100	1500	23328CA		190	243			158	280	3	0.40	1.69	2.51	1.65	41.7
150	225	56	2.1	485	795	1700	2200	23030CA	23030CA/W33	174	201	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80	8.01
	225	56	2.1	485	795	1700	2200	23030CAK		174	201	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80	7.41
	225	56	2.1	485	795	1700	2200	23030CAF3		174	201			162	213	2	0.22	3.00	4.60	2.80	7.96
	225	75	2.1	620	1050	1300	1700	24030CA/W33	24030CAK30/W33	175	196	5.5	3	162	213	2	0.31	2.20	3.30	2.20	9.39
	225	75	2.1	620	990	1300	1700	24030CA/W33X		175	196	5.5	3	162	213	2	0.31	2.20	3.30	2.20	9.39
	250	80	2.1	660	625	1400	1800	23130	23130/W33	182	216	11.1	5	162	238	2					15.8
	250	80	2.1	660	625	1400	1800	23130K	23130K/W33	182	216	11.1	5	162	238	2					16.1
	250	80	2.1	660	625	1400	1800	23130F3	23130F3/W33	182	216	11.1	5	162	238	2					15.6
	250	80	2.1	660	625	1400	1800	23130KF3		182	216	11.1	5	162	238	2					15.9

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsm	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	250	80	2.1	790	1140	1400	1800	23130CA	23130CA/W33	182	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	16.5
	250	80	2.1	790	1140	1400	1800	23130CAK	23130CAKF3/W33	182	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	16.4
	250	80	2.1	790	1140	1400	1800	23130CAF3	23130CAF3/W33	182	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	16.4
	250	100	2.1	970	1450	800	1000	24130CA	24130CA/W33	180	208	8.3	4.5	162	238	2	0.37	1.80	2.70	1.80	19.2
	250	100	2.1	970	1450	800	1000	24130CAK30/C3W33		180	208	8.3	4.5	162	238	2	0.37	1.80	2.70	1.80	19.0
	270	73	3	810	1050	1600	2000	22230CA	22230CA/W33	189	234	12	6	164	256	2.5	0.26	2.60	3.90	2.50	18.7
	270	73	3	810	1050	1600	2000	22230CAF3	22230CAK	189	234			164	256	2.5	0.26	2.60	3.90	2.50	18.5
	270	73	3	810	1050	1600	2000	22230ACA		189	234			164	256	2.5	0.26	2.60	3.90	2.50	18.2
	270	96	3	1030	1550	1100	1500	23230CA	23230CA/W33	188	228	11.1	6	164	256	2.5	0.35	1.90	2.90	1.80	26.6
	270	96	3	1030	1550	1100	1500	23230CAK/W33		188	228	11.1	6	164	256	2.5	0.35	1.90	2.90	1.80	26.3
	270	96	3	1030	1550	1100	1500	23230CA/HCW33		188	228	11.1	6	164	256	2.5	0.35	1.90	2.90	1.80	26.5
	300	118	4	1780	1110			23328CA		190	243			168	275	3					41.7
	320	108	4	1390	1810	1000	1400	22330CA	22330CA/W33	203	265	16.7	9	168	302	3	0.36	1.87	2.79	1.83	41.0
	320	108	4	1390	1810	1000	1400	22330CA/HCW33		203	265	16.7	9	168	302	3	0.36	1.87	2.79	1.83	40.6
	320	108	4	1390	1810	1000	1400	22330CAK	22330CAKF3	203	265			168	302	3	0.36	1.87	2.79	1.83	41.1
160	240	60	2.1	415	860	1700	2200	23032	23032/W33	185	213	11.1	4	172	228	2					10.2
	240	60	2.1	415	860	1700	2200	23032K	23032K/W33	185	213	11.1	4	172	228	2					9.89
	240	60	2.1	415	860	1700	2200	23032F3	23032F3/W33	185	213	11.1	4	172	228	2					10
	240	60	2.1	415	860	1700	2200	23032KF3		185	213			172	228	2					9.7
	240	60	2.1	555	875	1700	2200	23032CA	23032CA/W33	186	216	8.3	5	172	228	2	0.22	3.00	4.60	2.80	10.0
	240	60	2.1	555	875	1700	2200	23032CAK/W33		186	216	8.3	5	172	228	2	0.22	3.00	4.60	2.80	9.5
	240	60	2.1	555	875	1700	2200	23032CAF3		186	216			172	228	2	0.22	3.00	4.60	2.80	9.97
	240	80	2.1	600	1020	1100	1500	24032K/W33		183	209	8.3	5	172	228	2					12.1
	240	80	2.1	710	1210	1100	1500	24032CA/W33	24032CAF3/W33	183	209	8.3	5	172	228	2	0.30	2.30	3.40	2.20	13.2
	240	80	2.1	710	1210	1100	1500	24032CAK30F3	24032CAK30/W33	183	209	8.3	5	172	228	2	0.30	2.30	3.40	2.20	13.2
	240	80	2.1	710	1210	1200	1600	24032K/W33		184	209	8.3	5	172	228	2	0.32	2.09	3.11	2.04	12.1
	270	86	2.1	930	1300	1300	1700	23132	23132/W33	188	234	13.9	6	172	258	2					21.2
	270	86	2.1	930	1300	1300	1700	23132K		188	234			172	258	2					20.6
	270	86	2.1	930	1300	1300	1700	23132F3	23132F3/W33	188	234			172	258	2					21
	270	86	2.1	930	1300	1300	1700	23132N		188	234			172	258	2					21
	270	86	2.1	930	1430	1300	1700	23132CA	23132CA/W33	188	234	13.9	6	172	258	2	0.30	2.30	3.40	2.20	21.9
	270	86	2.1	930	1430	1300	1700	23132CAK		188	234			172	258	2	0.30	2.30	3.40	2.20	21.7
	270	86	2.1	930	1430	1300	1700	23132CAF3		195	234			172	258	2	0.30	2.30	3.40	2.20	21.9
	270	86	2.1	685	1140	1400	1800	23132K		193	231			172	258	2	0.34	1.99	2.96	1.94	20.6
	270	86	2.1	930	1300	1400	1800	23132CK	23132CK/W33	193	231	13.9	6	172	258	2	0.34	1.99	2.96	1.94	21.2
	270	109	2.1	1120	1690	700	900	24132CA/HAC9SOW20X		195	225	8.3	4	172	258	2	0.40	1.69	2.51	1.65	23.4

CA 型轴承



基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	270	109	2.1	1120	1690	700	900	24132CA/W33	24132CA/W33X	193	225	8.3	4	172	258	2	0.40	1.69	2.51	1.65	24.6
	270	109	2.1	1120	1690	700	900	24132CAK30/C3W33		193	225	8.3	4	172	258	2	0.40	1.69	2.51	1.65	24.2
	290	80	3	950	1380	1500	1900	22232CA	22232CAF3	193	249			174	276	2.5	0.27	2.50	3.70	2.50	24.6
	290	80	3	950	1300	1500	1900	22232CAK		201	249			174	276	2.5	0.27	2.50	3.70	2.50	23.8
	290	80	3	950	1300	1500	1900	22233ACA		201	249			174	276	2.5	0.27	2.50	3.70	2.50	24.1
	290	104	3	900	1600	1000	1400	23232		198	244			174	276	2.5					36.1
	290	104	3	900	1600	1000	1400	23232K		198	244			174	276	2.5					34.3
	290	104	3	900	1600	1000	1400	23232F3		198	244			174	276	2.5					35.9
	290	104	3	1160	1770	1000	1400	23232CA	23232CA/W33	189	244	13.9	7	174	276	2.5	0.35	1.90	2.90	1.80	30.2
	290	104	3	1160	1770	1000	1400	23232CAK	232232CAK/W33	200	244	13.9	7	174	276	2.5	0.35	1.90	2.90	1.80	28.9
	340	114	4	1200	1800	950	1300	22332	22332/W33	212	283	16.7	7	178	322	3					50.2
	340	114	4	1200	1800	950	1300	22332K	22332K/W33	212	283	16.7	7	178	322	3					49.5
	340	114	4	1200	1800	950	1300	22332F3		212	283			178	322	3					49.7
	340	114	4	1200	1800	950	1300	22332KF3		212	283			178	322	3					49
	340	114	4	1520	1860	950	1300	22332CAK		201	284			178	322	3	0.35	1.90	2.90	1.80	52.8
	340	114	4	1520	2050	950	1300	22332CA	22332CA/W33	201	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.6
	340	114	4	1520	2050	950	1300	22332CAF3	22332CAF3/W33	216	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.8
	340	114	4	1520	2050	950	1300	22332CAK		201	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.6
	340	114	4	1200	1800	950	1300	22332Q1/W33		212	283	16.7	7	178	322	3					50.2
	340	114	4	1520	2050	950	1300	22332CAKF3/W33		216	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.8
170	230	45	2	310	715	1700	2200	23934CA/W33		189	212	5.5	3	182	213	2					5.45
	260	67	2.1	510	1070	1600	2000	23034	23034/W33	200	231	11.1	5	182	248	2					13.7
	260	67	2.1	510	1070	1600	2000	23034K	23034K/W33	200	231	11.1	5	182	248	2					13.3
	260	67	2.1	510	1070	1600	2000	23034/YA2		200	231			182	248	2					13.6
	260	67	2.1	510	1070	1600	2000	23034F3		200	231			182	248	2					13.6
	260	67	2.1	510	1070	1600	2000	23034KF3		200	231			182	248	2					13.2
	260	67	2.1	670	1090	1600	2000	23034CA	23034CA/W33	198	231	11.1	5	182	248	2	0.23	2.90	4.40	2.80	14.1
	260	67	2.1	670	1090	1600	2000	23034CAK		198	231			182	248	2	0.23	2.90	4.40	2.80	13.8
	260	67	2.1	670	1090	1600	2000	23034CAF3		198	231			182	248	2	0.23	2.90	4.40	2.80	14.0
	260	67	2.1	670	1090	1600	2000	23034CAKF3/W33		198	231	11.1	5	182	248	2	0.23	2.90	4.40	2.80	13.5
	260	90	2.1	885	1500	1000	1400	24034CA	24034CA/W33	198	227	8.3	4	182	248	2	0.33	2.00	3.00	2.00	17.8
	260	90	2.1	885	1500	1000	1400	24034CAK/W33		188	226	8.3	4	198	249	2	0.33	2.00	3.00	2.00	16.8
	280	88	2.1	890	1450	1200	1600	23134	23134/W33	204	246	13.9	6	182	268	2					23
	280	88	2.1	890	1450	1200	1600	23134K	23134K/W33	204	246	13.9	6	182	268	2					21.6
	280	88	2.1	890	1450	1200	1600	23134F3		204	246			182	268	2					22.6
	280	88	2.1	890	1450	1200	1600	23134KF3		204	246			182	268	2					21.2

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min				mm				mm							
-	280	88	2.1	990	1530	1200	1600	23134CA	-	204	243	-	-	182	268	2	0.30	2.30	3.40	2.20	25.7
	280	88	2.1	990	1530	1200	1600	23134CAK	23134CAK/W33	204	243	13.9	6	182	268	2	0.30	2.30	3.40	2.20	24.3
	280	109	2.1	1160	1830	670	850	24134CA	24134CA/W33	203	237	8.3	5	182	268	2	0.37	1.80	2.70	1.80	25.4
	280	109	2.1	1160	1830	670	850	24134CAK30/W33		203	237	8.3	5	182	268	2	0.37	1.80	2.70	1.80	24.7
	280	88	2.1	990	1530	1200	1600	23134CAKF3		204	243			182	268	2	0.30	2.30	3.40	2.20	24.6
	280	109	2.1	1160	1770	670	850	24134CA/W33		203	237	8.3	5	182	268	2	0.37	1.80	2.70	1.80	24.8
	280	109	2.1	1160	1770	670	850	24134CA		203	237			182	268	2	0.37	1.80	2.70	1.80	25.4
	310	86	4	1060	1450	1300	1700	22234CA	22234CA/W33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	26.8
	310	86	4	1060	1450	1300	1700	22234CAK	22234CAK/W33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	26.2
	310	86	4	1060	1390	1300	1700	22234K/W33		215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	27.8
	310	110	4	1330	1930	950	1300	23234CA	23234CA/W33	214	261	13.9	7	188	292	3	0.34	1.99	2.96	1.94	38.0
	310	110	4	1330	1930	950	1300	23234CAF3/W33		214	261	13.9	7	188	292	3	0.34	1.99	2.96	1.94	37.7
	360	120	4	1300	2110	950	1300	22334	22334/W33	228	300	16.7	7	188	342	3					60.1
	360	120	4	1300	2110	950	1300	22334K	22334K/W33	228	300	16.7	7	188	342	3					60.1
	360	120	4	1300	2110	950	1300	22334KF3		228	300			188	342	3					59.4
	360	120	4	1300	2110	950	1300	22334F3		228	300			188	342	3					60
	360	120	4	1670	2120	950	1300	22334CA	22334CA/W33	231	299	16.7	7	188	342	3	0.34	1.99	2.96	1.94	62.6
	360	120	4	1670	2120	950	1300	22334CA/W33X		231	299	16.7	7	188	342	3	0.34	1.99	2.96	1.94	62.6
	360	120	4	1670	2120	950	1300	22334ACA		231	299			188	342	3	0.34	1.99	2.96	1.94	61.4
	360	120	4	1670	2120	950	1300	22334CA/HCEW33		231	299	16.7	7	188	342	3	0.34	1.99	2.96	1.94	62.6
	360	136	4	1670	2280	950	1300	23334X2/W33		229	292	22.3	12	188	342	3					68.6
180	250	52	2	430	830	1700	2200	23936CAF3/W33	23936CA/W33	204	230	9.5	4	190	240	2	0.18	3.80	5.60	3.60	7.4
	280	74	2.1	700	1320	1400	1800	23036	23036/W33	214	247	13.9	6	192	268	2					18.1
	280	74	2.1	700	1320	1400	1800	23036K	23036K/W33	214	247	13.9	6	192	268	2					17.6
	280	74	2.1	700	1320	1400	1800	23036/YA2		214	247			192	268	2					18
	280	74	2.1	700	1320	1400	1800	23036F3		214	247			192	268	2					17.6
	280	74	2.1	700	1320	1400	1800	23036KF3		214	247			192	268	2					17.2
	280	74	2.1	790	1280	1400	1800	23036CA	23036CA/W33	214	247	13.9	7.5	192	268	2	0.25	2.70	4.00	2.60	17.7
	280	74	2.1	790	1280	1400	1800		23036CAK/W33	214	247	13.9	7.5	192	268	2	0.25	2.70	4.00	2.60	16.8
	280	74	2.1	790	1280	1400	1800	23036CAF3		214	247			192	268	2	0.25	2.70	4.00	2.60	17.6
	280	100	2.1	1030	1750	950	1300	24036CA	24036CA/W33	210	242	8.3	4	192	268	2	0.33	2.00	3.00	2.00	25.7
	280	100	2.1	1030	1750	950	1300	24036CAF3/W33	24036CAK30F3/W33	210	242	8.3	4	192	268	2	0.33	2.00	3.00	2.00	25.6
	300	96	3	1140	1670	1100	1500	23136		216	259			194	286	2.5					28.6
	300	96	3	1140	1670	1100	1500	23136K	23136K/W33	216	259	13.9	6	194	286	2.5					28.2
	300	96	3	1140	1670	1100	1500	23136F3		216	259			194	286	2.5					28.2
	300	96	3	1140	1670	1100	1500	23136KF3	23136KF3/W33	216	259	13.9	6	194	286	2.5					27.8

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsm	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	300	96	3	1140	1800	1100	1500	23136CA	23136CA/W33	216	259	13.9	6	194	286	2.5	0.30	2.30	3.40	2.20	27.6
	300	96	3	1140	1800	1100	1500	23136CAF3	23136CAK	216	259			194	286	2.5	0.30	2.30	3.40	2.20	27.0
	300	96	3	1140	1800	1100	1500	23136CAK	23136CAK/W33	216	259	13.9	6	194	286	2.5	0.30	2.30	3.40	2.20	27.5
	300	96	3	1140	1800	1100	1500	23136CAK30/W33		216	259			194	286	2.5					26.8
	300	96	3	1140	1800	1100	1500	23136CAK/W33		216	259	13.9	6	194	286	2.5	0.30	2.30	3.40	2.20	26.5
	300	118	3	1330	2050	630	800	24136CA	24136CA/W33	212	252	11.1	6	194	286	2.5	0.37	1.80	2.70	1.80	33.0
	300	118	3	1330	2050	630	800	24136CA/HCW33YA2		212	252	11.1	6	194	286	2.5	0.37	1.80	2.70	1.80	32.8
	300	118	3	1330	2050	630	800	24136CAQ1		212	252			194	286	2.5	0.37	1.80	2.70	1.80	33.0
	320	86	4	1120	1550	1300	1700	22236	22236K	224	278			198	302	3					31.1
	320	86	4	1120	1550	1300	1700	22236KF3		224	278			198	302	3					30.2
	320	86	4	1120	1550	1300	1700	22236F3	22236F3/W33	224	278			198	302	3					30.8
	320	86	4	1120	1550	1300	1700	22236CA	22236CA/W33	224	278	16.7	6	198	302	3	0.26	2.60	3.90	2.50	29.4
	320	86	4	1120	1550	1300	1700	22236CAF3	22236CAQ1	224	278			198	302	3	0.26	2.60	3.90	2.50	29.2
	320	86	4	1120	1550	1300	1700	22236CAK	22236CAKF3	224	278			198	302	3	0.26	2.60	3.90	2.50	29.3
	320	86	4	1120	1550	1300	1700	22236CAK/W33	22236CAK/W33T	224	278	16.7	6	198	302	3	0.26	2.60	3.90	2.50	29.1
	320	112	4	1290	2270	900	1200	23236/W33		222	271	13.9	7	198	302	3					40
	320	112	4	1430	2130	900	1200	23236CA	23236CA/W33	222	271			198	302	3	0.35	1.90	2.90	1.80	38.7
	320	112	4	1430	2130	900	1200	23236CA/HCW33	23236CA/HCW33YA2	222	271	13.9	7	198	302	3	0.35	1.90	2.90	1.80	38.6
	320	112	4	1430	2130	900	1200	23236CAF3	23236CAF3/W33	222	271	13.9	7	198	302	3	0.35	1.90	2.90	1.80	38.5
	320	112	4	1430	2130	900	1200	23236CAK/W33	23236CAKF3/W33	222	271	13.9	7	198	302	3	0.35	1.90	2.90	1.80	38.4
	380	126	4	1400	2300	900	1200	22336	22336/W33	241	317	22.3	8	198	362	3					70.9
	380	126	4	1400	2300	900	1200	22336K	22336K/W33	241	317	22.3	8	198	362	3					69.8
	380	126	4	1400	2300	900	1200	22336F3		241	317			198	362	3					70.5
	380	126	4	1900	2400	900	1200	22336CA	22336CA/W33	242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	72.2
	380	126	4	1900	2400	900	1200	22336CAF3/W33		242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	71.3
	380	126	4	1900	2400	900	1200	22336CAK	22336CAK/W33	242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	71.3
190	260	52	2	440	855	1600	2000	23938CA/W33		213	238	5.5	3	202	248	2	0.18	3.80	5.60	3.60	8.29
	280	67	2.5	660	1210			20638		220	253			204	264	2					14.5
	290	75	2.1	720	1300	1300	1700	23038	23038/W33	222	259	13.9	5	202	278	2					19.6
	290	75	2.1	720	1300	1300	1700	23038K	23038K/W33	222	259	13.9	5	202	278	2					19.1
	290	75	2.1	720	1300	1300	1700	23038F3	23038F3/W33	222	259	13.9	5	202	278	2					19.4
	290	75	2.1	820	1450	1300	1700	23038CA	23038CA/W33	224	259	13.9	5	202	278	2	0.23	2.90	4.40	2.80	17.3
	290	75	2.1	820	1450	1300	1700	23038CAF3		224	259			202	278	2	0.23	2.90	4.40	2.80	17.2
	290	75	2.1	820	1450	1300	1700	23038CAK	23038CAK/W33	224	259	13.9	5	202	278	2	0.23	2.90	4.40	2.80	16.8
	290	75	2.1	820	1450	1300	1700	23038CAKF3/W33		224	259	13.9	5	202	278	2	0.23	2.90	4.40	2.80	16.5
	290	100	2.1	1060	1840	950	1300	24038CA	24038CA/W33	219	252	8.3	4.5	202	278	2	0.31	2.20	3.30	2.20	22.9

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)	
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo		
mm				KN		r/min				mm				mm								
-	290	100	2.1	1060	1840	950	1300	24038CAF3	-	219	252	-	-	202	278	2	0.31	2.20	3.30	2.20	22.8	
	290	100	2.1	1060	1840	950	1300	24038CA/W33X		219	252	8.3	4.5	202	278	2	0.31	2.20	3.30	2.20	22.4	
	320	104	3	1100	1880	1000	1400	23138	23138K/W33	232	271			204	306	2.5					35.3	
	320	104	3	1100	1880	1000	1400	23138K		232	271	13.9	7	204	306	2.5					35.3	
	320	104	3	1100	1880	1000	1400	23138F3		232	271			204	306	2.5					34.9	
	320	104	3	1100	1880	1000	1400	23138KF3		232	271			204	306	2.5					34.9	
	320	104	3	1300	1980	1000	1400	23138CA	23138CA/W33	232	276	13.9	7	204	306	2.5	0.31	2.20	3.30	2.20	34.3	
	320	104	3	1300	1980	1000	1400	23138CAK/W33		232	276	13.9	7	204	306	2.5					30	
	320	128	3	1520	2400	600	750	24138CA		226	267	11.1	6	204	306	2.5	0.40	1.69	2.51	1.65	41.9	
	320	128	3	1520	2400	600	750	24138CAF3		226	267	11.1	6	204	306	2.5	0.40	1.69	2.51	1.65	41.8	
	320	128	3	1520	2400	600	750	24138CA/HCW33	24138CA/C9W33	226	267	11.1	6	204	306	2.5	0.40	1.69	2.51	1.65	41.8	
	320	128	3	1520	2400	600	750	24138CAK30F3/W33		226	267	11.1	6	204	306	2.5	0.40	1.69	2.51	1.65	41.5	
	340	92	4	1210	1620	1200	1600	22238F3		235	293			208	322	3					35.6	
	340	92	4	1210	1620	1200	1600	22238CA		235	293			208	322	3	0.26	2.60	3.90	2.50	37.4	
	340	92	4	1210	1620	1200	1600	22238CA/W33	22238CA/W33	235	293	16.7	6	208	322	3	0.26	2.60	3.90	2.50	37.4	
	340	92	4	1210	1620	1200	1600	22238CAF3		235	293			208	322	3	0.26	2.60	3.90	2.50	37.2	
	340	92	4	1210	1620	1200	1600	22238CAK		235	293	16.7	6	208	322	3	0.26	2.60	3.90	2.50	37.3	
	340	92	4	1210	1620	1200	1600	22238ACA		235	293			208	322	3	0.26	2.60	3.90	2.50	37.0	
	340	120	4	1580	2400	850	1100	23238CA	23238CA/W33	237	288	16.7	7	208	322	3	0.35	1.90	2.90	1.80	44.8	
	340	120	4	1580	2400	850	1100	23238CAK/W33		237	288	16.7	7	208	322	3	0.35	1.90	2.90	1.80	43.1	
	400	132	5	2010	2630	850	1100	22338CA		22338CA/W33	257	334	22.3	8	212	378	4	0.34	1.99	2.96	1.94	82.2
	400	132	5	2010	2630	850	1100	22338CAF3			257	334			212	378	4	0.34	1.99	2.96	1.94	81.7
	400	132	5	2010	2630	850	1100	22338ACA	257		334	22.3	12	212	378	4	0.34	1.99	2.96	1.94	81.0	
	400	132	5	2010	2630	850	1100	22338ACA/W33X	257		334	22.3	12	212	378	4	0.34	1.99	2.96	1.94	81.0	
200	280	60	2.1	520	1150	1600	2000	23940CAF3/W33	23940CA/W33	226	254	9.5	4	212	268	2	0.19	3.61	5.38	3.53	12.1	
	280	186	1.1					H2344													16.8	
	310	82	2.1	660	1370	1200	1600	23040		236	271	13.9	6	212	298	2					25	
	310	82	2.1	660	1370	1200	1600	23040K		236	271	13.9	6	212	298	2					24.5	
	310	82	2.1	660	1370	1200	1600	23040F3	23040F3/W33	236	271	13.9	6	212	298	2					24.7	
	310	82	2.1	660	1370	1200	1600	23040KF3		236	271			212	298	2					24.2	
	310	82	2.1	950	1560	1200	1600	23040CA		237	276	13.9	7.5	212	298	2	0.25	2.70	4.00	2.60	22.6	
	310	82	2.1	950	1560	1200	1600	23040CAK		237	276	13.9	7.5	212	298	2	0.25	2.70	4.00	2.60	22.4	
	310	109	2.1	1230	2130	900	1200	24040CA/W33	24040CAK30/W33	233	268	11.1	5	212	298	2	0.33	2.00	3.00	2.00	31.3	
	340	112	3	1520	2240	950	1300	23140CA		243	292	16.7	7	214	326	2.5	0.31	2.20	3.30	2.20	43.8	
	340	112	3	1520	2240	950	1300	23140CA/HCW33YA2		243	292	16.7	7	214	326	2.5	0.31	2.20	3.30	2.20	43.5	
	340	112	3	1520	2240	950	1300	23140CAK		243	292	16.7	7	214	326	2.5	0.31	2.20	3.30	2.20	42.6	
	340	140	3	1710	3800	5601	700	24140CA/W33	23140CAK/W33	242	284	11.1	6	214	326	2.5	0.40	1.70	2.50	1.60	51.5	

CA 型轴承







基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号				其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑					d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min						mm				mm							
-	340	140	3	1710	3800	5601	700	24140CAK30F3	24140CAK30F3/W33		242	283	11.1	6	214	326	2.5	0.40	1.70	2.50	1.60	51.3	
	360	98	4	1390	1830	1100	1500	22240	22240/W33		248	309			218	342	3					44.2	
	360	98	4	1390	1830	1100	1500	22240K	22240K/W33		248	309			218	342	3					43.4	
	360	98	4	1390	1830	1100	1500	22240F3	22240KF3/W33		248	309			218	342	3					43.8	
	360	98	4	1390	1950	1100	1500	22240CA	22240CA/W33		250	309	16.7	6	218	342	3	0.26	2.60	3.90	2.50	44.7	
	360	98	4	1390	1950	1100	1500	22240CAF3	22240CAF3		250	309	16.7	6	218	342	3	0.26	2.60	3.90	2.50	44.3	
	360	98	4	1390	1950	1100	1500	22240CAK	22240CAK/W33		250	309	16.7	6	218	342	3	0.26	2.60	3.90	2.50	44	
	360	128	4	1770	2570	850	1100	23240CA/W33			249	304	16.7	8	218	342	3	0.35	1.90	2.90	1.80	53.4	
	360	128	4	1770	2570	850	1100	23240CA/HCW33			249	304	16.7	8	218	342	3	0.35	1.90	2.90	1.80	53.4	
	360	128	4	1770	2570	850	1100	23240CAK	23240CAK/W33		249	304	16.7	8	218	342	3	0.35	1.90	2.90	1.80	52	
	360	128	4	1770	2730	900	1200	23240/W33			248	304	16.7	8	218	342	3	0.36	1.87	2.79	1.83	56.5	
	420	138	5	2200	2760	850	1100	22340	22340/W33		269	350	22.3	8	222	398	4					96	
	420	138	5	2200	2760	850	1100	22340K	22340K/W33		269	350	22.3	8	222	398	4					94	
	420	138	5	1620	2740	850	1100	22340F3	22340F3/W33		269	350	22.3	8	222	398	4					95	
	420	138	5	2200	2860	850	1100	22340CA	22340CAF3		269	350			222	398	4	0.34	1.99	2.96	1.94	95.7	
	420	138	5	2200	2860	850	1100	22340CA/W33			269	350			222	398	4	0.34	1.99	2.96	1.94	96.7	
	420	138	5	2200	2860	850	1100	22340CAK	22340CAK/W33		269	350	22.3	8	222	398	4	0.34	1.99	2.96	1.94	94	
	420	138	5	2000	2860	850	1100	22340CK	22340CK/W33		269	350	22.3	8	222	398	4	0.34	1.99	2.96	1.94	90	
	420	165	5	2220	2860	750	950	23340CAF3			266	340			222	398	4	0.40	1.68	2.50	1.64	95.2	
220	300	60	2.1	520	1190	1500	1900	23944CA/W33	23944CAF3/C3W33		242	278	8.3	4	232	288	2	0.18	3.80	5.60	3.60	12.9	
	340	90	3	1160	1900	1100	1500	23044CA	23044CA/W33		260	303	13.9	6	234	326	2.5	0.24	2.80	4.20	2.80	30.3	
	340	90	3	1160	1900	1100	1500	23044CAK	23044CAK/W33		260	303	13.9	6	234	326	2.5	0.24	2.80	4.20	2.80	31.6	
	340	90	3	1160	1900	1100	1500	23044CA/YA2			260	303			234	326	2.5	0.25	2.75	4.09	2.69	31.5	
	340	90	3	1160	1900	1100	1500	23044CAF3			260	303			234	326	2.5	0.24	2.80	4.20	2.80	31	
	340	118	3	1480	2500	850	1100	24044CA	24044CA/W33		257	295	11.1	5	234	326	2.5	0.33	2.00	3.00	2.00	39.3	
	340	118	3	1480	2500	850	1100	24044CA/W33X			257	295	11.1	5	234	326	2.5	0.33	2.00	3.00	2.00	38.9	
	340	118	3	1480	2500	850	1100	24044CAN			257	295	11.1	5	234	326	2.5	0.33	2.00	3.00	2.00	39.1	
	340	118	3	1480	2500	850	1100	24044CAK30/W33			257	295	11.1	5	234	326	2.5	0.33	2.00	3.00	2.00	38.5	
	340	118	3	1480	2500	850	1100	24044CAF3	24044CAF3/W33		257	295	11.1	5	234	326	2.5	0.33	2.00	3.00	2.00	39	
	370	120	4	1500	1160	900	1200	23144	23144/W33		265	310	16.7	7	238	352	3					54.8	
	370	120	4	1500	1160	900	1200	23144K			265	310			238	352	3					53.2	
	370	120	4	1500	1160	900	1200	23144F3	23144F3/W33		265	310	16.7	7	238	352	3					54.3	
	370	120	4	1500	1160	900	1200	23144KF3/W33			265	310	16.7	7	238	352	3					52.4	
	370	120	4	1710	2710	900	1200	23144CA	23144CA/W33		268	320	16.7	7	238	352	3	0.30	2.30	3.40	2.20	54.7	
	370	120	4	1510	2750	900	1200	23144CA/HG2W33			268	320	16.7	7	238	352	3	0.30	2.30	3.40	2.20	54.6	
	370	120	4	1510	2710	900	1200	23144CAK	23144CAK/W33		268	320	16.7	7	238	352	3	0.30	2.30	3.40	2.20	53.1	

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	370	120	4	1730	2710	900	1200	23144CAKF3/W33	22244CAK/W33	268	320	16.7	7	238	352	3	0.30	2.30	3.40	2.20	52.7
	370	150	4	2010	3410	500	630	24144CA/W33	24144CAK30	262	308	11.1	6	238	352	3	0.40	1.70	2.50	1.60	66.4
	400	108	4	1670	2400	950	1300	22244CA	22244CA/W33	275	344	16.7	8	238	382	3	0.27	2.50	3.70	2.50	63.5
	400	108	4	1670	2400	950	1300	22244CA/W33X	22244CAF3	275	344	16.7	8	238	382	3	0.27	2.50	3.70	2.50	63
	400	108	4	1670	2400	950	1300	22244CAK	22244CAK/W33T	275	344			238	382	3	0.27	2.50	3.70	2.50	63.2
	400	144	4	2240	3280	750	950	23244CA/W33	23244CAK/W33	272.5	334	16.7	8	238	382	3	0.36	1.89	2.81	1.85	77.3
	460	145	5	2570	3450	980	1360	22344CA	22344CA/W33	293.5	384.5	22.3	12	246	422	4	0.32	2.09	3.11	2.04	119
	460	145	5	2570	3450	980	1360	22344CAK/W33		293.5	384.5	22.3	12	246	422	4	0.32	2.09	3.11	2.04	119
240	320	60	2.1	630	1360	1300	1700	23948CA	23948CA/W33	266	295	9.5	4	252	308	2	0.15	4.50	6.70	4.50	15.1
	320	60	2.1	660	1450	1300	1700	23948CAF3	23948CAF3/W33	266	295	9.5	4	252	308	2	0.15	4.50	6.70	4.50	14.9
	330	60	2.1	610	1280	1200	1500	23948X1CAF3/HA		266	295			252	308	2	0.15	4.50	6.70	4.50	15.8
	330	190	1.1					OH3152H													23.3
	360	92	3	1230	2110	1000	1400	23048	23048/W33	278	317	13.9	6	254	346	2.5					34.9
	360	92	3	1230	2110	1000	1400	23048Q1/YA2		278	317			254	346	2.5					34.8
	360	92	3	1230	2110	1000	1400	23048K	23048K/W33	278	317	13.9	6	254	346	2.5					33.9
	360	92	3	1230	2110	1000	1400	23048F3	23048F3/W33	278	317	13.9	6	254	346	2.5					34.5
	360	92	3	1230	2110	1000	1400	23048KF3	23048KF3/W33	278	317	13.9	6	254	346	2.5					33.5
	360	92	3	1230	2080	1000	1400	23048CA	23048CA/W33	278	322	13.9	6	254	346	2.5	0.24	2.80	4.20	2.80	34.2
	360	92	3	1230	2080	1000	1400	23048CAQ1/YA2		278	322			254	346	2.5	0.24	2.80	4.20	2.80	34.2
	360	92	3	1230	2080	1000	1400	23048CAK	23048CAK/W33	278	322	13.9	6	254	346	2.5	0.24	2.80	4.20	2.80	32.2
	360	92	3	1230	2080	1000	1400	23048CAQ1		278	322			254	346	2.5	0.24	2.80	4.20	2.80	34.2
	360	118	3	1520	2800	800	1000	24048CA		278	318	11.1	5	254	346	2.5	0.30	2.30	3.40	2.20	44.1
	360	118	3	1520	2800	800	1000	24048CA/W33X		278	318	11.1	5	254	346	2.5	0.30	2.30	3.40	2.20	43.7
	360	118	3	1520	2800	800	1000	24048CAK30	24048CAK30/W33	278	318	11.1	5	254	346	2.5	0.30	2.30	3.40	2.20	44.1
	400	128	4	1550	2930	850	1100	23148	23148/W33	290	347	16.7	8	258	382	3					47.5
	400	128	4	1550	2930	850	1100	23148K	23148K/W33	290	347	16.7	8	258	382	3					65.6
	400	128	4	1550	2930	850	1100	23148F3		290	347			258	382	3					66.7
	400	128	4	1980	3040	850	1100	23148CA	23148CA/W33	289	345	16.7	8	258	382	3	0.31	2.21	3.29	2.16	68.2
	400	128	4	1980	3040	850	1100	23148CAK/W33		289	345	16.7	8	258	382	3	0.31	2.21	3.29	2.16	66.5
	400	160	4	2280	3750	480	600	24148/W33		285	336	11.1	6	258	382	3					81
	400	160	4	2280	3750	480	600	24148F3/W33		285	336	11.1	6	258	382	3					80
	400	160	4	2280	3705	480	600	24148CA	24148CA/W33	285	336	11.1	6	258	382	3	0.40	1.70	2.50	1.60	79
	400	160	4	2280	3705	480	600	24148CAK/W33		285	336	11.1	6	258	382	3	0.40	1.70	2.50	1.60	75.6
	400	160	4	2280	3705	480	600	24148CAK30/C3W33	24148CAK30F3/W33	285	336	11.1	6	258	382	3	0.40	1.70	2.50	1.60	77.8
	440	120	4	2090	3250	900	1200	22248CA	22248CA/W33	290	383	18	7	258	422	3	0.27	2.50	3.70	2.50	85.3
	440	120	4	2090	3250	900	1200	22248CAK	22248CAK/W33	290	383	18	7	258	422	3	0.27	2.50	3.70	2.50	82.4

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsm	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	440	120	4	2090	3250	900	1200	22248CAF3/C9W33	22248CAF3/W33	303	379	18	7	258	422	3	0.27	2.50	3.70	2.50	85
	440	120	4	2090	3250	900	1200	22248K/W33		305	379	18	7	258	422	3	0.27	2.50	3.70	2.50	84.1
	440	160	4	2950	3950	670	850	23248CA/W33		292	369	22.3	8	258	422	3	0.35	1.90	2.90	1.80	102
	440	160	4	2950	3950	670	850	23248CAK/W33		292	369	22.3	8	258	422	3	0.35	1.90	2.90	1.80	102
	440	160	4	2950	3800	670	850	23248CAF3		292	369			258	422	3	0.35	1.90	2.90	1.80	102
	500	155	5	2950	4100	650	800	22348CA	22348CA/W33	330	390	22.3	12	297	439	4	0.32	2.09	3.11	2.04	146
	500	155	5	2950	4100	650	800	22348CAK	22348CAK/W33	330	390	22.3	12	297	439	4	0.32	2.09	3.11	2.04	145
241	410	128	4	1860	3350	1000	1400	2650CA		299	356			272	382	3	0.29	2.30	3.50	2.40	59.4
250	350	195	1.1					OH3156H													25.9
	360	75	2.1	902	1750	1100	1500	23952CA	23952CA/W33	294	328	12	6	272	348	2	0.18	3.80	5.60	3.60	21.6
	410	128	4	1860	3350			2650CA		298	356			271	390	3					59.4
260	360	75	2.1	835	1750	1100	1500	23952CA	23952CA/W33	287	331	12	6	271	348	2	0.18	3.80	5.60	3.60	24.4
	360	75	2.1	835	1750	1100	1500	23952CAK/W33		287	331	12	6	271	348	2	0.18	3.80	5.60	3.60	24.2
	400	104	4	1520	2550	900	1200	23052CA	23052CA/W33	306	357	16.7	7	278	382	3	0.23	2.90	4.40	2.80	49.8
	400	104	4	1520	2550	900	1200	23052CAF3		306	357			278	382	3	0.23	2.90	4.40	2.80	49.5
	400	104	4	1520	2550	900	1200	23052CAK	23052CAK/W33	306	357	16.7	7	278	382	3	0.23	2.90	4.40	2.80	46.9
	400	104	4	1520	2550	900	1200	23052CAKF3		306	357			278	382	3	0.23	2.90	4.40	2.80	46.6
	400	140	4	1930	3500	700	900	24052CA/W33		300	347	11.1	6	278	382	3	0.33	2.00	3.00	2.00	66.7
	400	140	4	1930	3800	700	900	24052CA/W33X3YA		300	347	11.1	6	278	382	3	0.33	2.00	3.00	2.00	67.2
	400	140	4	1930	3500	700	900	24052CAF3	24052CAF3/W33	300	347	11.1	6	278	382	3	0.33	2.00	3.00	2.00	64.9
	400	140	4	1930	3500	700	900	24052CAK30/W33		300	347	11.1	6	278	382	3	0.33	2.00	3.00	2.00	65.2
	440	144	4	2420	3700	800	1000	23152	23152/W33	318	372	16.7	12	278	422	3					92.1
	440	144	4	2420	3700	800	1000	23152K		318	372			278	422	3					90.2
	440	144	4	2420	3750	800	1000	23152K/HG2YA6		310	380			278	422	3					94.4
	440	144	4	2420	3750	800	1000	23152K/HG2YAB		310	380			278	422	3					94.4
	440	144	4	2420	3700	800	1000	23152F3		318	372			278	422	3					91.6
	440	144	4	2420	3750	800	1000	23152CA	23152CA/W33	310	379	16.7	9	278	422	3	0.31	2.20	3.30	2.20	88.9
	440	144	4	2420	3750	800	1000	23152CAK	23152CAK/W33	310	379	16.7	9	278	422	3	0.31	2.20	3.30	2.20	88.7
	440	144	4	2420	3750	800	1000	23152CAK/HG2C9YA6W33		310	379	16.7	9	278	422	3	0.31	2.20	3.30	2.20	88.7
	440	144	4	2420	3750	800	1000	23152CAK30	23152CAK30/W33	310	379	16.7	9	278	422	3	0.31	2.20	3.30	2.20	86.7
	440	180	4	2850	4560	430	530	24152CA	24152CA/W33	312	366	13.9	8	278	422	3	0.39	1.73	2.58	1.69	115
	440	180	4	2850	4560	430	530	24152CA/HAW36	24152CAQ1/HAW36	312	366	13.9	8	278	422	3	0.39	1.73	2.58	1.69	114
	440	180	4	2850	4560	430	530	24152CAK30/W33		312	366	13.9	8	278	422	3	0.39	1.73	2.58	1.69	112
	440	180	4	2850	4560	430	530	24152CAF3/W33		312	366	13.9	8	278	422	3	0.39	1.73	2.58	1.69	113

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min				mm				mm							
-	440	180	4	2420	4380	430	530	SX-24152	-	312	366	13.9	8	278	422	3	0.39	1.73	2.58	1.69	114
	480	130	5	2520	3600	850	1100	22252CA	22252CA/W33	330	414	22.3	12	282	458	4	0.27	2.51	3.74	2.45	106
	480	130	5	2520	3600	850	1100	22252CAK		330	414			282	458	4	0.27	2.51	3.74	2.45	105
	480	174	5	2800	4600	630	800	23252/HG2W33T		320	404	27	16	282	458	4					138
	480	174	5	3090	4750	630	800	23252CA/W33		320	404	22.3	8	282	458	4	0.35	1.90	2.90	1.80	141
	480	174	5	3090	4750	630	800	23252CA/W33X	23252CA/W33T	320	404	22.3	12	282	458	4	0.35	1.90	2.90	1.80	141
	480	174	5	3090	4750	630	800	23252CA/W33XB		320	404	25	15	282	458	4	0.35	1.90	2.90	1.80	141
	480	174	5	3090	4750	630	800	23252CAF3/W33		320	404	22.3	8	282	458	4	0.35	1.90	2.90	1.80	138
	480	174	5	3090	4750	630	800	23252CAK/W33		320	404	22.3	8	282	458	4	0.35	1.90	2.90	1.80	139
	480	174	5	3090	4750	630	800	23252CAKL/W33		320	404	22.3	8	282	458	4	0.35	1.90	2.90	1.80	137
	540	165	6	3370	4700	630	800	22352	22352/W33	349	446	24	10	288	512	5					191
	540	165	6	3370	4700	630	800	22352K	22352K/W33	349	446	24	10	288	512	5					190
	540	165	6	3370	4700	630	800	22352F3		349	446			288	512	5					190
	540	165	6	3370	4750	630	800	22352CA/W33		349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	186
	540	165	6	3370	4750	630	800	22352CAK/W33		349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	185
	540	165	6	3370	4750	630	800	22352CAF3	22352CAF3/W33	349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	184
	540	165	6	3370	4750	630	800	22352CAKF3/W33		349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	183
280	350	52	2	435	1230	1200	1500	23856CA	23856CA/W33	305	328	8.3	4.5	278	348	2	0.13	5.36	7.98	5.24	11.4
	380	75	2.1	805	1850	1000	1400	23956CA	23956CA/W33	316	346	12	6	292	368	2	0.18	3.80	5.66	3.72	25.3
	380	75	2.1	805	1850	1000	1400	23956CAQ1/W33		316	346	12	6	292	368	2	0.18	3.80	5.66	3.72	25.7
	420	106	4	1640	2810	850	1100	23056	23056/W33	326	371	16.7	7	296	400	3					54.9
	420	106	4	1640	2810	850	1100	23056K	23056K/W33	326	371	16.7	7	296	400	3					53.4
	420	106	4	1640	2810	850	1100	23056X1K		326	371			296	400	3					57.6
	420	106	4	1640	2810	850	1100	23056F3	23056F3/W33	326	371	16.7	7	296	400	3					54.6
	420	106	4	1640	2810	850	1100	23056KF3		326	371			296	400	3					53.1
	420	106	4	1640	2850	850	1100	23056CA	23056CA/W33	323	377	16.7	7	298	402	3	0.23	2.91	4.40	2.84	56.8
	420	106	4	1640	2850	850	1100	23056CAK	23056CAK/W33	323	377	16.7	7	298	402	3	0.23	2.91	4.40	2.84	56.6
	420	140	4	2050	3700	670	850	24056CA/W33		317	366	11.1	6	298	402	3	0.31	2.20	3.30	2.20	66.8
	420	140	4	2050	3700	670	850	24056CA/W33X	24056CA/W33YA2	317	366	11.1	6	298	402	3	0.31	2.20	3.30	2.20	68.6
	420	140	4	2050	3700	670	850	24056CAF3	24056CAF3/W33	317	366	11.1	6	298	402	3	0.31	2.20	3.30	2.20	66.8
	420	140	4	2050	3700	670	850	24056CAK30F3	24056CAK30F3/W33	317	366	11.1	6	298	402	3	0.31	2.20	3.30	2.20	67.2
	460	146	5	2520	4200	800	1000	23156/W33		337	400	16.7	8	302	438	4	0.32	2.09	3.11	2.04	99.1
	460	146	5	2520	4150	750	950	23156CA	23156CA/W33	333	400	16.7	8	302	438	4	0.30	2.30	3.40	2.20	104
	460	146	5	2520	4150	750	950	23156CAF3		333	400			302	438	4	0.30	2.30	3.40	2.20	103
	460	146	5	2520	4150	750	950	23156CAKF3		333	400			302	438	4	0.30	2.30	3.40	2.20	100
	460	146	5	2520	4150	750	950	23156CAK	23156CAK/W33	333	400	16.7	8	302	438	4	0.30	2.30	3.40	2.20	96.9

CA 型轴承



基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	460	130	5	2520	4150	750	950	23156X2CA	-	332	404	-	-	302	438	4	0.27	2.50	3.72	2.45	87
	460	180	5	2900	4950	400	500	24156CA	24156CA/W33	327	393	13.9	8	302	438	4	0.40	1.70	2.50	1.60	118
	460	180	5	2900	4950	400	500	24156CAK30/W33		327	393	13.9	8	302	438	4	0.40	1.70	2.50	1.60	115
	460	180	5	2900	4950	400	500	24156CA/HCW33		327	388	13.9	8	302	438	4	0.40	1.70	2.50	1.60	118
	500	130	5	2570	3600	800	1000	22256CA	22256CA/W33	347	435	22.3	8	302	478	4	0.26	2.60	3.90	2.50	118
	500	130	5	2570	3600	800	1000	22256CAK	22256CAK/W33	347	435	22.3	8	302	478	4	0.26	2.60	3.90	2.50	117
	500	130	5	2570	3600	800	1000	22256CAF3		347	435			302	478	4	0.26	2.60	3.90	2.50	117
	500	130	5	2130	3300	850	1100	22256/W33		348	435	22.3	8	302	478	4	0.27	2.50	3.70	2.50	113
	500	130	5	2130	3300	850	1100	22256K/W33		348	435	22.3	8	302	478	4	0.27	2.50	3.70	2.50	109
	500	176	5	3080	5100	600	750	23256CA	23256CA/W33	340	424	22.3	8	302	478	4	0.35	1.90	2.90	1.80	147
	500	176	5	3080	5100	600	750	23256CAF3	23256CAF3/W33	340	424	22.3	8	302	478	4	0.35	1.90	2.90	1.80	146
	500	176	5	3080	5100	600	750	23256CAK/W33		340	424	22.3	8	302	478	4	0.35	1.90	2.90	1.80	153
	500	176	5	3080	5100	600	750	23256CAKF3/W33		340	424	22.3	8	302	478	4	0.35	1.90	2.90	1.80	142
	580	175	6	3200	5600	600	750	22356	22356/W33	372	485	22.3	8	314	552	5	0.32	2.09	3.11	2.04	230
	580	175	6	3800	5700	600	750	22356CA	22356CA/W33	364	485	22.3	8	308	552	5	0.30	2.30	3.40	2.20	221
	580	175	6	3800	5700	600	750	22356CAK/W33		364	485	22.3	8	308	552	5	0.30	2.30	3.40	2.20	217
	580	175	6	3800	5700	600	750	22356CAF3/W33		364	485	22.3	8	308	552	5	0.30	2.30	3.40	2.20	221
300	380	60	3	640	1580	950	1400	23860CA/W33		328	357	12	6	310	368	2	0.13	5.20	7.70	5.00	16.8
	380	60	3	640	1580	950	1400	23860CAK/W33		328	357	12	6	310	368	2	0.13	5.20	7.70	5.00	17.6
	420	90	3	1140	2500	950	1300	23960CA/W33		339	382	15	6	314	406	2.5	0.19	3.60	5.30	3.60	40.1
	420	90	3	1140	2500	950	1300	23960CAK		339	382			314	406	2.5	0.19	3.60	5.30	3.60	39
	420	118	3	1580	3600	950	1300	24960CA/W33		339	376	18	7								52.8
	460	118	4	1400	3200	800	1000	23060	23060/W33	351	406	16.7	7	322	438	3					70.4
	460	118	4	1400	3200	800	1000	23060F3	23060F3/W33	351	406	16.7	7	322	438	3					69.8
	460	118	4	1400	3200	800	1000	23060KF3	23060KF3/W33	351	406	16.7	7	322	438	3					69.5
	460	118	4	1400	3200	800	1000	23060KQ1/W33		351	409	16.7	7	318	442	3					70.3
	460	118	4	2010	3450	800	1000	23060CA	23060CA/W33	351	409	16.7	7	318	442	3	0.23	2.90	4.40	2.80	75.8
	460	118	4	2010	3450	800	1000	23060CAK	23060CAK/W33	351	409	16.7	7	318	442	3	0.23	2.90	4.40	2.80	73.6
	460	118	4	2010	3450	800	1000	23060CAK/C9W33		351	409	16.7	7	318	442	3	0.23	2.90	4.40	2.80	73.4
	440	105	4	2010	3450	870	1100	23060X3CA/W33		343	396	16.7	9	302	438	3	0.21	3.16	4.71	3.09	54.7
	460	118	4	2010	3450	800	1000	23060CAF3/W33		351	409	16.7	7	318	442	3	0.23	2.90	4.40	2.80	74.9
	460	160	4	2570	4750	600	750	24060CA	24060CA/W33	342	399	13.9	7	318	442	3	0.32	2.09	3.11	2.04	99
	500	160	5	3040	4850	670	850	23160CA	23160CA/W33	356	433	16.7	8	322	478	4	0.30	2.30	3.40	2.20	127
	500	160	5	3040	4850	670	850	23160CAF1		356	433	16.7	9	322	478	4	0.30	2.30	3.40	2.20	143
	500	160	5	3040	4850	670	850	23160CA/HCEC9W33		356	433	16.7	9	322	478	4	0.30	2.30	3.40	2.20	126

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	500	160	5	3040	4850	670	850	23160CAF3	23160CAF3/C9W33	356	433	16.7	8	322	478	4	0.30	2.30	3.40	2.20	127
	500	160	5	3040	4850	670	850	23160CAKF3		356	433	16.7		322	478	4	0.30	2.30	3.40	2.20	123
	500	160	5	3040	4850	670	850	23160CAK	23160CAK/W33	356	433	16.7	9	322	478	4	0.30	2.30	3.40	2.20	123
	500	200	5	3560	5990	600	750	24160CA	24160CA/W33	356	420	13.9	6	322	478	4	0.39	1.75	2.61	1.71	160
	500	200	5	3560	5990	600	750	24160CAK30/W33		356	420	13.9	6	322	478	4	0.39	1.75	2.61	1.71	157
	540	140	5	2990	4300	750	950	22260CA	22260CA/W33	374	467			322	518	4	0.26	2.60	3.90	2.50	138
	540	140	5	2990	4300	750	950	22260CAF3	22260CAF3/W33	374	467	22.3	8	322	518	4	0.26	2.60	3.90	2.50	136
	540	140	5	2990	4300	750	950	22260CAKF3		374	467			322	518	4	0.26	2.60	3.90	2.50	136
	540	140	5	2990	4040	800	1000	22260/W33		374	467	22.3	8	322	518	4	0.27	2.50	3.70	2.50	140
	540	140	5	2990	4040	800	1000	22260K/W33		374	467	22.3	8	322	518	4	0.27	2.50	3.70	2.50	137
	540	192	5	3700	5560	530	670	23260CAF1	23260CAF3/W33	373	455	22	10	322	518	4	0.35	1.90	2.90	1.80	192
	540	192	5	3700	5560	530	670	23260CAKF1/W33	23260CAK30/W33	373	455	22	10	322	518	4	0.35	1.90	2.90	1.80	190
	540	192	5	3150	5300	530	670	23260/YA3	23260/W33YA3	373	455			322	518	4	0.35	1.90	2.90	1.80	194
	540	192	5	3700	5950	530	670	23260CA	23260CA/W33	373	455	22	10	322	518	4	0.35	1.90	2.90	1.80	190
	540	192	5	3700	5950	530	670	23260CAK/W33		373	455	22	10	322	518	4					187
	540	192	5	3700	5950	530	670	23260CA/W33T		373	455	22	10	322	518	4					193
	540	192	5	3700	5950	530	670	23260CAF1		373	455	22	10	322	518	4					194
540	192	5	3700	5950	530	670	23260CAF3/W33		373	455	22	10	322	518	4					192	
540	192	5	3700	5950	530	670	23260CAK/W33		373	455	22	10	322	518	4	0.35	1.90	2.90	1.80	189	
620	185	7.5	3950	6000			22360CA		396	523			335	586	6					271	
318	620	224	6	4350	7600			206/318/C9		424	524			348	578	5					320
320	400	60	2.1	670	1620	920	1280	23864CA/W33		346	376	13.9	6	332	388	2	0.12	5.60	8.40	5.60	20.5
	400	60	2.1	670	1620	920	1280	23864CAK/W33		346	376	13.9	6	332	388	2	0.12	5.60	8.40	5.60	20.3
	440	90	3	1360	2650	900	1200	23964CA	23964CA/W33	360	402	15	6	338	426	2.5	0.18	3.80	5.60	3.60	41.8
	440	90	3	1360	2650	900	1200	23964CAK/W33		360	405	15	6	360	427	2.5	0.18	3.80	5.60	3.60	40.4
	480	121	4	2130	3610	800	1000	23064	23064/W33	368	431	22	8	338	462	3					78.5
	480	121	4	2130	3610	800	1000	23064K		368	431										76.1
	480	121	4	2130	3610	800	1000	23064F3		368	431			338	462	3					77.5
	480	121	4	2130	3610	800	1000	23064/YA2		368	431			338	462	3					78.9
	480	121	4	2130	3900	800	1000	23064CA	23064CA/W33	368	431	16.7	8	338	462	3	0.23	2.90	4.40	2.80	84.8
	480	121	4	2130	3900	800	1000	23064CAK	23064CAK/W33	368	431	16.7	8	338	462	3	0.23	2.90	4.40	2.80	84.3
	480	121	4	2130	3900	800	1000	23064CAF3/W33		368	431	16.7	8	338	462	3	0.23	2.90	4.40	2.80	84.7
	480	160	4	2700	5100	560	700	24064CA	24064CA/W33	368	421	22	8	338	462	3	0.32	2.09	3.11	2.04	106
	480	160	4	2700	5100	560	700	24064CAF3	24064CAF3/W33	368	421	22	8	338	462	3	0.32	2.09	3.11	2.04	106
	480	160	4	2700	5100	560	700	24064CAK30/W33		368	421	22	8	338	462	3	0.32	2.09	3.11	2.04	103

CA 型轴承







基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	540	176	5	2990	5350	630	800	23164K/W33	-	387	465	22.3	12	342	518	4	-	-	-	-	165
	540	176	5	3560	5700	630	800	23164CA	23164CA/W33	389	465	22.3	8	342	518	4	0.31	2.20	3.30	2.20	200
	540	176	5	3560	5700	630	800	23164CAK	23164CAK/W33	389	465	22.3	8	342	518	4	0.31	2.20	3.30	2.20	195
	540	210	5	4040	6750	340	430	24164CA/W33	24164CA/W33T	364	455	17.7	9.5	342	518	4	0.40	1.70	2.50	1.60	206
	540	210	5	4040	6750	340	430	24164CAK30/W33		364	455	17.7	9.5	342	518	4	0.40	1.70	2.50	1.60	203
	580	150	5	3420	4660	670	850	22264CA	22264CA/W33	400	502	22.3	8	342	558	4	0.26	2.60	3.90	2.50	175
	580	150	5	3420	4660	670	850	22264CAK		400	502			342	558	4	0.26	2.60	3.90	2.50	172
	580	150	5	3420	4660	700	900	22264/W33		400	502	22.3	8	342	558	4	0.27	2.50	3.70	2.50	177
	580	150	5	3420	4660	700	900	22264K/W33		400	502	22.3	8	342	558	4	0.27	2.50	3.70	2.50	173
	580	208	5	4180	6370	500	630	23264	23264/W33	400	490			342	558	4	0.35	1.90	2.90	1.80	247
	580	208	5	4180	6820	500	630	23264CA	23264CA/W33	400	490	22.3	10	342	558	4	0.35	1.90	2.90	1.80	250
	580	208	5	4180	6820	500	630	23264CA/YA1W33		400	490	22.3	10	342	558	4	0.35	1.90	2.90	1.80	248
	580	208	5	4180	6820	500	630	23264CAF3	23264CAF3/W33	400	490	22.3	10	342	558	4	0.35	1.90	2.90	1.80	252
	580	208	5	4180	6820	500	630	23264CAKF3/W33		400	490	22.3	10	342	558	4	0.35	1.90	2.90	1.80	240
	580	208	5	4180	6820	500	630	23264CAK/W33		400	490	22.3	10	342	558	4	0.35	1.90	2.90	1.80	241
	670	200	7.5	4530	6820	450	600	22364CAK/W33		430	566	22.3	12	355	635	6					344
340	460	90	3	1390	2660	900	1200	23968CA/W33		378	423	15	6	354	446	2.5	0.17	4.00	5.90	4.00	46
	460	90	3	1390	2700	900	1200	23968CAK/W33		378	423	15	6	354	446	2.5	0.17	4.00	5.90	4.00	45.9
	460	90	3	1390	2660	900	1200	23968CAF3/W33		378	423	15	6	354	446	2.5	0.17	4.00	5.90	4.00	57.3
	520	133	5	2570	4400	700	900	23068CA	23068CA/W33	400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	115
	520	133	5	2570	4400	700	900	23068CA/W33YA1		400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	114
	520	133	5	2570	4400	700	900	23068CAK		400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	112
	520	133	5	2570	4400	700	900	23068CAF3	23068CAF3/W33	400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	114
	520	133	5	2570	4400	700	900	23068CAKF3	23068CAKF3/W33	400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	111
	520	133	5	2570	4400	700	900	23068CAK/W33		400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	111
	520	180	5	3280	5890	530	670	24068CA/W33	24068CA/C9W33	394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	137
	520	180	5	3280	5890	530	670	24068CAK/W33		394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	132
	520	180	5	3280	5890	530	670	24068CAF1/HA	24068CAF1/W33	394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	136
	520	180	5	3280	5890	530	670	24068CK30/W33		377	453	16.7	9	358	502	4	0.33	2.00	3.00	2.00	137
	520	180	5	3280	5890	530	670	24068CAF3	24068CAF3/W33	394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	136
	520	180	5	3280	5890	530	670	24068CAK30F1	24068CAK30F1/W33	394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	134
	520	180	5	3280	5890	530	670	24068CAK30F3	24068CAK30F3/W33	394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	134
	580	190	5	4040	6460	600	750	23168CA	23168CA/W33	412	497	22.3	8	362	558	4	0.31	2.20	3.30	2.20	211
	580	190	5	4040	6460	600	750	23168CAK/W33		412	497	22.3	8	362	558	4	0.31	2.20	3.30	2.20	208
	580	190	5	4040	6460	600	750	23168CAF3/W33		412	497	22.3	8	362	558	4	0.31	2.20	3.30	2.20	210
	580	190	5	4040	6460	600	750	23168CAKF3/W33		412	497	22.3	8	362	558	4	0.31	2.20	3.30	2.20	206

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	580	243	5	5040	8220	320	400	24168CA/W33	-	408	486	22.3	10	362	558	4	0.4	1.7	2.5	1.6	261
	580	243	5	5040	8220	320	400	24168CAK30/W33		408	486	22.3	10	362	558	4	0.40	1.70	2.50	1.60	256
	580	243	5	5040	8220	320	400	24168CAK30F3/W33		408	486	22.3	10	362	558	4	0.40	1.70	2.50	1.60	258
	620	224	6	4350	7600	430	530	23268		424	524			368	592	5	0.35	1.9	2.9	1.8	300
	620	224	6	5000	8150	500	700	23268CA	23268CA/W33	426	528			368	592	5	0.35	1.90	2.90	1.80	299
	620	224	6	5000	8150	500	700	23268CAK	23268CAK/W33	426	528	22.3	12	368	592	5	0.35	1.90	2.90	1.80	290
360	480	90	3	1390	3000	850	1100	23972CA	23972CA/W33	403	441	11.1	6	374	466	2.5	0.16	4.20	6.30	4.00	45.9
	480	90	3	1330	2610	850	1100	23972CAK/W33		403	441	11.1	6	374	466	2.5	0.16	4.20	6.30	4.00	46.4
	540	134	5	2610	4800	670	850	23072CA	23072CA/W33	419	486	22.3	8	382	518	4	0.23	2.90	4.40	2.80	126
	540	134	5	2610	4800	670	850	23072CAK		419	486			382	518	4	0.23	2.90	4.40	2.80	125
	540	134	5	2610	4800	670	850	23072CAF3	23072CAF1	419	486			382	518	4	0.23	2.90	4.40	2.80	125
	540	134	5	2610	4800	670	850	23072CAKF3/W33		419	486	22.3	8	382	518	4	0.23	2.90	4.40	2.80	124
	540	134	5	2610	4800	670	850	23072CAF3/HAW33	23072CAF3/W33	419	486	22.3	8	382	518	4	0.23	2.90	4.40	2.80	125
	540	180	5	3370	6220	600	750	24072CA	24072CA/W33	398	474	16.7	8	382	518	4	0.31	2.2	3.3	2.2	147
	540	180	5	3370	6220	600	750	24072CAK/W33		398	474	16.7	8	382	518	4	0.31	2.20	3.30	2.20	143
	540	180	5	3370	6220	600	750	24072CAK30		398	474			382	518	4	0.31	2.2	3.3	2.2	148
	600	192	5	3400	6200	560	700	23172K/W33		434	518	22.3	12	382	578	4	0.30	2.30	3.40	2.20	218
	600	192	5	4080	6850	560	700	23172CA	23172CA/W33	434	518	22.3	12	382	578	4	0.30	2.30	3.40	2.20	224
	600	192	5	4080	6850	560	700	23172CAK/W33		434	518	22.3	12	382	578	4	0.30	2.30	3.40	2.20	223
	600	192	5	4080	6850	560	700	23172CAKF1/W33		434	518	22.3	12	382	578	4	0.30	2.30	3.40	2.20	222
	600	243	5	5320	8840	300	380	24172CA	24172CA/W33	430	511	20	12	382	578	4	0.37	1.80	2.70	1.80	270
	600	243	5	5320	8840	300	380	24172CAW36		430	511	20	8	382	578	4	0.37	1.80	2.70	1.80	270
	600	243	5	5320	8840	300	380	24172CAF1	24172CAF1/W33	430	511	20	12	382	578	4	0.37	1.80	2.70	1.80	269
	600	243	5	5320	8840	300	380	24172CAK30/W33		430	511	20	12	382	578	4	0.37	1.80	2.70	1.80	267
	600	243	5	5320	8840	300	380	24172CAK30F1/W33	24172CAK30F3/W33	430	511	20	12	382	578	4	0.37	1.80	2.70	1.80	268
	600	243	5	5320	8840	300	380	24172CAQ1/W36		430	511	20	12	382	578	4	0.37	1.80	2.70	1.80	270
	600	243	5	5600	8400	300	380	SX-24172		430	511	20	8	382	578	4	0.37	1.80	2.70	1.80	271
	650	170	6	4200	6200	600	800	22272CA/W33		449	563	22.3	8	388	622	5	0.26	2.60	3.87	2.54	248
	650	232	6	5130	7880	400	500	23272	23272/W33	443	547			388	622	5	0.35	1.90	2.90	1.80	341
	650	232	6	5300	9050	500	700	23272CA	23272CA/W33	443	547	22.3	10	388	622	5	0.35	1.90	2.90	1.80	332
	650	232	6	5300	9050	500	700	23272CAK	23272CAK/W33	443	547			388	622	5	0.35	1.90	2.90	1.80	329
	650	232	6	5300	9050	500	700	23272CAKF3/W33		443	547	22.3	10	388	622	5	0.35	1.90	2.90	1.80	327
	750	224	7.5	5650	8600	400	500	22372CA	22372CA/W33	471	631	22.3	12	392	720	6	0.31	2.21	3.29	2.16	469
	750	224	7.5	5650	8600	400	500	22372CAK	22372CAK/W33	471	631	22.3	12	392	720	6	0.31	2.21	3.29	2.16	443
	750	224	7.5	5650	8600	400	500	22372CAF3		471	631			392	720	6	0.31	2.21	3.29	2.16	466
	750	224	7.5	5650	8600	400	500	22372CAKF3		471	631			392	720	6	0.31	2.21	3.29	2.16	441

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
380	520	106	4	1860	3900	800	1000	23976CA/W33	-	426	476	15	10	398	502	3	0.17	4.00	5.90	4.00	69.9
	520	106	4	1860	3900	800	1000	23976CAF1/W33	23976CAF3/W33	426	476	15	10	398	502	3	0.17	4.00	5.90	4.00	69.5
	560	135	5	2750	5000	630	800	23076CA	23076CA/W33	441	505	22.3	8	402	538	4	0.22	3.00	4.60	2.80	125
	560	135	5	2750	5000	630	800	23076CAK/W33		441	505	22.3	8	402	538	4	0.22	3.00	4.60	2.80	122
	560	135	5	2750	5000	630	800	23076CAF1/W33	23076CAF3/W33	441	505	22.3	8	402	538	4	0.22	3.00	4.60	2.80	129
	560	135	5	2750	5000	630	800	23076CAKF3	23076CAKF3/W33	441	505	22.3	8	402	538	4	0.22	3.00	4.60	2.80	125
	560	180	5	3420	6550	480	600	24076CA/W33		435	494	22	10	402	538	4	0.3	2.3	3.4	2.2	151
	560	180	5	3420	6550	480	600	24076CAF3	24076CAF3/W33	435	494	22.3	8	402	538	4	0.30	2.30	3.40	2.20	150
	560	180	5	3420	6550	480	600	24076CAK30F3/W33		435	494	22	10	402	538	4	0.30	2.30	3.40	2.20	153
	620	194	5	4180	7300	400	500	23176/W33		457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	237
	620	194	5	4300	7750	500	900	23176CA	23176CA/W33	457	540	22	8	402	598	4	0.3	2.3	3.4	2.2	249
	620	194	5	4300	7750	500	900	23176CA/W33T		457	540	27	16	402	598	4	0.30	2.30	3.40	2.20	248
	620	194	5	4300	7750	500	900	23176CAK	23176CAK/W33	457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	242
	620	194	5	4300	7750	500	900	23176CAK30/W33		457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	241
	620	194	5	4300	7750	500	900	23176CAF3/HAW33	23176CAF3/W33	457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	248
	620	194	5	4300	7750	500	900	23176CAKF3	23176CAKF3/W33	457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	241
	620	194	5	4300	7750	500	900	23176CAK/W33		457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	243
	620	243	5	5420	9310	300	380	24176CA/C9	24176CA/W33	457	540	16.7	9	402	598	4	0.30	2.30	3.40	2.20	296
620	243	5	5420	9310	300	380	24176CAK30/W33		457	540	16.7	9	402	598	4	0.30	2.30	3.40	2.20	290	
680	240	6	5750	9300	400	650	23276CA/W33		471	581	22.3	12	406	654	5	0.35	1.90	2.90	1.80	389	
680	240	6	5750	9300	400	650	23276CAKF3/W33	23176CAK30/W33	468	574	22.3	10	408	652	5	0.35	1.90	2.90	1.80	386	
780	230	7.5	6000	9300	350	500	22376CAF3	22376CAF3/W33	504	660			415	740	6					518	
400	540	106	4	1900	4000	750	950	23980CA/W33		445	497	15	10	418	522	3	0.17	4.00	5.90	4.00	72.9
	540	106	4	1900	4000	750	950	23980CAK/W33		445	497	15	10	418	522	3	0.17	4.00	5.90	4.00	71.3
	540	106	4	1900	4000	750	950	23980CAF1/W33	23980CAF3/W33	445	497	15	10	418	522	3	0.17	4.00	5.90	4.00	72.4
	540	100	4	1900	4000	750	950	23980X2CAF3/W33	23980X2CAF3/W33YA1	445	498	13.9	7.5	418	522	3	0.16	4.20	6.30	4.00	67.8
	590	142	5	3090	5500	630	800	23080X3CA	23080X3CA/W33	461	532	22.3	12	422	578	4	0.21	3.14	4.68	3.07	133
	600	148	5	3090	5500	600	750	23080CA	23080CA/P5W33	460	538			422	578	4	0.23	2.90	4.40	2.80	147
	600	148	5	3090	5500	600	750	23080CAK/W33		460	538	22	12	422	578	4	0.23	2.90	4.40	2.80	141
	600	148	5	3090	5500	600	750	23080CAF3	23080CAF3/W33	460	538	22	12	422	578	4	0.23	2.90	4.40	2.80	146
	600	148	5	3090	5500	600	750	23080CAKF3	23080CAKF3/W33	460	538	22	12	422	578	4	0.23	2.90	4.40	2.80	142
	600	200	5	4090	7800	450	560	24080CA/W33		458	524	22	12	422	578	4	0.30	2.30	3.40	2.20	203
	600	200	5	4090	7800	450	560	24080CAF3	24080CAF3/W33	458	524	22	12	422	578	4	0.30	2.30	3.40	2.20	202
	600	200	5	4090	7800	450	560	24080CAK30/W33		458	524	22	12	422	578	4	0.3	2.3	3.4	2.2	202
	650	200	6	4160	7860	380	480	23180/W33		475	568	22.3	8	428	622	5					210
	650	200	6	4550	8200	500	900	23180CA	23180CA/W33	480	568	22.3	8	428	622	5	0.28	2.40	3.60	2.50	273

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsm	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	650	200	6	4550	8200	500	900	23180CAF3	23180CAF3/W33	480	568	22.3	8	428	622	5	0.28	2.40	3.60	2.50	271
	650	200	6	4550	8200	500	900	23180CAKF3/W33	23180CAK/W33	480	568	22.3	8	428	622	5	0.28	2.40	3.60	2.50	264
	650	200	6	4550	8200	500	900	23180CA/HCRW33		480	568	22.3	8	428	622	5	0.28	2.40	3.60	2.50	272
	670	216	6	4200	8540	380	480	23180X3CA/W33		480	579	22.3	8	428	622	5	0.28	2.40	3.60	2.50	293
	650	250	6	5890	10070	320	400	24180CA	24180CA/W33	476	563	22.3	8	428	622	5	0.36	1.87	2.79	1.83	326
	650	250	6	5890	10070	320	400	24180CAF3	24180CAF3/W33	476	563	22.3	8	428	622	5	0.36	1.87	2.79	1.83	323
	650	250	6	5890	10070	320	400	24180CAK30/W33		476	563	22.3	8	428	622	5	0.36	1.87	2.79	1.83	320
	650	250	6	5890	10070	320	400	24180CA/HG2W33		476	563	22.3	8	428	622	5	0.36	1.87	2.79	1.83	325
	720	256	6	6450	11000	400	600	23280CA	23280CA/W33	499	606	22	10	428	692	5	0.35	1.90	2.90	1.80	468
	720	256	6	6450	11000	400	600	23280CAF3/W33	23280CAF3	499	606	22	10	428	692	5	0.35	1.90	2.90	1.80	465
	720	256	6	6450	11000	400	600	23280CAKF3/W33		499	606	22	10	428	692	5	0.35	1.90	2.90	1.80	452
	820	243	7.5	7400	10300	400	700	22380CA	22380CA/W33	520	694	22.3	12	442	790	6	0.31	2.21	3.29	2.16	623
	820	243	7.5	7400	10300	400	700	22380CA/HCW33	22380CA/W33	520	694	22.3	12	442	790	6	0.31	2.21	3.29	2.16	623
420	520	75	2.1	950	2630	750	950	23884CAK	23884CAK/W33	454	490	13.9	5	430	504	2	0.12	5.60	8.40	5.60	34.6
	560	106	4	1950	4050	700	900	23984ACA/W33		464	517	16.7	9	435	545	3	0.16	4.20	6.30	4.00	72.4
	560	106	4	1950	3950	700	900	23984CA/W33		464	517	16.7	9	435	545	3	0.16	4.20	6.30	4.00	73.6
	620	150	5	3300	6400	500	1000	23084CA	23084CA/W33	484	558			442	598	4	0.22	3.00	4.60	2.80	149
	620	150	5	3300	6400	500	1000	23084CAK/W33		484	558			442	598	4	0.22	3.00	4.60	2.80	143
	620	150	5	3300	6400	500	1000	23084CAF3	23084CAF3/W33	484	558	22	8	442	598	4	0.22	3.00	4.60	2.80	148
	620	150	5	3300	6400	500	1000	23084CAKF3	23084CAKF3/W33	484	558	22	8	442	598	4	0.22	3.00	4.60	2.80	143
	620	200	5	4180	8450	380	480	24084CA/W33	24084CA/HCW33	479	548	22.3	12	442	598	4	0.30	2.30	3.40	2.20	202
	620	200	5	4180	8450	380	480	24084CAF3/W33		479	548	22.3	12	442	598	4	0.30	2.30	3.40	2.20	201
	620	200	5	4180	8450	380	480	24084CAK30F3/W33X		479	548	22.3	12	442	598	4	0.30	2.30	3.40	2.20	197
	700	224	6	5320	9200	360	450	23184CA/W33	23184CAF3/W33	505	605	22.3	12	448	672	5	0.30	2.30	3.40	2.20	353
	700	224	6	5320	9200	360	450	23184CAK	23184CAK/W33	505	605	22.3	12	448	672	5	0.30	2.30	3.40	2.20	352
	700	224	6	5320	9200	360	450	23184CAF3	23184CAF3/W513	505	605	22.3	12	448	672	5	0.30	2.30	3.40	2.20	353
	700	280	6	7000	11950	300	380	24184CA/W33		497	599	22.3	12	448	674	5	0.38	1.80	2.60	1.70	436
	700	280	6	7000	11950	300	380	24184CAK30/W33		495	596	22.3	12	448	674	5	0.38	1.80	2.60	1.70	428
	700	280	6	7000	11950	300	380	24184CA/HCRW33		495	596	22.3	12	448	674	5	0.38	1.80	2.60	1.70	436
	760	272	7.5	7250	11900	400	550	23284CA/W33	23284CAK/W33	525	643	22	12	456	724	6	0.35	1.90	2.90	1.80	550
	760	272	7.5	7250	11900	400	550	23284CAK		525	643	22	12	456	724	6	0.35	1.90	2.90	1.80	551
	760	272	7.5	7250	11900	400	550	23284CAF3/C9W33		525	643	22	12	456	724	6	0.35	1.90	2.90	1.80	546
440	600	118	4	2413	4850	450	560	23988CAW33		492	553	16.7	8	462	578	3	0.17	4.00	5.90	4.00	101
	600	118	4	2413	4850	450	560	23988CAF3/W33		492	553	16.7	8	462	578	3	0.17	4.00	5.90	4.00	101

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsm	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	650	157	6	3550	6500	500	900	23088CA	23088CA/W33	507	585	22.3	8	468	622	5	0.22	3.00	4.60	2.80	186
	650	157	6	3550	6500	500	900	23088CAK/W33		507	585	22.3	8	468	622	5	0.22	3.00	4.60	2.80	179
	650	157	6	3550	6500	500	900	23088CAF3	23088CAF3/W33	507	585	22.3	8	468	622	5	0.22	3.00	4.60	2.80	185
	650	157	6	3550	6500	500	900	23088CAKF3	23088CAKF3/W33	507	585			468	622	5	0.22	3.00	4.60	2.80	178
	650	212	6	4550	9100	360	450	24088CA/W33		502	569	22.3	12	468	626	5	0.30	2.30	3.40	2.20	251
	650	212	6	4550	9100	360	450	24088CA/HCW33		502	569	22.3	12	468	626	5	0.30	2.30	3.40	2.20	251
	650	212	6	4550	9100	360	450	24088CAK30F3/W33		502	569	22.3	12	468	626	5	0.30	2.30	3.40	2.20	245
	720	226	6	5900	10000	400	750	23188CA	23188CA/W33	522	626			468	692	5	0.30	2.30	3.40	2.20	375
	720	226	6	5900	10000	400	750	23188CAK/W33		522	626	22.3	12	468	692	5	0.30	2.30	3.40	2.20	372
	720	280	6	7120	12500	300	380	24188CA/W33		517	618	22.3	12	468	692	5	0.37	1.80	2.70	1.80	436
	720	280	6	7120	12500	300	380	24188CAK30/W33		517	618	22.3	12	468	692	5	0.37	1.80	2.70	1.80	455
	790	280	7.5	7700	12800	350	500	23288CA/W33		548	675	22.3	12	472	578	6	0.35	1.90	2.90	1.80	611
	790	280	7.5	7700	12800	350	500	23288CAK/W33		548	675	22.3	12	472	578	6	0.35	1.90	2.90	1.80	578
460	580	118	3	1700	4655	450	560	24892CA	24892CA/W33	504	540	16.7	7	472	566	2.5	0.17	4.00	5.90	4.00	77
	580	118	3	1700	4655	450	560	24892CAK30/W33		504	540	16.7	7	472	566	2.5	0.17	4.00	5.90	4.00	82
	620	118	4	2400	5000	500	900	23992CA/W33		511	572	16.7	9	475	605	3	0.16	4.20	6.30	4.00	105
	620	110	4	2370	4750	430	530	23992X2CA/W33AYA1		511	574	16.7	9	475	605	3	0.16	4.20	6.30	4.00	96.8
	650	120	4	430	5150	420	510	23992X3CA	23992X3CA/W33	520	592	16.7	9	480	615	3	0.17	4.00	5.90	4.00	132
	680	163	6	3800	7140	500	850	23092CA	23092CA/W33	531	613	23.5	12	488	652	5	0.22	3.00	4.60	2.80	229
	680	163	6	3800	7140	500	850	23092CAF3	23092CAF3/W33	531	613	23.5	12	488	652	5	0.22	3.00	4.60	2.80	227
	680	163	6	3800	7140	500	850	23092CAKF3		531	613			488	652	5	0.22	3.00	4.60	2.80	226
	680	163	6	3800	7140	500	850	23092CAK	23092CAK/W33	531	613	23.5	12	488	652	5	0.22	3.00	4.60	2.80	228
	680	218	6	4900	10200	340	430	24092CA/W33		528	600	24	12	488	652	5	0.29	2.35	3.50	2.30	
	680	218	6	4900	10200	340	430	24092CAF3/W33		528	600	24	12	488	652	5	0.29	2.35	3.50	2.30	304
	680	218	6	4900	10200	340	430	24092CA/HCRW33		528	600	24	12	488	652	5	0.29	2.35	3.50	2.30	308
	760	240	7.5	6300	11100	350	700	23192CA	23192CA/W33	557	660	22	8	496	724	6	0.30	2.30	3.40	2.20	442
	760	240	7.5	6300	11100	350	700	23192CAK/W33		557	660	22	8	496	724	6	0.30	2.30	3.40	2.20	437
	760	240	7.5	6300	11100	350	700	23192CAF3	23192CAF3/W33	557	660	22	8	496	724	6	0.30	2.30	3.40	2.20	440
	760	240	7.5	6300	11100	350	700	23192CAKF3/W33		557	660	22	8	496	724	6	0.30	2.30	3.40	2.20	435
	760	300	7.5	7850	14400	160	200	24192CA/W33		540	639	22.3	8	496	724	6	0.37	1.80	2.70	1.80	461
	760	300	7.5	7850	14400	160	200	24192CAK30/W33		540	639	22.3	8	496	724	6	0.37	1.80	2.70	1.80	460
	760	300	7.5	7850	14400	160	200	24192CAF3/W33		540	639	22.3	8	496	724	6	0.37	1.80	2.70	1.80	459
	830	296	7.5	8400	13600	350	500	23292CAKF3/W33		566	698	22.3	10	496	794	6	0.35	1.90	2.90	1.80	698
479	790	258	7.5	5300	12100	300	380	231479X2CAKF1/W33XYB2		578	683	22	12	516	754	6	0.31	2.20	3.30	2.20	497

CA 型轴承







基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
480	600	90	3	1350	3985	500	900	23896CA	23896CA/W33	523	563	13.9	7.5	500	580	2.5	0.13	5.36	7.98	5.24	60.4
	650	128	5	2800	5725	500	900	23996CAW33		532	596	16.7	10	502	628	4	0.18	3.80	5.60	3.60	126
	650	128	5	2800	5725	500	900	23996CAF1/W33	23996CAF3/W33	532	596	16.7	10	502	628	4	0.18	3.80	5.60	3.60	125
	650	128	5	2800	5725	500	900	23996CAKF1	23996CAKF3	532	596			504	628	4	0.18	3.80	5.60	3.60	121
	650	128	5	2800	5725	500	900	23996CAKF1/W33		532	596	16.7	10	504	628	4	0.18	3.80	5.60	3.60	121
	700	165	6	3800	6900	450	850	23096CAW33		552	634	22.3	12	504	678	5	0.21	3.20	4.80	3.20	215
	700	165	6	3800	6900	450	850	23096CAW33		552	634	22.3	12	504	678	5	0.21	3.20	4.80	3.20	203
	700	165	6	3260	7530	400	500	23096F3	23096F3/W33	553	625	22.3	12	504	678	5	0.23	2.90	4.40	2.80	247
	700	218	6	5000	10400	340	430	24096CAW33		542	618	22.3	12	504	678	5	0.28	2.40	3.60	2.50	285
	700	218	6	5000	10400	340	430	24096CAK30/W33		542	618	22.3	12	504	678	5	0.28	2.40	3.60	2.50	290
	790	248	7.5	6850	12000	350	700	23196CAW33		578	687	22	12	516	754	6	0.30	2.30	3.40	2.20	520
	790	248	7.5	6850	12000	350	700	23196CAF1/W33X	23196CAF3/W33X	578	687	22	12	516	754	6	0.30	2.30	3.40	2.20	516
	790	248	7.5	6850	12000	350	700	23196CAKF1/W33X	23196CAKF3/W33X	578	687	22	12	516	754	6	0.30	2.30	3.40	2.20	485
	790	248	7.5	6850	12000	350	700	23196CAW33		578	687	22	12	516	754	6	0.30	2.30	3.40	2.20	489
	790	308	7.5	8550	14900	240	320	24196CAF3/W33		568	673	22.3	8	513	759	6	0.37	1.80	2.70	1.80	582
	790	308	7.5	8550	14900	240	320	24196CAK30/W33		568	673	22.3	8	513	759	6	0.37	1.80	2.70	1.80	584
	790	308	7.5	8550	14900	240	320	24196CAK30F3/W33		568	673	22.3	8	513	759	6	0.37	1.80	2.70	1.80	581
	870	310	7.5	6750	15200	280	360	23296/W33		581	736	22.3	12	516	834	6	0.35	1.90	2.90	1.80	910
	870	310	7.5	6750	15200	280	360	23296F3		581	736			516	834	6	0.35	1.90	2.90	1.80	909
	870	310	7.5	9200	15200	300	450	23296CAW33		581	732	22.3	12	516	834	6	0.35	1.90	2.90	1.80	853
870	310	7.5	9200	15200	300	450	23296CAK	23296CAK/W33	581	732			516	834	6	0.35	1.90	2.90	1.80	859	
870	310	7.5	9200	15200	300	450	23296CAF3	23296CAF3/W33	581	732	22.3	12	516	834	6	0.35	1.90	2.90	1.80	858	
870	310	7.5	9200	15200	300	450	23296CAKF3	23296CAKF3/W33	581	732	22.3	12	516	834	6	0.35	1.90	2.90	1.80	848	
500	620	90	3	1400	3800	420	520	238/500CAW33	238/500CA/W20	542	586	16.7	8	512	606	2.5	0.12	5.60	8.40	5.60	62
	620	90	3	1400	3800	420	520	238/500CAK/W33		542	586	16.7	8	512	606	2.5	0.12	5.60	8.40	5.60	54
	670	128	5	2800	5900	450	900	239/500CAW33		555	619	22.3	12	522	648	4	0.17	4.00	5.90	4.00	120
	670	128	5	2800	5750	450	900	239/500CAF1	239/500CAF1/W33	555	619	22.3	12	522	648	4	0.17	4.00	5.90	4.00	120
	670	128	5	2800	5750	450	900	239/500CAF3/W33		555	619	22.3	12	522	648	4	0.17	4.00	5.90	4.00	119
	670	128	5	2800	5750	450	900	239/500CAF1/W33YA1	239/500CAF3/W33YA1	555	619	22.3	12	522	648	4	0.17	4.00	5.90	4.00	120
	670	128	5	2800	5750	450	900	239/500CAK/W33		555	619	22.3	12	522	648	4	0.17	4.00	5.90	4.00	116
	720	167	6	4100	7700	450	800	230/500CAF3	230/500CAF3/W33	568	653	22.3	12	528	692	5	0.21	3.20	4.80	3.20	229
	720	167	6	4100	7900	450	800	230/500CAW33		568	653	22.3	12	528	692	5	0.21	3.20	4.80	3.20	230
	720	167	6	4100	7700	450	800	230/500CAKF3	230/500CAKF3/W33	568	653	22.3	12	528	692	5	0.21	3.20	4.80	3.20	228
	720	167	6	4100	7700	450	800	230/500CAKF3/W33X		568	653	22.3	8	528	692	5	0.21	3.20	4.80	3.20	227
	720	167	6	4100	7700	450	800	230/500CAF3/HAW33X		568	653	22.3	8	528	692	5	0.21	3.20	4.80	3.20	228
720	167	6	4100	7700	450	800	230/500CAKF3/HAW33X		568	653	22.3	8	528	692	5	0.21	3.20	4.80	3.20	227	

CA 型轴承







基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	720	218	6	5200	10450	420	520	240/500CAW33	240/500CA	565	645	22.3	12	523	698	5	0.26	2.60	3.90	2.50	297
	720	218	6	5200	10450	420	520	240/500CAK30/W33	231/500CAK/W33	565	645	22.3	12	523	698	5	0.26	2.60	3.90	2.50	298
	720	218	6	5200	10450	420	520	240/500CAF3/W33		565	645	22.3	12	523	698	5	0.26	2.60	3.90	2.50	295
	830	264	7.5	7550	13800	350	650	231/500CAW33		603	726	22.3	12	536	794	6	0.30	2.30	3.40	2.20	588
	830	325	7.5	9300	16100	300	380	241/500CAK30/W33		588	712	22.3	12	531	798	6	0.37	1.80	2.70	1.80	712
	830	325	7.5	9300	16100	300	380	241/500CAW33		588	712	22.3	12	531	798	6	0.37	1.80	2.70	1.80	719
	920	336	7.5	10500	17200	300	450	232/500CAF3/W33	232/500CAW33	620	774	22.3	12	536	884	6	0.35	1.90	2.90	1.80	977
	920	336	7.5	10500	18600	300	450	232/500CAK/W33		620	774	22.3	12	536	884	6	0.35	1.90	2.90	1.80	982
530	650	90	3	1800	5350	400	500	238/530CAF1/W33	248/530CA/W20 230/530CA/W33X 230/530CAF3/W33X 230/530CAK	575	613	22.4	12	552	652	2.5	0.12	5.60	8.40	5.60	64.2
	650	118	3	1800	5350	380	480	248/530CAW33		573	612	22	8	543	636	2.5	0.15	4.50	6.70	4.50	91
	650	118	3	1800	5350	380	480	248/530CAK30/W33		573	612	22	8	543	636	2.5	0.15	4.50	6.70	4.50	86
	710	136	5	3100	6700	400	800	239/530CAF3/W33AYA1		586	658	22.3	12	548	690	4	0.17	4.00	5.90	4.00	154
	710	136	5	3100	7100	400	800	239/530CAW33		586	658	22.3	12	548	690	4	0.17	4.00	5.90	4.00	155
	710	136	5	3100	7100	400	800	239/530CAK/W33		586	658	22.3	12	548	690	4	0.17	4.00	5.90	4.00	150
	710	136	5	3100	7100	400	800	239/530CA/HCRW33		586	658	22.3	12	548	690	4	0.17	4.00	5.90	4.00	155
	780	185	6	5000	10200	400	700	230/530CA		614	703	24	12	558	752	5	0.22	3.00	4.60	2.80	339
	780	185	6	5000	10200	400	700	230/530CAF3		614	703	24	12	558	752	5	0.22	3.00	4.60	2.80	335
	780	185	6	5000	10200	400	700	230/530CAK/W33		614	703	24	12	558	752	5	0.22	3.00	4.60	2.80	329
	780	185	6	5000	10200	400	700	230/530CA/HCRW33		614	703	24	12	558	752	5	0.22	3.00	4.60	2.80	338
	780	250	6	6350	12700	280	360	240/530CAW33		605	691	22.3	12	553	758	5	0.29	2.30	3.50	2.40	416
	780	250	6	6350	12700	280	360	240/530CA/HCRW33		605	691	22.3	12	553	758	5	0.29	2.30	3.50	2.40	416
	780	250	6	6350	13200	280	360	240/530CAB/HCRW33		605	691	24	12	553	758	5	0.29	2.30	3.50	2.40	420
	870	272	7.5	8050	15300	300	600	231/530CAW33		635	762	22.3	12	560	837	6	0.30	2.30	3.40	2.20	665
	870	272	7.5	8050	13300	300	600	231/530CAK/W33		635	762	22.3	12	560	837	6	0.30	2.30	3.40	2.20	640
	870	335	7.5	10000	18300	190	280	241/530CAW33		622	748	22.3	12	560	837	6	0.37	1.80	2.80	1.80	813
	870	335	7.5	10000	18000	190	280	241/530CAK30/W33		622	748	22.3	12	560	837	6	0.37	1.80	2.80	1.80	825
	980	335	9.5	11000	20300	250	400	232/530CAK30/W33		656	818	22.3	12	565	932	8	0.36	1.87	2.79	1.83	1200
560	750	140	5	3400	7200	400	800	239/560CAF1		239/560CAF3	621	693			582	728	4	0.16	4.20	6.30	4.00
	750	140	5	3400	7200	400	800	239/560CAF3/W33	239/560CAW33	621	693	22.3	12	582	728	4	0.16	4.20	6.30	4.00	178
	820	195	6	5500	10500	400	800	230/560CA	230/560CAF3	644	741			588	792	5	0.22	3.14	4.67	3.07	363
	820	195	6	5500	10500	400	800	230/560CAF3/W33	230/560CAW33	644	741	22.3	9	588	792	5	0.22	3.14	4.67	3.07	362
	820	195	6	5500	10500	400	800	230/560CAKF3/W33		644	741	22.3	9	588	792	5	0.22	3.14	4.67	3.07	351
	820	195	6	5500	10500	400	800	230/560CAK/W33	230/560CAK30/W33	644	741	22.3	9	588	792	5	0.22	3.14	4.67	3.07	353
	820	258	6	6950	13800	220	300	240/560CAW33	240/560X3CA/C3W33-QL	640	721	22.3	12	585	798	5	0.28	2.40	3.60	2.50	471
	820	258	6	6950	13800	220	300	240/560CAK30/W33		640	721	22.3	12	585	798	5	0.28	2.40	3.60	2.50	464

CA 型轴承



基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	920	280	7.5	9050	15900	300	550	231/560CA/W33	231/560CAF3/W33	677	803	22.3	12	596	884	6	0.30	2.30	3.40	2.20	756
	920	280	7.5	9050	15700	300	550	231/560CAK/W33	231/560CAKF3/W33	677	803	22.3	12	596	884	6	0.30	2.30	3.40	2.20	745
	920	280	7.5	9050	15700	300	550	231/560CA/HCRW33		677	8.3	22.3	12	596	884	6	0.30	2.30	3.40	2.20	756
	920	355	7.5	9500	20100	150	400	241/560CAF3/HCRW33		634	796	22.3	12	596	884	6	0.37	1.80	2.80	1.80	964
	920	355	7.5	11400	20500	120	160	241/560CAF3K30/W33	241/560CAF3K30/HCW33	634	796	22.3	12	596	884	6	0.37	1.80	2.80	1.80	950
	920	355	7.5	11400	20500	120	160	241/560CA/W33	241/560CA/HCW33	634	796	22.3	12	596	884	6	0.37	1.80	2.80	1.80	973
	920	355	7.5	11400	20500	120	160	241/560CAK30/W33	241/560CAK30/HCW33	634	796	22.3	12	596	884	6	0.37	1.80	2.80	1.80	955
	920	355	7.5	10000	20000	120	160	241/560K30/W33	241/560/W33YA3	662	777	22.3	12	596	884	6	0.37	1.80	2.80	1.80	956
	1030	365	9.5	11150	21000	250	400	232/560CA/W33		705	877	22.3	12	600	990	8	0.35	1.90	2.90	1.80	1380
	1030	365	9.5	11150	21000	250	400	232/560CAK/W33		705	877	22.3	12	600	990	8	0.35	1.90	2.90	1.80	1340
580	780	130	5	3050	6800	220	300	26/580CAKF3/W33		646	726	22.3	12	611	750	4					176
	870	240	6	6400	1400	220	300	26/580CAKF3/W33-1		671	774	22.3	12	622	735	5					512
600	800	150	5	3750	8400	400	700	239/600CA	239/600CA/W33	668	742	22.3	12	622	778	4	0.17	4.00	5.90	4.00	220
	800	150	5	3750	8400	400	700	239/600CAK/W33		668	742	22.3	12	622	778	4	0.17	4.00	5.90	4.00	213
	800	200	5	4250	11200	320	400	249/600CAF1/W33	249/600CAF3/W33	666	728	22.3	12	622	760	4	0.22	3.00	4.60	2.80	287
	870	200	6	5900	11600	350	650	230/600CAF3	230/600CAF3/W33	685	787	22.3	9	628	842	5	0.22	3.00	4.60	2.80	442
	870	200	6	5900	11600	350	650	230/600CAK	230/600CAK/W33	685	787	22.3	9	628	842	5	0.22	3.00	4.60	2.80	420
	870	200	6	5900	11600	350	650	230/600CAKF3		685	787			628	842	5	0.22	3.00	4.60	2.80	430
	870	200	6	5900	11600	350	650	230/600CA/W33		685	787	22.3	9	628	842	5	0.22	3.00	4.60	2.80	431
	870	272	6	8100	16500	300	500	240/600CA/W33		682	770	22.3	12	628	850	5	0.30	2.30	3.40	2.80	551
	870	272	6	8100	16500	300	500	240/600CA/HCRW33		682	770	22.3	12	628	850	5	0.30	2.30	3.40	2.80	551
	870	272	6	8100	16500	300	500	240/600/W33		680	770	22.3	12	628	850	5	0.30	2.30	3.40	2.20	550
	980	300	7.5	10100	18800	300	500	231/600CAF3/W33		717	855	22.3	12	660	996	6	0.29	2.30	3.50	2.40	894
	980	375	7.5	10900	22400	300	500	241/600CA		709	827	22	8	636	944	6	0.36	1.90	2.82	1.85	1151
	980	375	7.5	10900	22400	300	500	241/600CA/HCW33	241/600CA/HCRW33	709	827	22	8	636	944	6	0.36	1.90	2.82	1.85	1150
	980	375	7.5	10900	22400	300	500	241/600CAK30/W33		709	827	22	8	636	944	6	0.36	1.90	2.82	1.85	1134
	980	375	7.5	10900	22400	300	500	241/600CA/W33	241/600CAF3/W33X	709	827	22	8	636	944	6	0.36	1.90	2.82	1.85	1151
	1090	388	9.5	13100	25000	250	350	232/600CAK/W33	232/600CAK/W33	750	920			700	1000	8	0.35	1.93	2.88	1.80	1557
628	920	212	7.5	5600	12800	260	340	230/628CAF3/W33		721	831	22.3	9	666	884	6	0.21	3.20	4.80	3.20	481
630	780	112	4	2200	6300	300	400	238/630CAF3/W33		682	738	16.7	9	645	765	3	0.12	5.60	8.40	5.60	123
	850	165	6	4500	9750	300	600	239/630CA	239/630CAK/W33	705	786	22.3	12	658	822	5	0.17	4.00	5.90	4.00	292
	850	165	6	4500	9750	300	600	239/630CA/W33		705	786	22.3	12	658	822	5	0.17	4.00	5.90	4.00	290
	920	212	7.5	6500	12800	300	600	230/630CA/W33		721	831	22.3	9	666	884	6	0.21	3.20	4.80	3.20	470

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	920	212	7.5	6500	12800	300	600	230/630CAF3	230/630CAF3/W33	721	831	22.3	9	666	884	6	0.21	3.20	4.80	3.20	471
	920	290	7.5	7350	17100	220	300	240/630/W33		722	815	22.3	10	666	884	6	0.30	2.30	3.40	2.20	661
	1030	315	7.5	10200	20200	200	500	231/630CA/W33		756	918	22.3	12	668	996	6	0.30	2.30	3.40	2.20	1040
	1030	315	7.5	10200	20200	200	500	231/630CAK/W33		756	918	22.3	12	668	996	6	0.30	2.30	3.40	2.20	1020
	1030	400	7.5	12000	25600	160	210	241/630CA/W33	241/630CAF3/W33	736	885	22.3	12	662	996	6	0.37	1.80	2.70	1.80	1440
	1030	400	7.5	12000	25600	160	210	241/630CAF3/HBW33		736	885	22.3	12	662	996	6	0.37	1.80	2.70	1.80	1330
	1030	400	7.5	12000	25600	160	210	241/630CAK30/W33		736	885	22.3	12	662	996	6	0.37	1.80	2.70	1.80	1400
	850	212	7.5	4750	12200	240	330	249/630X2CAF3/W33		703	774	22.3	12								355
	820	112	4	2200	6300	270	350	238/670CA/W33		722	778	16.7	9	686	805	3	0.11	6.10	9.10	6.30	136
	820	112	4	2200	6300	270	350	238/670CAK/W33		722	778	16.7	9	686	805	3	0.11	6.10	9.10	6.30	128
	820	150	4	3100	9600	270	350	248/670CA/W33		716	771	16.7	9	686	805	3	0.16	4.20	6.30	4.00	315
670	800	112	4	2410	6600	300	600	238/670CAW33		721	778	16.7	9	693	805	3					128
	920	170	6	4850	10600	300	600	239/670CAF3/W33	239/670X1CA/W33YA3	743	831	22.3	12	692	876	5	0.17	4.00	5.90	4.00	321
	980	230	7.5	7400	14200	300	500	230/670CAF3	230/670CAF3/W33	760	885	22.3	12	706	944	6	0.22	3.00	4.60	3.20	601
	980	230	7.5	7400	15000	300	500	230/670CAK3/W33		760	885	22.3	12	706	944	6	0.22	3.00	4.60	3.20	596
	980	230	7.5	7400	14200	300	500	230/670CA/W33		760	885	22.3	12	706	944	6	0.22	3.00	4.60	3.20	604
	980	308	7.5	9700	19900	250	450	240/670CA		760	866	22.3	12	700	952	6	0.28	2.40	3.60	2.50	807
	1090	336	7.5	10800	22700	200	450	231/670CAW33		801	958	22.3	12	700	1056	6	0.30	2.30	3.40	2.20	1256
	1090	336	7.5	10800	21200	200	450	231/670CAK/W33		801	958	22.3	12	700	1056	6	0.30	2.30	3.40	2.20	1240
	1090	412	7.5	14000	31500	150	200	241/670CAW33	241/670CA/W33YA3	786	934	22.3	12	705	1056	6	0.36	1.87	2.79	1.83	1530
	1090	412	7.5	14000	31500	150	200	241/670CAK30/W33		786	934	22.3	12	705	1056	6	0.36	1.87	2.79	1.83	1507
	1220	438	12	15600	30500	200	350	232/670CA/W33	232/670CA/HCW33	832	1027	22.3	12	718	1170	10	0.35	1.90	2.90	1.80	2320
	1220	438	12	15600	30500	160	350	232/670CAK/W33		832	1027	22.3	12	718	1170	10	0.35	1.90	2.90	1.80	2250
680	980	160	6	4900	9950	300	500	26/680CAF3/W33		774	906	22.3	12	708	950	5					406
690	950	230	7.5	5930	14270	250	450	206/690CAW33-1		773	868		12	725	915	6					489
	990	180	6	5500	11800	220	310	206/690CAF3/W33		780	907	22.3	12	705	975	5	0.16				461
700	950	180	6	5000	11900	220	300	206/700CAF3/W33		780	877	13.3	12	715	935	5	0.16				378
710	870	118	4	2680	7500	260	350	238/710CAF3/W33		761	824	22.3	12	725	855	3	0.11	6.10	9.10	6.30	156
	950	180	6	5400	12000	300	550	239/710CAF1/W33	239/710CAF3/W33	787	882	22.3	12	733	927	5	0.17	4.00	5.90	4.00	364
	950	180	6	5400	12000	250	310	239/710CA/W33		787	882	22.3	12	733	927	5	0.17	4.00	5.90	4.00	367
	950	243	6	6600	15100	250	450	249/710CAF1/W33X		791	864	22.3	12	733	927	5	0.22	3.00	4.60	2.80	500
	1030	200	7.5	6500	14000	300	500	220/710X2CAF3/C9W33		802	944	22.3	12	746	994	6					566

CA 型轴承







基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	1030	200	7.5	6500	14000	300	500	220/710X2CAF3/C9W33	-	808	939	22.3	12	-	-	-	-	-	-	-	-
	1030	236	7.5	8050	16200	300	500	230/710CAF3/W33		814	939	22.3	12	746	994	6	0.21	3.20	4.80	3.20	669
	1030	236	7.5	8050	16200	300	500	230/710CAKF3/W33		814	939	22.3	12	746	994	6					649
	1030	236	7.5	8050	15700	300	500	230/710/W33		814	939	22.3	12	746	994	6	0.21	3.20	4.80	3.20	580
	1030	315	7.5	8900	21600	180	250	240/710CAW33		806	918	22.3	12	738	1002	6	0.27	2.50	3.70	2.50	910
	1030	315	7.5	8900	21600	180	250	240/710CAK30/W33		806	918	22.3	12	738	1002	6	0.27	2.50	3.70	2.50	893
	1150	345	9.8	11800	25200	200	400	231/710CAW33		851	1016	22.3	12	750	1110	8	0.28	2.40	3.60	2.50	1480
	1150	345	9.8	11800	25200	200	400	231/710CAK/W33		851	1016	22.3	12	750	1110	8	0.28	2.40	3.60	2.50	1430
	1150	438	9.5	14400	30800	90	120	241/710CAF1/W33	241/710CAF3/W33	838	982	22.3	12	754	1106	8	0.35	1.90	2.90	1.80	1791
	1150	438	9.5	14400	30800	90	120	241/710CAW33		838	982	22.3	12	754	1106	8	0.35	1.90	2.90	1.80	1801
	1150	438	9.5	14400	30800	90	120	241/710CAK/W33		838	982	22.3	12	754	1106	8	0.35	1.90	2.90	1.80	1761
	1150	438	9.5	13200	31000	105	140	241/710K30/HCW33		836	974	23.5	12.5	754	1106	8	0.38	1.80	2.60	1.70	1800
	1150	438	9.5	14400	30800	160	210	241/710CAK30/W33	241/710CAK30	876	1096	22.3	12	758	1232	8	0.35	1.90	2.90	1.80	1793
	1280	450	12	17200	33400	160	300	232/710CAW33		876	1096	22.3	12	758	1232	10	0.35	1.90	2.90	1.80	2571
750	920	128	5	3100	9000	240	310	238/750CAW33		806	873	22.3	12	770	902	4	0.11	6.10	9.10	6.30	186
	920	128	5	2800	8100	240	310	238/750CAK/W33		806	873	22.3	12	770	902	4	0.11	6.10	9.10	6.30	180
	920	170	5	3550	11000	220	300	248/750F1	248/750F3	808	864			770	902	4	0.16	4.20	6.30	4.00	249
	920	170	5	3650	11300	220	300	248/750CAW33		808	864	22.3	12	770	902	4	0.16	4.20	6.30	4.00	253
	1000	185	6	5800	12800	300	500	239/750CAW33		831	930	22.3	12	772	976	5	0.16	4.20	6.30	4.00	414
	1000	185	6	5800	13700	300	500	239/750CAK/W33		831	930	22.3	12	772	976	5	0.16	4.20	6.30	4.00	401
	1000	250	6	7400	18500	250	450	249/750CAW33		830	916	22.3	12	773	976	5	0.22	3.00	4.60	2.80	566
	1000	250	6	7400	17100	250	450	249/750CAK30/W33		830	916	22.3	12	773	976	5	0.22	3.00	4.60	2.80	558
	1090	250	7.5	9350	18000	250	450	230/750CA	230/750CAF1/W33XYA7	847	987	22.3	12	786	1054	6	0.21	3.20	4.80	3.20	789
	1090	250	7.5	9350	18000	250	450	230/750CAF3	230/750CAF3/W33	847	987	22.3	12	786	1054	6	0.21	3.20	4.80	3.20	786
	1090	335	7.5	9730	25000	170	220	240/750CAW33	240/750CA	852	970	22.3	12	779	1062	6	0.28	2.40	3.60	2.50	1070
	1090	335	7.5	9730	25000	170	220	240/750CAK30/W33		852	970	22.3	12	779	1062	6	0.28	2.40	3.60	2.50	1070
	1220	365	9.5	13350	28100	200	400	231/750CAW33		898	1080	22.3	12	798	1180	8	0.28	2.40	3.60	2.50	1760
	1220	365	9.5	13350	28100	200	400	231/750CAK/W33		898	1080	22.3	12	798	1180	8	0.28	2.40	3.60	2.50	1760
	1220	475	9.5	16400	37000	130	170	241/750CAW33		872	1039	22.3	12	792	1175	8	0.35	1.90	2.90	1.80	2170
	1220	475	9.5	16400	37000	130	170	241/750CAK30/W33		872	1039	22.3	12	792	1175	8	0.35	1.90	2.90	1.80	2135
	1220	475	9.5	16400	37000			241/750CAK30F3/W33		872	1039	22.3	12	792	1175	8	0.35	1.90	2.90	1.80	2146
	1220	475	9.5	16400	37000			241/750CAK30/HAW33		872	1039	22.3	12	792	1175	8					2160
	1360	475	15	19000	37500	90	120	232/750CAF1/W33	232/750CAF3/W33	930	1145	22.3	12	876	1536	14	0.36	1.87	2.79	1.83	3100
	1360	475	15	19000	37500	90	120	232/750CAKF3/W33		930	1145	22.3	12	876	1536	14	0.36	1.87	2.79	1.83	3012
	1360	475	15	19000	37500	90	120	232/750CAK/W33		930	1145	22.3	12	876	1536	14	0.36	1.87	2.79	1.83	2975
	1360	475	15	19000	37500			232/750CAK30/W33		930	1145	22.3	12	876	1536	14	0.36	1.87	2.79	1.83	3028

CA 型轴承







基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
800	980	180	5	3900	12200	250	500	248/800CA/W33	-	860	920	22.3	12	820	962	4	0.15	4.50	6.70	4.50	330
	1060	195	6	6200	14200	250	500	239/800CA/W33	239/800CAF3/W33	883	985	22.3	12	823	1036	5	0.16	4.20	6.30	4.00	480
	1060	195	6	6200	14200	250	500	239/800CAK/W33		883	985	22.3	12	823	1036	5	0.16	4.20	6.30	4.00	460
	1060	258	6	7750	18700	250	400	249/800CA/W33		880	971	22.3	12	823	1036	5	0.21	3.20	4.80	3.20	648
	1060	258	6	7750	18700	250	400	249/800CAK30/W33		880	971	22.3	12	823	1036	5	0.21	3.20	4.80	3.20	635
	1060	258	6	7750	19300	250	400	249/800CAF3/C9W33YA3	230/800X3CAF3/W33	880	971	22.3	12	823	1036	5	0.21	3.20	4.80	3.20	634
	1150	258	7.5	9700	19400	250	450	230/800CA/W33		900	1029	22.3	12	836	1114	6	0.20	3.40	5.00	3.20	894
	1150	345	7.5	10500	27000	170	220	240/800CAF3		900	1029	22.3	12	836	1114	6	0.27	2.50	3.70	2.50	1092
	1150	345	7.5	10500	27000	170	220	240/800CA/W33		900	1029	22.3	12	836	1114	6	0.27	2.50	3.70	2.50	1094
	1150	400	7.5	12000	29900	150	200	240/800X2CA/C3W33-QL	241/800CAF3/W33	900	1029	22.3	12	836	1114	6	0.27	2.50	3.70	2.50	1330
	1280	375	9.5	14350	30550	150	350	231/800CA/W33		948	1140	22.3	12	842	1238	8	0.28	2.40	3.60	2.50	1960
	1280	375	9.5	14350	30550	150	350	231/800CAK/W33		948	1140	22.3	12	842	1238	8	0.28	2.40	3.60	2.50	1900
	1280	475	9.5	17500	38400	130	170	241/800CAF1/W33		938	1102	22.3	12	842	1238	8	0.35	1.90	2.90	1.80	2350
	1280	475	9.5	17500	38400	130	170	241/800CAK30/W33		938	1102	22.3	12	842	1238	8	0.35	1.90	2.90	1.80	2313
	1420	488	15	19900	41000	100	150	232/800CAK30/W33		989	1198	22.3	12	899	1328	14	0.35	2.80	1.90	1.90	3419
	1420	488	15	19900	41000	100	150	232/800CAKF3/W33		989	1198	22.3	12	918	1328	14	0.35	2.80	1.90	1.90	3301
850	1030	136	5	3400	10000	180	250	238/850CA/W33		249/850CAF3/W33	910	980	22.3	12	866	1012	4	0.11	6.10	9.10	6.30
	1030	136	5	3400	10000	180	250	238/850CAK/W33	910		980	22.3	12	866	1012	4	0.11	6.10	9.10	6.30	236
	1120	200	6	5800	15100	250	450	239/850CA/W33	938		1045	22.3	12	872	1097	5	0.16	4.20	6.30	4.00	570
	1120	200	6	5800	15100	250	450	239/850CAK/W33	938		1045	22.3	12	872	1097	5	0.16	4.20	6.30	4.00	550
	1120	272	6	7920	22100	200	350	249/850CA/W33	230/850CAKF3	938	1028	22.3	12	872	1097	5	0.22	3.00	4.60	2.80	750
	1120	272	6	7920	22100	200	350	249/850CAK30/W33		938	1028	22.3	12	872	1097	5	0.22	3.00	4.60	2.80	730
	1220	272	7.5	9050	22500	200	400	230/850CAF1		954	1108			886	1184	6	0.20	3.40	5.00	3.20	1074
	1220	272	7.5	9700	22500	200	400	230/850CAKF1		954	1108			886	1184	6	0.20	3.40	5.00	3.20	1070
	1220	272	7.5	9950	23000	200	400	230/850CAF3/W33	240/850CAF1/YA1	954	1108	22.3	12	886	1184	6	0.20	3.40	5.00	3.20	1073
	1220	365	7.5	12000	29900	160	200	240/850CAF1/W33X		956	1086	22.3	12	886	1184	6	0.27	2.50	3.70	2.50	1410
	1220	365	7.5	12000	29900	160	200	240/850CAF1/W33		956	1086	22.3	12	886	1184	6	0.27	2.50	3.70	2.50	1410
	1220	365	7.5	12000	29900	160	200	240/850CAF3/W33X		956	1086	22.3	12	886	1184	6	0.27	2.50	3.70	2.50	1410
	1220	365	7.5	12000	29900	160	200	240/850CA/W33	240/850CAF3	956	1086	22.3	12	886	1184	6	0.27	2.50	3.70	2.50	1416
	1220	365	7.5	12000	29900	160	200	240/850X2CAF3/W33X		956	1086	22.3	12	886	1184	6	0.27	2.50	3.70	2.50	1275
	1220	365	7.5	12000	29900	160	200	240/850CAF3/W33		956	1086	22.3	12	886	1184	6	0.27	2.50	3.70	2.50	1410
	1360	400	12	15600	33450	150	350	231/850CA/W33		1008	1204	22.3	12	898	1312	10	0.28	2.40	3.60	2.50	2260
	1360	400	12	15600	33450	150	350	231/850CAK/W33		1008	1204	22.3	12	898	1312	10	0.28	2.40	3.60	2.50	2180
	1360	500	12	19200	42700	105	140	241/850CA/W33		986	1180	22.3	12	898	1312	10	0.35	1.90	2.90	1.80	2750
	1360	500	12	19200	42700	105	140	241/850CA30K/W33		986	1180	22.3	12	898	1312	10	0.35	1.90	2.90	1.80	2720

CA 型轴承







基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
884	1320	365	7.5	12900	28900	110	150	240/884/HCC9YA1	240/884F3/HCC9YA1	1038	1184	24	12	936	1258	6	0.28	2.40	3.60	2.50	1811
900	1090	190	5	4900	15500	210	375	248/900CAW/33	239/900CAF3/W33 239/900CA/W33 240/900X3/HCYA3 240/900X3F3/HCRYA3 241/900CAK30F3/W33	963	1031	22.3	12	918	1073	4	0.14	4.80	7.20	4.50	370
	1180	206	6	6250	16490	200	400	239/900CAF1/W33		988	1096	22.3	12	928	1150	5	0.15	4.50	6.70	4.50	611
	1180	206	6	6250	16490	200	400	239/900CA/C3W33-QL		988	1096	22.3	12	928	1150	5	0.15	4.50	6.70	4.50	616
	1180	206	6	6250	16490	200	400	239/900CAKF3/W33		988	1096	22.3	12	928	1150	5	0.15	4.50	6.70	4.50	591
	1270	365	7.5	11400	28400	160	210	240/900X3/HC		1007	1139	24	12	936	1236	6	0.28	2.40	3.60	2.50	1434
	1270	365	7.5	11400	28400	160	210	240/900X3/W33		1007	1139	24	12	936	1236	6	0.28	2.40	3.60	2.50	1434
	1270	365	7.5	11400	28400	160	210	240/900X3/HCC9YA1		1007	1139	24	12	936	1236	6	0.28	2.40	3.60	2.50	1434
	1280	280	7.5	9800	22500	200	350	230/900CAW/33		1024	1175	22.3	12	928	1250	6	0.20	3.40	5.00	3.20	1220
	1280	280	7.5	10100	23300	200	350	230/900CAF3/W33		1024	1175	22.3	12	928	1250	6	0.20	3.40	5.00	3.20	1168
	1280	280	7.5	9600	22000	200	350	230/900CAK/W33		1024	1175	22.3	12	928	1250	6	0.20	3.40	5.00	3.20	1180
	1280	375	7.5	13300	34000	140	190	240/900CAW/33		1010	1136	22.3	12	936	1244	6	0.26	2.60	3.90	2.50	1570
	1280	375	7.5	10000	28000	150	190	240/900/W33		1008	1136	24	12	936	1244	6	0.26	2.60	3.90	2.50	1520
	1280	480	7.5	15800	40400	140	170	240/900X2CA/C3W33-QL		1000	1136	25	25	936	1244	6	0.26	2.60	3.90	2.50	1976
	1270	365	7.5	10800	26600	140	170	240/900X3/W33		1139	1007	24	12	850	1220	6					1440
	1270	365	7.5	9900	28400	140	170	240/900X3/HC		1007	1139	24	12	850	1220	6					1434
	1270	365	7.5	11800	29700	140	170	240/900X3F3/HCR		1139	1007	24	12	850	1220	6					1434
	1270	365	7.5	11800	29700	140	170	240/900X3/HCC9YA1		1139	1007	24	12	850	1220	6					1434
	1320	365	7.5	10500	27600	130	170	240/900X3/HCC9-1		1021	1184	24	12	940	1282	6	0.26	2.60	3.90	2.50	1730
	1420	515	12	20300	46500	95	140	241/900CAW/33		1042	1233	22.3	12	948	1372	10	0.35	1.90	2.90	1.80	3060
	1420	515	12	20300	46500	95	140	241/900CAK/W33		1042	1233	22.3	12	948	1372	10	0.35	1.90	2.90	1.80	3400
	1420	515	12	20300	46500	95	140	241/900CAF3/W33		1042	1233	22.3	12	948	1372	10	0.35	1.90	2.90	1.80	3042
	1420	515	12	20300	46500	95	140	241/900CAK30/W33		1042	1233	22.3	12	948	1372	10	0.35	1.90	2.90	1.80	3360
	1580	515	15	23600	49000	90	110	232/900CAK30/W33		1114	1354		20	960	1500	14					4360
	1580	515	15	23600	49000	90	110	232/900CAK30F3/W33			1354		20	960	1500	14					
950	1250	224	7.5	7350	19000	200	400	239/950CAW/33	249/950CAW/33 249/950CAK30/W33 230/950CAF3/W33 240/950CAW/33 240/950CAK30/W33 231/950CA 241/950CAW/33 241/950CAK30/W33	1046	1163	22.3	12	978	1222	6	0.15	4.50	6.70	4.50	759
	1250	300	7.5	8900	25200	150	300	249/950CAW/33		1048	1149	22.3	12	978	1222	6	0.21	3.20	4.80	3.20	1030
	1250	300	7.5	8900	25200	150	300	249/950CAK30/W33		1048	1149	22.3	12	978	1222	6	0.21	3.20	4.80	3.20	1000
	1360	300	7.5	11600	27650	150	350	230/950CAF3/W33		1075	1234	22.3	12	978	1330	6	0.20	3.40	5.00	3.20	1440
	1360	412	7.5	14600	39000	125	160	240/950CAW/33		1072	1212	22.3	12	978	1330	6	0.27	2.50	3.70	2.50	1971
	1360	412	7.5	14000	37000	125	160	240/950CAK30/W33		1072	1212	22.3	12	978	1330	6	0.27	2.50	3.70	2.50	2000
	1500	438	12	18500	41600	90	130	231/950CA		1121	1319									2997	
	1500	545	7.5	22700	52200	90	120	241/950CAW/33		1104	1304	22.3	12	998	1452	6	0.35	1.90	2.90	1.80	3600
	1500	545	7.5	22700	52200	90	120	241/950CAK30/W33		1104	1304	22.3	12	998	1452	6	0.35	1.90	2.90	1.80	3540

CA 型轴承






基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号				其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑					d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min						mm				mm							
1000	1220	165	6	4400	13600	150	300	238/1000CAKF1A/W20	238/1000CAKF3A/W20	1069	1154	-	9	972	1260	5	0.11	5.92	8.81	5.78	402		
	1220	165	6	4580	13600	150	300	238/1000CA/C3W33-QL		1069	1154	22.3	12	972	1260	5	0.11	5.92	8.81	5.78	407		
	1320	315	7.5	10400	29000	150	300	249/1000CA/W33		1108	1211	22.3	12	965	1291	6	0.21	3.20	4.80	3.20	1188		
	1320	315	7.5	10400	29000	150	300	249/1000CAK30/W33		1108	1211	22.3	12	965	1291	6	0.21	3.20	4.80	3.20	1200		
	1420	260	7.5	10600	24000	150	170	220/1000X2CAF3/W33		1129	1304	22.3	12	965	1380	6					1332		
	1420	308	7.5	12700	30500	150	175	230/1000CAF1/W33	230/1000CAF3/W33	1140	1303	22.3	12	965	1392	6	0.19	3.60	5.30	3.60	1590		
	1420	412	7.5	14600	40500	110	150	240/1000CAF3/W33		1130	1267	22.3	12	965	1392	6	0.26	2.60	3.90	2.50	2130		
	1420	412	7.5	15600	40000	110	150	240/1000/W33		1127	1273	22.3	12	965	1385	6					2150		
	1580	462	12	20300	45600	95	130	231/1000CA/W33		1181	1404	22.3	12	965	1532	10	0.28	2.40	3.50	2.50	3520		
	1580	462	12	20300	45600	95	130	231/1000CAK/W33		1181	1404	22.3	12	965	1532	10	0.28	2.40	3.50	2.50	3410		
	1580	580	12	25300	58900	85	110	241/1000CA/W33		1160	1372	22.3	12	965	1532	10	0.35	1.90	2.90	1.80	4350		
	1580	580	12	25300	58900	85	110	241/1000CAK30/W33		1160	1372	22.3	12	965	1532	10	0.35	1.90	2.90	1.80	4260		
1060	1280	165	6	4500	14200	150	195	238/1060CA/W33		1134	1218	22.3	12	1082	1258	5	0.11	6.10	9.10	6.30	440		
	1280	165	6	4500	14200	150	195	238/1060CAK/W33		1134	1218	22.3	12	1082	1258	5	0.11	6.10	9.10	6.30	425		
	1280	218	6	5800	19000	125	160	248/1060CA/W33		1136	1211	22.3	12	1082	1258	5	0.14	4.80	7.20	4.50	576		
	1280	218	6	5800	19000	125	160	248/1060CAK30/W33		1136	1211	22.3	12	1082	1258	5	0.14	4.80	7.20	4.50	565		
	1400	250	7.5	9870	26300	145	170	239/1060CAF3/W33		1170	1304	22.3	12	1090	1365	6	0.16	4.20	6.30	4.00	1075		
	1400	250	7.5	9000	24700	145	170	239/1060CAKF3/W33X		1170	1304	22.3	12	1090	1365	6	0.16	4.20	6.30	4.00	1041		
	1400	250	7.5	9870	26300	145	170	239/1060CAKF3/W33	239/1060CAKF3/C9W33	1170	1304	22.3	12	1090	1365	6	0.16	4.20	6.30	4.00	1041		
	1400	260	7.5	9450	25400	145	170	239/1060X2CAF3/W33		1170	1300	22.3	12	1090	1365	6					1111		
	1400	335	7.5	11150	31500	145	170	249/1060CAF3/W33		1170	1304	22.3	12	1090	1365	6	0.16	4.20	6.30	4.00	1441		
	1400	335	7.5	11150	31500	120	150	249/1060CA/W33		1164	1285	22.3	12	1090	1365	6	0.21	3.20	4.80	3.20	1420		
	1400	335	7.5	11150	31500	120	150	249/1060CAK30/W33		1164	1285	22.3	12	1090	1365	6	0.21	3.20	4.80	3.20	1390		
	1500	325	9.5	13380	32300	120	160	230/1060CA/W33		1200	1377	22.3	12	1093	1465	8	0.19	3.60	5.30	3.60	2300		
	1500	325	9.5	13100	32300	120	160	230/1060CAK/W33		1200	1377	22.3	12	1093	1465	8	0.19	3.60	5.30	3.60	2210		
	1500	438	9.5	17000	44100	110	150	240/1060F3/HCW33		1185	1339	22.3	12	1093	1465	8	0.27	2.50	3.70	2.50	2500		
	1500	438	9.5	17000	44100	110	150	240/1060F3/W33		1185	1339	22.3	12	1093	1465	8	0.27	2.50	3.70	2.50	2500		
	1500	438	9.5	17200	45000	100	145	240/1060CA/W33		1190	1339	22.3	12	1093	1465	8	0.26	2.60	3.90	2.50	2540		
	1500	530	9.5	20000	52500	100	145	240/1060X2CAF3/W33		1190	1339	22.3	12	1093	1465	8	0.26	2.60	3.90	2.50	3010		
	1500	438	9.5	17200	45000	100	145	240/1060CAK30/W33		1190	1339	22.3	12	1093	1465	8	0.26	2.60	3.90	2.50	2540		
1120	1360	243	6	6900	22800	105	250	248/1120CA/W33		1198	1278	22.3	12	1140	1335	5	0.15	4.50	6.70	4.50	740		
	1360	243	6	6900	22800	105	250	248/1120CAK30/W33		1198	1278	22.3	12	1140	1335	5	0.15	4.50	6.70	4.50	725		
	1460	335	7.5	12000	35200	100	250	249/1120CAF3/W33		1235	1348	22.3	12	1146	1431	6	0.20	3.40	5.00	3.20	1500		
	1580	345	9.5	15000	38100	100	200	230/1120CAF3/W33X		1286	1443	40	25	1155	1545	8	0.19	3.40	5.00	3.20	2210		

CA 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min				mm				mm							
-	1580 1580 1750	462 462 630	9.5 9.5 15	18100 17800 29500	48500 47500 72000	100 100 70	200 200 80	240/1120CA/W33 240/1120CAK30/W33 241/1120K30F3/W33X	-	1268 1268 1297	1421 1421 1509	22.3 22.3	12 12 16	1155 1155	1545 1545	8 8	0.26 0.26	2.60 2.60	3.90 3.90	2.50 2.50	2940 2850 5610
1180	1420	180	6	5500	17600	150	190	238/1180CAK1A/W20	239/1180CAKF1/W33X 239/1180CAF3/W33 249/1180CAF3/W33X	1254	1349		9	1180	1450	5	0.11	6.28	9.35	6.14	577
	1420	180	6	5500	17600	150	190	238/1180CAF3A/W20		1254	1349		9	1180	1450	5	0.11	6.28	9.35	6.14	580
	1420	243	6	7300	25600	130	160	248/1180CA/W33		1250	1344	22.3	12	1180	1450	5	0.14	4.80	7.20	4.50	790
	1420	243	6	7300	25600	130	160	248/1180CAK30/W33		1250	1344	22.3	12	1180	1450	5	0.14	4.80	7.20	4.50	770
	1540	272	7.5	10750	30000	110	150	239/1180CAKF3/W33X		1296	1432	24	12	1216	1536	6	0.16	4.20	6.30	4.00	1346
	1540	272	7.5	10750	30000	110	150	239/1180CAF3/W33X		1296	1432	24	12	1216	1536	6	0.16	4.20	6.30	4.00	1391
	1540	355	7.5	13900	40000	110	150	249/1180CAF1/W33X		1290	1422	22.3	12	1216	1536	6	0.20	3.42	5.09	3.34	1772
	1540	355	7.5	13900	40000	110	150	249/1180CAK30F3/W33		1290	1422	22.3	12	1216	1536	6	0.20	3.42	5.09	3.34	1742
	1660	355	9.5	15000	36000	110	150	230/1180CA/HCRW33X		1328	1509	24	12	1240	1600	8	0.20	3.42	5.09	3.34	2476
	1660	355	9.5	10700	29600	110	150	230/1180CAF3/W33X		1328	1509	24	12	1240	1600	8	0.20	3.42	5.09	3.34	2460
	1660	355	9.5	10700	29600	110	150	230/1180F3/HCRC9W33X		1328	1509	24	12	1240	1600	8	0.20	3.42	5.09	3.34	2460
1200	1500	280	7.5	10100	31000	130	150	206/1200CA/W33		1296	1406	22.3	12	1236	1460	6					1150
1250	1750	375	9.5	17350	43650	100	120	230/1250CA/W33		1412	1610	22.3	12	1285	1715	8	0.19	3.60	5.30	3.60	2850
	1750	375	9.5	17350	43650	100	120	230/1250CAK/W33		1412	1610	22.3	12	1285	1715	8	0.19	3.60	5.30	3.60	2760
1320	1600	280	6	9820	33500	85	120	248/1320CA/W33	249/1320CAF3/W33 249/1320CAF3/W33	1418	1513	22.3	12	1342	1578	5	0.15	4.50	6.70	4.50	1175
	1600	280	6	9300	31800	85	120	248/1320CA30/W33		1418	1513	22.3	12	1342	1578	5	0.15	4.50	6.70	4.50	1150
	1720	400	7.5	15600	46500	80	110	249/1320CA/W33		1446	1588	24	12	1350	1691	6	0.21	3.20	4.80	3.20	2510
	1720	400	7.5	16400	49000	80	110	249/1320CAF3/HBW33		1446	1588	24	12	1350	1691	6	0.21	3.20	4.80	3.20	2500
	1720	400	7.5	15300	46500	80	110	249/1320CAK30/W33		1446	1588	24	12	1350	1691	6	0.21	3.20	4.80	3.20	2460
	1850	530	12	23200	63300	70	85	240/1320CAF3/W33T		1485	1662	40	25	1390	1765	11	0.25	2.70	4.00	2.60	4540
1350	1650	315	7.5	11600	39500	80	110	206/1350CAF3/W33		1450	1553	22.3	12	1390	1614	6					1473
1400	1820	425	9.5	20000	58500	70	85	249/1400CAF3/W33		1528	1681	22.3	12	1452	1768	8	0.20	3.42	5.09	3.34	2920
1440	1760	315	7.5	11500	39700	70	85	206/1440F3/W20		1543	1652		12	1475	1723	6					1685
1500	1820	315	7.5	12000	42700	67	83	248/1500CA/W33		1608	1710	24	12	1528	1792	6	0.15	4.50	6.70	4.50	1730
	1820	315	7.5	12000	42700	67	83	248/1500CAK30F3/W20		1608	1710		12	1528	1792	6	0.15	4.50	6.70	4.50	1717



C 型轴承






基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号		其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min				mm				mm							
40	80	23	1.1	91.7	85.5	6000	7500	22208C	22208C/W33	50.4	68.9	5.5	2	47	73	1	0.28	2.40	3.50	2.50	0.523
	80	23	1.1	94	87	6000	7500	22208CK	22208CK/W33	50.4	68.9	5.5	2	47	73	1	0.28	2.40	3.50	2.50	0.521
	90	33	1.5	143	133	4500	5600	22308C	22308C/W33	56	74	5.5	2.5	49	81	1.5	0.38	1.80	2.70	1.80	1.04
	90	33	1.5	143	133	4500	5600	22308CK	22308CK/W33	56	74	5.5	2.5	49	81	1.5	0.38	1.80	2.70	1.80	1.02
45	100	36	1.5	174	174	3800	4800	22309C	22309CK	57.4	81.4			54	91	1.5	0.26	2.60	3.90	2.50	1.56
	100	36	1.5	174	174	3800	4800	22309C/W33		57.4	81.4			54	91	1.5	0.26	2.60	3.90	2.50	1.51
50	90	23	1.1	98.8	103	5000	6300	22210C		62.5	81.6			57	83	1	0.25	2.60	3.90	2.50	0.642
	110	40	2	209	213	3400	4300	22310C	22310C/W33	62.9	90.6	5.5	2.5	61	100	2	0.38	1.80	2.70	1.80	1.96
	110	40	2	209	213	3400	4300	22310CK	22310CK/W33	62.9	90.6	5.5	2.5	61	100	2	0.38	1.80	2.70	1.80	1.89
55	100	25	1.5	119	121	4500	5600	22211C	22211C/W33	65.7	87.3	5.5	2	62	91	1.5	0.24	2.80	4.20	2.80	0.856
	100	25	1.5	119	120	4500	5600	22211CK/W33		65.7	87.3	5.5	2	62	91	1.5	0.24	2.80	4.20	2.80	0.844
	120	43	2	257	266	3200	4000	22311C	22311C/W33	69	99.5	5.5	2.5	65	110	2	0.37	1.90	2.90	1.80	2.37
	120	43	2	257	266	3200	4000	22311CK	22311CK/W33	69	99.5	5.5	2.5	65	110	2	0.37	1.90	2.90	1.80	2.32
60	110	28	1.5	148	158	4300	5300	22212C	22212C/W33	75.5	95	5.5	2	69	101	1.5	0.24	2.80	4.20	2.80	1.11
	110	28	1.5	148	158	4300	5300	22212CK	22212CK/W33	75.5	95	5.5	2	69	101	1.5	0.24	2.80	4.20	2.80	1.11
	130	31	2.1	201	228	3400	4300	22312C/W33		87.8	115	5.5	3	72	118	2	0.22	3.00	4.60	2.80	2.08
	130	46	2.1	295	318	2800	3600	22312C	22312C/W33	81.4	108	5.5	3	72	118	2	0.37	1.90	2.90	1.80	3.25
	130	46	2.1	295	318	2800	3600	22312CK	22312CK/W33	81.4	108	5.5	3	72	118	2	0.37	1.90	2.90	1.80	3.21
65	120	31	1.5	183	205	3800	4800	22213C	22213C/W33	81.5	103	5.5	2.5	74	111	1.5	0.25	2.70	4.00	2.50	1.55
	120	31	1.5	183	205	3800	4800	22213CK	22213CK/W33	81.5	103	5.5	2.5	74	111	1.5	0.25	2.70	4.00	2.50	1.52
	140	48	2.1	323	342	2600	3400	22313C	22313C/YB2	81.4	116			77	128	2	0.35	1.90	2.90	1.80	4.97
	140	48	2.1	323	342	2600	3400	22313C/W33		88.6	116	5.5	3	77	128	2	0.35	1.90	2.90	1.80	4.92
	140	48	2.1	323	342	2600	3400	22313CK	22313CK/W33	88.6	116	5.5	3	77	128	2	0.35	1.90	2.90	1.80	4.88
70	125	31	1.5	198	217	3600	4500	22214C	22214C/W33	86.8	109	6	2.5	79	116	1.5	0.24	3.00	4.60	2.80	1.63
	125	31	1.5	198	217	3600	4500	22214CK	22214CK/W33	86.8	109	6	2.5	79	116	1.5	0.24	3.00	4.60	2.80	1.59
	150	51	2.1	380	408	2200	3000	22314C	22314C/W33	95.8	125	8.3	4	82	138	2	0.35	1.90	2.90	1.80	4.48
	150	51	2.1	380	408	2200	3000	22314CK	22314CK/W33	95.8	125	8.3	4	82	138	2	0.35	1.90	2.90	1.80	4.45
75	130	31	1.5	201	228	3400	4300	22215C	22215C/W33	92	114	5.5	2.5	84	121	1.5	0.24	3.00	4.60	2.80	1.71
	130	31	1.5	201	228	3400	4300	22215CK	22215CK/W33	92	114	5.5	2.5	84	121	1.5	0.24	3.00	4.60	2.80	1.70
	160	55	2.1	418	451	2200	3000	22315C	22315C/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.39

C 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min				mm				mm							
-	160	55	2.1	418	451	2200	3000	22315CK	22315CK/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.37
	140	33	2	224	257	3200	4000	22216C	22216C/W33	95.1	122	5.5	2.5	91	129	2	0.22	3.00	4.60	2.80	2.10
	140	33	2	224	257	3200	4000	22216CK	22216CK/W33	95.1	122	5.5	2.5	91	129	2	0.22	3.00	4.60	2.80	2.09
	170	58	2.1	466	513	2000	2800	22316C	22316C/W33	109	142	8.3	4	92	158	2	0.34	1.90	2.90	1.80	6.60
	170	58	2.1	466	513	2000	2800	22316CK	22316CK/W33	109	142	8.3	4	92	158	2	0.34	1.90	2.90	1.80	6.56
85	150	36	2	271	309	2800	3600	22217C/W33		105	132	6.5	3	96	139	2	0.23	3.00	4.60	2.80	2.73
	150	36	2	271	309	2800	3600	22217CK	22217CK/W33	105	132	6.5	3	96	139	2	0.23	3.00	4.60	2.80	2.64
	180	60	3	523	589	1900	2600	22317C	22317C/W33	107	150	8.3	4	99	166	2.5	0.33	2.00	3.00	2.00	7.38
	180	60	3	523	589	1900	2600	22317CK	22317CK/W33	107	150	8.3	4	99	166	2.5	0.33	2.00	3.00	2.00	7.23
90	150	72	2	320	500			24118X2C/HG2		101	120			100	135	2					4.75
	160	40	2	309	356	2600	3400	22218C	22218C/W33	106	139	8.3	2.5	101	149	2	0.23	2.80	4.20	2.80	4.50
	160	40	2	255	356	2600	3400	22218CK	22218CK/W33	106	139	8.3	2.5	101	149	2	0.23	2.80	4.20	2.80	4.35
	160	52.4	2	337	480	1900	2600	23218C		106	136			101	149	2	0.31	2.20	3.30	2.20	4.66
	190	64	3	580	660	1800	2400	22318C	22318C/W33	113	159	8.3	5	104	176	2.5	0.35	2.00	3.00	2.00	10.1
	190	64	3	580	660	1800	2400	22318CK	22318CK/W33	113	159	8.3	5	104	176	2.5	0.35	2.00	3.00	2.00	9.25
95	170	43	2.1	361	428	2400	3200	22219C	22219C/W33	114	148	8.3	3	107	158	2	0.24	2.80	4.20	2.80	4.16
	170	43	2.1	361	428	2400	3200	22219CK	22219CK/W33	114	148	8.3	3	107	158	2	0.24	2.80	4.20	2.80	4.07
	200	67	3	637	727	1800	2400	22319C	22319C/W33	128	167	8.3	5	109	186	2.5	0.34	2.00	3.00	2.00	10.2
	200	67	3	637	727	1800	2400	22319CK	22319CK/W33	128	167	8.3	5	109	186	2.5	0.34	2.00	3.00	2.00	10.0
100	150	37	1.5	206	325	2400	3200	23020C	23020C/W33	116	135	5.5	3	110	140	2	0.22	2.90	4.40	2.80	2.32
	150	37	1.5	206	325	2400	3200	23020CK	23020CK/W33	116	135	5.5	3	110	140	2	0.22	2.90	4.40	2.80	2.28
	165	52	2	347	515	2000	2800	23120C	23120C/W33	121	143	5.5	3	110	155	2	0.30	2.30	3.40	2.20	4.43
	165	52	2	347	515	2000	2800	23120CK	23120CK/W33	121	143	5.5	3	110	155	2	0.30	2.30	3.40	2.20	4.39
	180	46	2.1	404	466	2200	3000	22220C	22220C/W33	124	156	8.3	3	112	168	2	0.24	2.80	4.20	2.80	5.30
	180	46	2.1	404	466	2200	3000	22220CK	22220CK/W33	124	156	8.3	3	112	168	2	0.24	2.80	4.20	2.80	5.25
	180	60.3	2.1	451	600	1700	2200	23220C	23220C/W33	125	153	8.3	4.5	112	168	2	0.33	2.00	3.00	2.00	6.65
	180	60.3	2.1	365	605	1700	2200	23220C/HG2W33		117	153	10	4.5	112	168	2					6.9
	215	73	3	774	903	1700	2200	22320C	22320C/W33	138	179	11.1	5	114	201	2.5	0.35	2.00	3.00	2.00	13.1
	215	73	3	774	903	1700	2200	22320CK	22320CK/W33	138	179	11.1	5	114	201	2.5	0.35	2.00	3.00	2.00	12.9
105	175	56	2	365	560	1900	2700	23121C	23121C/W33	127	151	5.5	3	115	165	2	0.30	2.20	3.30	2.20	5.36
	175	56	2	365	560	1900	2700	23121CK	23121CK/W33	127	151	5.5	3	115	165	2	0.30	2.20	3.30	2.20	5.19

C 型轴承



基本尺寸（mm）				基本额定载荷（kN）		极限转速		轴承代号				其他尺寸（mm）				接触面与倒角尺寸			计算系数				重量（kg）
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑					d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min						mm				mm							
110	170	45	2	295	460	2200	3000	23022C	23022C/W33	128	150	7.5	3	120	160	2	0.24	2.90	4.40	2.80	3.68		
	170	45	2	295	460	2200	3000	23022C/W33-2RS2		128	150	7.5	3	120	160	2	0.24	2.90	4.40	2.80	3.74		
	170	45	2	295	460	2200	3000	23022CK	23022CK/W33	128	150	7.5	3	120	160	2	0.24	2.90	4.40	2.80	3.57		
	180	56	2	409	590	1900	2600	23122C	23122C/W33	132	156	5.5	3	120	170	2	0.30	2.30	3.40	2.20	5.69		
	180	56	2	409	590	1900	2600	23122CK	23122CK/W33	132	156	5.5	3	120	170	2	0.30	2.30	3.40	2.20	5.67		
	180	69	2	494	713	1000	1400	24122C/W24		133	153		6	120	170	2	0.35	1.90	2.90	1.80	6.90		
	200	53	2.1	530	610	2000	2800	22222C	22222C/W33	133	173	8.3	4	122	188	2	0.26	2.70	4.00	2.50	7.32		
	200	53	2.1	530	610	2000	2800	22222CK	22222CK/W33	133	173	8.3	4	122	188	2	0.26	2.70	4.00	2.50	7.16		
	200	69.8	2.1	570	830	1600	2000	23222C		138	168			122	188	2	0.33	2.00	3.00	2.00	9.73		
	240	80	3	761	996	1600	2000	22322C	22322C/W33	151	197	13.9	6	122	188	2.5	0.34	2.20	3.30	2.20	18.2		
240	80	3	761	996	1600	2000	22322CK	22322CK/W33	151	197	13.9	6	122	188	2.5	0.34	2.20	3.30	2.20	17.7			
120	180	46	2	340	495	2000	2800	23024C		134	162			130	170	2	0.22	3.00	4.60	2.80	4.46		
	180	46	2	340	495	2000	2800	23024CK		134	162			130	170	2	0.22	3.00	4.60	2.80	4.32		
	200	62	2	490	715	1800	2400	23124C	23124C/W33	146	174	5.5	3	130	190	2	0.29	2.40	3.60	2.50	7.97		
	200	62	2	490	715	1800	2400	23124CK	23124CK/W33	146	174	5.5	3	130	190	2	0.29	2.40	3.60	2.50	7.96		
	200	80	2	620	925	1400	1800	24124C		146	167			130	190	2	0.38	1.80	2.70	1.80	10.0		
	215	58	2.1	600	730	1900	2600	22224C	22224C/W33	149	187	11.1	4	132	203	2	0.25	2.60	3.90	2.50	9.78		
	215	58	2.1	600	730	1900	2600	22224CK		149	187	11.1	4	132	203	2	0.25	2.60	3.90	2.50	9.75		
	215	58	2.1	600	730	1900	2600	22224C/C9		149	187	11.1	4	132	203	2	0.25	2.60	3.90	2.50	9.78		
	215	58	2.1	600	730	1900	2600	22224CK	22224CK/W33	149	187	11.1	4	132	203	2	0.25	2.60	3.90	2.50	9.66		
	215	76	2.1	660	940	1500	1900	23224C		150	182			132	203	2	0.34	1.90	2.90	1.80	11.5		
	260	86	3	920	1120	1400	1800	22324C	22324C/W33	165	218	13.9	6	134	246	2.5	0.35	1.90	2.90	1.80	23.8		
	260	86	3	920	1120	1400	1800	22324CK	22324CK/W33	165	218	13.9	6	134	246	2.5	0.35	1.90	2.90	1.80	21.9		
130	200	52	2	410	650	1900	2600	23026C	23026C/W33	153	179	9.5	4	140	190	2	0.24	2.90	4.40	2.80	6.12		
	200	52	2	410	650	1900	2600	23026CK	23026CK/W33	153	179	9.5	4	140	190	2	0.24	2.90	4.40	2.80	5.94		
	210	64	2	530	790	1700	2200	23126C	23126C/W33	156	183	8.3	4	140	200	2	0.28	2.40	3.50	2.50	9.66		
	210	64	2	530	790	1700	2200	23126CK	23126CK/W33	156	183	8.3	4	140	200	2	0.28	2.40	3.50	2.50	9.21		
	210	80	2	650	990	1700	2200	24126C/W33		146	178	8.3	4	140	200	2					10.9		
	210	80	2	650	1000	1700	2200	24126CK30/W33		146	178	8.3	4	140	200	2					10.9		
	230	64	3	700	880	1800	2400	22226C	22226C/W33	162	200	10	5	144	216	2.5	0.26	2.50	3.70	2.50	11.5		
	230	64	3	700	880	1800	2400	22226CK	22226CK/W33	162	200	10	5	144	216	2.5	0.26	2.50	3.70	2.50	11.3		
	280	93	4	1060	1320	1300	1700	22326C	22326C/W33	178	232	16.7	6	148	262	3	0.34	1.90	2.90	1.80	24.9		
280	93	4	1060	1320	1300	1700	22326CK	22326CK/W33	178	232	16.7	6	148	262	3	0.34	1.90	2.90	1.80	24.3			
140	210	53	2	440	715	1800	2400	23028C	23028C/W33	162	188	8.3	4.5	150	200	2	0.22	3.00	4.60	2.80	6.37		

C 型轴承



基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
-	210	53	2	440	715	1800	2400	23028CK	23028CK/W33	162	188	8.3	4.5	150	200	2	0.22	3.00	4.60	2.80	6.17
	225	68	2.1	600	935	1600	2000	23128C	23128C/W33	166	196	8.3	5	152	213	2	0.28	2.40	3.60	2.50	10.8
	225	68	2.1	600	935	1600	2000	23128CK	23128CK/W33	166	196	8.3	5	152	213	2	0.28	2.40	3.60	2.50	10.5
	250	68	3	670	860	1700	2200	22228C	22228C/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	14.5
	250	68	3	670	860	1700	2200	22228CK	22228CK/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	14.5
	250	88	3	810	1300	1200	1600	23228C/W33		164	212	11.1	6	154	236	2.5					18.1
	300	102	3.7	1230	1590	1100	1500	22328C	22328C/W33	191	249	16.7	7	158	282	3	0.34	1.90	2.90	1.80	35.2
	300	102	3.7	1230	1590	1100	1500	22328CK	22328CK/W33	191	249	16.7	7	158	282	3	0.34	1.90	2.90	1.80	34.8
150	225	56	2.1	485	730	1700	2200	23030C	23030C/W33	174	201	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80	7.44
	225	56	2.1	485	730	1700	2200	23030CK	23030CK/W33	174	201	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80	7.42
	250	80	2.1	790	1230	1400	1800	23130C	23130C/W33	173	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	16.3
	250	80	2.1	790	1230	1400	1800	23130CK	23130CK/W33	173	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	15.8
	250	100	2.1	970	1450	800	1000	24130C		180	208			162	238	2	0.37	1.80	2.70	1.80	18.7
	270	73	3	810	1100	1600	2000	22230C	22230C/W33	179	234	12	6	164	256	2.5	0.26	2.60	3.90	2.50	18.6
	270	96	3	1030	1390	1100	1500	23230C		177	228			164	256	2.5	0.35	1.90	2.90	1.80	25.7
	320	108	4	1320	1820	1000	1400	22330C		188	270			168	302	3					42.5
160	240	60	2.1	555	875	1700	2200	23032C	23032C/W33	180	216	11.1	4	172	228	2	0.22	3.00	4.60	2.80	8.99
	240	60	2.1	555	875	1700	2200	23032CK	23032CK/W33	180	216	11.1	4	172	228	2	0.22	3.00	4.60	2.80	8.76
	270	86	2.1	930	1420	1300	1700	23132C	23132C/W33	188	234	13.9	6	172	258	2	0.30	2.30	3.40	2.20	22
	270	86	2.1	930	1420	1300	1700	23132CK	23132CK/W33	188	234	13.9	6	172	258	2	0.30	2.30	3.40	2.20	21.4
	270	109	2.1	1120	1690	700	900	24132C/W33		193	225	8.3	4	172	258	2	0.40	1.69	2.51	1.65	24.8
	290	80	3	950	1280	1500	1900	22232C	22232C/W33	201	249	13.9	5	174	276	2.5	0.27	2.50	3.70	2.50	23.2
	290	80	3	950	1280	1500	1900	22232CK	22232CK/W33	201	249	13.9	5	174	276	2.5	0.27	2.50	3.70	2.50	22.7
	290	104	3	1160	1760	1000	1400	23232C	23232C/W33	201	244	13.9	7	174	276	2.5	0.35	1.90	2.90	1.80	29.7
	290	104	3	1160	1760	1000	1400	23232CK/W33		200	244	13.9	7	174	276	2.5	0.35	1.90	2.90	1.80	29.0
	340	114	4	1520	2050	950	1300	22332C	22332C/W33	189	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.6
	340	114	4	1520	2050	950	1300	22332CK	22332CK/W33	216	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	50.9
170	260	67	2.1	670	1150	1600	2000	23034C	23034C/W33	192	231	11.1	5	182	248	2	0.23	2.90	4.40	2.80	14.3
	260	67	2.1	670	1150	1600	2000	23034CK	23034CK/W33	192	231	11.1	5	182	248	2	0.23	2.90	4.40	2.80	13.8
	280	88	2.1	990	1520	1200	1600	23134C		204	243			182	268	2	0.30	2.30	3.40	2.20	22
	280	88	2.1	990	1520	1200	1600	23134CK	23134CK/W33	204	243	8.3	5	182	268	2	0.30	2.30	3.40	2.20	21.3
	310	86	4	1060	1450	1300	1700	22234C	22234C/W33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	29.3
	310	86	4	1060	1450	1300	1700	22234CK	22234CK/W33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	28.6
	360	120	4	1670	2050	950	1300	22334C		211	299			188	342	3	0.37	1.80	2.70	1.80	59.7

C 型轴承





基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y ₀	
mm				KN		r/min				mm				mm							
180	280	74	2.1	790	1290	1400	1800	23036C	23036C/W33	214	247	13.9	7.5	192	268	2	0.25	2.70	4.00	2.60	17.3
	280	74	2.1	790	1290	1400	1800	23036CK	23036CK/W33	214	247	13.9	7.5	192	268	2	0.25	2.70	4.00	2.60	17.1
	300	96	3	1140	1720	1100	1500	23136C/W33		216	259	13.9	6	194	286	2.5	0.30	2.30	3.40	2.20	26.3
	320	86	4	1120	1550	1300	1700	22236C	22236C/W33	224	278	16.7	6	198	302	3	0.26	2.60	3.90	2.50	30.1
	320	86	4	1120	1550	1300	1700	22236CK	22236CK/W33	224	278	16.7	6	198	302	3	0.26	2.60	3.90	2.50	29.4
	380	126	4	1900	2400	900	1200	22336C	22336C/W33	242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	70.1
	380	126	4	1900	2400	900	1200	22336CK	22336CK/W33	242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	68.8
190	290	75	2.1	820	1270	1300	1700	23038C		215	259			202	278	2	0.23	2.90	4.40	2.80	16.9
	320	128	3	1370	2330	600	750	24138CK30/W33		211	267	11.1	6	204	306	2.5					40.7
	340	92	4	1210	1700	1200	1600	22238C	22238C/W33	235	293	16.7	6	208	322	3	0.26	2.60	3.90	2.50	36.7
	340	92	4	1210	1700	1200	1600	22238CK	22238CK/W33	235	293	16.7	6	208	322	3	0.26	2.60	3.90	2.50	35.9
	400	132	5	2010	2520	850	1100	22338C		238	334			212	378	4	0.34	1.99	2.96	1.94	80.8
	400	132	5	2010	2780	850	1100	22338C	22338C/W33	257	334	22.3	8	212	378	4	0.34	1.99	2.96	1.94	82.4
	400	132	5	2010	2780	850	1100	22338CK	22338CK/W33	257	334	22.3	8	212	378	4	0.34	1.99	2.96	1.94	81.4
200	310	82	2.1	950	1560	1200	1600	23040C	23040C/W33	237	276	13.9	7.5	212	298	2	0.25	2.70	4.00	2.60	24.8
	310	82	2.1	950	1560	1200	1600	23040CK	23040CK/W33	237	276	13.9	7.5	212	298	2	0.25	2.70	4.00	2.60	24.6
	340	112	3	1370	2330	950	1300	23140C/W33		230	292	16.7	9	214	326	2.5					42.3
	360	98	4	1390	1950	1100	1500	22240C	22240K	237	309			218	342	3	0.26	2.60	3.90	2.50	43.7
	420	138	5	2000	2870	850	1100	22340C	22340C/W33	269	350	22.3	8	222	398	4	0.34	1.99	2.96	1.94	92.3
	420	138	5	2000	2870	850	1100	22340CK	22340CK/W33	269	350	22.3	8	222	398	4	0.34	1.99	2.96	1.94	90.3
220	340	90	3	1058	1987	1100	1500	23044C/W33-ZH		252	305	13.9	7.5	240	320	2.5					29.8
240	360	92	3	1130	2080	1000	1400	23048C/W33		271	326	13.9	7.5	260	335	2.5					33.1
	360	118	3	1420	2790	800	1000	24048C/W33		264	316	11.1	6	254	346	2.5					42.3
	400	128	4	1980	3040	850	1100	23148C	23148C/W33	289	345	16.7	8	258	382	3	0.31	2.21	3.29	2.16	65.9
	400	128	4	1980	3040	850	1100	23148CK	23148CK/W33	289	345	16.7	8	258	382	3	0.31	2.21	3.29	2.16	63.9
	440	160	4	2400	3950	670	850	23248CK30/W33		282	369	22.3	12	258	422	3					107
	440	160	4	2400	3950	670	850	23248CK/W33		282	369	22.3	12	258	422	3					107
260	400	104	4	1520	2560	900	1200	23052C	23052C/W33	306	357	16.7	7	278	382	3	0.23	2.90	4.40	2.80	48
	400	104	4	1520	2560	900	1200	23052CK	23052CK/W33	306	357	16.7	7	278	382	3	0.23	2.90	4.40	2.80	47.7
	440	144	4	2250	4020	800	1000	23152C/W33		300	379	16.7	9	278	422	3					90.2
	480	130	5	2520	3600	850	1100	22252C/W33-ZH		330	410	22.3	12	282	458	4					110
	540	165	6	3370	4650	630	800	22352C/C9W33		349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	185

C 型轴承






基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号		其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑			d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min				mm				mm							
280	420	106	4	1640	2940	850	1100	23056C	23056C/W33	323	377	16.7	7	298	402	3	0.23	2.91	4.40	2.84	55.1
	420	106	4	1640	2940	850	1100	23056CK	23056CK/W33	323	377	16.7	7	298	402	3	0.23	2.91	4.40	2.84	54
	460	146	5	2230	4060	750	950	23156C/W33		320	400	16.7	9	302	438	4					97.2
300	460	118	4	1840	3440	600	750	23060C/W33-ZH		338	412	16.7	9	323	437	3					71.8
	460	160	4	2570	4780	600	750	24060C/W33		342	399	13.9	7	318	442	3	0.32	2.09	3.11	2.04	97.3
	500	200	5	3560	5990	600	750	SX-24160C		356	420	13.9	6	322	478	4	0.39	1.75	2.61	1.71	161
320	480	160	4	2700	5200	560	700	24064C/W33		354	423	22	8	335	465	3	0.32	2.09	3.11	2.04	97.9
	580	208	5	3950	7010	500	630	23264CK/W33		379	488	22.3	12	342	558	4					241
340	520	133	5	2340	4430	530	670	23068C/W33-ZH	24068C/W33	383	467	22.3	12	316	495	4					102
	520	180	5	3280	5890	530	670	24068C/W33		377	453	16.7	9	358	502	4	0.33	2.00	3.00	2.00	139
	520	180	5	3280	5890	530	670	24068CK30/W33		377	453	16.7	9	358	502	4	0.33	2.00	3.00	2.00	137
	521	181	5	3280	6170	530	670	24068CK30/W33		377	453	16.7	9	358	502	4	0.33	2.00	3.00	2.00	137
360	540	134	5	2610	4680	670	850	23072C/W33		419	486	22.3	8	382	518	4	0.23	2.90	4.40	2.80	108
380	560	180	5	3420	7000	480	600	24076C/W33		435	494	16.7	9	402	538	4	0.3	2.3	3.4	2.2	152

CC 型轴承

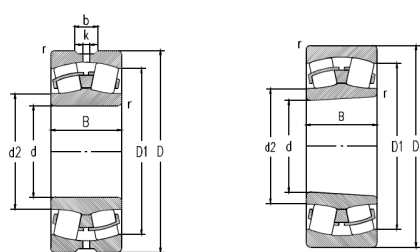




基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号	其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min			mm				mm							
45	100	36	1.5	130	155	3700	4700	22309CC	57.6	82.5	-	-	54	91	1.5	0.37	1.80	2.70	1.80	1.35
50	90	23	1.1	80	95	4800	6100	22210CC	60	79.2			57	83	1	0.24	2.80	4.20	2.80	0.6
55	100	25	1.5	95	115	4400	5500	22211CC	66	88.1			64	91	1.5	0.24	2.80	4.20	2.80	0.82
60	110	28	1.5	115	140	3900	4900	22212CC	72.7	96.6			69	101	1.5	0.24	2.8	4.20	2.80	1.1
	130	46	205	255	2.1	2900	3700	22312CC	74.9	109			72	118	2	0.35	1.9	2.90	1.80	2.95
65	120	31	1.5	170	216	2800	3600	22213S/W33	77	106	5.5	3	74	111	1.5	0.24	2.80	4.20	2.80	1.57
	140	48	2.1	235	275	2500	3300	22313CC	82	118			77	128	2	0.35	1.90	2.90	1.80	3.55
70	125	31	1.5	135	175	3500	4400	22214CC	84.6	111			79	116	1.5	0.23	2.90	4.40	2.80	1.55
	150	51	2.1	285	355	2300	3100	22314CC/W33	88	127	8.3	4.5	82	138	2	0.35	1.90	2.90	1.80	4.3
75	130	1.5	31	145	190	3300	4200	22215CC	89.7	116			84	121	1.5	0.22	3.00	4.60	2.80	1.65
	160	55	2.1	310	405	2100	2900	22315CC/W33	94.2	134	8.3	4.5	87	148	2	0.35	1.90	2.90	1.80	5.25
80	140	33	2	160	210	3100	3900	22216CC	95.1	124			90	130	2	0.22	3.00	4.60	2.80	2.05
	170	58	2.1	325	410	1900	2700	22316CC/W33	100	144	8.3	4.5	92	158	2	0.35	1.90	2.90	1.80	6.2
85	150	36	2	246	325	3000	3800	22217CC/W33	101	133	5.5	3	96	139	2	0.22	3.00	4.60	2.80	2.68
	180	60	3	395	495	1800	2500	22237CC/W33	106	154	8.3	4.5	99	166	2.5	0.33	2.00	3.00	2.00	7.25
90	160	52.4	2	345	440	2700	3600	23218CC/W33	106	137	5.5	3	101	149	2	0.31	2.20	3.30	2.20	4.54
	190	64	3	477	610	1800	2400	22318CC	159	159	11.1	6	104	176	2.5	0.35	1.90	2.90	1.80	8.72
95	170	43	2.1	265	355	2300	3100	22219CC/W33	113	149	8.3	4.5	107	158	2	0.24	2.80	4.20	2.80	4
	200	67	3	485	645	1700	2300	22319CC/W33	118	168	11.1	6	109	186	2.5	0.35	1.90	2.90	1.80	10
100	165	52	2	300	450	1900	2700	23120CC/W33	115	145	5.5	3	110	155	2	0.3	2.30	3.40	2.20	4.4
	180	46	2.1	290	390	2100	2900	22220CC/W33	120	157	8.3	4.5	112	168	2	0.24	2.80	4.20	2.80	4.85
	180	60.3	2.1	460	610	2300	3300	23220CC/W33	117	153	8.3	4.5	112	168	2	0.33	2.00	3.00	2.00	6.47
	215	73	3	774	903	1700	2200	22320CC/W33	138	179	11.1	5	114	201	2.5	0.35	1.90	2.90	1.80	13.4
110	170	45	2	300	460	3000	4100	23022CC/W33	126	151	5.5	3	120	160	2	0.23	2.90	4.40	2.80	3.69
	180	56		355	565	1800	2500	23122CC/W33	126	157	8.3	4.5	120	170	2	0.30	2.30	3.40	2.20	5.55

CC 型轴承





基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号	其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min			mm				mm							
-	200 240	53 80	2.1 3	370 770	520 1020	1900 1600	2700 2000	22222CC/W33 22322CC/W33	132 141	173 197	8.3 13.9	4.5 7.5	122 122	188 188	2 2.5	0.25 0.35	2.70 1.90	4.00 2.90	2.50 1.80	7 17.8
120	180	46	2	345	510	3000	3900	23024CC/W33	134	163	5.5	3	130	170	2	0.22	3.00	4.60	2.80	4.08
	180	60	2	420	670	2300	3300	24024CC/W33	132	158	5.5	4	130	170	2	0.30	2.30	3.40	2.20	5.53
	200	62	2	400	645	1700	2300	23124CC/W33	139	173	8.3	4.5	130	190	2	0.28	2.40	3.60	2.50	7.8
	200	80	2	545	910	850	1100	24124CC/W33	135	169	5.5	3	130	190	2	0.37	1.80	2.70	1.80	10
	215	58	2.1	510	730	1900	2600	22224CC/W33	143	187	11.1	6	132	203	2	0.25	2.70	4.00	2.50	9.06
	215	76	2.1	560	880	1400	1800	23224CC/W33	141	183	8.3	4.5	132	203	2	0.35	1.90	2.90	1.80	22
	260	86	3	840	1100	1300	1700	22324CC/W33	152	216	13.9	7.5	134	246	2.5	0.35	1.90	2.90	1.80	22
130	210	64	2	450	710	1600	2100	23126CC/W33	148	184	8.3	4.5	140	200	2	0.28	2.40	3.60	2.50	8.55
	230	64	3	500	750	1700	2300	22226CC/W33	153	200	11.1	6	144	216	2.5	0.26	2.60	3.90	2.50	11
	230	80	3	630	1000	1200	1600	23226CC/W33	152	196	8.3	4.5	144	216	2.5	0.33	2.00	3.00	2.00	14
	280	93	4	1090	1310	1750	2300	22326CC/W33	157	233	16.7	9	148	262	3	0.35	1.90	2.90	1.80	28.1
140	225	68	2.1	495	850	1500	1900	23128CC/W33	159	196	8.3	4.5	152	213	2	0.28	2.40	3.60	2.50	13
	250	68	3	600	900	1700	2200	22228CC/W33	166	216	11.1	6	154	236	2.5	0.26	2.60	3.90	2.50	14
	300	102	4	1100	1500	1000	1400	22328CC/W33	175	247	16.7	9	158	282	3	0.35	1.90	2.90	1.80	34.5
150	225	56	2.1	400	700	1600	2100	23030CC/W33	169	203	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80	7.95
	225	75	2.1	635	1080	1750	2500	24030CC/W33	164	196	5.5	3	162	213	2	0.30	2.30	3.40	2.20	10.3
	250	80	2.1	675	1140	1300	1700	23130CC/W33	173	216	11.1	6	162	238	2	0.30	2.30	3.40	2.20	16
	270	73	3	700	1000	1500	1900	22230CC/W33	179	234	13.9	7.5	164	256	2.5	0.26	2.60	3.90	2.50	18
	270	73	3	810	1100	1600	2000	22230CS/W33	179	234	13.9	7.5	164	256	2.5	0.25	2.60	3.90	2.50	18.4
	320	108	4	1200	1710	900	1300	22330CC/W33	189	267	16.7	9	168	302	3	0.35	1.90	2.90	1.80	41.5
160	240	60	2.1	470	810	1600	2100	23032CC/W33	181	217	11.1	6	172	228	2	0.22	3.00	4.60	2.80	9.7
	270	86	2.1	790	1300	1200	1600	23132CC/W33	185	234	13.9	7.5	172	258	2	0.30	2.30	3.40	2.20	20.5
	270	109	2.1	1000	1700	650	850	24132CC/W33	181	228	8.3	4.5	172	258	2	0.4	1.70	2.50	1.60	25
	290	80	3	845	1250	1400	1800	22232CC/W33	191	250	13.9	7.5	174	276	2.5	0.26	2.60	3.90	2.50	22.5
	340	114	4	1350	1940	900	1200	22332CC/W33	201	282	16.7	9	178	322	3	0.35	1.90	2.90	1.80	50
170	260	67	2.1	600	1040	1500	1900	23034CC/W33	192	232	11.1	6	182	248	2	0.23	2.90	4.40	2.80	13
	280	88	2.1	800	1400	1100	1500	23134CC/W33	195	244	13.9	7.5	182	268	2	0.30	2.30	3.40	2.20	21.5
	310	86	4	900	1410	1200	1600	22234CC/W33	204	267	16.7	9	188	292	3	0.27	2.50	3.70	2.50	28.5

CC 型轴承





基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号	其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	Y1	Y2	Yo	
mm				KN		r/min			mm				mm							
-	360	120	4	1490	2100	900	1200	22334CC/W33	213	300	16.7	9	188	342	3	0.33	2.00	3.00	2.00	58.5
180	280	74	2.1	700	1220	1300	1700	23036CC/W33	204	248	13.9	7.5	192	268	2	0.24	2.80	4.20	2.80	17
	300	96	3	1160	1760	1600	2100	23136CC/W33	207	259	13.9	7.5	194	286	2.5	0.30	2.30	3.40	2.20	27
	320	86	4	980	1500	1200	1600	22236CC/W33	214	277	16.7	9	198	302	3	0.26	2.60	3.90	2.50	29.5
	380	126	4	1680	2390	850	1100	22336CC/W33	224	317	22.3	12	198	362	3	0.35	1.90	2.90	1.80	69
190	290	75	2.1	700	1280	1200	1600	23038CC/W33	216	260	13.9	7.5	202	278	2	0.23	2.90	4.40	2.80	18
	340	92	4	1100	1650	1200	1500	22238CC/W33	226	294	16.7	9	208	322	3	0.19	3.60	5.30	3.60	36.5
	340	120	4	1390	2300	800	1500	23238CC/W33	223	287	16.7	9	208	322	3	0.35	1.90	2.90	1.80	47.5
	400	132	5	1800	2580	800	1000	22338CC/W33	237	333	22.3	12	212	378	4	0.35	1.90	2.90	1.80	80
200	360	98	4	1200	1880	1000	1400	22240CC/W33	238	312	16.7	9	218	342	3	0.26	2.60	3.90	2.50	43.5
	420	138	5	1960	2800	800	1000	22340CC/W33	249	351	22.3	12	222	398	4	0.33	2.00	3.00	2.00	92.5
220	370	150	4	1800	3300	450	600	24144CC/W33	248	310	11.1	6	238	352	3	0.4	1.70	2.50	1.60	65
	400	144	4	2000	3350	700	900	23244CC/W33	260	338	16.7	9	238	382	3	0.35	1.90	2.90	1.80	79.5
240	360	92	3	1100	2000	1000	1400	23048CC/W33	271	325	13.9	7.5	254	346	2.5	0.23	2.90	4.40	2.80	33.5
	360	118	3	1300	2650	700	900	24048CC/W33	265	316	11.1	6	254	346	2.5	0.3	2.30	3.40	2.20	42.5
	400	128	4	1700	3100	790	1000	23148CC/W33	277	347	16.7	9	258	382	3	0.3	2.30	3.40	2.20	65.5
	400	160	4	2000	3800	450	650	24148CC/W33	271	337	11.1	6	258	382	3	0.4	1.70	2.50	1.60	80.5
260	440	144	4	2470	3900	1000	1400	23152CC/W33	300	379	16.7	9	278	422	3	0.31	2.20	3.30	2.20	90.2
280	420	140	4	1800	3700	600	800	24056CC/W33	309	368	11.1	6	298	402	3	0.31	2.20	3.30	2.20	68.5
300	420	90	3	1150	2440	900	1200	23960CC/W33	333	385	11.1	6	314	406	2.5	0.19	3.60	5.30	3.60	40.5

剖分轴承





基本尺寸 (mm)					基本額定載荷 (kN)		軸承代號	其他尺寸 (mm)		計算係數				重量 (kg)
d	D	B	C	rsmin	Cr	Cor		d1	D1	e	Y1	Y2	Y0	
mm					KN			mm		mm				
120	200	142	80	2	540	540	24124D	165	168	0.37	1.8	2.7	1.8	18.5
140	230	102	53	2	350	350	23028D	181	190	0.22	3	4.6	2.8	15.2
180	300	125	74	2.1	680	680	23136X2D	221	247	0.24	2.8	4.2	2.8	32
280	500	260	176	5	2650	2650	23256D	420	438	0.35	1.9	2.9	1.9	178
300	500	160	160	5	1660	1660	23160D	419	434	0.3	2.3	3.4	2.2	135
360	540	220	134	5	2150	2150	23072D	477	481	0.23	2.9	4.4	2.8	158
400	600	240	148	5	2750	2750	23080D	523	540	0.23	2.9	4.4	2.8	210
420	620	150	150	6	2750	2750	23084D	542	561	0.22	3	4.6	2.8	160
460	700	245	165	6	3150	3150	23092X3D	605	635	0.21	3.2	4.8	3.2	346
530	780	265	185	6	3400	3400	230530D	666	704	0.21	3.2	4.8	3.2	389
560	870	330	200	6	5020	5020	230560X3D	734	785	0.22	3	4.6	2.8	585
600	980	515	375	7.5	10000	10000	241600D	812	833	0.35	1.9	2.9	1.8	1370
630	920	310	212	7.5	5650	5650	230630D	799	836	0.21	3.2	4.8	3.2	636
670	980	350	230	7.5	6400	6400	230670D	862	890	0.21	3.2	4.8	3.2	820
710	950	375	243	6	5720	5720	249710D	862	867	0.22	3	4.6	2.8	710
	1030	360	236	7.5	6900	6900	230710D	902	938	0.21	3.2	4.8	3.2	895
750	1000	360	250	6	6310	6310	249750D	901	915	0.22	3	4.6	2.8	716
	1090	340	250	7.5	6810	6810	230750D	931	992	0.2	3.4	5	3.2	961
800	1060	370	258	6	6850	6850	249800D	957	967	0.21	3.2	4.8	3.2	815
	1150	358	258	7.5	6850	6850	230800D	885	1045	0.27	2.50	3.70	2.50	1087
	1150	540	258	7.5	6850	6850	230800DW	885	1045					1367
	1150	490	325	7.5	12200	12200	240800X2D	1045	1075	0.27	2.5	3.7	2.5	1990

剖分轴承






基本尺寸 (mm)					基本额定载荷 (kN)		轴承代号	其他尺寸 (mm)		计算系数				重量 (kg)
d	D	B	C	rsmín	Cr	Cor		d1	D1	e	Y1	Y2	Y0	
mm					KN			mm		mm				
850	1120	390	272	6	7350	20500	249/850D	1010	1027	0.22	3	4.6	2.8	835
	1220	455	365	7.5	10900	25800	240/850D	1030	1092	0.27	2.5	3.7	2.5	1650
	1220	660	365	7.5	10900	25800	240/850WD	1030	1092	0.27	2.5	3.7	2.5	1931
	1220	540	365	7.5	10900	25800	240/850WBD	1060	1092	0.27	2.5	3.7	2.5	1781
	1280	540	375	7.5	12200	30600	240/850X3D	1124	1146	0.26	2.6	3.9	2.5	2380
884	1320	478	365	9.5	11000	24900	240/884D/HC			0.25	2.7	4	2.6	2457
900	1180	400	280	6	8100	22600	239/900X2	1059	1085	0.21	3.2	4.8	3.2	1120
	1270	478	365	9.5	9800	24600	240/900X3D	1118	1130	0.25	2.7	4	2.6	1970
	1280	498	375	9.5	9800	24600	240/900X2D/HC	1118	1130	0.25	2.7	4	2.6	2064
	1320	478	365	9.5	9850	24100	240/900X3D/HCC9-2	1140	1178	0.24	2.8	4.2	2.8	2050
	1270	470	365	9.5	9800	24600	240/900X3D-2	1118	1130	0.25	2.7	4	2.6	1970
1270	470	365	9.5	9800	24600	240/900X3D-3	1118	1130	0.25	2.7	4	2.6	1880	
950	1250	420	300	7.5	8800	25200	249/950D	1132	1148	0.21	3.2	4.8	3.2	1320
	1360	420	300	7.5	9100	21000	230/950D	1169	1234	0.2	3.4	5	3.2	1956
	1360	640	300	7.5	9100	21000	230/950D-1	1050	1234	0.2	3.4	5	3.2	2338
1000	1470	530	345	9.5	14400	35900	230/100X3D	1271	1338	0.21	3.2	4.8	3.2	3030
	1420	556	412	7.5	13300	34500	240/1000D	1107	1276					2633
1060	1460	500	335	7.5	11400	33000	249/1060X1D	1331	1349	0.2	3.4	5	3.2	2476
	1500	585	438	9.5	15000	40000	240/1060D	1164	1349	0.2	3.4	5	3.2	3083
	1500	611.5	438	9.5	15000	40000	240/1060D-1	1164	1349	0.2	3.4	5	3.2	3089
	1500	575	438	9.5	15000	40000	240/1060D-2	1164	1349	0.2	3.4	5	3.2	3354
	1460	500	335	7.5	11300	33000	249/1120D	1331	1349	0.2	3.4	5	3.2	2100
1540	525	355	7.5	14200	43000	240/1120X3D	1403	1419	0.2	3.4	5	3.2	2920	
1180	1540	500	355	7.5	10000	31500	249/1180D	1394	1428	0.2	3.4	5	3.2	2254
1250	1750	560	375	9.5	19500	48000	230/1250D	1562	1607	0.19	3.6	5.3	3.6	3850

振动筛VB轴承




基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号	其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{min}	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min			mm				mm							
80	170	58	2.1	345	495	2000	2800	22316/VBW33	109	142			92	158	2	0.34	1.99	2.96	1.94	6.24
85	180	60	3	355	505	1900	2600	22317Q1/VB	115	150			99	166	2.5	0.34	1.99	2.96	1.94	8.19
	180	60	3	355	505	1900	2600	22317Q1/VBW33	115	150			99	166	2.5	0.34	1.99	2.96	1.94	7.59
90	190	64	3	462	625	1800	2400	22318/VBW33	123	159	8.3	5	104	176	2.5	0.34	1.99	2.96	1.94	8.49
95	200	67	3	485	685	1800	2400	22319/VBW33	128	167	8.3	5	109	186	2.5	0.34	1.99	2.96	1.94	10.5
100	215	73	3	530	650	1800	2400	22320Q1/VB	135	179			114	201	2.3	0.37	1.80	2.70	1.80	13.5
	215	73	3	530	650	1800	2400	22320Q1/VBW33	135	179	11.1	5	114	201	2.3	0.37	1.80	2.70	1.80	13.5
105	175	56	2	402	550	1900	2700	22321Q1/VB	127	151			115	165	2	0.31	2.20	3.30	2.20	5.48
110	240	80	3	650	910	1600	2000	22322Q1/VB	150	197			124	226	2.5	0.37	1.80	2.70	1.80	18.9
	240	80	3	650	910	1600	2000	22322Q1/VBW33	150	197	13.9	6	124	226	2.5	0.37	1.80	2.70	1.80	18.8
120	260	86	3	840	1100	1400	1800	22324Q1/VB	165	215			134	246	2.5	0.35	1.90	2.90	1.80	23.3
	260	86	3	840	1100	1400	1800	22324Q1/VBW33	165	215			134	246	2.5	0.35	1.90	2.90	1.80	23.3
130	230	64	3	495	685	1800	2400	22226KQ1/VBW33	172	210	11.1	6	144	216	2.5	0.30	2.50	3.70	2.50	11.2
	280	93	4	840	1300	1300	1700	22326/VBHAC9W33	178	232	16.7	6	148	262	3	0.36	1.88	2.79	1.83	28.6
	280	93	4	840	1300	1300	1700	22326/VBW33	178	232	16.7	6	148	262	3	0.36	1.88	2.79	1.83	28.6
140	300	102	4	840	1300	1200	1600	22328Q1/VBW33	186	247	16.7	9	158	282	3	0.37	1.80	2.70	1.80	37.0
	300	118	4	1060	1450	1100	1500	22328Q1/VBW33	210	270	16.7	9	158	280	3	0.42	1.69	2.51	1.65	41.8
150	320	108	4	1160	1580	1100	1500	22330Q1/VBW33	203	265	16.7	9	168	302	3	0.37	1.80	2.70	1.80	44.6
160	290	80	3	950	1230	1500	1900	22232KQ1/VBW33	201	249	13.9	5	174	276	2.5	0.27	2.50	3.70	2.50	22.5
	340	114	4	1400	2050	950	1300	22332Q1/VBW33	201	284	16.7	7	178	322	3	0.36	1.87	2.79	1.83	52.8
	340	136	4	1520	1860	950	1300	22332Q1/VBW33	216	284	22	8	178	322	3	0.35	1.90	2.90	1.80	60.6
170	360	120	4	1500	2110	1300	1700	22334Q1/VBW33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	61.7
	360	136	4	1880	2540	800	1000	22334X2Q1/VBHAC9W33	226	292	22.3	12	188	342	3	0.41	1.65	2.45	1.61	69.0
180	380	126	4	1620	2400	900	1200	22336Q1/VBW33	242	316	22.3	8	198	362	3	0.35	1.90	2.90	1.80	71.3
190	400	132	5	1800	2630	850	1100	22338Q1/VBW33	257	334	22.3	8	212	378	4	0.35	1.90	2.90	1.80	82.2
	340	120	4	1420	2400	850	1100	22328KQ1/VBW33	237	288	16.7	7	208	322	3	0.35	1.90	2.90	1.80	48
200	420	138	5	1910	2860	850	1100	22340Q1/VBW33	269	350	22.3	8	222	398	4	0.35	1.90	2.90	1.80	97

CB轴承






基本尺寸 (mm)				基本额定载荷 (kN)		极限转速		轴承代号	其他尺寸 (mm)				接触面与倒角尺寸			计算系数				重量 (kg)
d	D	B	r _{smin}	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	d _a	D _a	r _a	e	Y1	Y2	Y _o	
mm				KN		r/min			mm				mm							
65	100	35	1.1	110	165	3800	4800	24013CB-2RS/HG2	75	87			74	90	1					0.966
75	115	40	1.1	158	240	2900	3500	24015CB/HG2W33	88	101	5.5	3	82	106	1					1.48
90	160	52.4	2	300	440	1900	2600	23218CB/HG2W33	111	137	5.7	3	101	149	2					4.5
95	170	43	2.1	275	370	2400	3200	22219CB/HG2W33	120	149	8.4	4.5	107	158	2					4.29
100	180	60.3	2.1	400	570	1700	2200	23220CB/HG2W33	125	153	8.4	4.5	112	168	2					6.44
110	180	69	2	410	660	1000	1400	24122CB/HG2W33	131	154	5.5	3	120	170	2					6.95
120	180 200	60 62	2 2	365 430	630 650	1600 1900	2000 2600	24024CB/HG2W33 23124CB/HG2W33	138 146	158 175	5.5 8.3	4 4.5	130 130	170 190	2 2					553 7.97
130	200	69	2	470	820	1800	2400	24026CB/HG2W33	151	174	5.5	3	140	190	2					7.76
140	210	69	2	460	860	1800	2400	24028CB/HG2W33	160	184	6	3	150	200	2					8.51
160	240	80	2.1	640	1180	1100	1500	24032CB/HG2W33	184	209	10	4.5	172	228	2					12.9

SDB型调心滚子轴承

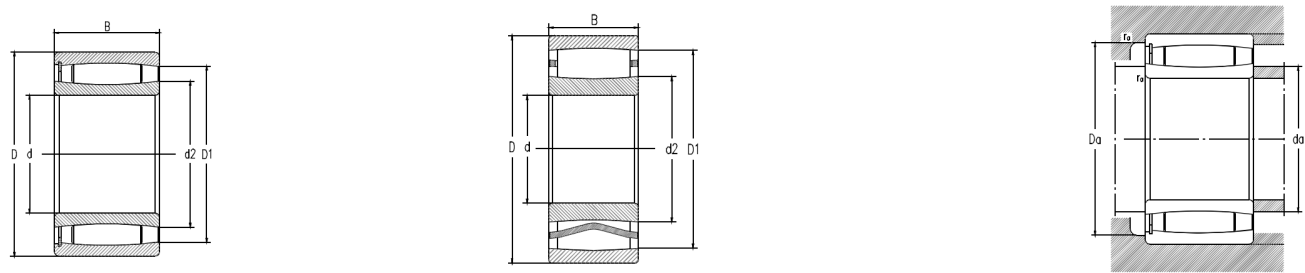




基本尺寸 (mm)				基本额定载荷 (kN)		极限转速	轴承代号	其他尺寸 (mm)				接触面与倒角尺寸			计算系数		重量 (kg)
d	D	B	r _{sm}	Cr	Cor	d ₂		D ₁	b	k	d _a	D _a	r _a	K ₁	K ₂		
mm				KN		r/min		mm				mm					
75	105	40	1	204	325	1900	SDB5915V/HG2YAD	82	96			81	95	1	0.098	0.114	1.07
	105	40	1	204	325	1900	SDB5915V/YAD	82	96			81	95	1	0.098	0.114	1.07
	105	54	1	200	325	1600	SDB6915V-2RS/HG2	85	94			81	98	1	0.073	0.154	1.36
	105	54	1	200	325	1600	SDB6915V/HG2C9	85	94			81	98	1	0.073	0.154	1.35
85	120	46	1.1	275	465	1700	SDB5917V/YAD	95	110			91	113	1	0.098	0.109	1.52
90	125	46	1.1	200	400	1600	SDB5918V/C9	101	113			98	116	1	0.089	0.131	1.71
	125	46	1.1	200	400	1600	SDB5918V-2RS/C9	101	113			98	116	1	0.089	0.131	1.72
100	150	50	1.5	345	530	1400	SDB4020V/HG2W33AYAD	112	135	10	3	110	138	1.5	0.098	0.118	3.05
	150	67	1.5	495	865	1100	SDB5020V/C9YA7	114	135			110	138	1.5	0.112	0.094	4.23
120	180	60	2	510	850	1100	SDB4024V/HG2C9	139	164			134	168	2	0.107	0.103	5.48
	180	60	2	510	850	1100	SDB4024V/HG2W33A	139	164	10	3	134	168	2	0.107	0.103	5.45
	180	60	2	510	850	1100	SDB4024V/W33YAD	139	164	5.5	4	134	168	2	0.107	0.103	5.44
130	200	69	2	700	1085	850	SDB4026V/HG2YAD	146	181			142	190	2	0.113	0.097	7.79
	200	69	2	700	1100	850	SDB4026V/YAD	146	181			142	190	2	0.113	0.097	8.04
150	225	75	2.1	755	1330	750	SDB4030V/C9	172	204			165	213	2	0.107	0.106	10.4
160	240	80	2.1	890	1460	600	SDB4032V/HG2W33AYAD	179	217	11	4	175	220	2	0.109	0.103	12.6
220	340	90	3	1280	2030	220	SDB3044/C9	256	311			240	320	2.5	0.11	0.10	29.1

紧定套





基本尺寸									型号 带锁紧螺母和 锁定装置的 紧定套	锁紧 螺母	锁定 装置	适用的 液压螺母	重量 (kg)
d1	d	d3	B1	B2	B3	G	G1	A					
mm													
60	65	85	65	14		M65×2			H2313	KM13	MB13	HMV13E	0.582
70	80 80	105 105	46 46	17 17		M80×2 M80×2			H216 H316	KM16 KM16	MB16 MB16	HMV16E HMV16E	0.966 1.04
75	85	110	63	18		M85×2			H317	KM17	MB17	HMV17E	1.17
80	90	120	65	18		M90×2			H318	KM18	MB18	HMV18E	1.1
90	100	130	97	20		M100×2			H2320	KM20	MB20	HMV20E	2.76
100	110 110	145 145	81 105	21 21		M110×2 M110×2			H3122 H2322	KM22 KM22	MB22 MB22	HMV22E HMV22E	2.33 2.84
110	120 120	145 155	72 88	22 22		M120×2 M120×2			H3024 H3124	KML24 KM24	MBL24 MB24	HMV24E HMV24E	1.95 2.39
115	130	165	121	23		M130×2			H2326	KM26	MB26	HMV26E	4.72
140	160 160 160	190 210 210	93 119 147	28 28 28		M160×3 M160×3 M160×3			H3032 H3132 H2332	KML32 KM32 KM32	MBL32 MB32 MB32	HMV32E HMV32E HMV32E	6.64 7.47 9.2
150	170 170	200 220	101 122	29 29		M170×3 M170×3			H3034 H3134	KML34 KM34	MBL34 MB34	HMV34E HMV34E	6.31 8
160	180 180	210 230	109 131	30 30		M180×3 M180×3			H3036 H3136	KML36 KM36	MBL36 MB36	HMV36E HMV36E	6.73 9.39
170	190	220	112	31		M190×3			H3038	KML38	MBL38	HMV38E	7.62
180	200 200	240 250	120 150	32 32		M200×3 M200×3			H3040 H3140	KML40 KM40	MBL40 MB40	HMV40E HMV40E	9.71 12
200	220 220 220 220	260 280 280 280	126 161 161 186	30 35 35 35	41	Tr220×4 Tr220×4 Tr220×4 Tr220×4	M6 M6	4.2 4.2	H3044 H3144 OH3144XH H2344	HML44 HM44 HM44 Hm44	MSL44 MS44 MB44 Mb44	HMV44E HMV44E HMV44E HMV44E	11.2 15.3 14.9 16.8

紧定套



基本尺寸									型号 带锁紧螺母和 锁定装置的 紧定套	锁紧 螺母	锁定 装置	适用的 液压螺母	重量 (kg)
d1	d	d3	B1	B2	B3	G	G1	A					
mm													
220	240 240	300 300	172 172	37 37		Tr240×4 Tr240×4	M6	4.2	H3148 OH3148H	HM48 HM48	MB48 MB48	HMV48E HMV48E	18.4 16
240	260 260 260 260	310 310 330 330	116 145 190 190	34 34 39 39	46 46	Tr260×4 Tr260×4 Tr260×4 Tr260×4	M6 M6 M6	4.2 4.2 4	OH3952H H3052 H3152 OH3152H	HML52 HML52 HM52 HM52	MSL48 MSL48 MB52 MB52	HMV52E HMV52E HMV52E HMV52E	14.8 16 22.8 23.3
260	280 280 280 280	330 350 350 350	152 195 195 224	38 38 38 41	50 51 41	Tr280×4 Tr280×4 Tr280×4 Tr280×4	M6 M6 M6	4.2 4.2 4.2	H3056 H3156 OH3156H H2356	HML56 KM56 HM56X2 HM56	MSL56 MS52 MB56 MB56	HMV56E HMV56E HMV56E HMV56E	18.4 25.2 25.9 29.6
280	300 300	360 380	168 208	42 40	54 53	Tr300×4 Tr300×4	M6 M6	4.2 4.2	H3060 OH3160H	HML60 HM60	MSL60 MS60	HMV60E HMV60E	24 31.4
300	320 320 320	380 400 400	140 226 258	42 42 42	55 56 56	Tr320×5 Tr320×5 Tr320×5	M6 M6 M6	4 4 4	OH3964H OH3164H H3264	HML64 HM64 HM64	MSL64 MS64 MS64	HMV64E HMV64E HMV64E	21.4 32.5 40.8
320	340	440	254	55	72	Tr340×5	M6	4	OH3168H	HM68	MS68	HMV68E	52.4
340	360 360	420 460	188 259	45 58	58 75	Tr360×5 Tr360×5	M6 M6	4 4	OH3072H OH3172H	HML72 HM72	MSL72 MS68	HMV72E HMV72E	20.6 57.3
360	380 380	450 490	193 264	48 60	62 77	Tr380×5 Tr380×5	M6 M6	4 4	H3076 H3176	HML76 HM76	MSL76 MS76	HMV76E HMV76E	43.5 62.9
380	400 400	470 520	210 272	52 62	66 82	Tr400×5 Tr400×5	M6 M6	4 4	H3080 OH3180H	HML80 Hm80	MSL76 Ms80	HMV80E HMV80E	43.5 65

退卸套



基本尺寸								型号 退卸套	退卸时 适用的螺母	适用的 液压螺母	重量 (kg)
d1	d	B1	B2	G	G1	G3	A				
mm											
95	100	64	68	M110×2	11			AH3120	KM22	HMV22E	0.66
105	110	65	72	M120×2	11			AH3122			0.76
145	150	96	101	M160×3	15			AHX3130	KM32	HMV32E	1.8
170	180	105	110	M200×3	17			AH2236	KM40		3.4
	180	116	122	M190×3	19			AHX3136	KM38	HMV38E	4.25
200	220	130	136	Tr240×4	20			AH2244			9.23
220	240	154	161	Tr260×4	25			AH3148	HM3052	HMV52E	15.9
	240	189	197	Tr260×4	30			AH2348	HM3052	HMV52E	15.9
320	340	225	234	Tr360×5	33			AHX3168	HM3172	HMV72E	28.1
340	360	167	176	Tr380×5	30	G1/4	9	AOH3072	HM3076	HMV3076E	21
		269	289	Tr380×5	26	G1/4	9	AOH24172	HM3176	HMV3076E	29.6
360	380	170	180	Tr410×5	31	G1/4	9.5	AOH3076			22.8
400	420	186	196	Tr440×5	34			AHX3084	HM3088	HMV88E	26.9
440	460	202	213	Tr480×5	37			AHX3092H	HM3096	HMV96E	34
460	480	295	307	Tr500×5	45	G1/4	9	AOH3196	HM31/500	HMV100E	60
510	530	225	235	Tr560×6	54			AHX06/530			47.8
540	560	250	261	Tr600×6	54			AH30/560-1			60.6
560	580	180	190	Tr600×6	47			AH26/580			38
	580	300	308	Tr620×6	60			AH26/580-1			86
1010	1060	310	328	Tr1095×8	50	G1/4	15	AOH239/1060			261



京澎机械设备(上海)有限公司

Jingpeng Machinery & Equipment (Shanghai) Co., Ltd.



Contact : Anny Fu

Tel : 13636560152 18134111662

Mailbox : sales@yosobearing.com

Address : 18th floor, building 2, 515 Yishan Road, Xuhui District, Shanghai