



General Specifications


Connection Mode B & C	
Clockwise Rotation/ Counter Clockwise Rotation	
FG Signal	
PWM Control	
Locked Rotor Protection	
Power	30W (Internal Drive)
	50W (External Drive)
Life Expectancy	~3000H (Oil Bearing)
	~5000H (Ball Bearing)

Motor Data

Motor model	Rated voltage e VDC	No-load		Rated				Stall	
		Speed r/min	Curren mA	Speed r/min	Torque g.cm	Current mA	Powe W	Torque g.cm	Current A
BL3650-1261	12	6100	530	4819	296.5	192	15	1412	7.16
BL3650-1265	12	6500	250	5300	200	1400	11	1050	4
BL3650-2440	24	4000	80	3400	200	420	7	1300	2.4
BL3650-24194	24	19400	440	15326	162.5	161	26	774	6

*** Note: It's only typical technical data, special requirement can be customized.**

Dimensions

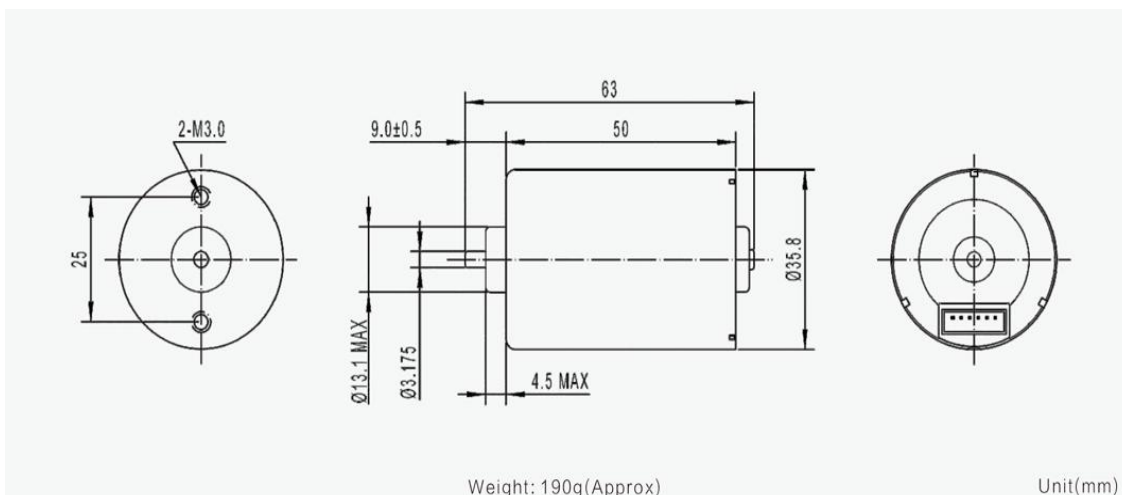

*** Note: The motor parts such as shaft size, encoders, cables & connectors can be customized.**