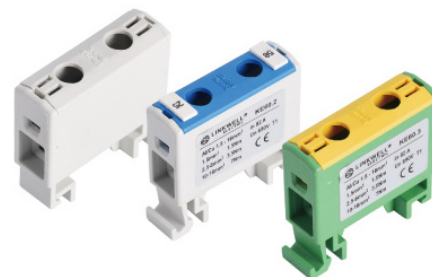
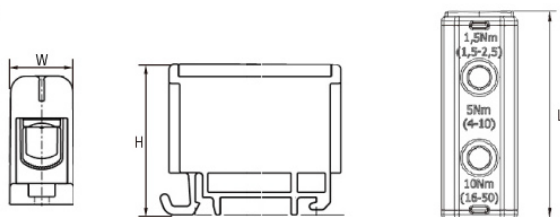


## KE 60


**16mm<sup>2</sup>-1 pole 2 holes**

Dustproof cover can be added. Model KEPC016

**■ DIMENSION (mm)**


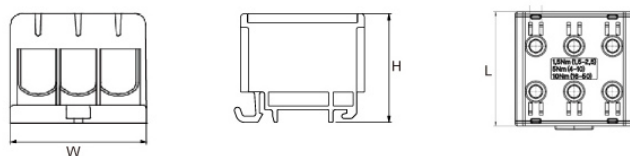
| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE60.1       |       |                              |                         |                         |                                                             |               |             |                |
| KE60.2       |       | 1.5-16                       | 1000                    | Cu 85<br>Al 75          | 1.5Nm(1.5mm <sup>2</sup> )<br>3.0Nm(2.5-16mm <sup>2</sup> ) | 13.5×40×42    | 20          | 1000           |
| KE60.3       |       |                              |                         |                         |                                                             |               |             |                |

## KE 70

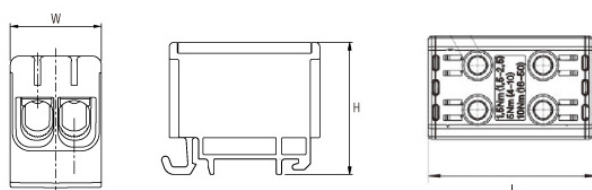**16mm<sup>2</sup>-1 pole 4 holes**
**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE70.1       |       |                              |                         |                         |                                                             |               |             |                |
| KE70.2       |       | 1.5-16                       | 1000                    | Cu 85<br>Al 75          | 1.5Nm(1.5mm <sup>2</sup> )<br>3.0Nm(2.5-16mm <sup>2</sup> ) | 22×38.5×45    | 30.5        | 500            |
| KE70.3       |       |                              |                         |                         |                                                             |               |             |                |



## KE 60.4

**16mm<sup>2</sup>-3 pole 6 holes**
**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE60.4       |       |                              |                         |                         |                                                             |               |             |                |
| KE60.5       |       | 1.5-16                       | 1000                    | Cu 85<br>Al 75          | 1.5Nm(1.5mm <sup>2</sup> )<br>3.0Nm(2.5-16mm <sup>2</sup> ) | 37.5×39×45    | 56          | 400            |
| KE60.6       |       |                              |                         |                         |                                                             |               |             |                |

**KE 60.7****16mm<sup>2</sup>-5 pole 10 holes**

■ DIMENSION (mm)





| Product code | Color                                                                             | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-----------------------------------------------------------------------------------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE60.7       |  | 1.5-16                       | 1000                    | Cu 85<br>Al 75          | 1.5Nm(1.5mm <sup>2</sup> )<br>3.0Nm(2.5-16mm <sup>2</sup> ) | 63×40×61.4    | 94          | 200            |

**KE 50****35mm<sup>2</sup>-1 pole 2 holes**

Dustproof cover can be added. Model KEPC035




■ DIMENSION (mm)

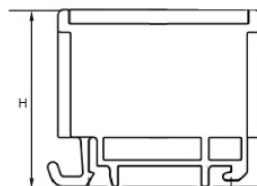

| Product code | Color                                                                               | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                 | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------------------------------------------------------------------------------------|------------------------------|-------------------------|-------------------------|-----------------------------------------------------------|---------------|-------------|----------------|
| KE50.1       |  | 2.5-35                       | 1000                    | Cu 135<br>Al 120        | 3Nm(2.5-16mm <sup>2</sup> )<br>6Nm(25-35mm <sup>2</sup> ) | 16×40×46      | 24.5        | 500            |
| KE50.2       |  |                              |                         |                         |                                                           |               |             |                |
| KE50.3       |  |                              |                         |                         |                                                           |               |             |                |

**KE 65****35mm<sup>2</sup>-1 pole 4 holes**


■ DIMENSION (mm)



| Product code | Color                                                                               | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                 | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------------------------------------------------------------------------------------|------------------------------|-------------------------|-------------------------|-----------------------------------------------------------|---------------|-------------|----------------|
| KE65.1       |  | 2.5-35                       | 1000                    | Cu 135<br>Al 120        | 3Nm(2.5-16mm <sup>2</sup> )<br>6Nm(25-35mm <sup>2</sup> ) | 27×40×46      | 42          | 300            |
| KE65.2       |  |                              |                         |                         |                                                           |               |             |                |
| KE65.3       |  |                              |                         |                         |                                                           |               |             |                |




## KE 50.4

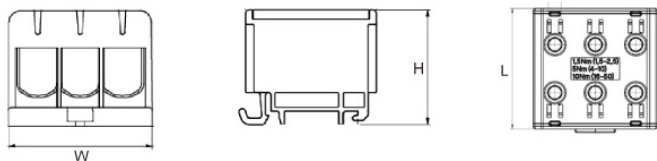**35mm<sup>2</sup>-3 pole 6 holes**
**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                 | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-----------------------------------------------------------|---------------|-------------|----------------|
| KE50.4       |       |                              |                         |                         |                                                           |               |             |                |
| KE50.5       |       | 2.5-35                       | 1000                    | Cu 135<br>Al 120        | 3Nm(2.5-16mm <sup>2</sup> )<br>6Nm(25-35mm <sup>2</sup> ) | 46×40×45.5    | 67          | 300            |
| KE50.6       |       |                              |                         |                         |                                                           |               |             |                |



## KE 65.7

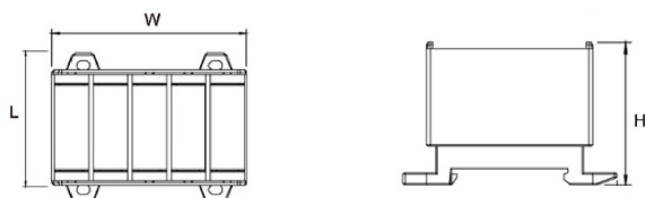**35mm<sup>2</sup>-5 pole 10 holes**
**■ DIMENSION (mm)**


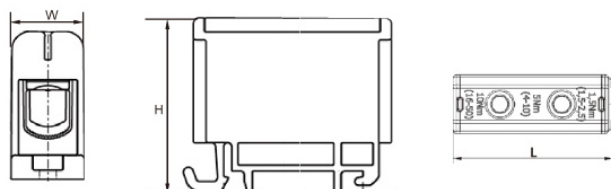
| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                 | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-----------------------------------------------------------|---------------|-------------|----------------|
| KE65.7       |       | 2.5-35                       | 1000                    | Cu 135<br>Al 120        | 3Nm(2.5-16mm <sup>2</sup> )<br>6Nm(25-35mm <sup>2</sup> ) | 80×40×65      | 114         | 200            |



## KE 61

**50mm<sup>2</sup>-1 pole 2 holes**

Dustproof cover can be added. Model KEPC050


**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|----------------------------------------------------------|---------------|-------------|----------------|
| KE61.1       |       |                              |                         |                         |                                                          |               |             |                |
| KE61.2       |       | 2.5-50                       | 1000                    | Cu 160<br>Al 145        | 4Nm(2.5-4mm <sup>2</sup> )<br>12Nm(6-50mm <sup>2</sup> ) | 17.8×43×49    | 35          | 500            |
| KE61.3       |       |                              |                         |                         |                                                          |               |             |                |



**KE 66****50mm<sup>2</sup>-1 pole 4 holes**


■ DIMENSION (mm)

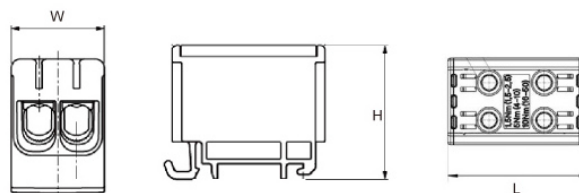

| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|----------------------------------------------------------|---------------|-------------|----------------|
| KE66.1       |       |                              |                         |                         |                                                          |               |             |                |
| KE66.2       |       | 2.5-50                       | 1000                    | Cu 160<br>Al 145        | 4Nm(2.5-4mm <sup>2</sup> )<br>12Nm(6-50mm <sup>2</sup> ) | 29.8×43×49    | 61          | 300            |
| KE66.3       |       |                              |                         |                         |                                                          |               |             |                |

**KE 71****50mm<sup>2</sup>-1 pole 6 holes**


■ DIMENSION (mm)

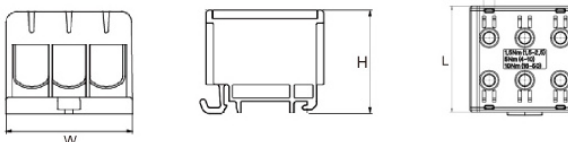

| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|----------------------------------------------------------|---------------|-------------|----------------|
| KE71.1       |       |                              |                         |                         |                                                          |               |             |                |
| KE71.2       |       | 2.5-50                       | 1000                    | Cu 160<br>Al 145        | 4Nm(2.5-4mm <sup>2</sup> )<br>12Nm(6-50mm <sup>2</sup> ) | 49×43×48      | 100.5       | 185            |
| KE71.3       |       |                              |                         |                         |                                                          |               |             |                |

**KE 61****50mm<sup>2</sup>-3 pole 6 holes**



■ DIMENSION (mm)

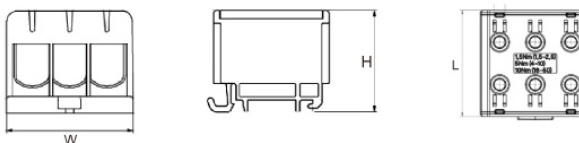

| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|----------------------------------------------------------|---------------|-------------|----------------|
| KE61.4       |       |                              |                         |                         |                                                          |               |             |                |
| KE61.5       |       | 2.5-50                       | 1000                    | Cu 160<br>Al 145        | 4Nm(2.5-4mm <sup>2</sup> )<br>12Nm(6-50mm <sup>2</sup> ) | 49×43×48      | 100.5       | 185            |
| KE61.6       |       |                              |                         |                         |                                                          |               |             |                |



## KE 61.7

**50mm<sup>2</sup>-5 pole 10 holes**
**■ DIMENSION (mm)**


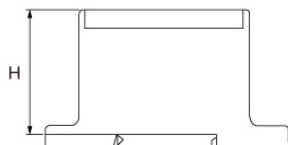

| Product code | Color                                                                             | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-----------------------------------------------------------------------------------|------------------------------|-------------------------|-------------------------|----------------------------------------------------------|---------------|-------------|----------------|
| KE61.7       |  | 2.5-50                       | 1000                    | Cu 160<br>Al 145        | 4Nm(2.5-4mm <sup>2</sup> )<br>12Nm(6-50mm <sup>2</sup> ) | 86×44×51      | 161.5       | 200            |



## KE 62

**95mm<sup>2</sup>-1 pole 2 holes**




Dustproof cover can be added. Model KEPC095

**■ DIMENSION (mm)**


| Product code | Color                                                                               | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                  | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------------------------------------------------------------------------------------|------------------------------|-------------------------|-------------------------|------------------------------------------------------------|---------------|-------------|----------------|
| KE62.1       |  | 16-95                        | 1000                    | Cu 245<br>Al 220        | 10Nm(16-25mm <sup>2</sup> )<br>20Nm(35-95mm <sup>2</sup> ) | 24×49×86      | 95          | 240            |
| KE62.2       |  |                              |                         |                         |                                                            |               |             |                |
| KE62.3       |  |                              |                         |                         |                                                            |               |             |                |



## KE 67


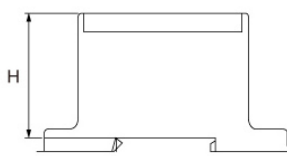

**95mm<sup>2</sup>-1 pole 4 holes**
**■ DIMENSION (mm)**


| Product code | Color                                                                               | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                  | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------------------------------------------------------------------------------------|------------------------------|-------------------------|-------------------------|------------------------------------------------------------|---------------|-------------|----------------|
| KE67.1       |  | 16-95                        | 1000                    | Cu 245<br>Al 220        | 10Nm(16-25mm <sup>2</sup> )<br>20Nm(35-95mm <sup>2</sup> ) | 42×49×86      | 172.5       | 90             |
| KE67.2       |  |                              |                         |                         |                                                            |               |             |                |
| KE67.3       |  |                              |                         |                         |                                                            |               |             |                |



**KE 72****95mm<sup>2</sup>-1 pole 6 holes**

■ DIMENSION (mm)





| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                  | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|------------------------------------------------------------|---------------|-------------|----------------|
| KE72.1       |       |                              |                         |                         |                                                            |               |             |                |
| KE72.2       |       | 16-95                        | 1000                    | Cu 245<br>Al 220        | 10Nm(16-25mm <sup>2</sup> )<br>20Nm(35-95mm <sup>2</sup> ) | 60×49×86      | 245         | 90             |
| KE72.3       |       |                              |                         |                         |                                                            |               |             |                |

**KE 63****150mm<sup>2</sup>-1 pole 2 holes**

Dustproof cover can be added. Model KEPC150




■ DIMENSION (mm)

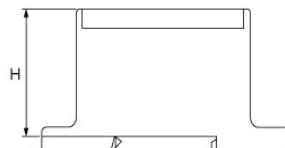

| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                    | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|--------------------------------------------------------------|---------------|-------------|----------------|
| KE63.1       |       |                              |                         |                         |                                                              |               |             |                |
| KE63.2       |       | 35-150                       | 1000                    | Cu 320<br>Al 290        | 14Nm(35-95mm <sup>2</sup> )<br>30Nm(120-150mm <sup>2</sup> ) | 29.5×59×95    | 163.5       | 180            |
| KE63.3       |       |                              |                         |                         |                                                              |               |             |                |

**KE 68****150mm<sup>2</sup>-1 pole 4 holes**


■ DIMENSION (mm)

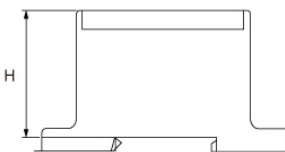

| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                    | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|--------------------------------------------------------------|---------------|-------------|----------------|
| KE68.1       |       |                              |                         |                         |                                                              |               |             |                |
| KE68.2       |       | 35-150                       | 1000                    | Cu 320<br>Al 290        | 14Nm(35-95mm <sup>2</sup> )<br>30Nm(120-150mm <sup>2</sup> ) | 51.5×59×95    | 290.5       | 90             |
| KE68.3       |       |                              |                         |                         |                                                              |               |             |                |



## KE 73

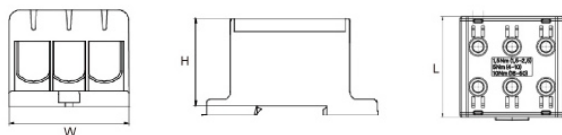**150mm<sup>2</sup>-1 pole 6 holes**
**■ DIMENSION (mm)**


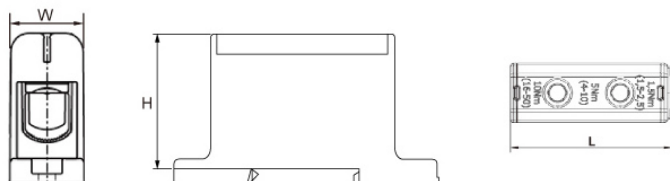
| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                    | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|--------------------------------------------------------------|---------------|-------------|----------------|
| KE73.1       |       |                              |                         |                         |                                                              |               |             |                |
| KE73.2       |       | 35-150                       | 1000                    | Cu 320<br>Al 290        | 14Nm(35-95mm <sup>2</sup> )<br>30Nm(120-150mm <sup>2</sup> ) | 74×59×95      | 426         | 60             |
| KE73.3       |       |                              |                         |                         |                                                              |               |             |                |



## KE 64

**240mm<sup>2</sup>-1 pole 2 holes**


Dustproof cover can be added. Model KEPC240

**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE64.1       |       |                              |                         |                         |                                                             |               |             |                |
| KE64.2       |       | 35-240                       | 1000                    | Cu 425<br>Al 380        | 12Nm(35-70mm <sup>2</sup> )<br>45Nm(95-240mm <sup>2</sup> ) | 38×67×131     | 318         | 100            |
| KE64.3       |       |                              |                         |                         |                                                             |               |             |                |



## KE 69

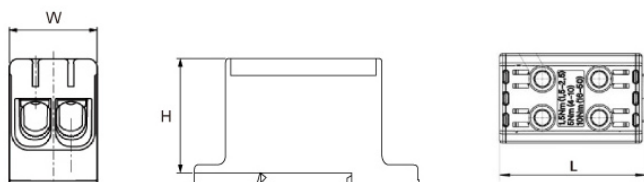**240mm<sup>2</sup>-1 pole 4 holes**
**■ DIMENSION (mm)**


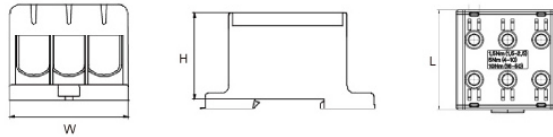
| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE69.1       |       |                              |                         |                         |                                                             |               |             |                |
| KE69.2       |       | 35-240                       | 1000                    | Cu 425<br>Al 380        | 12Nm(35-70mm <sup>2</sup> )<br>45Nm(95-240mm <sup>2</sup> ) | 65×67×131     | 566.5       | 90             |
| KE69.3       |       |                              |                         |                         |                                                             |               |             |                |



### KE 74

**240mm<sup>2</sup>-1 pole 6 holes**

■ DIMENSION (mm)




| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                   | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|-------------------------------------------------------------|---------------|-------------|----------------|
| KE74.1       |       |                              |                         |                         |                                                             |               |             |                |
| KE74.2       |       | 35-240                       | 1000                    | Cu 425<br>Al 380        | 12Nm(35-70mm <sup>2</sup> )<br>45Nm(95-240mm <sup>2</sup> ) | 94×67×131     | 850         | 30             |
| KE74.3       |       |                              |                         |                         |                                                             |               |             |                |

### KE 75

**300mm<sup>2</sup>-1 pole 2 holes**

■ DIMENSION (mm)

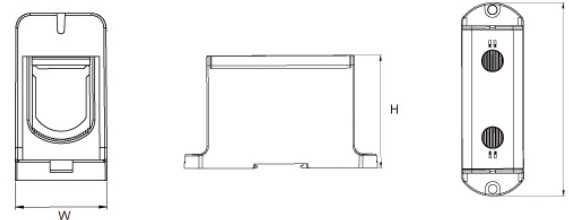


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm    | W×H×L<br>(mm) |
|--------------|-------|------------------------------|-------------------------|-------------------------|------------------------------|---------------|
| KE75.1       |       |                              |                         |                         |                              |               |
| KE75.2       |       | 95-300                       | 1000                    | Cu 520<br>Al 490        | 45Nm(95-300mm <sup>2</sup> ) | 44.7x81.5x140 |
| KE75.3       |       |                              |                         |                         |                              |               |

### KE 80


**300mm<sup>2</sup>-2 pole 4 holes**

■ DIMENSION (mm)

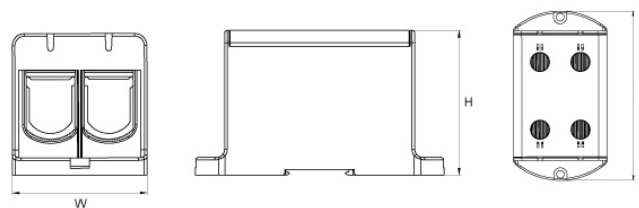

| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm    | W×H×L<br>(mm) |
|--------------|-------|------------------------------|-------------------------|-------------------------|------------------------------|---------------|
| KE80.1       |       |                              |                         |                         |                              |               |
| KE80.2       |       | 95-300                       | 1000                    | Cu 520<br>Al 490        | 45Nm(95-300mm <sup>2</sup> ) | 77.5x81.5x140 |
| KE80.3       |       |                              |                         |                         |                              |               |


## KE 85

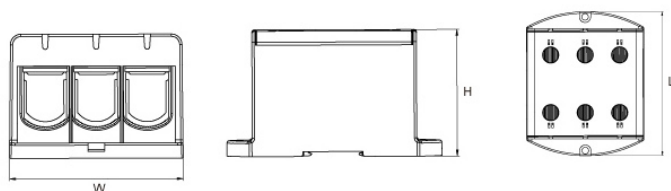**300mm<sup>2</sup>-3 pole 6 holes**
**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm    | W×H×L<br>(mm) |
|--------------|-------|------------------------------|-------------------------|-------------------------|------------------------------|---------------|
| KE85.1       |       |                              |                         |                         |                              |               |
| KE85.2       |       | 95-300                       | 1000                    | Cu 520<br>Al 490        | 45Nm(95-300mm <sup>2</sup> ) | 114×81.5×140  |
| KE85.3       |       |                              |                         |                         |                              |               |




## KE 62N

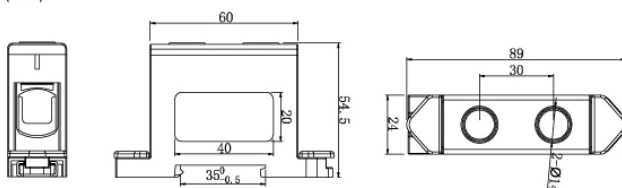**95mm<sup>2</sup>-1 pole 2 holes**
**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                  | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|------------------------------------------------------------|---------------|-------------|----------------|
| KE62N.1      |       |                              |                         |                         |                                                            |               |             |                |
| KE62N.2      |       |                              |                         |                         |                                                            |               |             |                |
| KE62N.3      |       | 35-240                       | 1000                    | Cu 245<br>Al 220        | 10Nm(16-25mm <sup>2</sup> )<br>20Nm(35-95mm <sup>2</sup> ) | 94×67×130     | 850         | 30             |
| KE62N.4      |       |                              |                         |                         |                                                            |               |             |                |
| KE62N.5      |       |                              |                         |                         |                                                            |               |             |                |



## KE 100

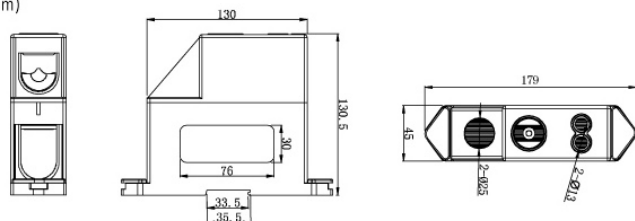**300mm<sup>2</sup>-1 pole 4 holes**
**■ DIMENSION (mm)**


| Product code | Color | Conductor<br>mm <sup>2</sup> | Nominal<br>Voltage<br>V | Nominal<br>Current<br>A | Tightenig<br>Torque<br>Nm                                                                    | W×H×L<br>(mm) | Weight<br>g | Package<br>pcs |
|--------------|-------|------------------------------|-------------------------|-------------------------|----------------------------------------------------------------------------------------------|---------------|-------------|----------------|
| KE100.1      |       |                              |                         |                         |                                                                                              |               |             |                |
| KE100.2      |       |                              |                         |                         |                                                                                              |               |             |                |
| KE100.3      |       | 35-300                       | 1000                    | Cu 600<br>Al 500        | 8Nm(2×10-70mm <sup>2</sup> )<br>30Nm(35-185mm <sup>2</sup> )<br>50Nm(90-300mm <sup>2</sup> ) | 45×130.5×179  | 700         | 20             |
| KE100.4      |       |                              |                         |                         |                                                                                              |               |             |                |
| KE100.5      |       |                              |                         |                         |                                                                                              |               |             |                |

