

TRANSFORMER






JAdopting technology of siemens company, design and manufacture JSG series three phase transformer by LINKWELL, with voltage between 160VA and 16KVA. The figure and installation thersize have be standardized and can be used together with 4AP series of Siemens, product comply with VDE0550、IEC439、JB5555、GB5226 and other International and national standards.

JSG series transformer used for equipment with input and output voltage less than 500V and frequency 50/60Hz.

Various inputs of the product, the output voltage level, the connection group, the number of adjustment taps and position (generally $\pm 5\%$), the distribution of winding capacity, the arrangement of secondary single-phase windings, the use of rectifier circuits, whether to require The outer casing and the like can be carefully designed and manufactured according to the requirements of the user.

■ Outline and mounting dimensions

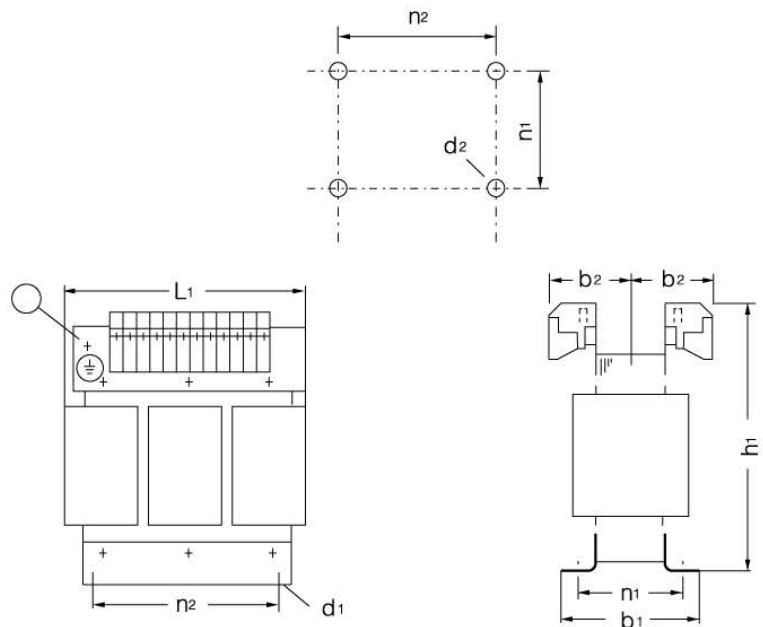


Model No.	Capacity KVA	b1 max	b2 max	d1	d2	h1 max	L1 max	n1	n2
JSG-0.16	0.16	64	50	5×8	M4	140	122	49	90
JSG-0.25	0.25	67	48	6×12	M5	162	156	49	113
JSG-0.4	0.4	82	56	6×12	M5	162	156	64	113
JSG-0.63	0.63	76	51	7.4×13	M6	187	181	56	136
JSG-1	1	97	61	7.4×13	M6	187	181	76	136
JSG-1.6	1.6	115	98	7.4×13	M6	214	229	94	170
JSG-2.5	2.5	133	102	10×18	M8	241	264	101	200
JSG-4	4.0	148	104	10×18	M8	250	270	118	224
JSG-6.3	6.3	155	129	10×18	M8	330	360	130	260
JSG-8	8	170	134	12×20	M10	330	360	140	260
JSG-10	10	170	134	12×20	M10	330	360	150	260



SG series low-voltage three-phase dry-type transformers are widely used in industrial and mining enterprises, CNC machine tools, machining centers, various types of machinery, power plants, airports and other places with high safety and fire protection requirements, for conversion power, lighting electrical, power supply, rectifier power supply.



■ Outline and mounting dimensions

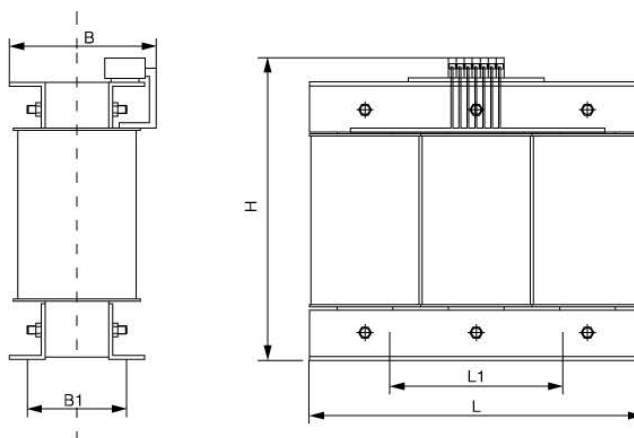

Model No.	Capacity (KVA)	Input voltage(V)	Connection group	Outline size			Installation size		Hole radius
				L	B	H	L1	B1	
SG-2.5	2.5	660	△ or Y	270	180	260	200	120	8.5
SG-3	3			270	190	260	200	120	8.5
SG-4	4			300	190	290	220	120	8.5
SG-5	5			300	210	290	220	130	8.5
SG-6	6			300	220	290	260	140	8.5
SG-7	7			360	200	330	260	130	8.5
SG-8	8			360	210	330	260	140	8.5
SG-10	10			360	220	330	260	150	12.5
SG-12	12			360	230	330	260	160	12.5
SG-15	15			420	280	420	319	170	12.5
SG-20	20	380	△ or Y	420	280	420	319	180	12.5
SG-25	25			420	300	420	319	190	12.5
SG-30	30			480	270	450	360	220	12.5
SG-40	40			540	300	450	360	250	12.5
SG-45	45			600	300	560	450	250	12.5
SG-50	50			600	350	560	450	220	12.5
SG-60	60			600	350	560	450	220	15
SG-80	80			660	380	660	550	250	15
SG-100	100			660	380	660	550	250	15




■ Outline and mounting dimensions

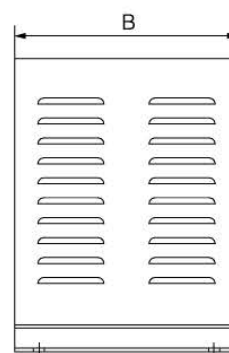


Model No.	Capacity (KVA)	Outline size		
		L	B	H
SGC-2.5KVA	2.5	300	240	280
SGC-3KVA	3	300	240	280
SGC-4KVA	4	390	280	320
SGC-5KVA	5	390	280	320
SGC-6KVA	6	390	280	320
SGC-8KVA	8	500	350	450
SGC-10KVA	10	500	350	450
SGC-12KVA	12	500	350	450
SGC-15KVA	15	500	350	450
SGC-20KVA	20	600	420	520
SGC-25KVA	25	600	420	520
SGC-30KVA	30	600	420	520
SGC-40KVA	40	600	420	520
SGC-45KVA	45	740	500	650
SGC-50KVA	50	740	500	650
SGC-60KVA	60	740	500	650
SGC-80KVA	80	840	530	650
SGC-100KVA	100	840	530	650




■ Outline and mounting dimensions




JBK5-40~800




JBK5-1000~1600



JBK5-1000~2500



■ Model and its meaning

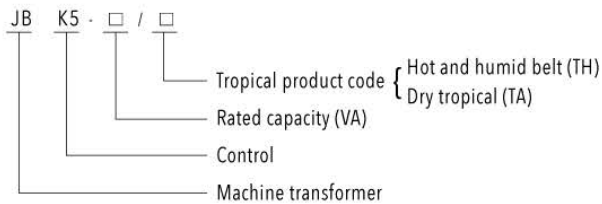

Model No.	Rated volume (VA)	Efficiency(%)	Voltage of output under load		Voltage of output unloaded		Rated input voltage (V)	Rated Output voltage (V)	Remarks
			Signal winding (%)	Control winding (%)	Signal winding (%)	Control winding (%)			
JBK5-40	40	80	$6 \geq U_m > 5$ $12 \geq U_m > 10$	95%-105% UH	6或12	1.1Um	AC380 ±5%	AC220 (127) 110	The distribution of every winding capacity can be made according to user's demand
JBK5-63	63								
JBK5-100	100								
JBK5-160	160	85							
JBK5-250	250								
JBK5-400	400								
JBK5-630	630	90	$6 \geq U_m > 4.5$ $12 \geq U_m > 9$						
JBK5-800	800								
JBK5-1000	1000								
JBK5-1600	1600	$12.8 \geq U_m > 9.6$ $13.5 \geq U_m > 10$	48 35 24						
JBK5-2500	2500								
JBK5-3000	3000								
JBK5-4000	4000	90	$15.2 \geq U_m 11$	0-380或 0-220 不帶±5%	12 6				
JBK5-5000	5000								
JBK5-6000	6000								
JBK5-7000	7000								
JBK5-8000	8000								
JBK5-10000	10000								
JBK5-15KVA	15000								
JBK5-20KVA	20000								
JBK5-30KVA	30000								
JBK5-40KVA	40000								
JBK5-50KVA	50000	60000							
JBK5-60KVA									

Model No.	B max	D max	E max	Installation hole spacing A	Installation hole spacing C	Installation hole K	F max	Remarks
JBK5-40、63	78	77	90	58±1	47±1	4.6	1.2	
JBK5-100	84	93	94	64±1	62±1	4.6	1.2	
JBK5-160	96	93	107	82±1	73.5±1	5.5	1.5	
JBK5-250	96	107	108	80±1	85±1	5.8	1.5	
JBK5-400	120	102	124	94±1	85±1	7	2	
JBK5-500	120	115	124	94±1	91±1	7	2	
JBK5-630	150	114	144	123±1	91±1	7	2	
JBK5-800	150	124	144	126±1	104±1	7	2	
JBK5-1000	155	205	133	133±1	152±1	8.2	2.5	Horizontal
JBK5-1000	168	134	153	138±1	109±1	7.5	2.5	Vertical
JBK5-1600	170	225	144	144±1	175±1	8.2	3	Horizontal
JBK5-1600	168	147	146	138±1	122±1	7.5	2.5	Vertical
JBK5-2500	200	250	160	170±1	200±1	9	4	Horizontal
JBK5-2500	180	165	180	151±1	131±1	8	4	Vertical
JBK5-3000	200	250	180	170±1	200±1	9	4	Horizontal
JBK5-3000	180	165	180	151±1	131±1	8	4	Vertical(L)
JBK5-3000	228	185	215	190±1	150±1	9.8	5	Vertical(S)
JBK5-4000	200	250	180	170±1	200±1	9	4	Horizontal
JBK5-4000	228	185	215	190±1	150±1	9.8	5	Vertical
JBK5-5000	244	355	215	240±1	247±1	10.5	4	Horizontal
JBK5-5000	228	185	215	190±1	150±1	9.8	5	Vertical
JBK5-6000	244	355	215	240±1	247±1	10.5	4	Horizontal
JBK5-6000	240	220	235	201±1	180±1	9.8	5	Vertical
JBK5-7000	240	220	320	250±1	180±1	9.8	5	Vertical
JBK5-8000	300	240	320	250±1	180±1	12	5	Vertical
JBK5-10000	300	240	320	250±1	180±1	12	5	Vertical


Model No.	Rated volume (VA)	Efficiency (%)	Voltage of output under load		Voltage of output unloaded		Rated input voltage (V)	Rated Output voltage (V)	Remarks	
			Signal winding (%)	Control winding (%)	Signal winding (%)	Control winding (%)				
JBK5-40	40	80	$6 \geq U_m > 5$ $12 \geq U_m > 10$	95-105% UH	6 or 12	1.1Um	AC380 ±5%	AC220 (127) 110	The distribution of every winding capacity can be made according to user's demand	
JBK5-63	63									
JBK5-100	100									
JBK5-160	160									
JBK5-250	250	85					AC220 ±5%	48 35 24		
JBK5-400	400									
JBK5-630	630									
JBK5-800	800									
JBK5-1000	1000	90	$6 \geq U_m > 4.5$ $12 \geq U_m > 9$							Light or Control
JBK5-1600	1600									
JBK5-2500	2500									
JBK5-3000	3000									
JBK5-4000	4000	$12.8 \geq U_m > 9.6$ $13.5 \geq U_m > 10$	Signal							
JBK5-5000	5000									
JBK5-6000	6000									
JBK5-7000	7000									
JBK5-8000	8000	96	$15.2 \geq U_m > 11$				0-380或 0-220 不带 ±5%	12 6		
JBK5-10000	10000									



Series JBK6 machine controlling transformer is our company introduces the series of the foreign latest transformer by LINKWELL, on the basis of the JBK5 controlling transformer, develop the new generation transformer, JBK6 transformer's , appearance size, installation size, and the occasion of using are same as JBK5 transformer, besides JBK5 transformer's advantage, JBK6 transformer has the following characteristic:

1. The terminal screw is bigger than JBK5, it is more convenient and firmer to wire.
2. With shortcut and hot protector, it is more reliable to use.
3. The transformer adopts the craft of vacuum soak painting, the insulating material import from foreign country, insulating ability is more steady.

■ Outline and mounting dimensions

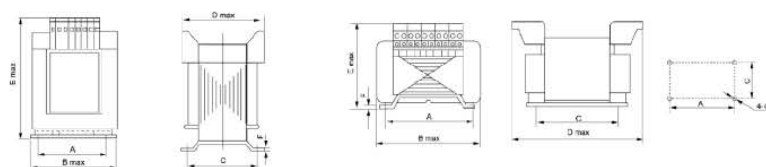

JBK6-40~800

JBK6-1000~1600 Vertical


JBK6-1000~2500

Model No.	B max	D max	E max	Installation hole spacing A	Installation hole spacing C	Installation hole K	F max	Remarks
JBK6-40、63	78	72	90	56±0.15	46±0.125	4.6	1.5	
JBK6-100	85	75	96	64±0.15	62±0.15	4.6	1.5	
JBK6-160	96	92	105	84±0.175	73.5±0.15	5.5	1.5	
JBK6-250	96	100	104	84±0.175	85±0.175	5.8	1.5	
JBK6-400	120	100	122	90±0.175	85±0.175	5.8	2	
JBK6-630	150	110	140	122±0.2	90±0.175	7	2	
JBK6-800	150	128	142	122±0.2	105±0.2	7	2	
JBK6-1000	150	190	142	126±0.2	155±0.2	7	3	Horizontal
JBK6-1000	168	125	155	105±0.2	138±0.2	9	2	Vertical
JBK6-1600	170	225	153	140±0.2	176±0.2	7	3	Horizontal
JBK6-1600	168	138	155	116±0.2	138±0.2	9	2	Vertical
JBK6-2500	194	160	165	172±0.2	195±0.23	7	4	Horizontal


Model No.	Rated volume (VA)	Efficiency (%)	Voltage of output under load		Voltage of output unloaded		Rated input voltage (V)	Rated Output voltage (V)	Remarks	
			Signal winding (%)	Control winding (%)	Signal winding (%)	Control winding (%)				
JBK6-40	40	80	6≥Um>5 12≥Um>10	95-105% UH	6 or 12	1.1Um	AC380 ±5%	AC220 (127) 110	The distribution of every winding capacity can be made according to user's demand	
JBK6-63	63									Control
JBK6-100	100									
JBK6-160	160									
JBK6-250	250	85						48 35 24		Light or Control
JBK6-400	400									
JBK6-630	630									
JBK6-800	800	90					12 6	Signal		
JBK6-1000	1000									
JBK6-1600	1600									
JBK6-2500	2500									
			6≥Um>4.5 12≥Um>9				AC220 ±5%			





■ Outline and mounting dimensions



LBK6-40~800



LBK6-1000~1600 Vertical



LBK6-1000~2500



Model No.	B max	D max	E max	Installation hole spacing A	Installation hole spacing C	Installation hole K	F max	Remarks
LBK6-40、63	78	72	90	56±0.15	46±0.125	4.6	1.5	
LBK6-100	85	75	96	64±0.15	62±0.15	4.6	1.5	
LBK6-160	96	92	105	84±0.175	73.5±0.15	5.5	1.5	
LBK6-250	96	100	104	84±0.175	85±0.175	5.8	1.5	
LBK6-400	120	100	122	90±0.175	85±0.175	5.8	2	
LBK6-630	150	110	140	122±0.2	90±0.175	7	2	
LBK6-800	150	128	142	122±0.2	105±0.2	7	2	
LBK6-1000	150	190	142	126±0.2	155±0.2	7	3	Horizontal
LBK6-1000	168	125	155	105±0.2	138±0.2	9	2	Vertical
LBK6-1600	170	225	153	140±0.2	176±0.2	7	3	Horizontal
LBK6-1600	168	138	155	116±0.2	138±0.2	9	2	Vertical
LBK6-2500	194	160	165	172±0.2	195±0.23	7	4	Horizontal

Model No.	Rated volume (VA)	Efficiency (%)	Voltage of output under load		Voltage of output unloaded		Rated input voltage (V)	Rated Output voltage (V)	Remarks		
			Signal winding (%)	Control winding (%)	Signal winding (%)	Control winding (%)					
LBK6-40	40	80	6≥Um>5 12≥Um>10	95-105% UH	6 or 12	1.1Um	AC380 ±5%	AC220	The distribution of every winding capacity can be made according to user's demand		
LBK6-63	63							(127)			
LBK6-100	100							110			
LBK6-160	160	85					48	35		24	Light or Control
LBK6-250	250										
LBK6-400	400										
LBK6-630	630	90					6≥Um>4.5 12≥Um>9	AC220 ±5%		12	Signal
LBK6-800	800										
LBK6-1000	1000										
LBK6-1600	1600										
LBK6-2500	2500										