
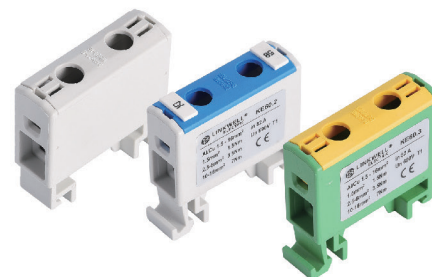


KE 60

16mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC016

■ DIMENSION (mm)

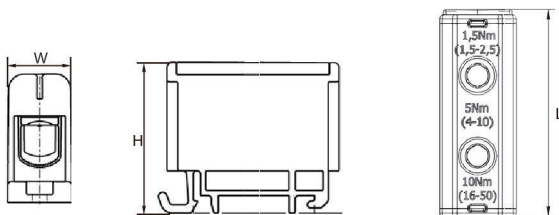


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE60.1								
KE60.2		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm ²) 3.0Nm(2.5-16mm ²)	13.5×40×42	20	1000
KE60.3								

KE 70

16mm²-1 pole 4 holes

■ DIMENSION (mm)

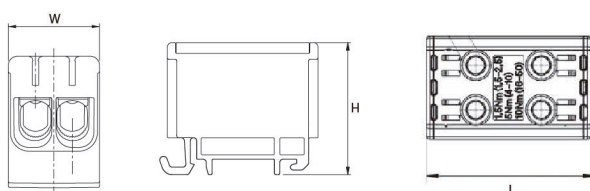


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE70.1								
KE70.2		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm ²) 3.0Nm(2.5-16mm ²)	22×38.5×45	30.5	500
KE70.3								

KE 60.4

16mm²-3 pole 6 holes

■ DIMENSION (mm)


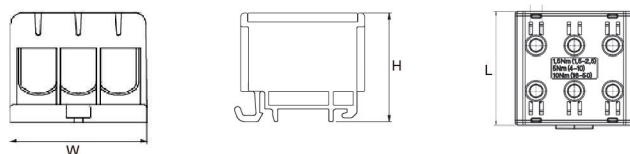


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE60.4								
KE60.5		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm ²) 3.0Nm(2.5-16mm ²)	37.5×39×45	56	400
KE60.6								

KE 60.7

16mm²-5 pole 10 holes

■ DIMENSION (mm)



Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE60.7		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm ²) 3.0Nm(2.5-16mm ²)	63×40×61.4	94	200






KE 50

35mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC035

■ DIMENSION (mm)







Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE50.1								
KE50.2		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm ²) 6Nm(25-35mm ²)	16×40×46	24.5	500
KE50.3								



KE 65

35mm²-1 pole 4 holes

■ DIMENSION (mm)

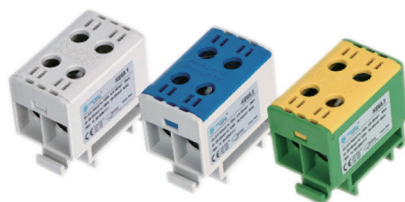


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE65.1								
KE65.2		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm ²) 6Nm(25-35mm ²)	27×40×46	42	300
KE65.3								



KE 50.4

35mm²-3 pole 6 holes

■ DIMENSION (mm)

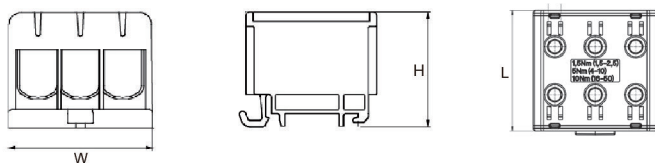


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE50.4								
KE50.5		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm ²) 6Nm(25-35mm ²)	46×40×45.5	67	300
KE50.6								



KE 65.7

35mm²-5 pole 10 holes

■ DIMENSION (mm)

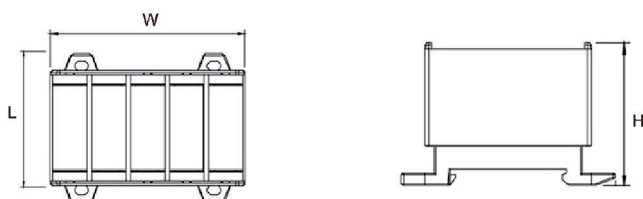

Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE65.7		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm ²) 6Nm(25-35mm ²)	80×40×65	114	200




KE 61

50mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC050

■ DIMENSION (mm)

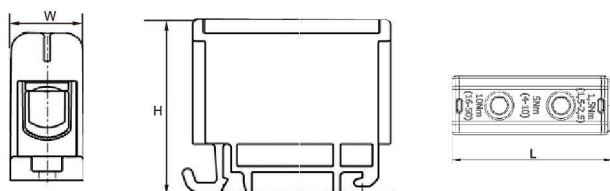


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE61.1								
KE61.2		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm ²) 12Nm(6-50mm ²)	17.8×43×49	35	500
KE61.3								



KE 66

50mm²-1 pole 4 holes

■ DIMENSION (mm)

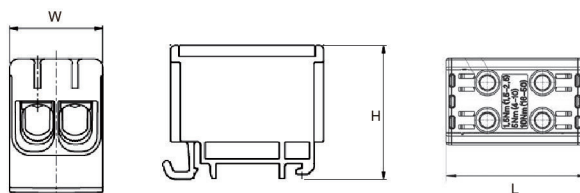


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE66.1								
KE66.2		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm ²) 12Nm(6-50mm ²)	29.8×43×49	61	300
KE66.3								

KE 71

50mm²-1 pole 6 holes

■ DIMENSION (mm)

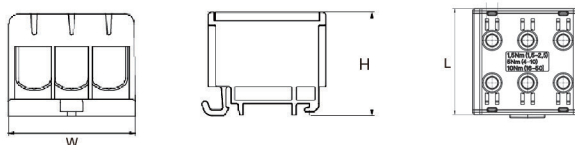


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE71.1								
KE71.2		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm ²) 12Nm(6-50mm ²)	49×43×48	100.5	185
KE71.3								

KE 61

50mm²-3 pole 6 holes

■ DIMENSION (mm)


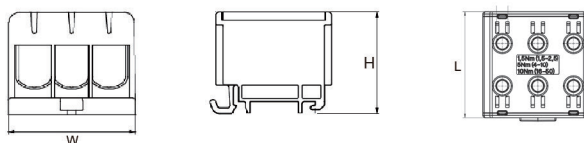


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE61.4								
KE61.5		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm ²) 12Nm(6-50mm ²)	49×43×48	100.5	185
KE61.6								

KE 61.7

50mm²-5 pole 10 holes

■ DIMENSION (mm)



Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE61.7		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm ²) 12Nm(6-50mm ²)	86×44×51	161.5	200






KE 62

95mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC095

■ DIMENSION (mm)






Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE62.1		16-95	1000	Cu 245 Al 220	10Nm(16-25mm ²) 20Nm(35-95mm ²)	24×49×86	95	240



KE 67

95mm²-1 pole 4 holes

■ DIMENSION (mm)






Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE67.1		16-95	1000	Cu 245 Al 220	10Nm(16-25mm ²) 20Nm(35-95mm ²)	42×49×86	172.5	90



KE 72

95mm²-1 pole 6 holes

■ DIMENSION (mm)





Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE72.1								
KE72.2		16-95	1000	Cu 245 Al 220	10Nm(16-25mm ²) 20Nm(35-95mm ²)	60×49×86	245	90
KE72.3								

KE 63

150mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC150

■ DIMENSION (mm)






Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE63.1								
KE63.2		35-150	1000	Cu 320 Al 290	14Nm(35-95mm ²) 30Nm(120-150mm ²)	29.5×59×95	163.5	180
KE63.3								

KE 68

150mm²-1 pole 4 holes

■ DIMENSION (mm)





Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE68.1								
KE68.2		35-150	1000	Cu 320 Al 290	14Nm(35-95mm ²) 30Nm(120-150mm ²)	51.5×59×95	290.5	90
KE68.3								

KE 73

150mm²-1 pole 6 holes

■ DIMENSION (mm)

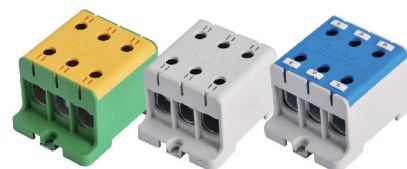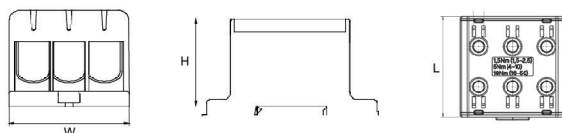

Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE73.1								
KE73.2		35-150	1000	Cu 320 Al 290	14Nm(35-95mm ²) 30Nm(120-150mm ²)	74×59×95	426	60
KE73.3								




KE 64

240mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC240

■ DIMENSION (mm)

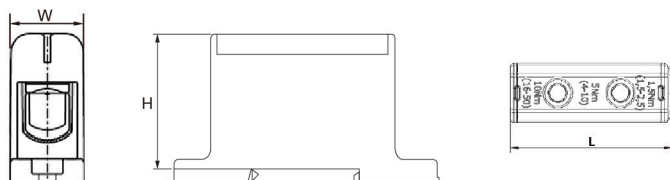



Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE64.1								
KE64.2		35-240	1000	Cu 425 Al 380	12Nm(35-70mm ²) 45Nm(95-240mm ²)	38×67×131	318	100
KE64.3								



KE 75

300mm²-1 pole 2 holes

■ DIMENSION (mm)

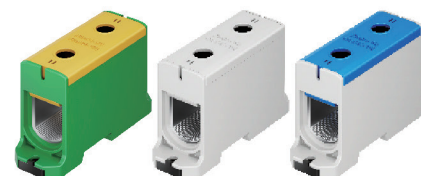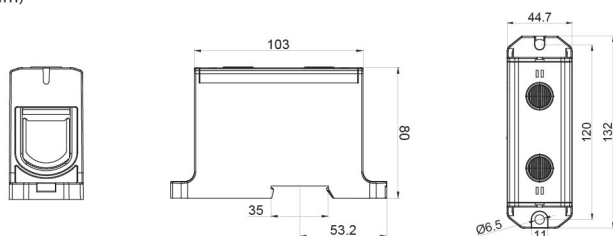



Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)
KE75.1						
KE75.2		95-300	1000	Cu 520 Al 490	35Nm(95-150mm ²) 45Nm(185-300mm ²)	44.7×80×132
KE75.3						



KE 69

240mm²-1 pole 4 holes

■ DIMENSION (mm)

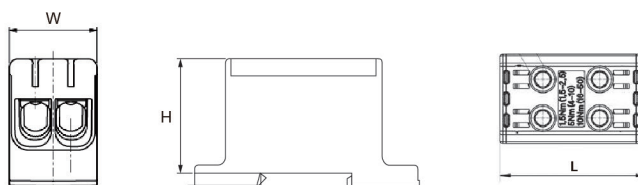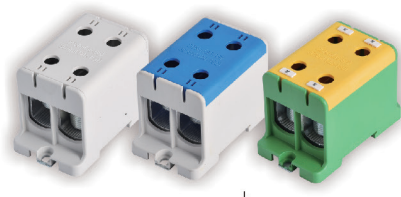


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE69.1								
KE69.2		35-240	1000	Cu 425 Al 380	12Nm(35-70mm ²) 45Nm(95-240mm ²)	65×67×131	566.5	90
KE69.3								



KE 74

240mm²-1 pole 6 holes

■ DIMENSION (mm)

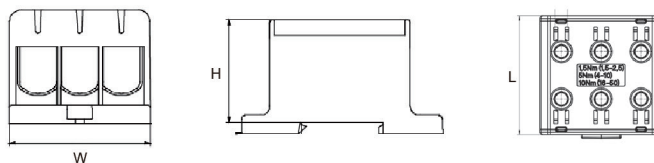


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE74.1								
KE74.2		35-240	1000	Cu 425 Al 380	12Nm(35-70mm ²) 45Nm(95-240mm ²)	94×67×131	850	30
KE74.3								



KE 62N

95mm²-1 pole 2 holes

■ DIMENSION (mm)

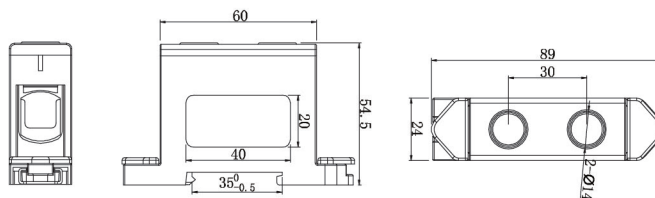


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE62N.1								
KE62N.2		16-95	1000	Cu 245 Al 220	10Nm(16-25mm ²) 20Nm(35-95mm ²)	24×54.5×89	95	30
KE62N.3								
KE62N.4								
KE62N.5								



KE 100

300mm²-1 pole 4 holes
■ DIMENSION (mm)

IEC 60947-7-5

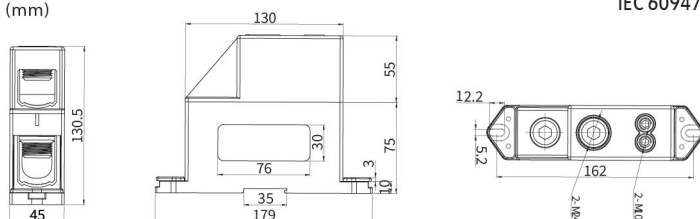


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE100.1		300	1000	600	8Nm(2x35mm ²) 30Nm(1x70mm ²) 55Nm(185-300mm ²)	45x130.5x179	700	20
KE100.2								
KE100.3								
KE100.4								
KE100.5								



KE 101

300mm²-1 pole 3 holes
■ DIMENSION (mm)

IEC 60947-7-5

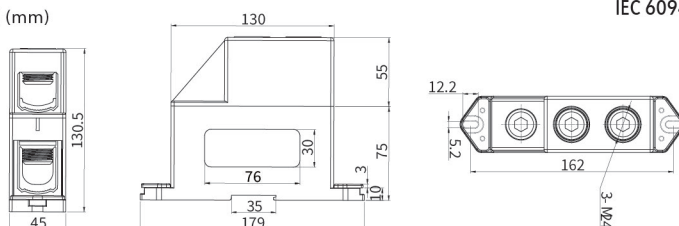


Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE101.1		300	1000	600	55Nm(185-300mm ²)	45x130.5x179	680	20
KE101.2								
KE101.3								
KE101.4								
KE101.5								



KE 102

300mm²-1 pole 2 holes
■ DIMENSION (mm)

IEC 60947-7-5

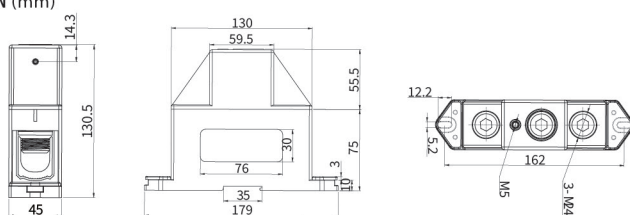

Product code	Color	Conductor mm ²	Nominal Voltage V	Nominal Current A	Tightenig Torque Nm	W×H×L (mm)	Weight g	Package pcs
KE102.1		300	1000	600	55Nm(185-300mm ²)	45x130.5x179	620	20
KE102.2								
KE102.3								
KE102.4								
KE102.5								



KEPC Protection Covers

KE Universal terminal for AL/CU conductors



KEPC016



KEPC035



KEPC050



KEPC095



KEPC150



KEPC240



1



2

SPECIFICATION

Model	Description
KEPC016	Prtection cover for KE 16mm ²
KEPC035	Prtection cover for KE 35mm ²
KEPC050	Prtection cover for KE 50mm ²
KEPC095	Prtection cover for KE 95mm ²
KEPC0150	Prtection cover for KE 150mm ²
KEPC0240	Prtection cover for KE 240mm ²