TERMINAL BLOCKS

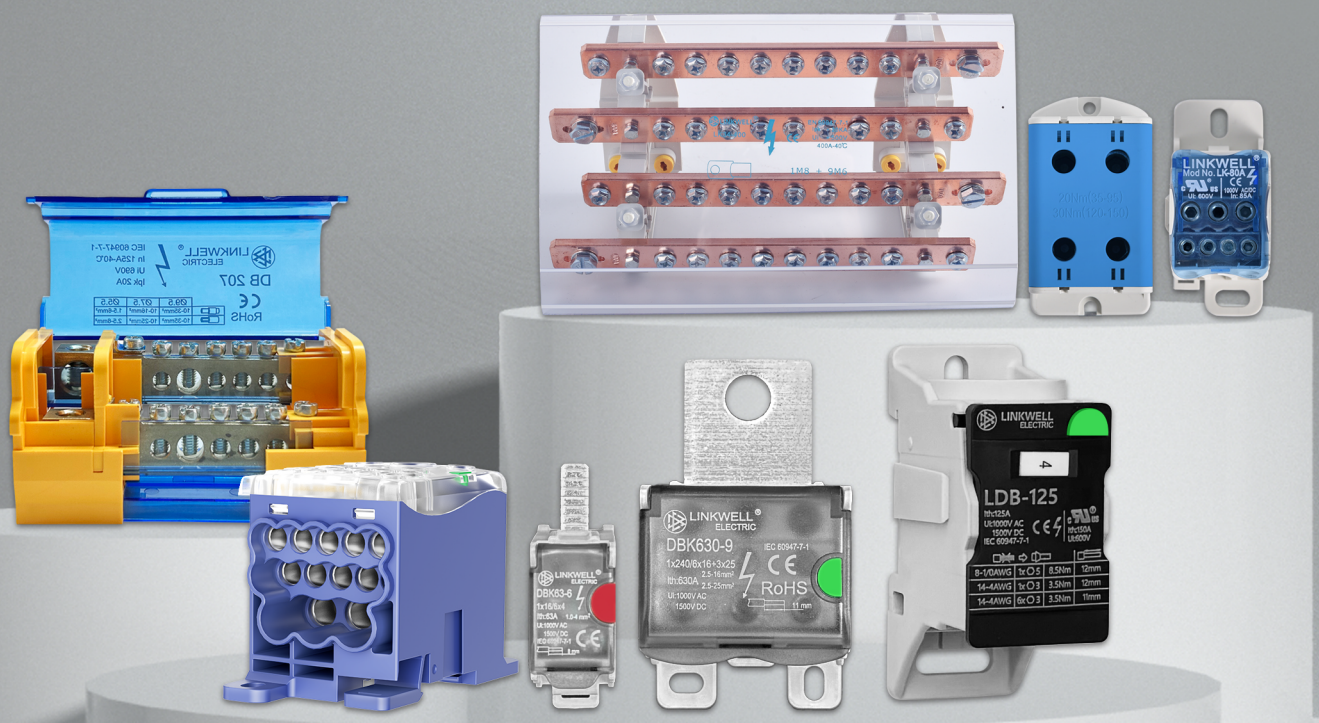

LK-80A

80A IEC 60947-7-1
85 Amp

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=80A IEC
I=85A UL/CSA
□ Icw KA rms Is:3
□ IPK KA:22
□ Ui:1000V IEC
600V UL

■ Metric **or common jumper

Unit	mm²			Γ(N.m)
	6...16	X1		3.5
	2.5...6	X4		1.2
	2.5...16	X2		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	16...4	X1		19.5
	16...8	X4		10.6
	16...4	X2		19.5

LK-125A

125A IEC 60947-7-1
150 Amp

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=125A IEC
I=150A UL/CSA
□Icw KA rms Is:4.2
□IPK KA:30
□Ui: 1000V IEC
600V UL

■ Accessories UJ

■ Metric **or common jumper

Unit	mm²			Γ(N.m)
	10...35	X1		8.5
	6...16**	X1		3.5
	2.5...16	X6		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	8...1/0	X1		57
	14...2	X1		31
	14...4	X6		31

LK-160A

160A IEC 60947-7-1
200 Amp

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=160A IEC
I=200A UL/CSA
□ Icw KA rms Is:11.8
□ IPK KA:30
□ Ui:1000V IEC
600V UL

■ Accessories UJ

■ Metric **or common jumper

Unit	mm²			Γ(N.m)
	10...70	X1		8.5
	6...16**	X1		3.5
	2,5...16	X6		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	8...3/0	X1		75
	14...2	X1		31
	14...4	X6		31

LK-250A

250A IEC 60947-7-1
255 Amp

■ Accessories TF 250A 

Modular:

Allows versatile building of power blocks single pole,two pole,three pole or four pole.

IP20 cULus CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=250A IEC
I=255A UL/CSA
□Icw KA rms Is:24.5
□IPK KA:51
□Ui:1000V IEC
600V UL

■ Metric **or common jumper

Unit	mm²	mm²			Γ(N.m)
	35...120		X1		19
	6...35	6...25	X2		4.4
	2.5...16	2.5...16	X5		2.7
	2.5...10	2.5...10	X4		2.7

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	6...250 Kcmil	X1		221
	14...1	X2		39
	14...4	X5		24
	14...6	X4		24

LK-400A

400A IEC 60947-7-1
355 Amp

■ Accessories TF 400A 

Modular:

Allows versatile building of power blocks single pole,two pole,three pole or four pole.

IP20 cULus CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=400 A IEC
I=355 A UL/CSA
□ Icw KA rms Is:24.5
□ IPK KA:51
□ Ui:1000V IEC
600V UL

■ Metric **or common jumper

Unit	mm²	mm²			Γ(N.m)
	95...185		X1		25
	6...35	6...25	X2		4.4
	2.5...16	2.5...16	X5		2.7
	2.5...10	2.5...10	X4		2.7

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	3/0...400 Kcmil	X1		221
	14...1	X2		39
	14...4	X5		24
	14...6	X4		24

LK-500A

500A IEC 60947-7-1
520 Amp
Connected with Flexible busbar

Modular:

Allows versatile building of power blocks single pole,two pole,three pole or four pole.

IP20 cULus CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=500 A IEC
I=520 A UL/CSA
□Icw KA rms Is:24.5
□IPK KA:51
□Ui:1000V IEC
600 V UL

TH flexible busbar

4 x 15.5 x 0.8
6 x 15.5 x 0.8
2 x 20 x 1
3 x 20 x 1
4 x 20 x 1
5 x 20 x 1
6 x 20 x 1
2 x 24 x 1
3 x 24 x 1
4 x 24 x 1
5 x 24 x 1
6 x 24 x 1
8 x 24 x 1

■ Metric **or common jumper

Unit	mm²	mm²			Γ(N.m)
	4x15,5x0.8,6x24x1	4x15,5x0.8,6x24x1			10
	6...35	6...25	X2		4.4
	2.5...16	2.5...16	X5		2.7
	2.5...10	2.5...10	X4		2.7

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	4x15,5x0.8,6x24x1			88.5
	14...1	X2		39
	14...4	X5		24
	14...6	X4		24

LKH-125A

125A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 CE RoHS COMPLIANT UL94-V0

■ Dimensions



I=125A IEC
□Icw KA rms Is:4.2
□IPK KA:25
□Ui: 1000V IEC

■ Metric **or common jumper

Unit	mm²			Γ(N.m)
	10...35	X1		8.5
	10...35	X1		8.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	8...1/0	X1		57
	8...1/0	X1		57

LKH-250A

255A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 CE RoHS COMPLIANT UL94-V0

■ Dimensions

I=255A IEC
□Icw KA rms Is:14.4
□IPK KA:42
□Ui: 1000V IEC

■ Metric **or common jumper

Unit	mm²			Γ(N.m)
	35...120	X1		19
	35...120	X1		19

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	6...250Kcmil	X1		168
	6...250Kcmil	X1		168

LDB-80

80A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 c UL us CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=80A IEC
I=85A UL/CSA
□ Icw KA rms Is:3
□ IPK KA:22
□ Ui:1000V IEC
600V UL

■ Metric **or common jumper

Unit	mm²			Γ(N.m)
	6...16	X1		3.5
	2.5...6	X4		1.2
	2.5...16	X2		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	16...4	X1		19.5
	16...8	X4		10.6
	16...4	X2		19.5

LDB-125

125A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=125A IEC
I=150A UL/CSA
□ Icw KA rms Is:4.2
□ IPK KA:30
□ Ui: 1000V IEC
600V UL

■ Accessories UJ

■ Metric ** or common jumper

Unit	mm²			Γ(N.m)
	10...35	X1		8.5
	6...16**	X1		3.5
	2.5...16	X6		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	8...1/0	X1		57
	14...2	X1		31
	14...4	X6		31

LDB-160

160A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=160A IEC
I=200A UL/CSA
□ Icw KA rms Is:11.8
□ IPK KA:30
□ Ui:1000V IEC
600V UL

■ Accessories UJ

■ Metric ** or common jumper

Unit	mm²			Γ(N.m)
	10...70	X1		8.5
	6...16**	X1		3.5
	2,5...16	X6		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	8...3/0	X1		75
	14...2	X1		31
	14...4	X6		31

LDB-200

200A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 CE RoHS UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=200A IEC
□ Icw KA rms Is:15
□ IPK KA:35
□ Ui: 1000V IEC

■ Metric ** or common jumper

Unit	mm²			Γ(N.m)
	10...95	x2		8-10
	2.5...16	x10		2-3

Data page for ref only ,
details & doubts please email: info@linkwell.org

LDB-250

250A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=160A IEC
I=200A UL/CSA
□ Icw KA rms Is:11.8
□ IPK KA:30
□ Ui:1000V IEC
600V UL

■ Accessories TF250A

■ Metric ** or common jumper

Unit	mm²			Γ(N.m)
	10...70	X1		8.5
	6...16**	X1		3.5
	2,5...16	X6		3.5

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	8...3/0	X1		75
	14...2	X1		31
	14...4	X6		31

LDB-400

400A IEC 60947-7-1

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=400 A IEC
I=355 A UL/CSA
□ Icw KA rms Is:24.5
□ IPK KA:51
□ Ui:1000V IEC
600V UL

■ Accessories TF400A

■ Metric ** or common jumper

Unit	mm²	mm²			Γ(N.m)
	95...185		X1		25
	6...35	6...25	X2		4.4
	2.5...16	2.5...16	X5		2.7
	2.5...10	2.5...10	X4		2.7

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	3/0...400 Kcmil	X1		221
	14...1	X2		39
	14...4	X5		24
	14...6	X4		24

LDB-500

500A IEC 60947-7-1
Connected with Flexible busbar

Modular:

Keeping only one input,the blocks can be connected in parallel using a jumper wire.Easily double or triple the neutral.

IP20 cULus CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions



I=500 A IEC
I=520 A UL/CSA
□ Icw KA rms Is:24.5
□ IPK KA:51
□ Ui:1000V IEC
600 V UL

TH flexible busbar

- 4 x 15.5 x 0.8
- 6 x 15.5 x 0.8
- 2 x 20 x 1
- 3 x 20 x 1
- 4 x 20 x 1
- 5 x 20 x 1
- 6 x 20 x 1
- 2 x 24 x 1
- 3 x 24 x 1
- 4 x 24 x 1
- 5 x 24 x 1
- 6 x 24 x 1
- 8 x 24 x 1

■ Metric ** or common jumper

Unit	mm²	mm²			Γ(N.m)
	4x15,5x0.8,6x24x1	4x15,5x0.8,6x24x1			10
	6...35	6...25	X2		4.4
	2.5...16	2.5...16	X5		2.7
	2.5...10	2.5...10	X4		2.7

■ Imperial

Unit	AWG			Torque Inch/Lbs.
	4x15,5x0.8,6x24x1			88.5
	14...1	X2		39
	14...4	X5		24
	14...6	X4		24

KDB25 1/1

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

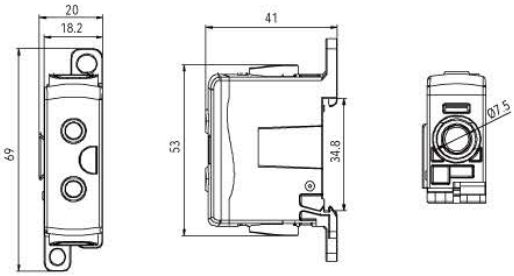

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	2.5-25	1.5-16	3	101A	1000V AC 1500V DC
	1x	2.5-25	1.5-16	3		

KDB35 1/1

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

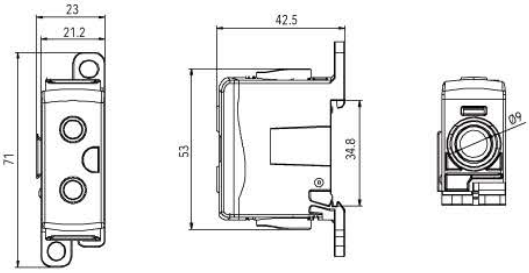

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	4-35	2.5-25	4	125A	1000V AC 1500V DC
	1x	4-35	2.5-25	4		

KDB50 1/1

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

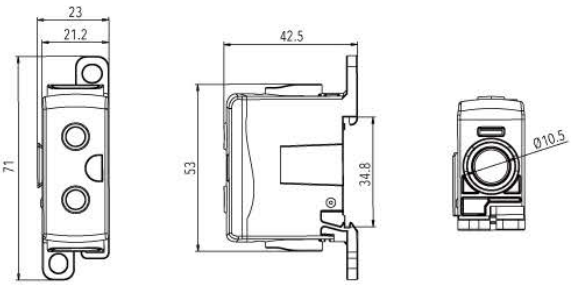

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	6-50	4-35	4	160A	1000V AC 1500V DC
	1x	6-50	4-35	4		

KDB70 1/1

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

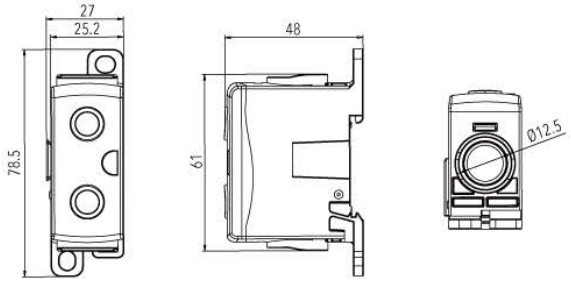

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	10-70	6-50	10	192A	1000V AC 1500V DC
	1x	10-70	6-50	10		

KDB95 1/1

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

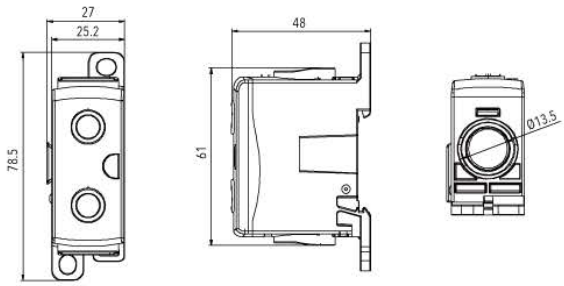

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	16-95	10-70	10	232A	1000V AC 1500V DC
	1x	16-95	10-70	10		

KDB16 1/2

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

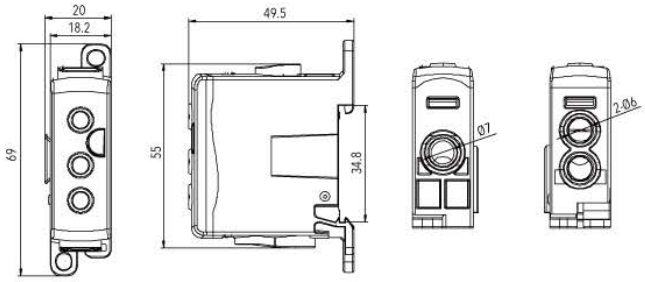

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	1.5-16	1.5-10	3	85A	1000V AC 1500V DC
	2x	1.5-10	1.0-6	2		

KDB25 1/2

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

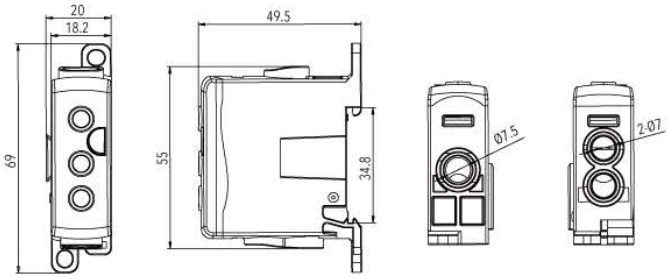

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	2.5-25	1.5-16	3	101A	1000V AC 1500V DC
	2x	1.5-16	1.5-10	3		

KDB35 1/2

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

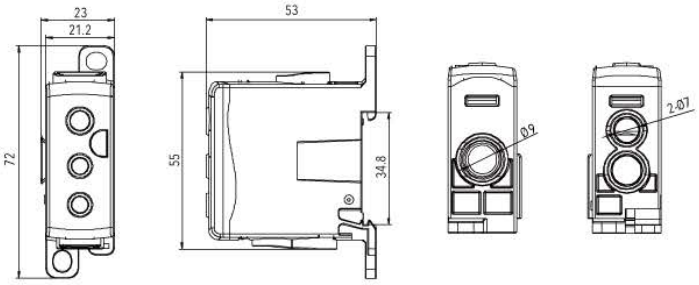

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	4-35	2.5-25	4	125A	1000V AC 1500V DC
	2x	2.5-25	1.5-16	3		

KDB50 1/2

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

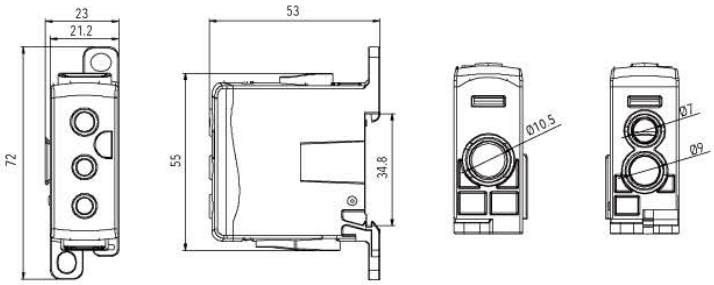

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	6-50	3-35	4	160A	1000V AC 1500V DC
	1x	4-35	2.5-25	4		
	1x	2.5-25	1.5-16	3		

KDB70 1/2

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

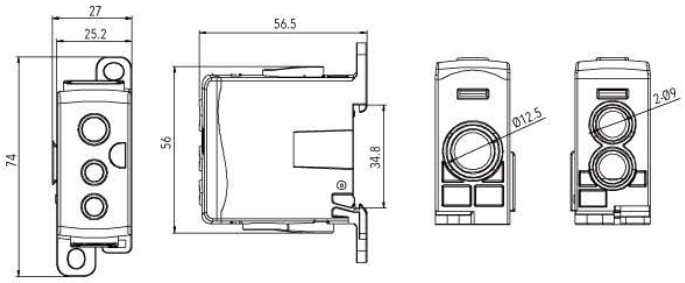

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	10-70	6-50	10	192A	1000V AC 1500V DC
	2x	4-35	2.5-25	4		

KDB95 1/2

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

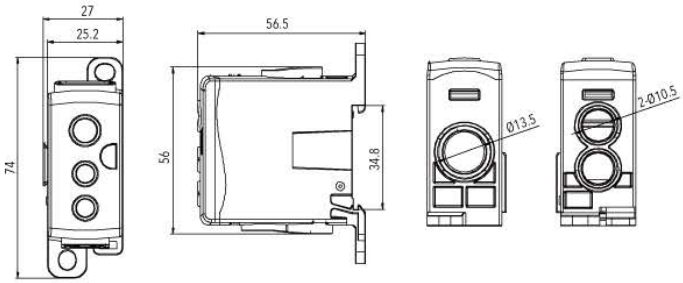

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	16-95	10-70	10	232A	1000V AC 1500V DC
	2x	6-50	3-35	4		

KDB70 1/4

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

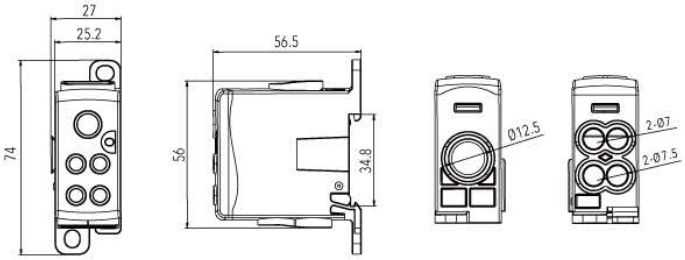

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	10-70	6-50	10	192A	1000V AC 1500V DC
	2x	2.5-25	1.5-16	3		
	2x	1.5-16	1.5-10	3		

KDB95 1/4

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

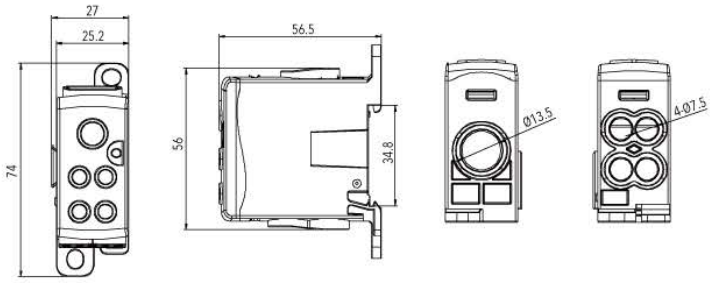

■ Metric

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	16-95	10-70	10	232A	1000V AC 1500V DC
	4x	2.5-25	1.5-16	3		

KDB25 1/6

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

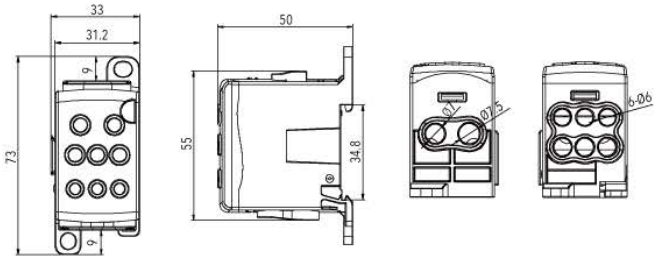

■ Metric ** or common jumper

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	2.5-25	1.5-16	3	101A	1000V AC 1500V DC
	1x	6-16**	4-10**	3		
	3x	1.5-16	1.5-10	3		
	3x	1.5-10	1.0-6	2		

KDB35 1/6

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

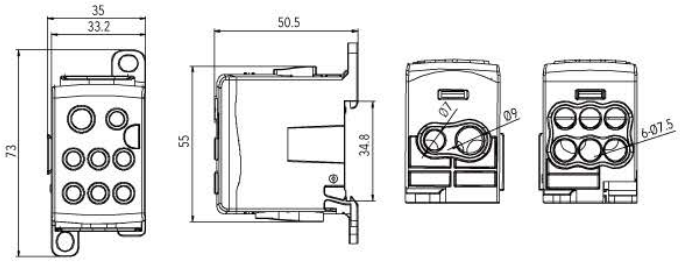

■ Metric ** or common jumper

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	4-35	2.5-25	4	125A	1000V AC 1500V DC
	1x	6-16**	4-10**	3		
	3x	2.5-25	1.5-16	3		
	3x	1.5-16	1.5-10	3		

KDB70 1/8

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

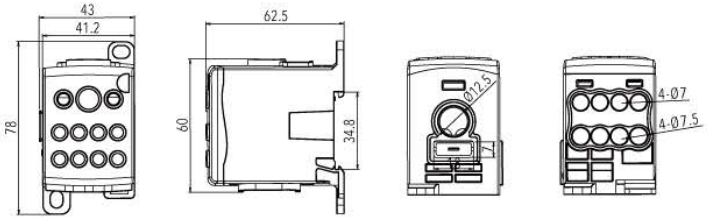

■ Metric

Unit		mm²	mm²	mm	Γ(N.m)	Rated Current	Rated Voltage
	1x	10-70	6-50		10	175A	1000V AC 1500V DC
	1x	-	-	Flat conductor 15.5x5	2	192A	
	8x	2.5-25	1.5-16		3		

KDB95 1/10

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

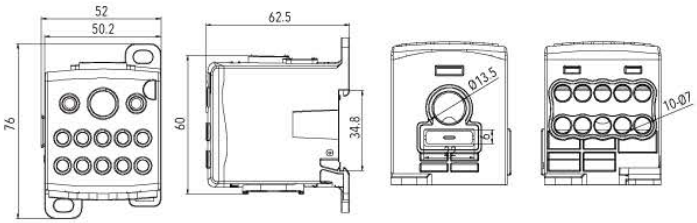

■ Metric

Unit		mm²	mm²	mm	Γ(N.m)	Rated Current	Rated Voltage
	1x	16-95	10-70		10	232A	1000V AC 1500V DC
	1x	-	-	Flat conductor 20x5	2	270A	
	10x	2.5-25	1.5-16		3		

KDB95 1/18

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

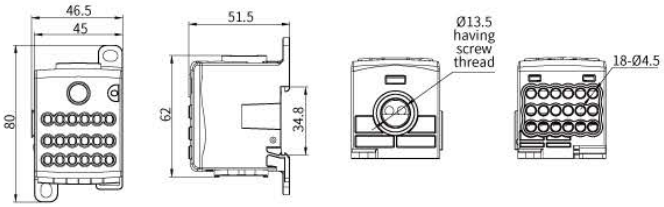

■ Metric ** or common jumper

Unit		mm²	mm²	Γ(N.m)	Rated Current	Rated Voltage
	1x	10-95	6-70	10	232A	1000V AC 1500V DC
	1x	10-50**	6-35**	4		
	18x	1.5-10	1.5-6	3		

KDB120 1/13

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

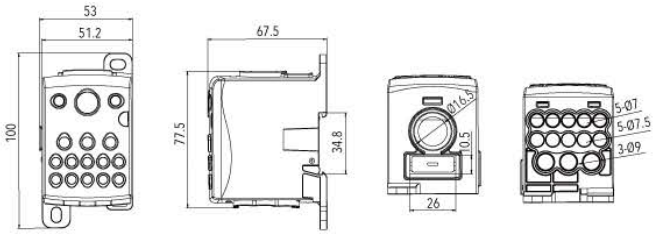

■ Metric

Unit		mm²	mm²	mm	Γ(N.m)	Rated Current	Rated Voltage
	1x	35-120	25-95		14	250A	1000V AC 1500V DC
	1x	-	-	Flat conductor 24x10	2	400A	
	3x	4-35	2.5-25		4		
	5x	2.5-25	1.5-16		3		
	5x	1.5-16	1.5-10		3		

KDB185 1/13

EN60947-7-1

IP20 CE RoHS COMPLIANT UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

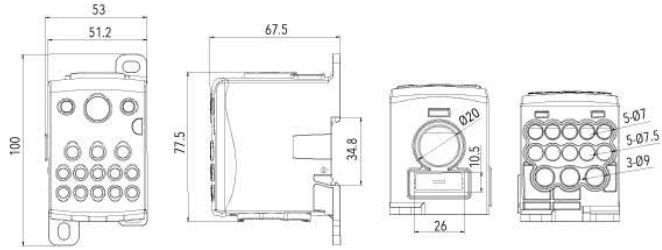

■ Metric

Unit		mm²	mm²	mm	Γ(N.m)	Rated Current	Rated Voltage
	1x	95-185	70-150		20	400A	1000V AC 1500V DC
	1x	-	-	Flat conductor 24x10	2	490A	
	3x	4-35	2.5-25		4		
	5x	2.5-25	1.5-16		3		
	5x	1.5-16	1.5-10		3		

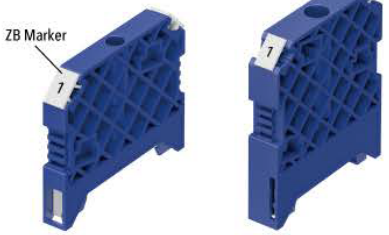

LEW 3508 LEW 3512

LEW 3508

Fit TS35 DIN rail
Material: PA
Installation Method:
Screw-tightening installation
Maximum torque: 1.0Nm
Operating Temperature: -50°C to 100°C
Marker: ZB5/ZB6

■ Dimensions (mm)

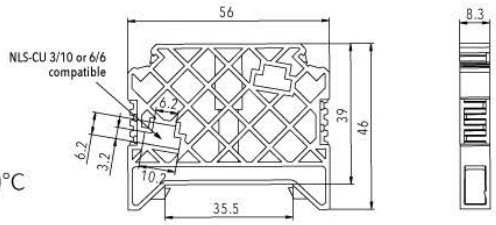

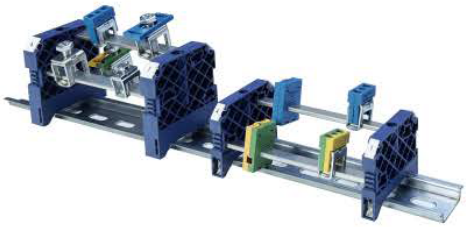

LEW 3512

Fit TS35 DIN rail
Material: PA
Installation Method:
Screw-tightening installation
Maximum torque: 2.0Nm
Operating Temperature: -50°C to 100°C
Marker: ZB5/ZB6/ZB8/ZB10

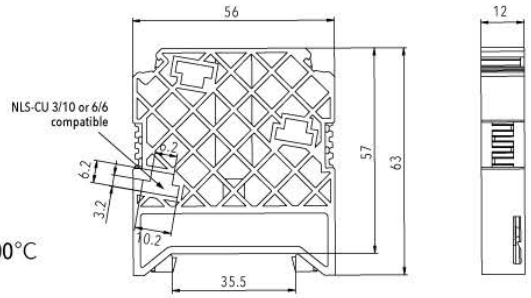

CE RoHS COMPLIANT UL94-V0

DBK63-3

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

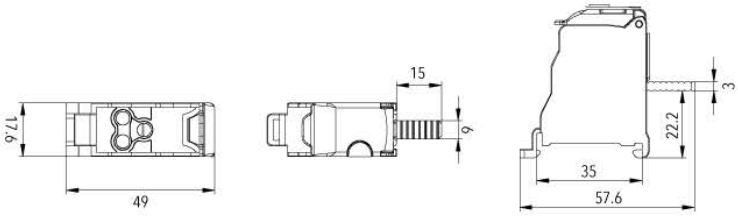

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK63-3	3x6 mm²	63A	1500V DC 1000V AC

DBK63-4

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

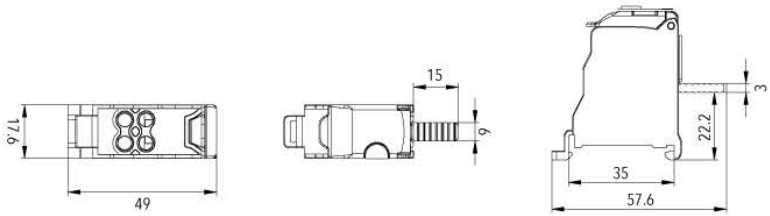

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK63-4	4x6 mm²	63A	1500V DC 1000V AC

DBK63-6

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

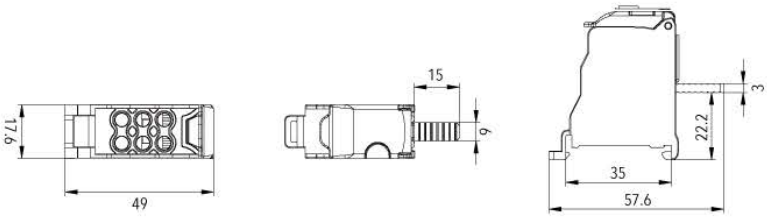

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK63-6	6x4 mm²	63A	1500V DC 1000V AC

DBK63-9

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

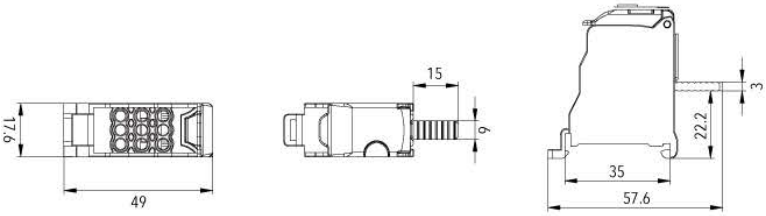

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK63-9	9x2.5 mm²	63A	1500V DC 1000V AC

DBK125-3

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

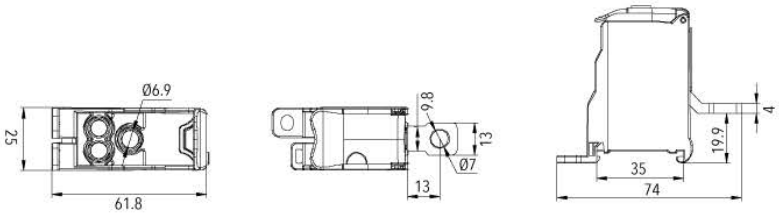

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK125-3	3x16 mm²	125A	1500V DC 1000V AC

DBK125-6

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

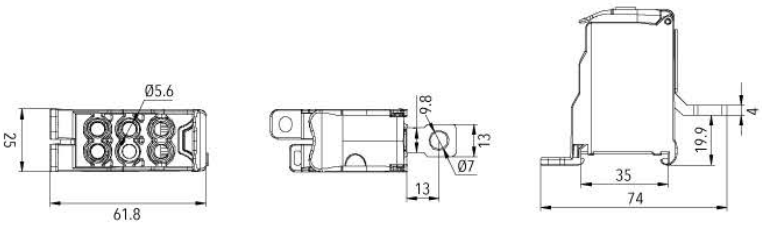

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK125-6	6x10 mm²	125A	1500V DC 1000V AC

DBK125-9

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

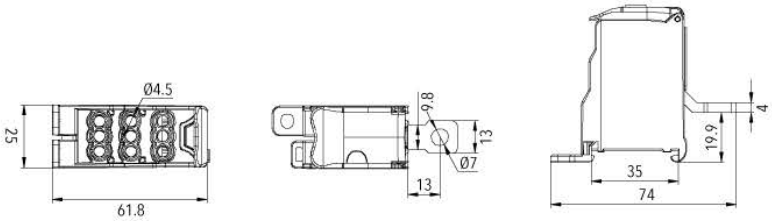

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK125-9	9x6 mm²	125A	1500V DC 1000V AC

DBK250-3

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

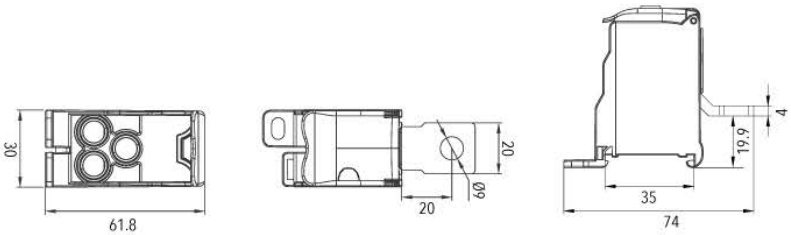

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK250-3	3x25 mm²	250A	1500V DC 1000V AC

DBK250-6

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

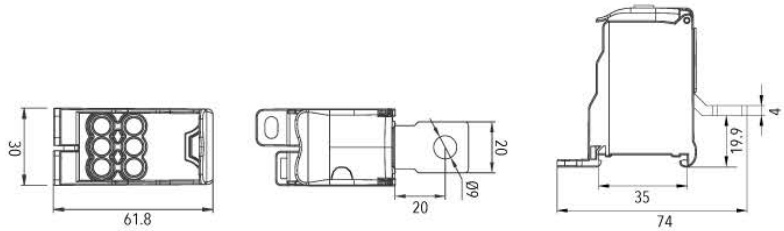

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK250-6	6x16 mm²	250A	1500V DC 1000V AC

DBK250-8

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

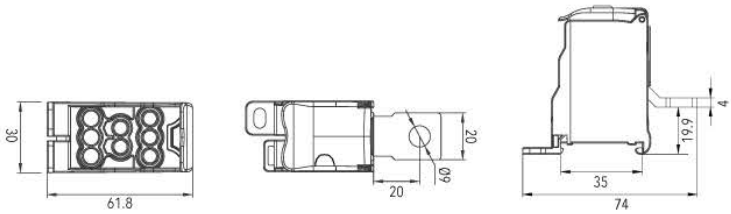

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK250-8	8x16 mm²	250A	1500V DC 1000V AC

DBK250-9

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

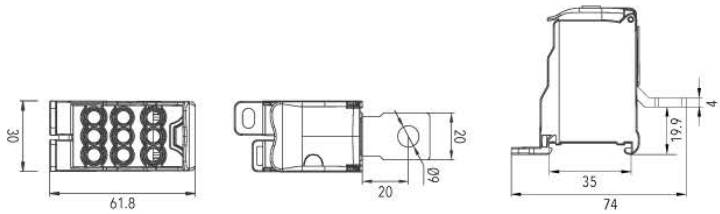

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK250-9	9x10 mm²	250A	1500V DC 1000V AC

DBK400-5

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

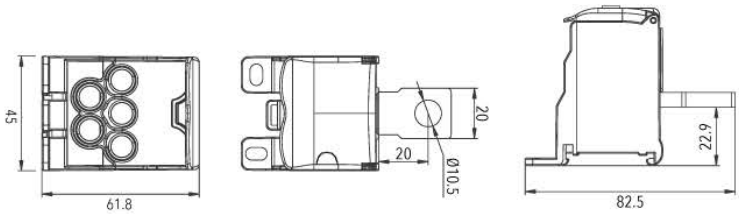

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK400-5	5x25 mm²	400A	1500V DC 1000V AC

DBK400-6

CE RoHS IEC UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

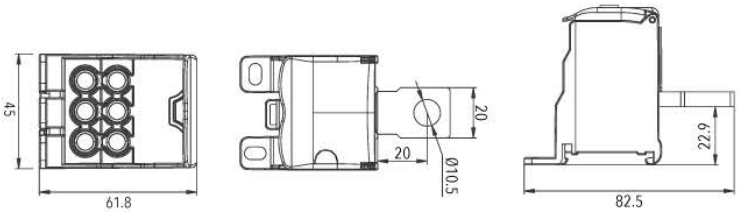

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK400-6	6x16 mm²	400A	1500V DC 1000V AC

DBK400-9

CE RoHS IEC UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

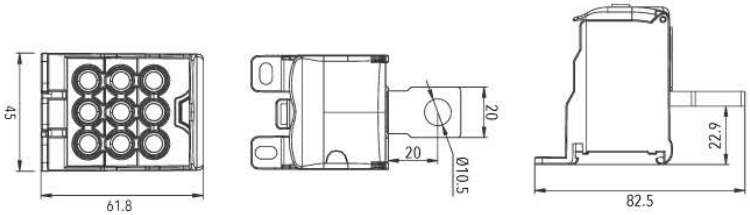

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK400-9	9x16 mm²	400A	1500V DC 1000V AC

DBK400-12

CE RoHS IEC UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

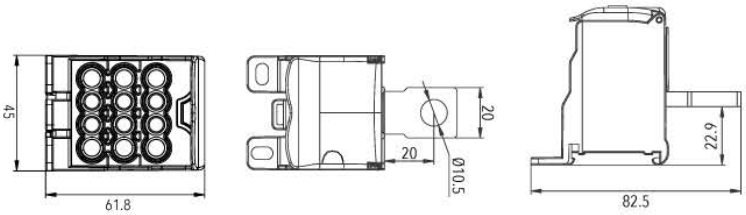

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK400-12	6x16 mm² 6x10 mm²	400A	1500V DC 1000V AC

DBK400-18

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

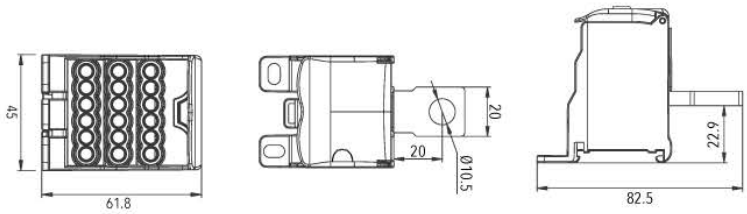

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK400-18	18x6 mm²	400A	1500V DC 1000V AC

DBK630-3

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

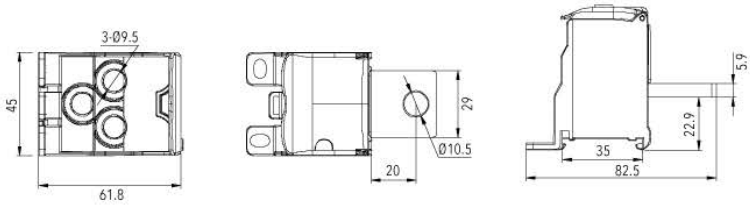

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK630-3	3x50 mm²	630A	1500V DC 1000V AC

DBK630-5

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

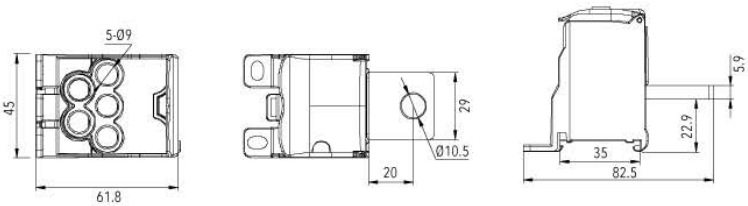

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK630-5	5x35 mm²	630A	1500V DC 1000V AC

DBK630-6

CE RoHS IEC UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

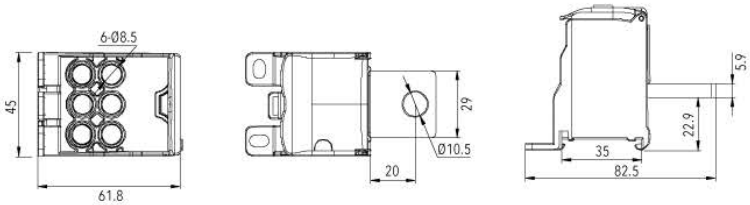

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK630-6	6x25 mm²	630A	1500V DC 1000V AC

DBK630-9

CE RoHS IEC UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

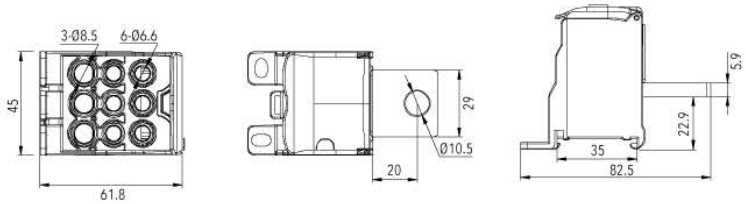

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK630-9	6x16 mm² 3x25 mm²	630A	1500V DC 1000V AC

DBK630-15

CE RoHS IEC UL94-V0

COLOR MARKER: BU GN BR BK WH RD YL

■ Dimensions (mm)

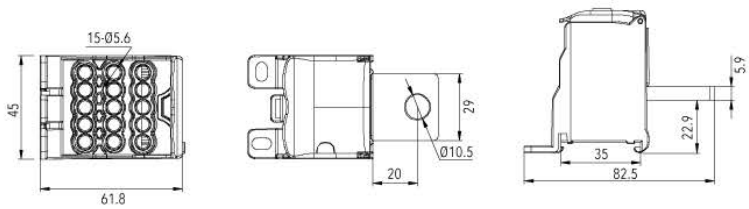

■ Metric ** or common jumper

Model	Output	Rated Current	Rated Voltage
DBK630-15	15x10 mm²	630A	1500V DC 1000V AC

DB 16/6 3/4

1 Pole 80 A

IP20 CE RoHS UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)



Unit	mm²		Ø		Γ(N.m)
	2.5...16	X1	6.2		3.0
	2.5...6	X4	4.5		1.5
	2.5...16	X2	6.2		3.0

DB 35-16/16 1-1/8

1 Pole 125 A

IP20 CE RoHS UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)



Unit	mm²		Ø		Γ(N.m)
	10...35	X1			5.0
	6...16	X1	6.2		3.0
	2.5...16	X8	6.2		3.0

DB 70-16/16 1-1/8

1 Pole 160 A

IP20 CE RoHS UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)



Unit	mm²		Ø		Γ(N.m)
	16...70	X1			5.0
	6...16	X1	6.2		3.0
	2.5...16	X8	6.2		3.0

DB 120/35/16-10 1/2-5-4

1 Pole 250 A

IP20 CE RoHS COMPLIANT UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)



Unit	mm²		Ø		Γ(N.m)
	35...120	X1			19.0
	2.5...35	X2	9.5		3.5
	2.5...16	X5	6.8		6.0
	2.5...10	X4	6.2		3.0

DB 185/35-16-10 1/2-5-4

1 Pole 400 A

IP20 CE RoHS COMPLIANT UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)



Unit	mm²		Ø		Γ(N.m)
	95...185	X1			25.0
	2.5...35	X2	9.5		3.5
	2.5...16	X5	6.8		2.0
	2.5...10	X4	6.2		2.0

DB 3P-35/16 1/6

3 Pole 125 A

IP20 CE RoHS COMPLIANT UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)

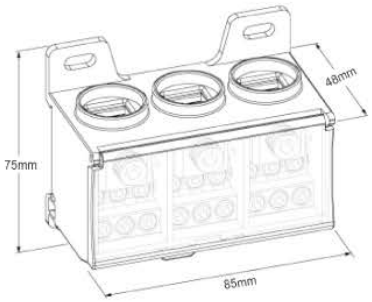

Unit	mm²		Ø		Γ(N.m)
	10...35	X3			5.0
	2.5...16	X18	6.2		3.0

DB 3P-70/16 1/6

3 Pole 160 A

IP20 CE RoHS COMPLIANT UL94-V0

Copper or aluminum cable input

■ Dimensions (mm)

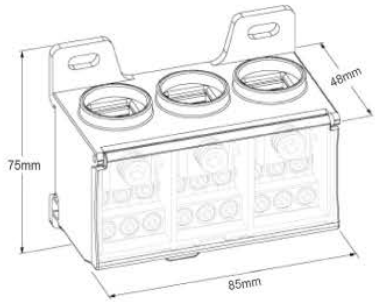

Unit	mm²		Ø		Γ(N.m)
	16...70	X3	12		5.0
	2.5...16	X18	6.2		3.0

DB-207

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 2 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		3-5
	2.5...6	1.5...6	X5	5.5		2-3
	10...25	6...16	X1	7.5		2-3

DB-211

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 2 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		3-5
	2.5...6	1.5...6	X7	5.5		2-3
	10...25	6...16	X3	7.5		2-3

DB-215

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 2 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...25	X1	8.5		3-5
	1.5...4	0.75...4	X11	4.5		1.2-1.5
	2.5...6	1.5...6	X3	5.5		2-3

DB-407

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		3-5
	2.5...6	1.5...6	X5	5.5		2-3
	10...25	6...16	X1	7.5		2-3

DB-411

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X7	5.5		2-3
	10...25	6...16	X3	7.5		2-3

DB-412

IP20 CE RoHS UL94-V0

Amp = 160A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...50	10...25	X1	12		8-10
	10...35	10...25	X3	8.5		2-3
	2.5...16	1.5...16	X8	7		2-3

DB-415

IP20 CE RoHS UL94-V0

Amp = 125A Ui: 690V IEC

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X11	5.5		2-3
	10...25	6...16	X1	7.5		2-3
	10...35	10...25	X2	8.5		2-3

UK-207

IP20 CE RoHS UL94-V0

Amp = 125A Ui: 500V

- For type
- Flame retardant : UL94-V0
- Pole: 2 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X5	5.5		2-3
	10...25	6...16	X1	7.5		2-3

UK-211

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 500V

- For type
- Flame retardant : UL94-V0
- Pole: 2 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X7	5.5		2-3
	10...25	6...16	X3	7.5		2-3

UK-215

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 500V

- For type
- Flame retardant : UL94-V0
- Pole: 2 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X11	5.5		2-3
	10...25	6...16	X3	7.5		2-3

UK-407

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 500V

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X5	5.5		2-3
	10...25	6...16	X1	7.5		2-3

UK-411

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 500V

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X7	5.5		2-3
	10...25	6...16	X3	7.5		2-3

UK-412

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 160A Ui: 600V

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...50	10...25	X1	12		8-10
	10...35	10...25	X3	8.5		2-3
	2.5...16	1.5...16	X8	7		2-3

UK-415

IP20 CE RoHS COMPLIANT UL94-V0

Amp = 125A Ui: 500V

- For type
- Flame retardant : UL94-V0
- Pole: 4 pole
- Rigid cable
- Flexible stranded cable

■ Dimensions



Unit	mm²	mm²		Ø		Γ(N.m)
	10...35	10...35	X1	9.5		6-7
	2.5...6	1.5...6	X11	5.5		2-3
	10...25	6...16	X1	7.5		2-3
	10...35	10...25	X2	8.5		2-3

LK-207

500V



Model	LK-207	Amp=100A	LK-207B	Amp=125A
Flame retardant	UL94-V0		UL94-V0	
	2 poles	1x25mm ²/1x Ø8.5mm	2 pole	1x35mm²/1xØ9mm
Terminals per pole		3x6mm²/3x Ø5.5mm		5x6mm²/5xØ5.5mm
		3x4mm²/3x Ø4.5mm		1x25mm²/1xØ7.5mm

IP20 TÜVRheinland CE RoHS COMPLIANT UL94-V0

LK-211

500V





Model	LK-211	Amp=100A	LK-211B	Amp=125A
Flame retardant	UL94-V0		UL94-V0	
	2 poles	2x25mm ²/2xØ8.5mm	2 pole	2x35mm²/2xØ9mm
Terminals per pole		5x6mm²/5xØ5.5mm		2x25mm ²/2xØ7.5mm
		4x4mm²/4xØ4.5mm		7x6mm²/7xØ5.5mm

IP20 TÜVRheinland CE RoHS COMPLIANT UL94-V0

LK-215

500V



Model	LK-215	Amp=100A	LK-215B	Amp=125A
Flame retardant	UL94-V0		UL94-V0	
	2 poles	2x25mm ²/2xØ8.5mm	2 pole	11x6mm²/11xØ5.5mm
Terminals per pole		7x6mm²/7xØ5.5mm		2x25mm ²/2xØ7.5mm
		6x4mm²/6xØ4.5mm		2x35mm²/2xØ9mm

IP20 TÜVRheinland CE RoHS COMPLIANT UL94-V0

LK-407
500V



Model	LK-407	Amp=100A	LK-407B	Amp=125A
Flame retardant	UL94-V0		UL94-V0	
	4 poles	1x25mm ²/1xØ8.5mm	4 pole	1x35mm²/1xØ9mm
Terminals per pole		3x6mm²/3xØ5.5mm		5x6mm²/5xØ5.5mm
		3x4mm²/3xØ4.5mm		1x25mm ²/1xØ7.5mm

IP20 TÜVRheinland CE RoHS COMPLIANT UL94-V0

LK-411
500V



Model	LK-411	Amp=100A	LK-411B	Amp=125A
Flame retardant	UL94-V0		UL94-V0	
	4 poles	2x25mm ²/2xØ8.5mm	4 pole	2x35mm²/2xØ9mm
Terminals per pole		5x6mm²/5xØ5.5mm		2x25mm ²/2xØ7.5mm
		4x4mm²/4xØ4.5mm		7x6mm²/7xØ5.5mm

IP20 TÜVRheinland CE RoHS COMPLIANT UL94-V0

LK-415
500V



Model	LK-415	Amp=100A	LK-415B	Amp=125A
Flame retardant	UL94-V0		UL94-V0	
	4 poles	2x25mm ²/2xØ8.5mm	4 pole	11x6mm²/11xØ5.5mm
Terminals per pole		7x6mm²/7xØ5.5mm		2x25mm ²/2xØ7.5mm
		6x4mm²/6xØ4.5mm		2x35mm²/2xØ9mm

IP20 TÜVRheinland CE RoHS COMPLIANT UL94-V0




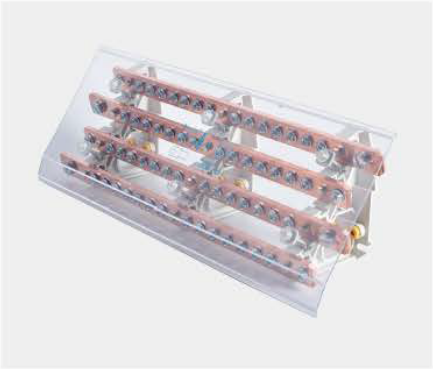

Performance:

- Compact space and highest capacity.
- Safe and easy electric connection.
- Protection: Transparent cover.
- Snap-on DIN Rail or mount to panel with screws.
- Halogen-free.
- Confirm to ROHS.
- Icc up to 35KA

Material:

- PA, Polyamide 66.UL94V-0 grade, inflaming ratarding. good resist dissolve, good bounce impact force. Working Temperature: -40 °C~+110 °C;
- PC, Polycarbonate, good glossiness, inflaming retarding, good bounce impact force. and thermal stability is great. Working Temperature: -60 C~+135 °C;
- Brass (160A) , Copper (125A, 200A, 250A, 400A);
- Voltage: 690V;
- Color: clear/grey color.

CE RoHS COMPLIANT UL94-V0

SPECIFICATION

Model	Dimensions	Copper platoon size	Rated current	Nominal voltage	Phase	In/Out	IPK	Uimp
	mm	mm	A	V			KA	KV
LK34-160	180X138X74	17x8x147	160	690	4	1x120+4x80+8x65	20	5
LK34-1256	182X170X77	12x4x153	125	690	4	1xM8+5xM6	48	6
LK34-12511	280X170X77	12x4x248	125	690	4	1xM8+10xM6	30	6
LK34-12517	420X170X77	12x4x384	125	690	4	1xM8+16xM6	40	6
LK34-2006	182x170x77	15x4x153	200	690	4	1xM8+5xM6	48	6
LK34-20011	280x170x77	15x4x248	200	690	4	1xM8+10xM6	30	6
LK34-20017	420x170x77	15x4x384	200	690	4	1xM8+16xM6	40	6
LK34-2506	182x170x77	20x5x153	250	690	4	1xM8+5xM6	48	8
LK34-25011	280x170x77	20x5x248	250	690	4	1xM8+10xM6	30	8
LK34-25027	630x170x77	20x5x592	250	690	4	1xM8+26xM6	40	8
LK34-4006	182x150x116	25x6x153	400	690	4	1xM8+5xM6	48	8
LK34-40011	280x150x116	25x6x248	400	690	4	1xM8+10xM6	30	8
LK34-40017	420x150x116	25x6x384	400	690	4	1xM8+16xM6	40	8
LK34-40027	630x150x116	25x6x592	400	690	4	1xM8+26xM6	40	8

KE 60

16mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC016

■ DIMENSION (mm)

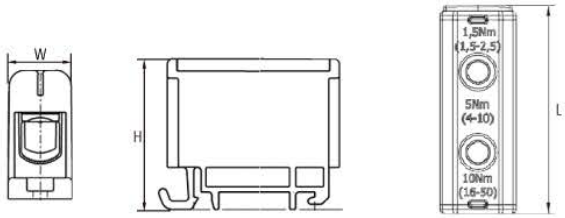

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE60.1		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm²) 3.0Nm(2.5-16mm²)	13.5×40×42	20	1000
KE60.2								
KE60.3								

KE 70

16mm²-1 pole 4 holes

■ DIMENSION (mm)

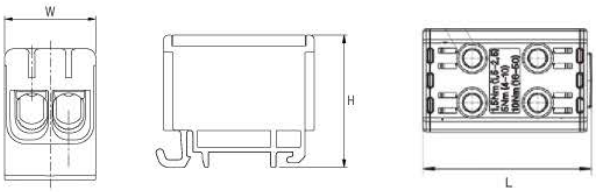

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE70.1		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm²) 3.0Nm(2.5-16mm²)	22×38.5×45	30.5	500
KE70.2								
KE70.3								

KE 60.4

16mm²-3 pole 6 holes

■ DIMENSION (mm)

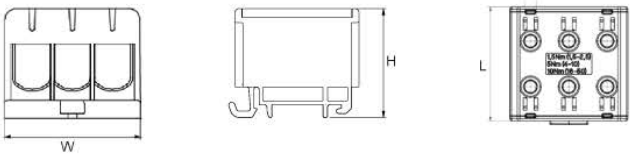

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE60.4		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm²) 3.0Nm(2.5-16mm²)	37.5×39×45	56	400
KE60.5								
KE60.6								

KE 60.7

16mm²-5 pole 10 holes

■ DIMENSION (mm)





Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE60.7		1.5-16	1000	Cu 85 Al 75	1.5Nm(1.5mm²) 3.0Nm(2.5-16mm²)	63×40×61.4	94	200

KE 50

35mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC035

■ DIMENSION (mm)







Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE50.1 KE50.2 KE50.3		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm²) 6Nm(25-35mm²)	16×40×46	24.5	500

KE 65

35mm²-1 pole 4 holes

■ DIMENSION (mm)







Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE65.1 KE65.2 KE65.3		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm²) 6Nm(25-35mm²)	27×40×46	42	300

KE 50.4

35mm²-3 pole 6 holes

■ DIMENSION (mm)

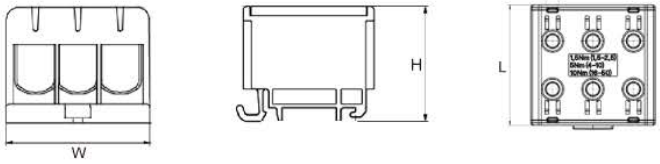

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE50.4		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm²) 6Nm(25-35mm²)	46×40×45.5	67	300
KE50.5								
KE50.6								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 65.7

35mm²-5 pole 10 holes

■ DIMENSION (mm)

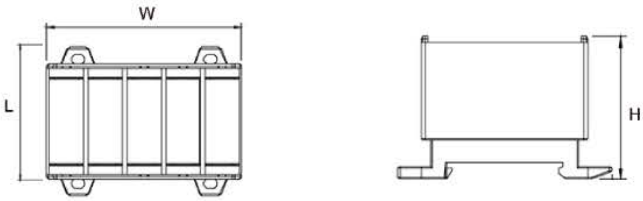

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE65.7		2.5-35	1000	Cu 135 Al 120	3Nm(2.5-16mm²) 6Nm(25-35mm²)	80×40×65	114	200

CE CB RoHS COMPLIANT REACH UL94-V0

KE 61

50mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC050

■ DIMENSION (mm)

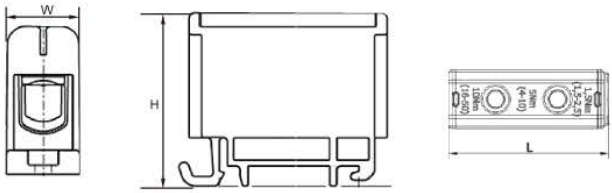

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE61.1		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm²) 12Nm(6-50mm²)	17.8×43×49	35	500
KE61.2								
KE61.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 66

50mm²-1 pole 4 holes

■ DIMENSION (mm)

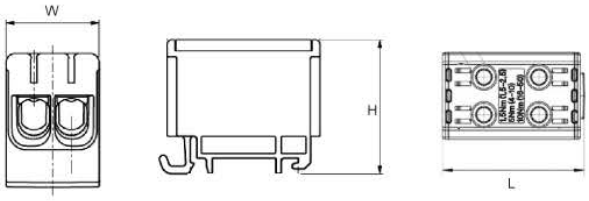

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE66.1		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm²) 12Nm(6-50mm²)	29.8×43×49	61	300
KE66.2								
KE66.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 71

50mm²-1 pole 6 holes

■ DIMENSION (mm)

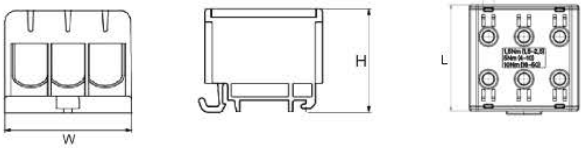

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE71.1		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm²) 12Nm(6-50mm²)	49×43×48	100.5	185
KE71.2								
KE71.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 61

50mm²-3 pole 6 holes

■ DIMENSION (mm)

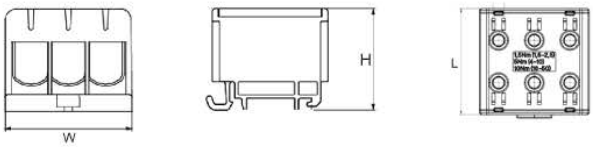

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE61.4		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm²) 12Nm(6-50mm²)	49×43×48	100.5	185
KE61.5								
KE61.6								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 61.7

50mm²-5 pole 10 holes

■ DIMENSION (mm)

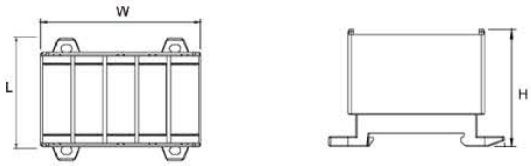

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE61.7		2.5-50	1000	Cu 160 Al 145	4Nm(2.5-4mm²) 12Nm(6-50mm²)	86×44×51	161.5	200

CE CB RoHS COMPLIANT REACH UL94-V0

KE 62

95mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC095

■ DIMENSION (mm)

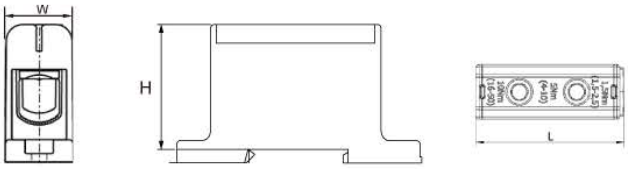

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE62.1		16-95	1000	Cu 245 Al 220	10Nm(16-25mm²) 20Nm(35-95mm²)	24×49×86	95	240
KE62.2								
KE62.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 67

95mm²-1 pole 4 holes

■ DIMENSION (mm)

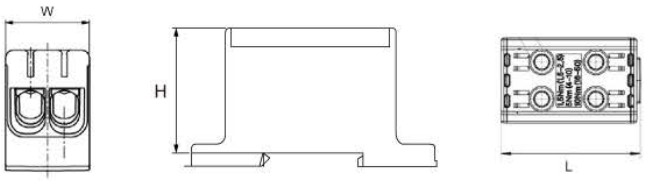

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE67.1		16-95	1000	Cu 245 Al 220	10Nm(16-25mm²) 20Nm(35-95mm²)	42×49×86	172.5	90
KE67.2								
KE67.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 72

95mm²-1 pole 6 holes

■ DIMENSION (mm)

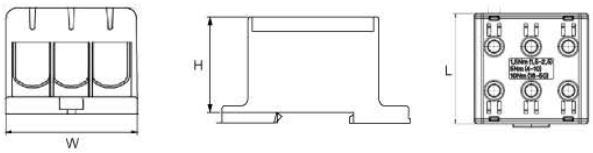

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE72.1		16-95	1000	Cu 245 Al 220	10Nm(16-25mm²) 20Nm(35-95mm²)	60×49×86	245	90
KE72.2								
KE72.3								

KE 63

150mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC150

■ DIMENSION (mm)

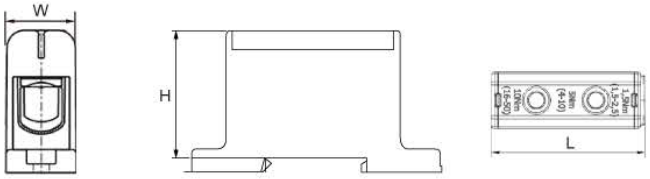

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE63.1		35-150	1000	Cu 320 Al 290	14Nm(35-95mm²) 30Nm(120-150mm²)	29.5×59×95	163.5	180
KE63.2								
KE63.3								

KE 68

150mm²-1 pole 4 holes

■ DIMENSION (mm)

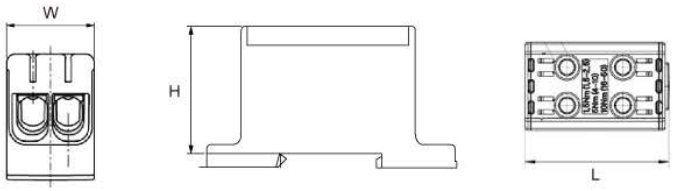

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE68.1		35-150	1000	Cu 320 Al 290	14Nm(35-95mm²) 30Nm(120-150mm²)	51.5×59×95	290.5	90
KE68.2								
KE68.3								

KE 73

150mm²-1 pole 6 holes

■ DIMENSION (mm)

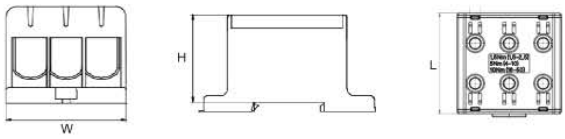

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE73.1		35-150	1000	Cu 320 Al 290	14Nm(35-95mm²) 30Nm(120-150mm²)	74×59×95	426	60
KE73.2								
KE73.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 64

240mm²-1 pole 2 holes

Dustproof cover can be added. Model KEPC240

■ DIMENSION (mm)

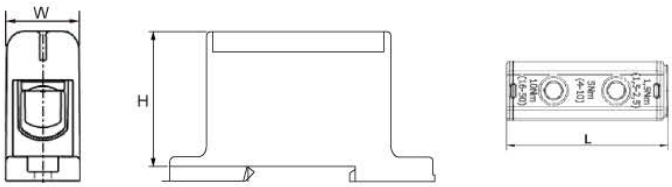

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE64.1		35-240	1000	Cu 425 Al 380	12Nm(35-70mm²) 45Nm(95-240mm²)	38×67×131	318	100
KE64.2								
KE64.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 69

240mm²-1 pole 4 holes

■ DIMENSION (mm)

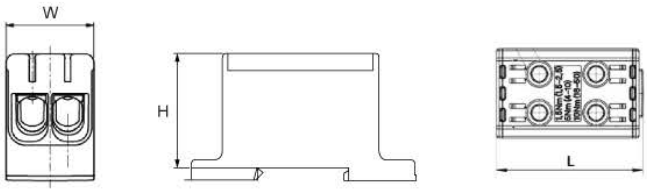

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE69.1		35-240	1000	Cu 425 Al 380	12Nm(35-70mm²) 45Nm(95-240mm²)	65×67×131	566.5	90
KE69.2								
KE69.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 74

240mm²-1 pole 6 holes

■ DIMENSION (mm)

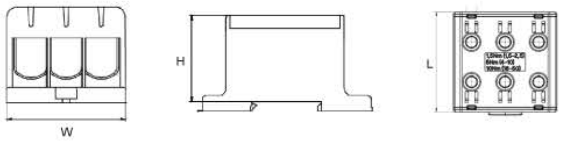

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE74.1		35-240	1000	Cu 425 Al 380	12Nm(35-70mm²) 45Nm(95-240mm²)	94×67×131	850	30
KE74.2								
KE74.3								

CE CB RoHS COMPLIANT REACH UL94-V0

KE 75

300mm²-1 pole 2 holes

■ DIMENSION (mm)

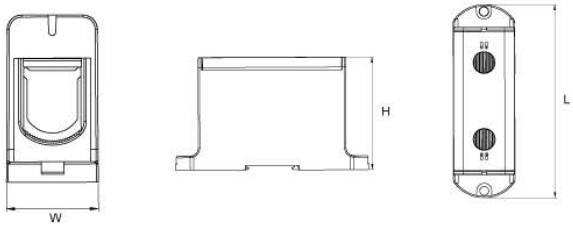

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L
		mm²	V	A	Nm	(mm)
KE75.1		95-300	1000	Cu 520 Al 490	45Nm(95-300mm²)	44.7x81.5x140
KE75.2						
KE75.3						

CE CB RoHS COMPLIANT REACH UL94-V0

KE 80

300mm²-2 pole 4 holes

■ DIMENSION (mm)

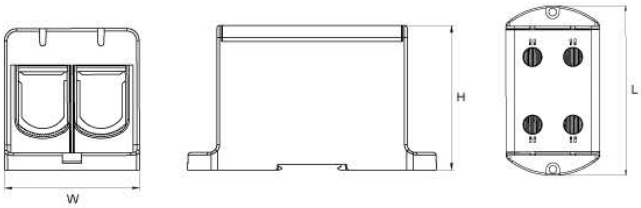

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L
		mm²	V	A	Nm	(mm)
KE80.1		95-300	1000	Cu 520 Al 490	45Nm(95-300mm²)	77.5x81.5x140
KE80.2						
KE80.3						

CE CB RoHS COMPLIANT REACH UL94-V0

KE 85

300mm²-3 pole 6 holes

■ DIMENSION (mm)

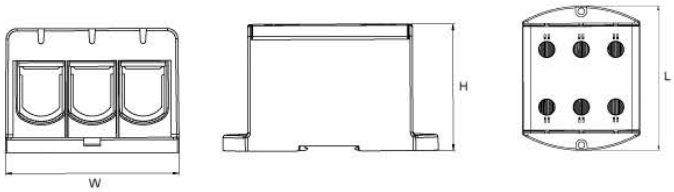

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L
		mm²	V	A	Nm	(mm)
KE85.1		95-300	1000	Cu 520 Al 490	45Nm(95-300mm²)	114×81.5×140
KE85.2						
KE85.3						

KE 62N

95mm²-1 pole 2 holes

■ DIMENSION (mm)

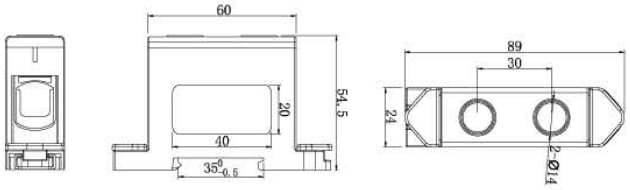

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE62N.1		35-240	1000	Cu 245 Al 220	10Nm(16-25mm²) 20Nm(35-95mm²)	94×67×130	850	30
KE62N.2								
KE62N.3								
KE62N.4								
KE62N.5								

KE 100

300mm²-1 pole 4 holes

■ DIMENSION (mm)

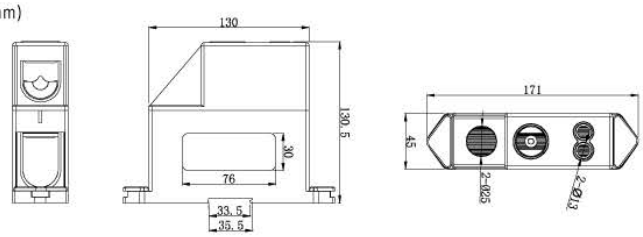

Product code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
KE100.1		35-300	1000	Cu 600 Al 500	8Nm(2x10-70mm²) 30Nm(35-185mm²) 50Nm(90-300mm²)	45×130.5×171	700	20
KE100.2								
KE100.3								
KE100.4								
KE100.5								

KEPC Protection Covers

KE Universal terminal for AL/CU conductors

KEPC016 KEPC035 KEPC050 KEPC095 KEPC150 KEPC240

1

2

SPECIFICATION

Model	Description
KEPC016	Prtection cover for KE 16mm²
KEPC035	Prtection cover for KE 35mm²
KEPC050	Prtection cover for KE 50mm²
KEPC095	Prtection cover for KE 95mm²
KEPC0150	Prtection cover for KE 150mm²
KEPC0240	Prtection cover for KE 240mm²

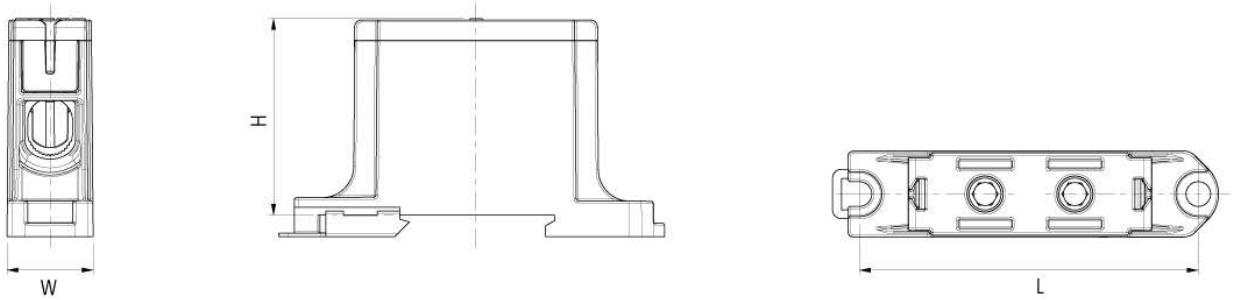

SPECIFICATION

Product Code	Color	Conductor	Nominal Voltage	Nominal Current	Tightenig Torque	W×H×L	Weight	Package
		mm²	V	A	Nm	(mm)	g	pcs
LK161	Grey	2.5-50	1000	Cu160 Al145	4Nm(2.5-4mm²) 12Nm(6-50mm²)	19.2x49x82.5	52	500
LK161.2	Blue							
LK161.4	Red							
LK161.6	Black							
LK162	Grey	16-95	1000	Cu245 Al220	10Nm(16-25mm²) 20Nm(35-95mm²)	25x56x93.6	112.5	240
LK162.2	Blue							
LK162.4	Red							
LK162.6	Black							
LK163	Grey	35-150	1000	Cu320 Al290	14Nm(35-95mm²) 30Nm(120-150mm²)	30.5x65x163	179	180
LK163.2	Blue							
LK163.4	Red							
LK163.6	Black							

LK 25/16

1 pole

1000 V AC/DC | 2x16mm² 152A Cu
1x25mm² 101A Al

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 25/16-1 for aluminium copper conductors	LK25/16-1P LB		2.5Nm(2.5-16mm²) 2.5Nm(2.5-25mm²)	20x39x55	IEC 60947-7-1
	LK25/16-1P PE				
	LK25/16-1P N				
	LK25/16-1P LS				
	LK25/16-1P LG				

LK 25/16

2 pole

1000 V AC/DC | 2x16mm² 152A Cu
1x25mm² 101A Al

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 25/16-1 for aluminium copper conductors	LK25/16-2P N		2.5Nm(2.5-16mm²) 2.5Nm(2.5-25mm²)	39x39x55	IEC 60947-7-1
	LK25/16-2P LB				
	LK25/16-2P LG				
	LK25/16-2P PE				
	LK25/16-2P LS				

LK 25/16

3 pole

1000 V AC/DC | 2x16mm² 152A Cu
1x25mm² 101A Al

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 25/16-3 for aluminium copper conductors	LK25/16-L G/N/PE		2.5Nm(2.5-16mm²) 2.5Nm(2.5-25mm²)	58x39x55	IEC 60947-7-1
	LK25/16-3L BSG				
	LK25/16-3L G				



LK 25/16

4 pole

1000 V AC/DC | 2x16mm² 152A Cu
1x25mm² 101A Al

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 25/16-4 for aluminium copper conductors	LK25/16-L BSG/N		2.5Nm(2.5-16mm²) 2.5Nm(2.5-25mm²)	79x39x55	IEC 60947-7-1
	LK25/16-3L G/N				
	LK25/16-4L G				



LK 25/16

5 pole

1000 V AC/DC | 2x16mm² 152A Cu
1x25mm² 101A Al

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 25/16-5 for aluminium copper conductors	LK25/16-5P L PE/B/S/G/N		2.5Nm(2.5-16mm²) 2.5Nm(2.5-25mm²)	97x39x55	IEC 60947-7-1
	LK25/16-5P L PE/G/N				
	LK25/16-5P L G				



LK 25/16-1P.3

1 pole

1000 V AC/DC | 4x2.5-16mm² 101A Cu
2x2.5-25mm² 101A Cu

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK25/16-1P.3 for aluminium copper conductors	LK25/16-1P.3 LB		2.5Nm(4x2.5-16mm²) 2.5Nm(2x2.5-25mm²)	28.3x39x55	IEC 60947-7-1
	LK25/16-1P.3 PE				
	LK25/16-1P.3 N				
	LK25/16-1P.3 S				
	LK25/16-1P.3 LG				



LK 25/16-1P.4

1 pole

1000 V AC/DC | 6x2.5-16mm² 101A Cu
2x2.5-25mm² 101A Cu

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK25/16-1P.4 for aluminium copper conductors	LK25/16-1P.4 LB		2.5Nm(6x2.5-16mm²) 2.5Nm(2x2.5-25mm²)	36.4x39x55	IEC 60947-7-1
	LK25/16-1P.4 PE				
	LK25/16-1P.4 N				
	LK25/16-1P.4 S				
	LK25/16-1P.4 LG				

LK 35/25

1 pole

1000 V AC/DC | 2x25mm² 202A Cu
1x35mm² 125A Al

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 35/25-1 for aluminium copper conductors	LK35/25-1P LB		2.5Nm(2.5-25mm²) 3.5Nm(4-35mm²)	22x43x54	IEC 60947-7-1
	LK35/25-1P PE				
	LK35/25-1P N				
	LK35/25-1P S				
	LK35/25-1P LG				

LK 35/25

2 pole

1000 V AC/DC | 2x25mm² 202A Cu
1x35mm² 125A Al

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 35/25-2 for aluminium copper conductors	LK35/25-2P LB		2.5Nm(2.5-25mm²) 3.5Nm(4-35mm²)	43.5x43x54	IEC 60947-7-1
	LK35/25-2P PE				
	LK35/25-2P N				
	LK35/25-2P LS				
	LK35/25-2P LG				

LK 35/25

3 pole

1000 V AC/DC | 2x25mm² 202A Cu
1x35mm² 125A Al

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 35/25-3 for aluminium copper conductors	LK35/25-L G/N/PE		2.5Nm(2.5-25mm²) 3.5Nm(4-35mm²)	65x43x54	IEC 60947-7-1
	LK35/25-3L BSG				
	LK35/25-3L G				

LK 35/25

4 pole

1000 V AC/DC | 2x25mm² 202A Cu
1x35mm² 125A Al

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 35/25-4 for aluminium copper conductors	LK35/25-3L BSG/N		2.5Nm(2.5-25mm²) 3.5Nm(4-35mm²)	87x43x55	IEC 60947-7-1
	LK35/25-3L G/N				
	LK35/25-4L G				



LK 35/25

5 pole

1000 V AC/DC | 2x25mm² 202A Cu
1x35mm² 125A Al

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 35/25-5 for aluminium copper conductors	LK35/25-PE/3L BSG/N		2.5Nm(2.5-25mm²) 3.5Nm(4-35mm²)	107x44x52	IEC 60947-7-1
	LK35/25-PE/3L G/N				
	LK35/25- 5L G				



LK 35/25-1P.3

1 pole

1000 V AC/DC | 4x2.5-25mm² 125A Cu
2x4-35mm² 125A Cu

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK35/25-1P.3 for aluminium copper conductors	LK35/25-1P.3 LB		2.5Nm(4x2.5-25mm²) 3.5Nm(2x4-35mm²)	35.2x44.2x55	IEC 60947-7-1
	LK35/25-1P.3 PE				
	LK35/25-1P.3 N				
	LK35/25-1P.3 S				
	LK35/25-1P.3 LG				



LK 35/25-1P.4

1 pole

1000 V AC/DC | 6x2.5-25mm² 125A Cu
2x4-35mm² 125A Cu

CE IEC UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK35/25-1P.4 for aluminium copper conductors	LK35/25-1P.4 LB		2.5Nm(6x2.5-16mm²) 2.5Nm(2x4-35mm²)	44.7x44.2x55	IEC 60947-7-1
	LK35/25-1P.4 PE				
	LK35/25-1P.4 N				
	LK35/25-1P.4 S				
	LK35/25-1P.4 LG				



LK 70/50

1 pole

1000 V AC/DC | 2x50mm² 300A Cu
1x70mm² 192A Al

CE IEC UL94-V0

DIMENSION (mm)





SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
LK 70/50-1 for aluminium copper conductors	LK70/50-1P LB		6Nm(6-50mm²) 10Nm(10-70mm²)	33x46x62	IEC 60947-7-1
	LK70/50-1P PE				
	LK70/50-1P N				
	LK70/50-1P LS				
	LK70/50-1P LG				

DB 100A

1000V AC
100A AL
101A CU

Input:
2 x 25mm²-2.5mm²
16mm²-1.5mm²

Output:
6 x 10mm²-1.5mm²
6mm²-1.5mm²

CE RoHS COMPLIANT UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
DB 100A for aluminium copper conductors	DB 100A- LB		2Nm(6x10mm²) 4Nm(2x25mm²)	30.2x49x55.4	IEC 60947-7-1
	DB 100A- PE				
	DB 100A-N				
	DB 100A- LS				
	DB 100A- LG				

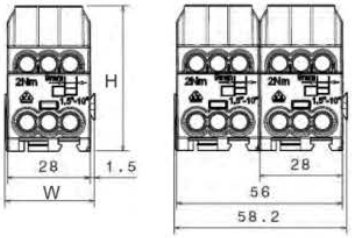

DB 200A

1000V AC
1500V DC
185A AL
200A CU

Input:
1 x 70mm²-10mm²
50mm²-6mm²
1 x 35mm²-4mm²
25mm²-2.5mm²

Output:
6 x 16mm²-1.5mm²
10mm²-1.5mm²

CE RoHS COMPLIANT UL94-V0

DIMENSION (mm)



SPECIFICATION

Model	Type	Color	Tightenig Torque	W×H×L	Standards
			Nm	(mm)	
DB 200A for aluminium copper conductors	DB 200A- LB		3Nm(6x16mm²) 6Nm(1x35mm²) 6Nm(1x70mm²)	38.5x 57.5x69.75	IEC 60947-7-1
	DB 200A- PE				
	DB 200A-N				
	DB 200A- LS				
	DB 200A- LG				



KV225A

■ DIMENSION (mm)



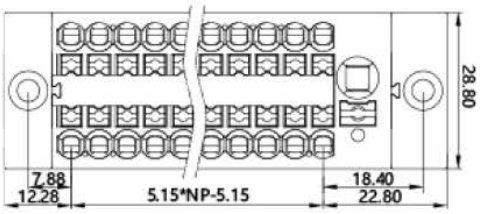

KV225B

■ DIMENSION (mm)



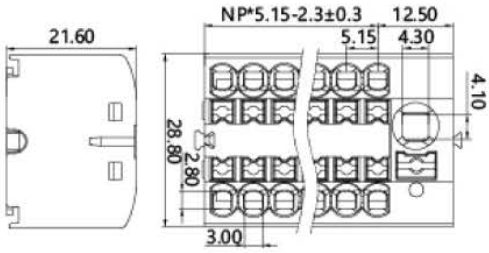

CE RoHS COMPLIANT UL94-V0

COLOR MARKER KIT:

Model	Line diameters are divided into lines and main lines	Rated Voltage	Rated Current	Overvoltage Category /Pollution Degree			Rate Impulse Voltage	Poles	Pitch	Stripping length	Operating temperature	Number of poles
KV225A KV225B	0.2-4/0.5-6/10	690V	24/41A	III/3	III/2	II/2	4kV	N=02~12P	5.15mm	8-10mm	-40℃~105℃	1P/2P/3P/4P 5P/6P/7P/8P 9P/10P/11P/12P

KV225G

■ DIMENSION (mm)



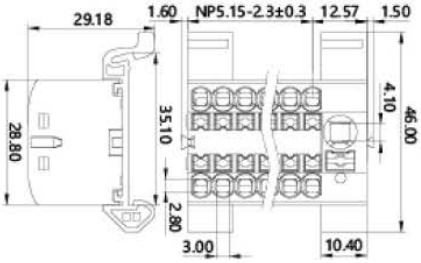

KV225H

■ DIMENSION (mm)



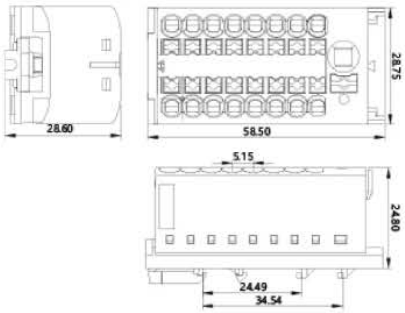

CE RoHS COMPLIANT UL94-V0

COLOR MARKER KIT:

Model	Line diameters are divided into lines and main lines	Rated Voltage	Rated Current	Overvoltage Category Pollution Degree			Rate Impulse Voltage	Poles	Pitch	Stripping length	Operating temperature	Number of poles
KV225G KV225H	0.2-4/0.5-6/10	690V	24/41A	III/3	III/2	II/2	4kV	N=02~12P	5.15mm	8-10mm	-40℃~105℃	1P/2P/3P/4P 5P/6P/7P/8P 9P/10P/11P/12P

LINKWELL ELECTRIC

KV225D-A

■ DIMENSION (mm)



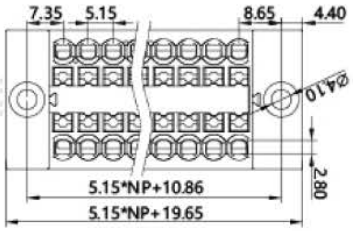

KV225D

■ DIMENSION (mm)



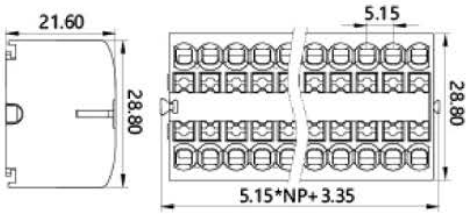

CE RoHS COMPLIANT UL94-V0

COLOR MARKER KIT:

Model	Line diameters are divided into lines and main lines	Rated Voltage	Rated Current	Overvoltage Category Pollution Degree			Rate Impulse Voltage	Poles	Pitch	Stripping length	Operating temperature	Number of poles
KV225D-A KV225D	0.2-4/0.5-6/10	690V	24/41A	III /3	III /2	II /2	4kV	N=02~12P	5.15mm	8-10mm	-40℃~105℃	1P/2P/3P/4P 5P/6P/7P/8P 9P/10P/11P/12P

KV225D-G

■ DIMENSION (mm)



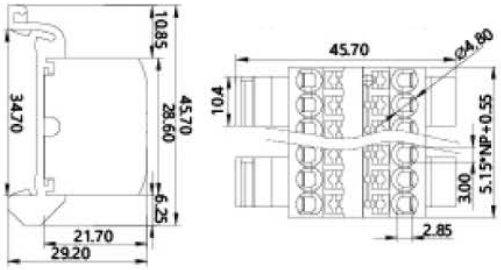

KV225D-H

■ DIMENSION (mm)



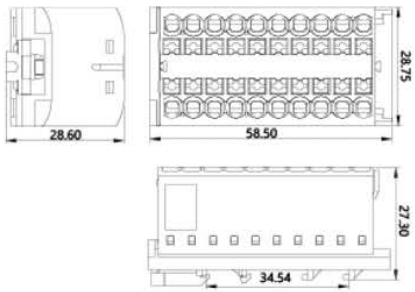

CE RoHS COMPLIANT UL94-V0

COLOR MARKER KIT:

Model	Line diameters are divided into lines and main lines	Rated Voltage	Rated Current	Overvoltage Category Pollution Degree			Rate Impulse Voltage	Poles	Pitch	Stripping length	Operating temperature	Number of poles
KV225D-G KV225D-H	0.2-4/0.5-6/10	690V	24/41A	III /3	III /2	II /2	4kV	N=02~12P	5.15mm	8-10mm	-40℃~105℃	1P/2P/3P/4P 5P/6P/7P/8P 9P/10P/11P/12P

KV2251A

■ DIMENSION (mm)



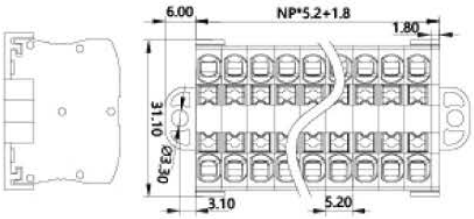

KV2251B

■ DIMENSION (mm)



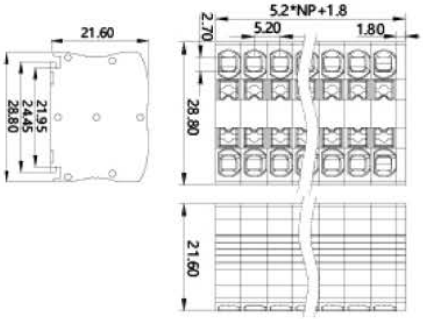

CE RoHS COMPLIANT UL94-V0

COLOR MARKER KIT:

Model	Line diameters are divided into lines and main lines	Rated Voltage	Rated Current	Overvoltage Category Pollution Degree			Rate Impulse Voltage	Poles	Pitch	Stripping length	Operating temperature	Number of poles
KV2251A KV2251B	0.2-4	690V	32A	III/3	III/2	II/2	4kV	N=02~12P	5.15mm	8-10mm	-40℃~105℃	1P/2P/3P/4P 5P/6P/7P/8P 9P/10P/11P/12P

KV2251G

■ DIMENSION (mm)



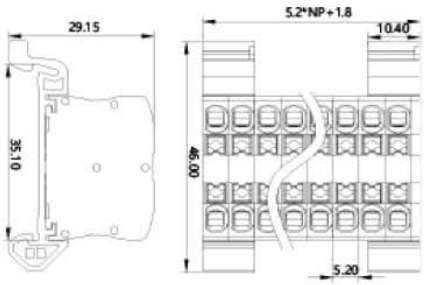

KV2251H

■ DIMENSION (mm)



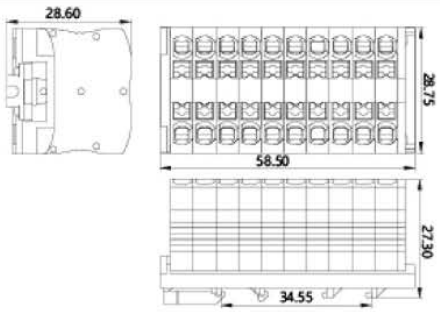

CE RoHS COMPLIANT UL94-V0

COLOR MARKER KIT:

Model	Line diameters are divided into lines and main lines	Rated Voltage	Rated Current	Overvoltage Category Pollution Degree			Rate Impulse Voltage	Poles	Pitch	Stripping length	Operating temperature	Number of poles
KV2251G KV2251H	0.2-4	690V	32A	III/3	III/2	II/2	4kV	N=02~12P	5.15mm	8-10mm	-40℃~105℃	1P/2P/3P/4P 5P/6P/7P/8P 9P/10P/11P/12P

PT series pussh in terminal block

Order number


PT 2.5


PT 2.5-TW


PT 2.5-QU

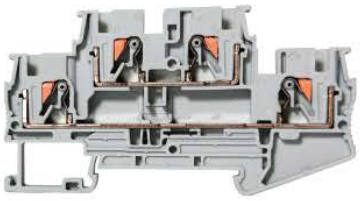
PTTB 2.5

SPECIFICATION

Model	Dimensions	Current Voltage	Marker	Solid wire Stranded wire	End cover	Plug-in-bridge	End clamp
	WxLxH (mm)	[A] / [V]					
PT 1.5/S	3.5x45x30.5	17.5/500	ZB 3.5	0.14-1.5/26-14 0.14-1.5/26-14	D-PT 1.5/S	FBS 2-3.5 FBS 3-3.5 FBS 5-3.5 FBS 10-3.5	
PT 2.5	5.2x48.6x35.3	24/800	ZB 5	0.14-4/26-12 0.14-2.5/26-14	D-PT 2.5	FBS 2-5 FBS 3-5 FBS 5-5 FBS 10-5	
PT 4	6.2x56x35.3	32/800	ZB 6	0.2-6/24-10 0.2-4/24-12	D-PT 4	FBS 2-6 FBS 3-6 FBS 5-6 FBS 10-6	
PT 6	8.2x57.7x42.2	41/1000	ZB 8	0.5-10/20-8 0.5-6/20-10	D-PT 6	FBS 2-8 FBS 3-8 FBS 5-8 FBS 10-8	
PT 10	10.2x67.7x49.5	57/1000	ZB 10	0.5-16/20-6 0.5-10/20-8	D-PT 10	FBS 2-10 FBS 3-10 FBS 5-10 FBS 10-10	
PT 16	12.2x75.4x53	76/1000	ZB 1	0.5-25/20-4 0.5-16/20-6	D-PT 16	FBS 2-12 FBS 3-12 FBS 5-12 FBS 10-12	
PT 1.5-TW	3.5x30.5x54	17.5/500	ZB 3.5	0.14-1.5/26-14 0.14-1.5/26-14	D-PT 1.5-TW	FBS 2-3.5 FBS 3-3.5 FBS 5-3.5 FBS 10-3.5	
PT 2.5-TW	5.2x35.3x60.5	24/800	ZB 5	0.14-4/26-12 0.14-2.5/26-14	D-PT 2.5-TW	FBS 2-5 FBS 3-5 FBS 5-5 FBS 10-5	E/LUK EB3
PT 4-TW	6.2x25.3x66.5	32/800	ZB 6	0.2-6/24-10 0.2-4/24-12	D-PT 4-TW	FBS 2-6 FBS 3-6 FBS 5-6 FBS 10-6	
PT 1.5-QU	3.5x30.5x63.2	17.5/500	ZB 3.5	0.14-1.5/26-14 0.14-1.5/26-14	D-PT 1.5-QU	FBS 2-3.5 FBS 3-3.5 FBS 5-3.5 FBS 10-3.5	
PT 2.5-QU	5.2x35.3x72.2	24/800	ZB 5	0.14-4/26-12 0.14-2.5/26-14	D-PT 2.5-QU	FBS 2-5 FBS 3-5 FBS 5-5 FBS 10-5	
PT 4-QU	6.2x35.3x77	32/800	ZB 6	0.2-6/24-10 0.2-4/24-12	D-PT 4-QU	FBS 2-6 FBS 3-6 FBS 5-6 FBS 10-6	
PTTB 1.5	3.5x41.1x65.4	17.5/500	ZBFM 3.5	0.14-1.5/26-14 0.14-1.5/26-14	D-PTTB 1.5	FBS 2-3.5 FBS 3-3.5 FBS 5-3.5 FBS 10-3.5	
PTTB 2.5	5.2x45.8x68	24/800	ZBFM 5	0.14-4/26-12 0.14-2.5/26-14	D-PTTB 2.5	FBS 2-5 FBS 3-5 FBS 5-5 FBS 10-5	
PTTB 4	6.2x47.5x83.5	32/800	ZBFM 60	0.2-6/24-10 0.2-4/24-12	D-PTTB 4	FBS 2-6 FBS 3-6 FBS 5-6 FBS 10-6	

PT series pussh in terminal block

Order number

PTV 2.5

PTU 6-T

PT 4-HESI

PT 2.5-3L

SPECIFICATION

Model	Dimensions WxLxH (mm)	Current Voltage [A] / [V]	Marker	Solid wire Stranded wire	End cover	End clamp
PTV 2.5	5.2x35.3x50.8	24/800	ZBFM 5	0.14-4/26-12 0.14-2.5/26-14	D-PTV 2.5	E/LUK EB3
PTU 6-T	8.2x48x73.9	41/500	ZB 8	0.5-10/20-8 0.5-6/20-10	D-PTU 6	
PT 4-HESI	8.2x35.3x67.8	6.3/500	ZB 6	0.2-6/24-10 0.2-4/24-12	D-PTC 4	
PT 2.5-3L	5.2x56.4x102	20/500	ZBFM 5	0.14-4/26-12 0.14-2.5/26-14	D-PT 2.5-3L	

PT series pussh in terminal block



PT 4-PE



PT 4-TWIN-PE



PT 4-QU-PE



PTTB 2.5-PE

SPECIFICATION

Model	Dimensions WxLxH (mm)	Solid wire Stranded wire	Marker	End cover	End clamp
PT 2.5-PE	5.2x35.3x48.6	0.14-4/26-12 0.14-2.5/26-14	ZB 5	D-PT 2.5	E/LUK EB3
PT 4-PE	6.2x35.3x56	0.2-6/24-10 0.2-4/24-12	ZB 6	D-PT 4	
PT 6-PE	8.2x42.2x57.7	0.5-10/20-8 0.5-6/20-10	ZB 8	D-PT 6	
PT 10-PE	10.2x49.5x67.7	0.5-16/20-6 0.5-10/20-8	ZB 10	D-PT 10	
PTTB 2.5-PE	5.2x45.8x68	0.14-4/26-12 0.14-2.5/26-14	ZBFM 5	D-PTTB 2.5	
PTTB 4-PE	6.2x47.5x83.5	0.2-6/24-10 0.2-4/24-12	ZBFM 6	D-PTTB 4	
PT 2.5-TWIN-PE	5.2x35.3x60.5	0.14-4/26-12 0.14-2.5/26-14	ZB 5	D-PT 2.5-TW	
PT 4-TWIN-PE	6.2x25.3x66.5	0.2-6/24-10 0.2-4/24-12	ZB 6	D-PT 4-TW	
PT 2.5-QU-PE	5.2x35.3x72.5	0.14-4/26-12 0.14-2.5/26-14	ZB 5	D-PT 2.5-QU	
PT 4-QU-PE	6.2x35.3x77	0.2-6/24-10 0.2-4/24-12	ZB 6	D-PT 4-QU	

LUK 2.5B

32A 800V

Size: T6.2xH40.6xW42.6mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB6

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm grey	D-LUK 2.5
Fixed bridge: 2poles 3poles	FBI10-6
Insertion bridge poles: 2poles 3poles 10poles	EB2-6; EB3-6; EB10-6
Switching jumper: complete set, need to add end cover between the two terinals	LUSBR2-7
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	-
Partition plate: T1.5mm	ATP-LUK
End clamp	E/LUK

LUK 3N

32A 800V

Size: T5.2xH46xW42.7mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB5

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm grey	D-LUK4/10
Fixed bridge: 2poles 3poles	FBI10-5
Insertion bridge poles: 2poles 3poles 10poles	EB2-5; EB3-5; EB10-5
Switching jumper: complete set, need to add end cover between the two terinals	-
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	TS-K
Partition plate: T1.5mm	-
End clamp	E/LUK

LUK 5N

41A 800V

Size: T6.2xH46.2xW42.6mm
Rigid wire: 0.2-6mm²
Flexible wire: 0.2-4mm²
With mark bar: ZB6

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm grey	D-LUK4/10
Fixed bridge: 2poles 3poles	FBI10-6
Insertion bridge poles: 2poles 3poles 10poles	EB2-6; EB3-6; EB10-6
Switching jumper: complete set, need to add end cover between the two terinals	LUSBR2-7
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	TS-K
Partition plate: T1.5mm	ATP-LUK
End clamp	E/LUK

LUK 6N

57A 800V

Size: T8.2xH46xW42.7mm
Rigid wire: 0.2-10mm²
Flexible wire: 0.2-6mm²
With mark bar: ZB8

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

End plate: thickness 1.5mm grey	D-LUK4/10
Fixed bridge: 2poles 3poles	FBI10-8
Insertion bridge poles: 2poles 3poles 10poles	EB2-8; EB3-8; EB10-8
Switching jumper: complete set, need to add end cover between the two terinals	LUSBR2-8/13
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	TS-K
Partition plate: T1.5mm	ATP-LUK
End clamp	E/LUK

LUK 10N

76A 800V

Size: T10.2xH42.8xW42.5mm
Rigid wire: 0.5-16mm²
Flexible wire: 0.5-10mm²
With mark bar: ZB10

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

End plate: thickness 1.5mm grey	D-LUK4/10
Fixed bridge: 2poles 3poles	FBI10-10
Insertion bridge poles: 2poles 3poles 10poles	EB2-10; EB3-10; EB10-10
Switching jumper: complete set, need to add end cover between the two terinals	-
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	TS-K
Partition plate: T1.5mm	ATP-LUK
End clamp	E/LUK

LUK 16N

100A 800V

Size: T12.2xH52.2xW42.5mm
Rigid wire: 2.5-25mm²
Flexible wire: 4-16mm²
With mark bar: ZB10

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

End plate: thickness 1.5mm grey	D-LUK16
Fixed bridge: 2poles 3poles	FBI10-12
Insertion bridge poles: 2poles 3poles 10poles	EB2-12; EB3-12; EB10-12
Switching jumper: complete set, need to add end cover between the two terinals	-
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	TS-K
Partition plate: T1.5mm	ATP-LUK
End clamp	E/LUK

LUK 35N

125A 800V

Size: T15.2xH52.7xW50.7mm
Rigid wire: 10-35mm²
Flexible wire: 10-35mm²
With mark bar: ZB10

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

End plate: thickness 1.5mm grey	-
Fixed bridge: 2poles 3poles	FBI2-15; FBI3-15
Insertion bridge poles: 2poles 3poles 10poles	EB2-15; EB3-15; EB10-15
Switching jumper: complete set, need to add end cover between the two terinals	-
Diaphragms: used for electrical isolation between adiacent bridges; insert after the fact; no space	TS-K
Partition plate: T1.5mm	-
End clamp	E/LUK

LUKH 50

150A 1000V

Size: T20xH76.2xW71.2mm
Rigid wire: 16-50mm²
Flexible wire: 25-50mm²
With mark bar: ZB10

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

Edge insertion stub: Fully insulated, inserted into the terinal clamp body and embedded in the terminal housing, 2 bits; 3-bit	-
Aluminium alloy	E/AL-NS 35

LUKH 95

232A 1000V

Size: T25xH91xW83.9mm
Rigid wire: 25-95mm²
Flexible wire: 35-95mm²
With mark bar: ZB10

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

Edge insertion stub: Fully insulated, inserted into the terminal clamp body and embedded in the terminal housing, 2 bits; 3-bit	EB2-25; EB3-25
Aluminium alloy	E/AL-NS 35

LUKH 150

309A 1000V

Size: T31.5xH111.2xW100.1mm
Rigid wire: 35-150mm²
Flexible wire: 50-150mm²
With mark bar: ZB10

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

Edge insertion stub: Fully insulated, inserted into the terminal clamp body and embedded in the terminal housing, 2 bits; 3-bit	-
Aluminium alloy	E/AL-NS 35

LUKH 240

415A 1000V

Size: T36xH122.5xW101.5mm
Rigid wire: 70-240mm²
Flexible wire: 70-240mm²
With mark bar: ZB10

IEC 60947-7-1

Parameters

Edge insertion stub: Fully insulated, inserted into the terminal clamp body and embedded in the terminal housing, 2 bits; 3-bit	-
Aluminium alloy	E/AL-NS 35

LUKK 3

32A 500V

Size: T5.2xH61.4xW56.8mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB5

IEC 60947-7-1

Parameters

End cover: grey	D-LUKK3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thicknes 2.5mm gray	DG-LUKK3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thickness 2.5mm	DP-LUKK3/5
Insertion bridge poles: 2 poles 10 poles	EB2-5; EB3-5; EB10-5
With insulation pads bridge pieces: 10 poles, divsible,10 screws, in order to form a jumper that skips some of the terminals, it needs to be padded	FBI10-5

LUKK 5

32A 500V

Size: T6.2xH61.2xW56.5mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-4mm²
With mark bar: ZB6

IEC 60947-7-1

Parameters

End cover: grey	D-LUKK3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thicknes 2.5mm gray	DG-LUKK3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thickness 2.5mm	DP-LUKK3/5
Insertion bridge poles: 2 poles 10 poles	EB2-6; EB3-6; EB10-6
With insulation pads bridge pieces: 10 poles, divsible,10 screws, in order to form a jumper that skips some of the terminals, it needs to be padded	FBI10-6



LUKKB 3

32A 500V

Size: T5.8xH61.2xW67.7mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB5

IEC 60947-7-1

Parameters

End cover: grey	D-LUKKB3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thicknes 2.5mm gray	DG-LUKKB3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thickness 2.5mm	DP-LUKKB3/5
Insertion bridge poles: 2 poles 10 poles	EB2-5; EB3-5; EB10-5
With insulation pads bridge pieces: 10 poles, divsible,10 screws, in order to form a jumper that skips some of the terminals, it needs to be padded	FBI10-5
Emd damp:suitable for mounting rails of type ⊏ or ⊔ for supporting double deck	E/LUK



LUKKB 5

32A 500V

Size: T6.3xH61.2xW67.6mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB6

IEC 60947-7-1

Parameters

End cover: grey	D-LUKKB3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thicknes 2.5mm gray	DG-LUKKB3/5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thickness 2.5mm	DP-LUKKB3/5
Insertion bridge poles: 2 poles 10 poles	EB2-6; EB3-6; EB10-6
With insulation pads bridge pieces: 10 poles, divsible,10 screws, in order to form a jumper that skips some of the terminals, it needs to be padded	FBI10-6
Emd damp:suitable for mounting rails of type ⊏ or ⊔ for supporting double deck	E/LUK

LMBKK 2.5

24A 500V

Size: T5.2xH47.4xW61.9mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB5

IEC 60947-7-1

Parameters

End cover: grey	D-LMBKKB2.5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thicknes 2.5mm gray	DG-LMBKKB2.5
Space compensation plate: used to offset ingterlayer misalignment when placed adjacent to a normal terminal: thickness 2.5mm	DP-LMBKKB2.5
Insertion bridge poles: 2 poles 10 poles	EB2-5; EB3-5; EB10-5
With insulation pads bridge pieces: 10 poles, divsible,10 screws, in order to form a jumper that skips some of the terminals, it needs to be padded	FBI10-5
Emd damp:suitable for mounting rails of type ⊏ or ⊔ for supporting double deck	E/LUK

LUK 5-HESI

6.3A 800V

Size: T8.2xH46.2xW72.6mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-4mm²
With mark bar: ZB8
With or without indicator light

* The current is determined by the fuse
* The voltage is determined by the indicator light

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

Consumed current with indicator: suitable for ⊏⊐ or ⊏⊐ type guide rails, for fuse 5x20,5x25,6.3x32mm, indicators are optional	-
Consumed current with indicator: 15-24V AC/DC, 3.5-7.5mA	-
Consumed current with indicator: 110-250V AC/DC, 1.5-3.5mA AC, 0.2-0.8mA DC	-
Consumed current with indicator: 15-24V AC/DC, 3.5-7.5mA	LUK5-HESILED 24
Consumed current with indicator: 110-250V AC/DC, 1.5-3.5mA AC, 0.2-0.8mA DC	LUK5-HESILED 250
Fixed bridge: terminal center short connection,10poles, divisible, 10screws, with insulating sleeve	-
Insertion bridge poles: 2poles 3poles 10poles	EB2-8; EB3-8; EB10-8

LUK 10-DREHSI

10A 800V

Size: T12.3xH55xW61.5mm
Rigid wire: 0.5-16mm²
Flexible wire: 0.5-16mm²
With mark bar: ZB8
With or without indicator light

* The current is determined by the fuse
* The voltage is determined by the indicator light

IEC 60947-7-1

CE RoHS COMPLIANT IEC UL94-V0

Parameters

Consumed current with indicator: suitable for ⊏⊐ or ⊏⊐ type guide rails, for fuse 5x20,5x25,6.3x32mm, indicators are optional	LUK10-DREHSI 5x20
Consumed current with indicator: 15-24V AC/DC, 3.5-7.5mA	LUK10-DREHSILED 24 5x20
Consumed current with indicator: 110-250V AC/DC, 1.5-3.5mA AC, 0.2-0.8mA DC	LUK10-DREHSILED 250 5x20
Consumed current with indicator: 15-24V AC/DC, 3.5-7.5mA	-
Consumed current with indicator: 110-250V AC/DC, 1.5-3.5mA AC, 0.2-0.8mA DC	-
Fixed bridge: terminal center short connection,10poles, divisible, 10screws, with insulating sleeve	FBI10-12
Insertion bridge poles: 2poles 3poles 10poles	EB2-12; EB3-12; EB10-12

LUK 5-MTK-P/P

16A 800V

Series knife disconnect terminal block
Size: T6.2xH62xW51.6mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-4mm²
With mark bar: ZB6

IEC 60947-7-1

Parameters

Side plug stub: fully insulated /2 bit; Fully insulated /3 bit; Separable, insulated back /10 bit	EB2-6; EB3-6; EB10-6
End plate: Gray	Closed shell, no need to install end plate

LUDK 4

32A 690V

LUDK series terminals
Size: T6.2xH45.5xW58.4mm
Rigid wire: 0.2-4mm²
Flexible wire: 0.2-2.5mm²
With mark bar: ZB6

IEC 60947-7-1

Parameters

End cover: grey	D-LUDK 4
Fixed bridge: for cross connection at terminal center, 10 screws, screw head with insulate collar, 10 poles, divisible	FBI10-6
Insulation bridge: insulated 2poles, insulated 3poles, divisible, back insulated 10 poles	EB2-6; EB3-6; EB10-6
Emd clamp: suitable for mounting rails of type ⊏ or ⊑ for supporting double deck	E/LUK

LURTK/S

57A 400V

LUK series umiversal terminal block
Size: T8.1xH50.9xW72.5mm
Rigid wire: 0.5-10mm²
Flexible wire: 0.5-6mm²
With mark bar: ZB8

IEC 60947-7-1

Parameters

Knife disconnect terminal: universal mounting clamp for DIN rail type ⊏ or ⊑ test socket available at both sides	-
End plate: Gray	D-LURTK/S
Center type bridge: used to disconnect part of the short on both sides, 10, separable, with 10 screws	FB10-LRTK/S
Insertion bridge: insulated 2poles, insulated 3poles, divisible, back insulated 10poles	EB2-8; EB3-8; EB10-8
Switching jumper: on both sides of the disconnect point, switching inward, with 2 screws	LUSB2-LRTK/S

LBK 4

41A 800V

Series quaternity umiversal terminal block
Size: T20.5xH23xW34mm
Rigid wire: 0.2-6mm²
Flexible wire: 0.2-4mm²
Installation method: Panel screws M3

IEC 60947-7-1

LKLM-A

CE RoHS COMPLIANT UL94-V0

Insert strip-sheet,with locator holes and lines
Used for terminal strip markers KLM1, Lettering area size:24x4mm

Terminal strip marker: for strip marking
Adjustable height, mount on DIN Rail E/UK-NS or E/NS/35N used marker pen B-STIFT or CMS system
Marking for insert strip ES/KLM 2-GB, Lettering area size:44x7mm

Terminal strip marker: Same above, without insert strip marker ES/KLM 2-GB
Packing units: 50

B1/B2 (GREY)

CE RoHS COMPLIANT UL94-V0

Terminal strip marker: for strip marking
Mounting on DIN Rail ⊏ or ⊔, with insert strip marke
Used B-STIFT or CMS system to mark the strip
Lettering field size: 40x17mm
Packing units: 10

E/LMK End Clamp

UL94-V0

E/LMK 1

End clamp: mount on ⊏ Din Rail Ns15, T 6mm
Mounting hole Ø3.2mm,material:KRILEN

E/LUK



End clamp: mount on DIN Rail ⊏ or ⊔
Fit for KLM strip marker or 1 piece of label No...8, T 9.5mm
Material: KRILEN

E/AL-NS 35

End clamp: enhanced design,made of aluminum
To support end 50-240mm² of the terminal strips, push mounting on ⊔ DIN Rail
Clamped by 2 screws and, fit for 2 piece of label No...10, T 10mm

ZB/DEK

SPECIFICATION

Model No. Blank	Model NO.	Model NO.
ZB4-BLANK	ZB5 1-10	ZB6 1-10
ZB5-BLANK	ZB5 11-20	ZB6 11-20
ZB6-BLANK	ZB5 21-30	ZB6 21-30
ZB8-BLANK	ZB5 31-40	ZB6 31-40
ZB10-BLANK	ZB5 41-50	ZB6 41-50
DEK5-BLANK	ZB5 51-60	ZB6 51-60
DEK6-BLANK	ZB5 61-70	ZB6 61-70
	ZB5 71-80	ZB6 71-80
	ZB5 81-90	ZB6 81-90
	ZB5 91-100	ZB6 91-100
	ZB8 1-10	ZB10 1-10
	ZB8 11-20	ZB10 11-20
	ZB8 21-30	ZB10 21-30
	ZB8 31-40	ZB10 31-40
	ZB8 41-50	ZB10 41-50
	ZB8 51-60	ZB10 51-60
	ZB8 61-70	ZB10 61-70
	ZB8 71-80	ZB10 71-80
	ZB8 81-90	ZB10 81-90
	ZB8 91-100	ZB10 91-100

SPECIFICATION

Model NO.	Model NO.	Model NO.
ZB4 1-10	DEK5 1-10	DEK6 1-10
ZB4 11-20	DEK5 11-20	DEK6 11-20
ZB4 21-30	DEK5 21-30	DEK6 21-30
ZB4 31-40	DEK5 31-40	DEK6 31-40
ZB4 41-50	DEK5 41-50	DEK6 41-50
ZB4 51-60	DEK5 51-60	DEK6 51-60
ZB4 61-70	DEK5 61-70	DEK6 61-70
ZB4 71-80	DEK5 71-80	DEK6 71-80
ZB4 81-90	DEK5 81-90	DEK6 81-90
ZB4 91-99	DEK5 91-100	DEK6 91-100

LUSLKG Single pussh in and double-out plug-in terminal blocks

CE RoHS COMPLIANT UL94-V0

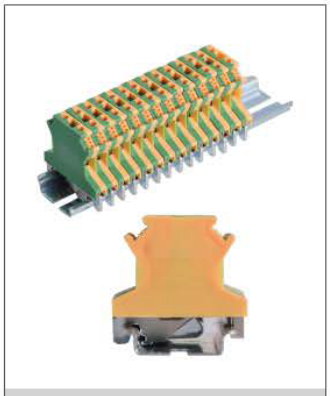

LUSLKG 2.5

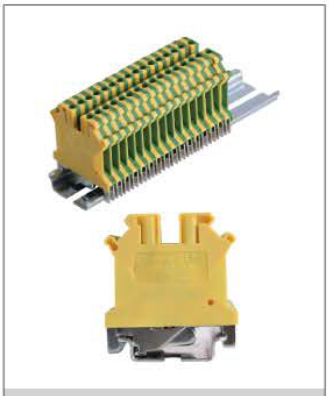

LUSLKG 3

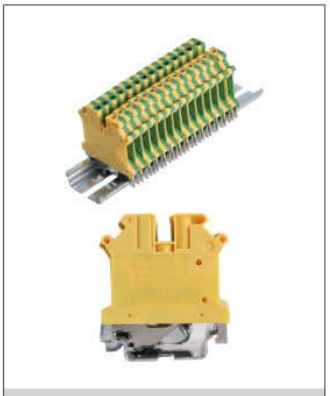

LUSLKG 5

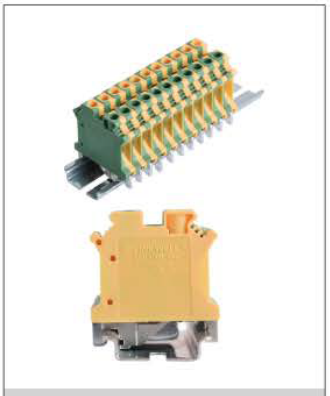

LUSLKG 6

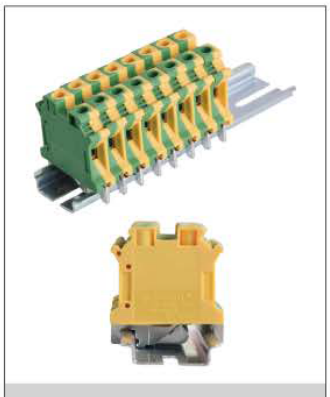

LUSLKG 10

LUSLKG 16

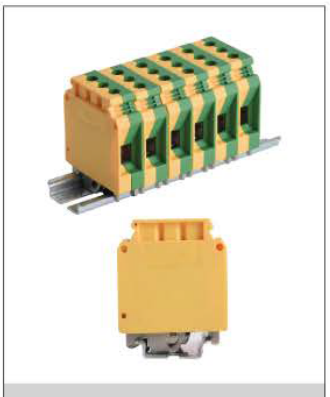

LUSLKG 35

LUSLKG 50

SPECIFICATION

Model	Dimensions	Solid cross section	Stranded cross section	Zack strip	Approvals
	TxHxW (mm)	mm^2	mm^2		
LUSLKG 2.5	6.2x42x42.9	0.2-4	0.2-2.5	ZB6	CE & RoHs
LUSLKG 3	5.2x46x42.9	0.2-4	0.2-2.5	ZB5	CE & RoHs
LUSLKG 5	6.2x46x43.1	0.2-4	0.2-4	ZB6	CE & RoHs
LUSLKG 6	8.2x46x42.6	0.2-10	0.2-6	ZB6	CE & RoHs
LUSLKG 10	10.2x46x42.4	0.5-16	0.5-10	ZB10	CE & RoHs
LUSLKG 16	12.2x46x43.1	2.4-25	4-16	ZB10	CE & RoHs
LUSLKG 35	15.2x62x50.3	10-35	10-35	ZB10	CE & RoHs
LUSLKG 50	20.5x83.5x71	16-50	25-50	ZB10	CE & RoHs
LUKK5-PE	6.2x63x56.8	0.2-4	0.2-4	ZB6	CE & RoHs

EK

EK 2.5/35

EK 4/35

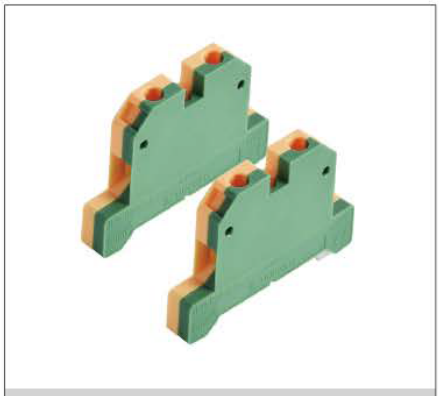

EK 6/35

EK 10/35

EK 16/35

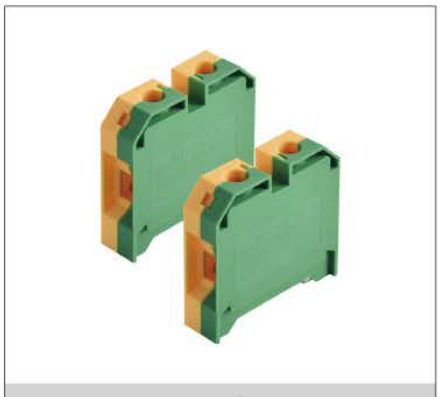

EK 35/35

SPECIFICATION

Model	Dimensions	Stranded cross	Connection type	Approvals
	TxHxW (mm)	mm^2		
EK 2.5/35	6.6x36.5x56.5	0.2-2.5	screw connection	CE/RoHS/UL94V0
EK 4/35	6.6x40.3x57.4	0.2-4	screw connection	CE/RoHS/UL94V0
EK 6/35	8x40.4x57.1	0.2-6	screw connection	CE/RoHS/UL94V0
EK 10/35	10x40.3x56.8	0.5-10	screw connection	CE/RoHS/UL94V0
EK 16/35	12x46.5x57.2	0.5-16	screw connection	CE/RoHS/UL94V0
EK 35/35	16x56.6x58.6	10-35	screw connection	CE/RoHS/UL94V0

LSAK 2.5EN

24A 800V

Size: T6.1xH40.4xW40.9mm
Stranded cross: 0.2-2.5mm²
Connection type: Screw connection

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm	AP2.5
Centre type jumper bar: 10 potential,2,3,4 potential	2.5EN, Q2poles, 3poles,10poles
End clamp	LEW35
Continuous number of printing	DEK5/6(1...10)

LSAK 4EN

32A 800V

Size: T6.5xH45.3xW40.6mm
Stranded cross: 0.2-4mm²
Connection type: Screw connection

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm	AP4-10
Centre type jumper bar: 10 potential,2,3,4 potential	4EN, Q2poles, 3poles,10poles
End clamp	LEW35
Continuous number of printing	DEK6(1...10)

LSAK 6EN

41A 800V

Size: T7.9xH45xW39.9mm
Stranded cross: 0.2-6mm²
Connection type: Screw connection

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm	AP4-10
Centre type jumper bar: 10 potential,2,3,4 potential	6EN, Q2poles, 3poles,10poles
End clamp	LEW35
Continuous number of printing	DEK6(1...10)

LSAK 10EN

57A 800V

Size: T10xH45.2xW40.5mm
Stranded cross: 0.5-10mm²
Connection type: Screw connection

IEC 60947-7-1



Parameters

End plate: thickness 1.5mm	AP4-10
Centre type jumper bar: 10 potential,2,3,4 potential	10EN, Q2poles, 3poles,10poles
End clamp	LEW35
Continuous number of printing	DEK6(1...10)

LSAK 16EN

76A 800V

Size: T12xH51.2xW50.3mm
Stranded cross: 0.5-16mm²
Connection type: Screw connection

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm	AP16
Centre type jumper bar: 10 potential,2,3,4 potential	16EN, Q2poles, 3poles,10poles
End clamp	LEW35
Continuous number of printing	DEK5/6(1...10)

LSAK 35EN

125A 800V

Size: T18.2xH61.6xW58.5mm
Stranded cross: 10-35mm²
Connection type: Screw connection

IEC 60947-7-1

Parameters

End plate: thickness 1.5mm	AP35
Centre type jumper bar: 10 potential,2,3,4 potential	35EN, Q2poles, 3poles,10poles
End clamp	LEW35
Continuous number of printing	DEK6(1...10)

LASK1 EN

6.3A 500V

Size: T8.1xH39xW52.1mm
Stranded cross: 0.2-4mm²
Connection type: Screw connection

IEC 60947-7-1



Parameters

End plate: thickness 1.5mm	AP-LASK1
-	-
End clamp	LEW35
Continuous number of printing	DEK6(1...10)

Solid-State Relay Module

- Input With LED Display
- NPN/PNP Compatible
- 4/8/16 Relay
- 35mm DIN Rail Installation

SPECIFICATION

Terminal Type	Screw terminal			Push-in terminal		
Model	LKMT04S-L	LKMT08S-L	LKMT16S-L	LKMT04M-L	LKMT08M-L	LKMT16M-L
Relay Digits	4	8	16	4	8	16
Dimension(mm)	48x85x38	70x85x38	130x85x38	48x85x39	70x85x39	130x85x39
Switch	MOSFET					
Output polarity	COM-					
Output Voltage	12~24VDC					
Peak Voltage	100V					
Short-time withstand current	10A					
Working Current	5A					
Output Protection	Built-in free-wheeling diode					
Input Voltage	12~24VDC					
Input polarity	COM+/-					
Isolation voltage resistance	3750V					
Operation tempreture	-40°C~+70°C					

Model Designatio

SSR Module		Terminal Type Screw Push-in	
LKMT	08	S	-L
	Relay digits 04:04 digits 08:08 digits 16:16 digits		Module Base Color Standard:Green L:Black

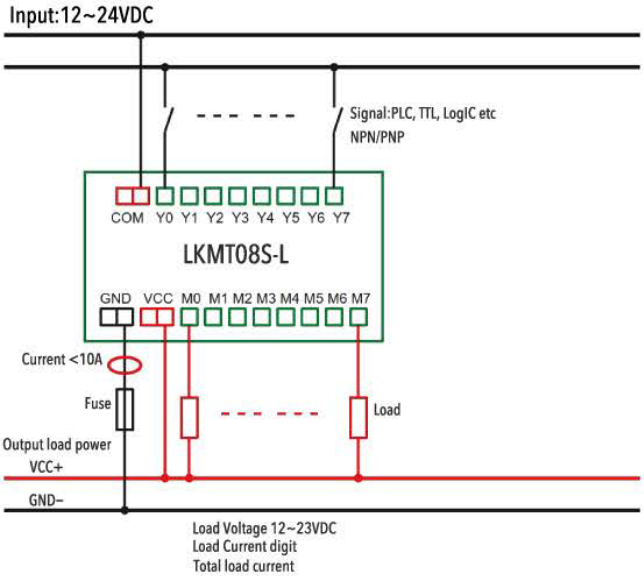

Both LAK and LAKG interconnected end is designed for fixing the installed end. They areinstalled on the busbar 3x10mm

LAK: without insulation cap

LAKG: with insulation cap at different colours

There are also three different holders for different user, which including single, double and triple layers

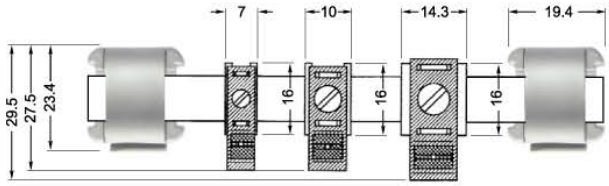

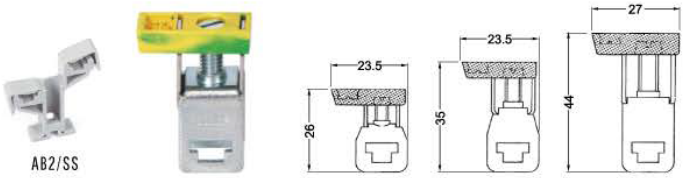

SPECIFICATION

Model No.		
Ⓢ LAK 4 / LAKG 4 BU / LAKG 4 GNYE / LAKG 4 BK	N/PE interconnected end: 4mm² No insulation cap/Insulation cap	Blue(For N) / Greenlish yellow(For PE) / Black(For L1,L2,L3)
Ⓢ LAK 16 / LAKG 16 BU / LAKG 16 GNYE / LAKG 16 BK	N/PE interconnected end: 16mm² No insulation cap/Insulation cap	Blue(For N) / Greenlish yellow(For PE) / Black(For L1,L2,L3)
Ⓢ LAK 35 / LAKG 35 BU / LAKG 35 GNYE / LAKG 35 BK	N/PE interconnected end: 35mm² No insulation cap/Insulation cap	Blue(For N) / Greenlish yellow(For PE) / Black(For L1,L2,L3)
NLS-CU 3/10	(1)Copper busbar: 3×10mm， 1 meter long, tin plated, rated current 140A.	
AB/SS	(2)Single holder: using for busbar 3×10mm.	
AB/2SS	(3)Double-layer holder: using for busbar 3×10mm.	

*Pay attention to the current loading capacity of busbar.

Connection data	Solid wire (mm²)	Multiple wire (mm²)	AWG	I(A)
L(AKG) 4	0.5-4	0.5-4	20-12	32*
L(AKG) 16	1.5-16	1.5-16	16-6	76*
L(AKG) 35	1.5-35	1.5-25	16-2	125*

LINKWELL ELECTRIC

In switchgear and control equipment, it is sometimes necessary to connect the neutral and ground wires to a single busbar. This can be done using a busbar on which multiple wires are connected in a compact manner (up to 70 wires can be connected on a busbar one meter long). The conductor may be connected to the busbar by the press frame or the shrapnel, and the busbar may be pressed to the busbar support by the press plate or screw.The ZB and the 10 x 3mm or 6 x 6mm busbar can be used ideally as a junction between the neutral line and the ground line with the busbar frame.

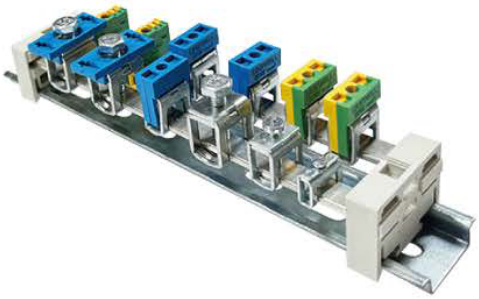

PMR 117

Fixed support

UL94-V0

Materials: PA66-UL94-V0





ZB 4

Busbar 10x3mm

Single hard wire: 0.5...6.0mm²
Flexible conductor: 0.5...4.0mm²
Screw: M3
Wire stripping length: 16mm

SPECIFICATION

Model	Dimensions				Quantity
	a	thickness	c	h1	
ZB 4 (No insulating cover)	11.7	5.6	16.0	10.0	50

ZB16

Busbar 10x3mm

Single hard wire: 2.5...16mm²
Flexible conductor: 2.5...16mm²
Multiple hard wire: 16...25mm²
Screw: M4
Wire stripping length: 16mm

SPECIFICATION

Model	Dimensions				Quantity
	a	thickness	c	h1	
ZB 16 (No insulating cover)	17.0	10.0	16.0	17.0	50

ZB35

Busbar 10x3mm

Flexible conductor: 16...35mm²
Multiple hard wire: 16...50mm²
Screw: M6
Wire stripping length: 19mm

Model	Dimensions				Quantity
	a	thickness	c	h1	
ZB 35(No insulation cover)	21.0	14.4	18.4	20.5	20

ZB4K

Busbar 10x3mm



Single hard wire: 0.5...6.0mm²
Flexible conductor: 0.5...4.0mm²
Screw: M3
Wire stripping length: 16mm

Model	Dimensions				Quantity
	a2	thickness	d	h2	
ZB 4K GN/GE	18.5	6.0	19.0	13.0	50
ZB 4K BL	18.5	6.0	19.0	13.0	50

ZB16K

Busbar 10x3mm

Single hard wire: 2.5...16mm²
Flexible conductor: 2.5...16mm²
Multiple hard wire: 16...25mm²
Screw: M4
Wire stripping length: 16mm

Model	Dimensions				Quantity
	a	thickness	d	h1	
ZB 16K GN/GE	24.0	10.0	19.2	20.0	50
ZB 16K BL	24.0	10.0	19.2	20.0	50

ZB35K

Busbar 10x3mm

Flexible conductor: 16...35mm²
Multiple hard wire: 16...50mm²
Screw: M6
Wire stripping length: 19mm

Model	Dimensions				Quantity
	a	thickness	d	h1	
ZB 35K GN/GE	24.0	10.0	19.2	20.0	50
ZB 35K BL	24.0	10.0	19.2	20.0	50

SV Bus-bar Holder

UL94-V0

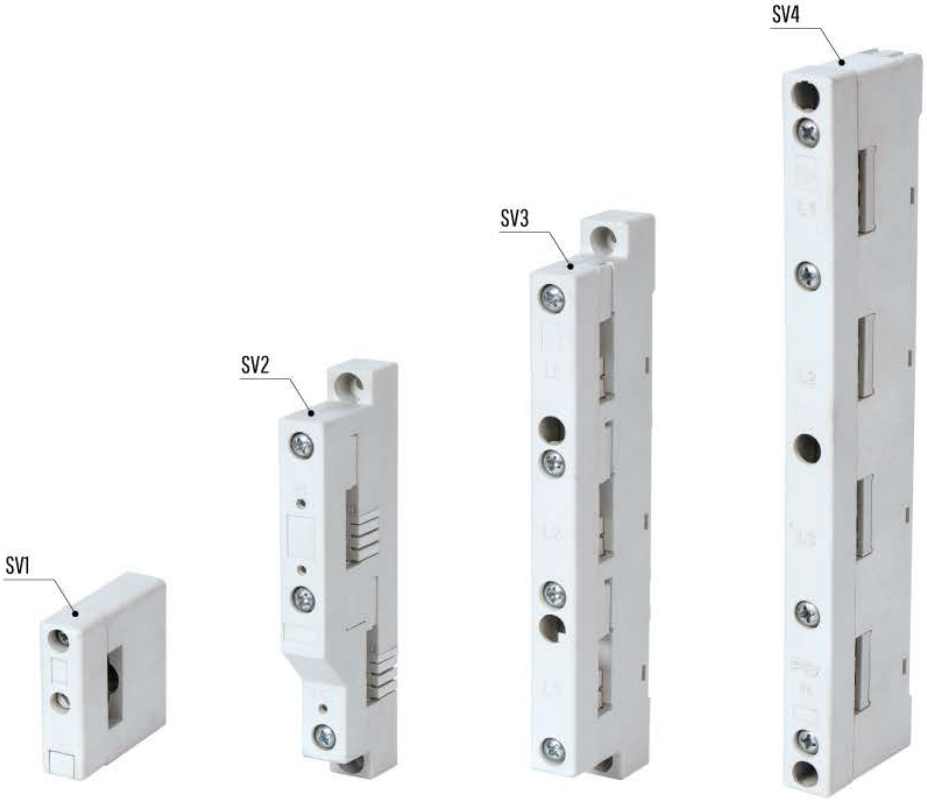

Rated working voltage up to 1000 volt,50/60 Hz.according to VDE 0660

Model	Rated current up to	Number of poles	Centre distance of bus stand	Suitable for Busbar size	Tightening turning moment		Per package
					Fixed screw	Fixed the cover	
SV1	800	1	–	30X10mm	5-8Nm	1-3Nm	2
SV2	800	2	60mm	30X10mm,30X5mm,25x10mm,25x5mm,20x10mm, 20x5mm,15x10mm,15x5mm,12x10mm,12x5mm	3-5Nm	1-3Nm	2
SV3	800	2	60mm	30X10mm,30X5mm,25x10mm,25x5mm,20x10mm, 20x5mm,15x10mm,15x5mm	3-5Nm	1-3Nm	2
SV4	800	4	60mm	30X10mm,30X5mm,25x10mm,25x5mm,20x10mm, 20x5mm,15x10mm,15x5mm	3-5Nm	1-3Nm	2

Copper Busbar

Model	Cu221	Cu222	Cu223	Cu224	Cu225
Specifications(mm)	30×5	25×5	20×10	20×5	30×10
Rated current(A)	447	384	497	319	800

1.Up to 2 meters copper plating. 2.Length optional electroless copper

Flexible Insulated Busbar

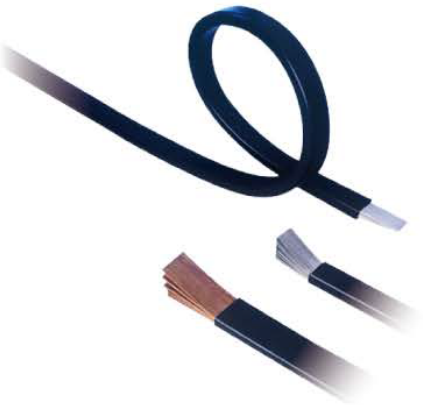

Technical parameters of conductors

Copper strips (≥99.9%Cu)
Electrical conductivity: ≥55Sm/mm²
Vickers hardness: <50HV

Tensile Strength: ≥200MPa
Extensibility: ≥30%

Technical data of flexible insulated busbars

Operating temperature: -30~+105°C
Flame retardant: self-extinguishing
Operating voltage: 750V

Compressive strength: 15min/50HZ
earth: ≥15kV
flexible insulated busbars: ≥30kV

Technical data of insulation

Material: PVC
Colour: black
Thickness: 1.8-2.1mm
Shore hardness: A70-80

Electrical strength: ≥23kV/mm
Oxygen index: 30%
Elasticity:
≥180% after7-day aging-test with 135°C
Tensile strength: ≥20MPa

SPECIFICATION

Dimensions and Qty (mmxmmx of strips)	Cross section (mm²)	Ampacity (A)			Dimensions and Qty (mmxmmx of strips)	Cross section (mm²)	Ampacity (A)		
		△ T=20K (3)	△ T=40K (4)	△ T=50K (5)			△ T=20K (3)	△ T=40K (4)	△ T=50K (5)
15.5 x 0.8 x 2	24.8	125	175	200	40 x 1 x 2	80	240	330	380
15.5 x 0.8 x 3	37.2	160	210	240	40 x 1 x 3	120	330	480	540
15.5 x 0.8 x 4	49.6	195	265	295	40 x 1 x 4	160	400	560	630
15.5 x 0.8 x 6	74.4	225	320	360	40 x 1 x 5	200	450	630	710
15.5 x 0.8 x 8	99.2	265	380	430	40 x 1 x 6	240	480	680	750
15.5 x 0.8 x 10	124	300	420	480	40 x 1 x 8	320	600	830	920
20 x 1 x 2	40	170	240	270	40 x 1 x 10	400	670	920	1030
20 x 1 x 3	60	230	320	360	50 x 1 x 3	150	400	570	650
20 x 1 x 4	80	270	380	440	50 x 1 x 4	200	490	700	790
20 x 1 x 5	100	300	430	490	50 x 1 x 5	250	540	780	880
20 x 1 x 6	120	330	470	530	50 x 1 x 6	300	590	840	950
20 x 1 x 8	160	400	560	620	50 x 1 x 8	400	680	1000	1130
20 x 1 x 10	200	420	580	650	50 x 1 x 10	500	750	1100	1300
24 x 1 x 2	48	200	280	320	63 x 1 x 5	315	650	900	1000
24 x 1 x 3	72	250	360	410	63 x 1 x 6	378	690	980	1100
24 x 1 x 4	96	280	410	460	63 x 1 x 8	504	840	1200	1350
24 x 1 x 5	120	330	470	530	63 x 1 x 10	630	920	1300	1450
24 x 1 x 6	144	360	510	570	80 x 1 x 5	400	700	1100	1230
24 x 1 x 8	192	420	590	670	80 x 1 x 6	480	780	1210	1360
24 x 1 x 10	240	500	700	790	80 x 1 x 8	640	950	1400	1570
32 x 1 x 2	64	230	320	360	80 x 1 x 10	800	1090	1550	1730
32 x 1 x 3	96	280	410	460	100 x 1 x 5	500	860	1250	1400
32 x 1 x 4	128	320	460	520	100 x 1 x 6	600	950	1380	1530
32 x 1 x 5	160	390	550	610	100 x 1 x 8	800	1100	1580	1760
32 x 1 x 6	192	440	620	700	100 x 1 x 10	1000	1220	1710	1920
32 x 1 x 8	256	510	720	822	100 x 1 x 12	1200	1300	1800	2010
32 x 1 x 10	320	600	840	930					

Wire terminal block (Push-in)

UL94-V0

Scope of use:

Use as busbar system for L， N or PE cables in switchgear，control equipment and as conductor connection terminal in instrument boxes
for installation in busbar systems E-Cu or CUPONAL

Mode ofaction:

Fully insulated terminals for tool- free wire connection
Wire release via inline unlocking pin

Material:

Polyamide
Fire resistancemeets UL 94-V0 standard

Advantage:

No maintenance required
Time-saving plug-in installation
Marking area embedded in terminal housing
Universal conductor

SPECIFICATION

Model	Busbar thickness (mm)	Solid wire (mm^2)	Stranded wire (mm^2)
LK0905	5	0.5-6	0.5-4
LK1305	5	1.5-16	1.5-16
LK0910	10	0.5-6	0.5-4
LK1310	10	1.5-16	1.5-16
LK0905PE	5	0.5-6	0.5-4
LK1305PE	5	1.5-16	1.5-16
LK0910PE	10	0.5-6	0.5-4
LK1310PE	10	1.5-16	1.5-16

SPECIFICATION

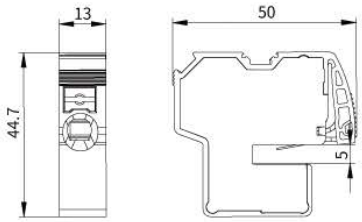

LK1305



LK0905



LK1310



LK0910

SV series Non-punched wire terminal block



Model No.	H Minimum	H Maximun	Thickness of bus	Round lead wiring*	Piled copper busbar terminal space	Torque	Per package
	mm	mm	mm	mm	mm	Nm	pcs
SV201	17	23	4-5	1-4	-	2	50pcs
SV202	22	29	4-5	2.5-16	8 x 8	3	50pcs
SV203	26	39	4-5	16-50	10.5 x 11	6-8	50pcs
SV204	39	57	4-5	35-70	16.5 x 15	10-12	50pcs
SV205	44	66	4-5	70-185	22.5 x 20	12-15	50pcs
SV206	17	23	9-10	1-4	-	2	50pcs
SV207	22	29	9-10	2.5-16	8 x 8	3	50pcs
SV208	26	39	9-10	16-50	10.5 x 11	6-8	50pcs
SV209	39	57	9-10	35-70	16.5 x 15	10-12	50pcs
SV210	44	66	9-10	70-185	22.5 x 20	12-15	50pcs

LK series Busbar terminal

Model No.	For busbars	Connection min.-max.	Terminal space (W/H mm)	For use up to max.	Pack size	Weight kg/100u.	Part No.
LK401	5mm flat busbars	1.5-16	7.5x7.5	180A	100	2.1	01 284
LK402		4-35	10.5x11	270A	50	4.6	01 285
LK403		16-70	14x14	400A	25	7.1	01 287
LK404		16-120	17x15	440A	25	10.6	01 068
LK405	10mm flat busbars	1.5-16	7.5x7.5	180A	100	2.3	01 289
LK406		4-35	10.5x11	270A	50	4.7	01 290
LK407	10mm flat busbars double -T and triple -T section	16-70	14x14	400A	25	7.5	01 292
LK408		16-120	17x15	440A	25	10.9	01 203

SM25

Tensile strength(LBS): 500
Torgue strength(LBS): 6
Voltage withstand(KV): 6
screw(mm): 6
weight(G): 28



SM30

Tensile strength(LBS): 550
Torgue strength(LBS): 8
Voltage withstand(KV): 8
screw(mm): 8
weight(G): 44



SM35

Tensile strength(LBS): 800
Torgue strength(LBS): 10
Voltage withstand(KV): 10
screw(mm): 8
weight(G): 50



SM40

Tensile strength(LBS): 650
Torgue strength(LBS): 10
Voltage withstand(KV): 12
screw(mm): 8
weight(G): 86



SM45

Tensile strength(LBS): 100
Torgue strength(LBS): 20
Voltage withstand(KV): 15
screw(mm): 10
weight(G): 70



SM51

Tensile strength(LBS): 1000
Torgue strength(LBS): 20
Voltage withstand(KV): 15
screw(mm): 8
weight(G): 83



SM60

Tensile strength(LBS): 1500
Torgue strength(LBS): 40
Voltage withstand(KV): 25
screw(mm): 10
weight(G): 170



SM76

Tensile strength(LBS): 1500
Torgue strength(LBS): 40
Voltage withstand(KV): 25
screw(mm): 10
weight(G): 233



STEPPED INSULATOR

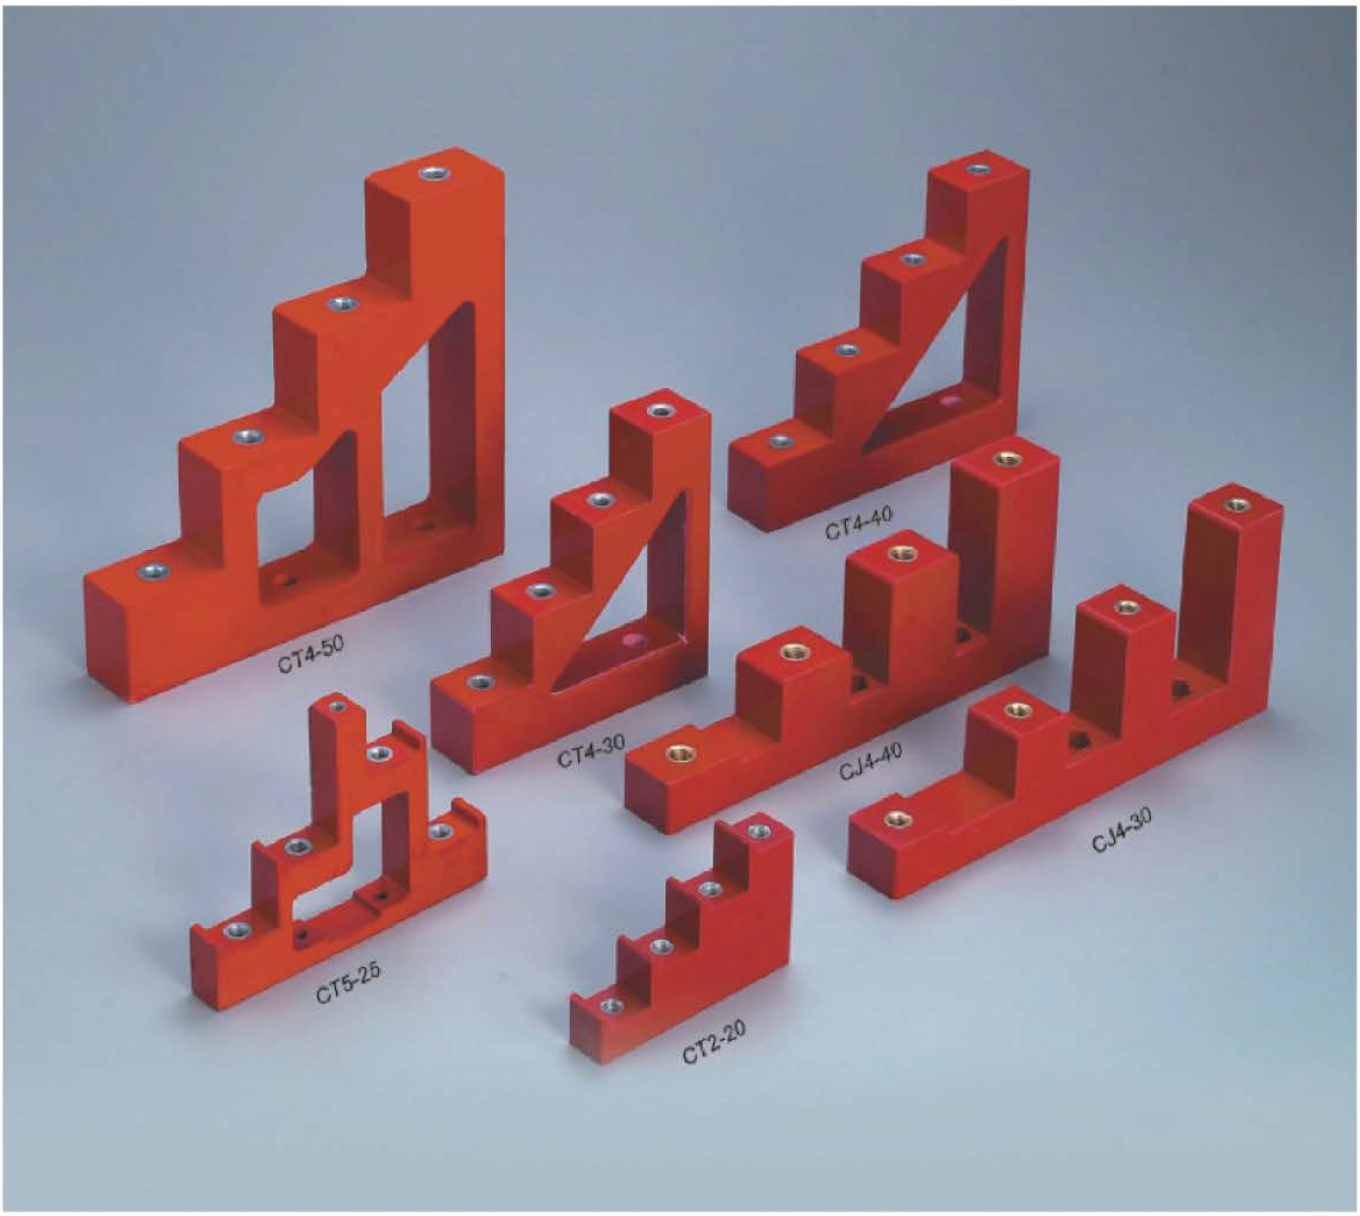

CT - □ □□

- Width
- Phase number
- Series

CE RoHS COMPLIANT UL94-V0

Parameters

Operating Temperature: -40~+140°C
Insert: Brass.Steel with Zn coating
Matenial: BMC(Bough Moulding Compound)
SMC(Sheet Moulding Compound)
Colour,Insert,material In capability accordance with customer needs

STEP INSULATORS

CT2-15



CT4-40



CT2-20



CT4-50



CT2-25



CJ4-30

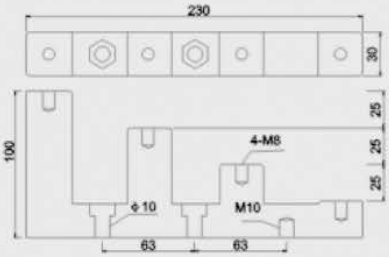

CT5-25



CJ4-40

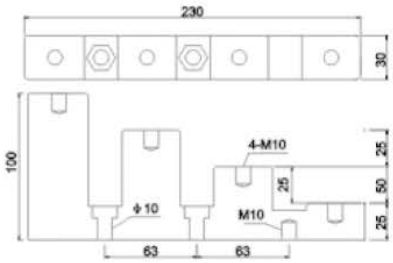

CT4-30



CJ-50

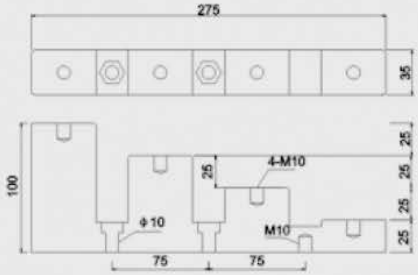

RT18 series FUSE

LINKWELL ELECTRIC

The RT18 series fuse is consisted of fuse-link and fuse-base. The fuse-link is made up of fuse-element with variable cross-section or just a wire.either of which is enclosed in a fuse-tube of high strength ceramics. The fuse-tube is filled with special quartzsands in a particular density, acting as an arcextinguish media. The fuse is of high breaking capacity, perfect current cutting-off characteristic and low power dissipation.

One desian. one series, suitable for being used by all power equipment manufacturers. RT series products have the lowest energy consumption design in the fuse industry, which is more energy-saving and eco-friendly.

CE RoHS COMPLIANT UL94-V0



Model No.	Order Number	Rated Voltage	Rated Current	Dimension (mm)		
		V	A	A	ΦB	C
RT18-32	2C50A10G38F	AC500	2	38	10.3	10
	4C50A10G38F	AC500	4			
	6C50A10G38F	AC500	6			
	8C50A10G38F	AC500	8			
	10C50A10G38F	AC500	10			
	16C50A10G38F	AC500	16			
	20C50A10G38F	AC500	20			
	25C50A10G38F	AC500	25			
	32C40A10G38F	AC400	32			
RT18-63	10C50A14G51F	AC500	10	51	14.3	12
	16C50A14G51F	AC500	16			
	20C50A14G51F	AC500	20			
	25C50A14G51F	AC500	25			
	32C50A14G51F	AC500	32			
	36C50A14G51F	AC500	36			
	40C50A14G51F	AC500	40			
	50C50A14G51F	AC500	50			
	63C40A14G51F	AC400	63			
RT18-125	20C50A22G58F	AC500	20	58	22.2	14
	25C50A22G58F	AC500	25			
	32C50A22G58F	AC500	32			
	36C50A22G58F	AC500	36			
	40C50A22G58F	AC500	40			
	50C50A22G58F	AC500	50			
	63C50A22G58F	AC500	63			
	80C50A22G58F	AC500	80			
	100C50A22G58F	AC500	100			
	125C40A22G58F	AC400	125			

RT18-32/32X

RT18-32,RT18-32x,
stands for Light Indicator
Can be modulized
to be 2P,3P,4P.





Parameters

Model No.	Order Number	Rated Voltage	Rated Current	Dimension (mm)					
		V	A	A	B	C	D	E	F
RT18-32	32K50A10F	AC500	32	80.5	62	17.5	62	78.5	43
RT18-32X	32XK50A10F	AC500	32						

RT18-63L/63LX

RT18-63L,RT63LX
Can be modulized to be 2P,3P,4P.
L: stands for Lockable
X: stands for Light indicator





Parameters

Model No.	Order Number	Rated Voltage	Rated Current	Dimension (mm)					
		V	A	A	B	C	D	E	F
RT18-63L	63K50A14F	AC500	63	-	90	27	77	108	-
RT18-63LX	63XK50A14F	AC500	63						

RT18-125L/125LX

RT18-125L,RT125LX
Can be modulized to be 2P,3P,4P.
L: stands for Lockable
X: stands for Light indicator





Parameters

Model No.	Order Number	Rated Voltage	Rated Current	Dimension (mm)					
		V	A	A	B	C	D	E	F
RT18-125L	125K50A22F	AC500	125	128	103	35.5	76	123	39.6
RT18-125LX	125XK50A22F	AC500	125						

NEUTRAL CONDUCTOR RAIL

N7

PE7

U7

Model No.	Terminal cross section	Dimension LxW (mm)	Rated Voltage V	Rated Current A
N7	7X16mm²	54X23mm	400	63
PE7	7X16mm²	54X23mm	400	63
U7	7X16mm²	54X23mm	400	63

N12

PE12

U12

Model No.	Terminal cross section	Dimension LxW (mm)	Rated Voltage V	Rated Current A
N12	12X16mm²	90X23mm	400	63
PE12	12X16mm²	90X23mm	400	63
U12	12X16mm²	90X23mm	400	63

N15

PE15

U15

Model No.	Terminal cross section	Dimension LxW (mm)	Rated Voltage V	Rated Current A
N15	15X16mm²	110X23mm	400	63
PE15	15X16mm²	110X23mm	400	63
U15	15X16mm²	110X23mm	400	63

NEUTRAL CONDUCTOR RAIL

LK series

- Suitable for Cu cables: 2.5-16mm²
- Available in black, brown, grey, blue (N) and yellow/green (PE)
- Touchproof, IP20
- Housing and cover in PA66, UL94-VO
- Certified according to EN/IEC 60947-7-1, EN/IEC60947-7-2, EN60998-1
- Mounting: DIN-rail
- Environmentally friendly materials
- Durable laser markings

IP20 CE RoHS COMPLIANT UL94-V0 IEC

LK 1607

Un- **63A** In(Cu)- **1000V**

Pole: 1P
Key Size: M5
Mounting: Rail

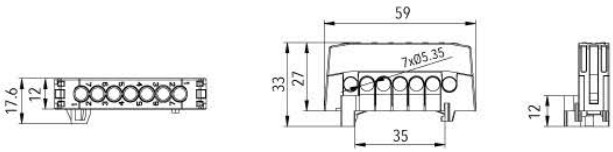

Parameters

Type	Color	Cu	Torque Cu	Weight
		mm²	N-m	g
LK1607BK	Black	2.5-16	1.2	28.8
LK1607BL	Blue	2.5-16	1.2	28.8
LK1607BN	Brown	2.5-16	1.2	28.8
LK1607GY	Grey	2.5-16	1.2	28.8
LK1607YG	Yellow/Green	2.5-16	1.2	28.8

IP20 CE RoHS COMPLIANT UL94-V0 IEC

LK 1612

Un- **63A** In(Cu)- **1000V**

Pole: 1P
Key Size: M5
Mounting: Rail

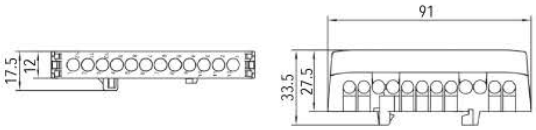

Parameters

Type	Color	Cu	Torque Cu	Weight
		mm²	N-m	g
LK1612BK	Black	2.5-16	1.2	43.3
LK1612BL	Blue	2.5-16	1.2	43.3
LK1612BN	Brown	2.5-16	1.2	43.3
LK1612GY	Grey	2.5-16	1.2	43.3
LK1612YG	Yellow/Green	2.5-16	1.2	43.3

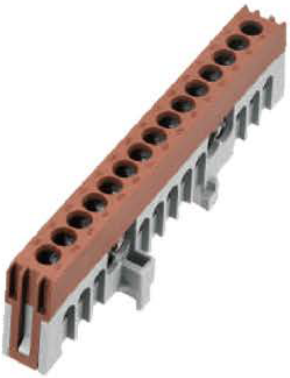

IP20 CE RoHS COMPLIANT UL94-V0 IEC

LK 1615

Un- **63A** In(Cu)- **1000V**

Pole: 1P
Key Size: M5
Mounting: Rail

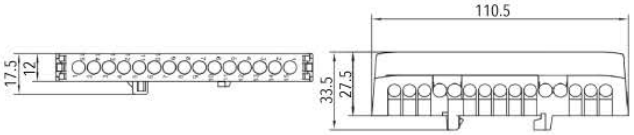

Parameters

Type	Color	Cu	Torque Cu	Weight
		mm²	N-m	g
LK1615BK	Black	2.5-16	1.2	52.6
LK1615BL	Blue	2.5-16	1.2	52.6
LK1615BN	Brown	2.5-16	1.2	52.6
LK1615GY	Grey	2.5-16	1.2	52.6
LK1615YG	Yellow/Green	2.5-16	1.2	52.6

LK032

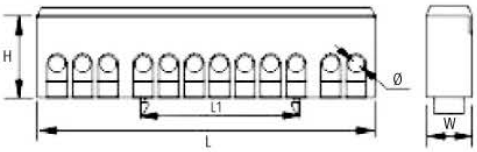

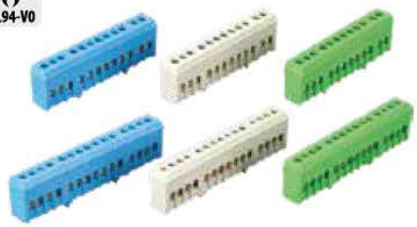

Item no.	Spec.	L1	L2	H	W	Ø	screw size	Plastic setting
	w x h-hole	mm						
LK 032-01	6x9-7	53.0	35.0	26.3	13.0	5.2	M5.0	PA
LK 032-02	6x9-12	88.0	35.0	26.3	13.0	5.2	M5.0	PA
LK 032-03	6x9-15	108.0	35.0	26.3	13.0	5.2	M5.0	PA

D-8X12

There are 8x12 copper rowsin insulating crust

- D-8x12/12 Potential
- D-8x12/10 Potential
- D-8x12/8 Potential
- D-8x12/6 Potential
- D-8x12/4 Potential

G-8X12

G-8x12 copper rows in insulatingcrust with earthing in one end.

- G-8x12/12 Potential
- G-8x12/10 Potential
- G-8x12/8 Potential
- G-8x12/6 Potential
- G-8x12/4 Potential

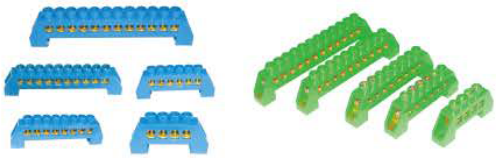

LK033

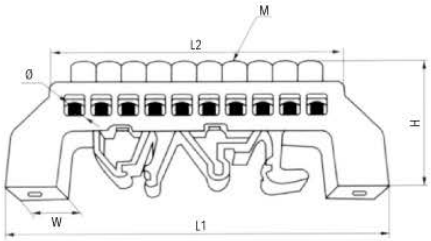

Item no.	Spec.	L1	L2	H	W	Φ	screw size	Plastic setting
	w x h-hole	mm						
LK 033-01	6x9-4	57.5	34	34.5	10.5	5.0	M4	PA
LK 033-02	6x9-6	57.7	46.7	34.5	10.5	5.0	M4	PA
LK 033-03	6x9-8	78.5	60	34.5	10.5	5.0	M4	PA
LK 033-04	6x9-10	89	72.8	34.5	10.5	5.0	M4	PA
LK 033-05	6x9-12	102	85.7	34.5	10.5	5.0	M4	PA
LK 033-06	8x12-4	77.5	40.6	38.6	12.6	7.0	M5	PA
LK 033-07	8x12-6	77.5	57.3	38.6	12.6	7.0	M5	PA
LK 033-08	8x12-8	94.3	74.4	38.6	12.6	7.0	M5	PA
LK 033-09	8x12-10	111.0	91	38.6	12.6	7.0	M5	PA
LK 033-10	8x12-12	128.4	108.6	38.6	12.6	7.0	M5	PA
LK 033-11	8x12-14	145.8	135.6	38.6	12.6	7.0	M5	PA

H10X16

TERMINAL HOLDER -H10x16 FOR 63A
Width: 50 mm
material holder: PA 66
free of halogen

H8X12/6X8

Busbar plated or not for lmeter.





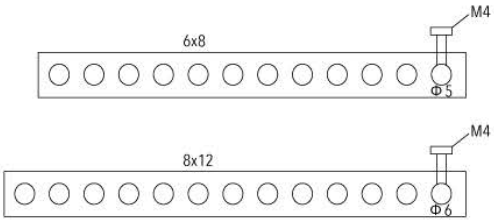

DRB

Double row brass terminal series

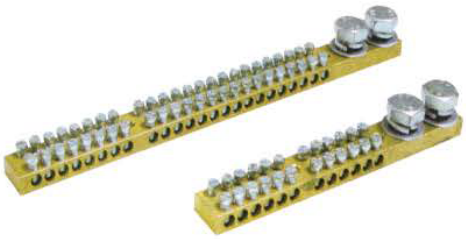

DRB-9×19/24 DRB-9×19/12

Model No.	Way	Brass specification	Rated current	Dimension	Screw no.s	Installation hole Distance
		(mm)	(A)	(mm)		
DRB-9x19/6	6	9x19	180A	102x45x45	2 x M10/12 x M5	50 (M5)
DRB-9x19/12	12	9x19	180A	144x45x45	2 x M10/24 x M5	50 (M5)
DRB-9x19/18	18	9x19	180A	187x45x45	2 x M10/36 x M5	120 (M5)
DRB-9x19/24	24	9x19	180A	230x45x45	2 x M10/48 x M5	120 (M5)
DRB-9x19/36	36	9x19	180A	315x45x45	2 x M10/72 x M5	120 (M5)