



LINKWELL
ELECTRIC

CLIMATE CONTROL SERIES
TERMINAL BLOCKS SERIES
TRANSFORMER SERIES
PANEL ACCESSORIES AND OTHERS



ABOUT US

OUR STRENGTH

As a growing multinational group, LINKWELL operates through a network of self-owned and joint-venture factories, ensuring strict quality control while offering one-stop panel accessory solutions. Our integrated approach combines in-house R&D, manufacturing, and strategic partnerships to deliver cost-effective, reliable products.

GLOBAL PRESENCE

Serving **100+ countries** across Europe, the Americas, the Middle East, South Asia, and China, we are recognized for:



Engineered Reliability

Consistent performance
meeting international
standards



Competitive Value

Optimal pricing without
compromising quality



Responsive Support

Customer-centric service
with fast technical
assistance

TRUSTED BY INDUSTRY LEADERS

We proudly partner with global brands including ABB, SIEMENS, SCHNEIDER Electric, ROCKWELL Automation, reinforcing our commitment to excellence in the electrical and automation sectors.





COMPANY MISSION

To win respect of "Made in China" from the world



COMPANY VALUE

Realize the dream for employees
Create value for customers
Take responsibilities for the society



COMPANY VISION

To be global and well-known brand
One-stop solution supplier for electrical cabinet components




APPLICATION **AREA**


Wind Power




Energy Storage

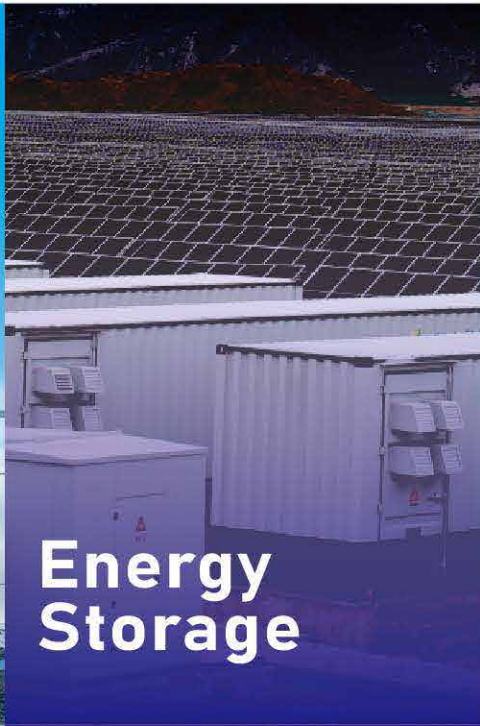


Solar Industry

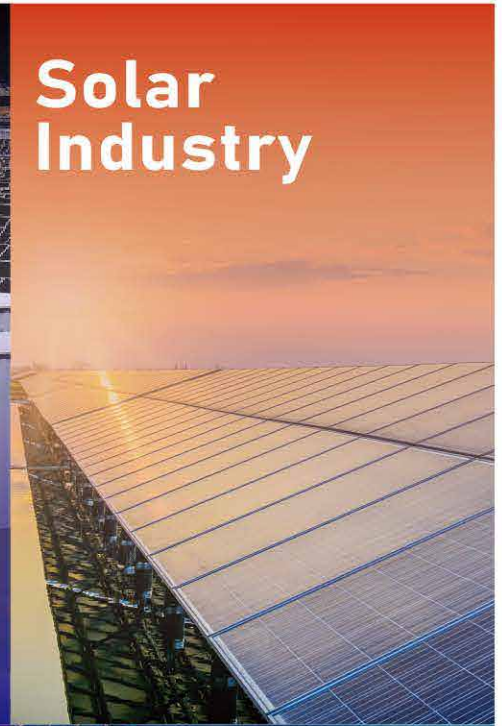


Robot Automation

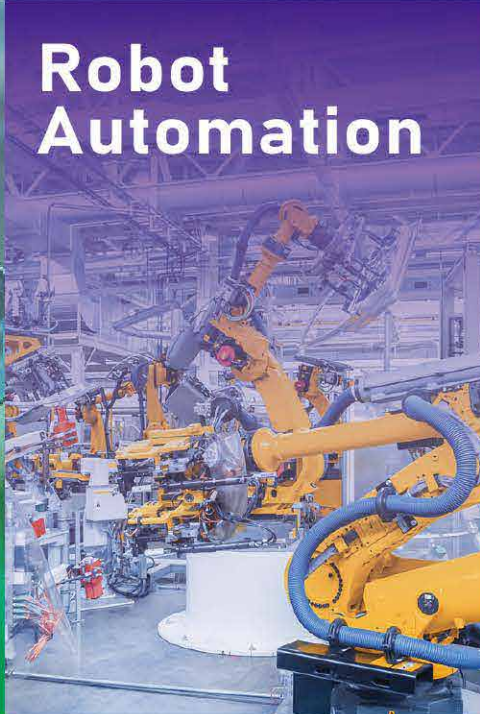


EV Automobile

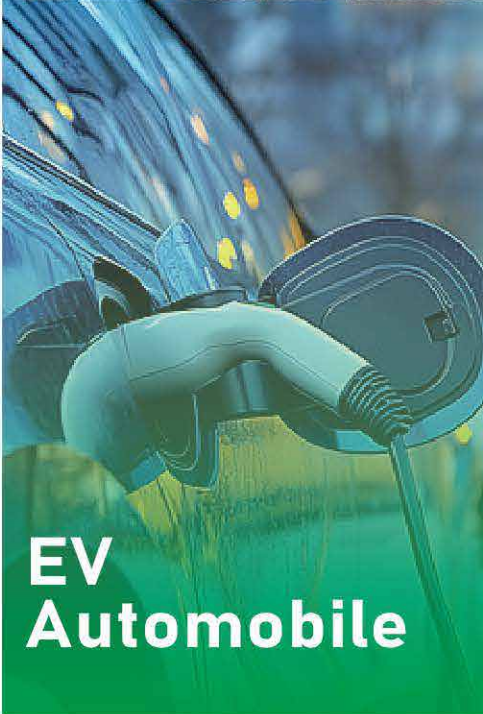

Electrical Installation

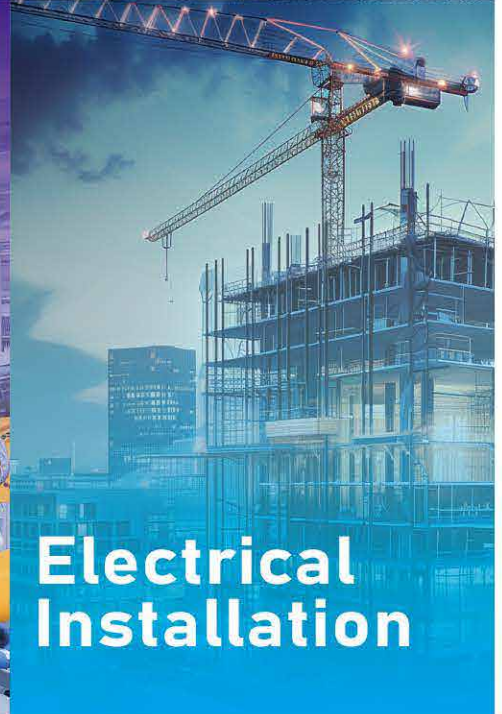

CONTENTS



FAN AND FILTER SERIES

00-00



CABINET ROOF FAN SERIES

00-00



CABINET AIR CONDITIONER SERIES

00-00



COOLING FAN SERIES

00-00



CONTROL SERIES

00-00



HEATER SERIES

00-00



CABINET LIGHTING SERIES

00-00



TERMINAL BLOCKS SERIES

00-00



TRANSFORMER SERIES

00-00




ENCLOSURES AND BOXES SERIES

00-00



CABLE MANAGEMENT SYSTEM


00-00



FAN AND FILTER



Introduction To Fan And Filter Classification

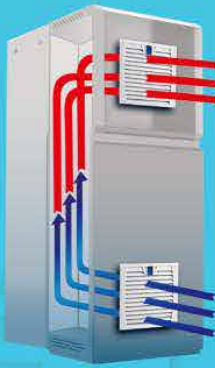

Low noise



Energy saving



Water proofing



Copper motor



High Air flow



Fast installation



with EMC function

1. LK32 series

Easy-open buckle



Power supply working indicator option



3. FF series

Standard material PC+Alloy, UV resistance



Corrugated filter mat option



5. FU series

Flexible fan size by embedded nuts



Air duct optional




2. LK66 series

Straight line grill design



High quality waterproofsealing ring

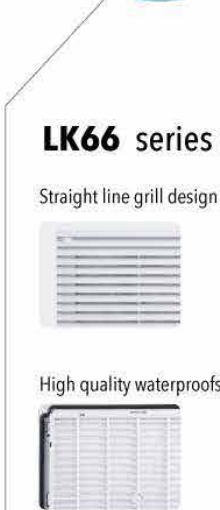


4. FK55 series

Thinner cover



Curve line grill design

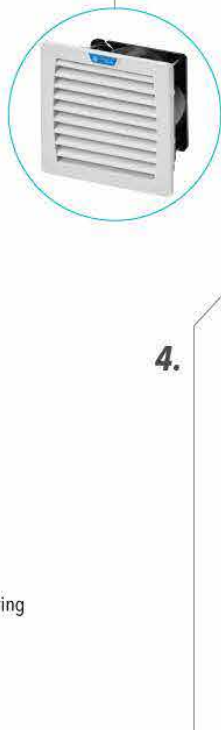


6. FK series

Easy-open Structure, quicker Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

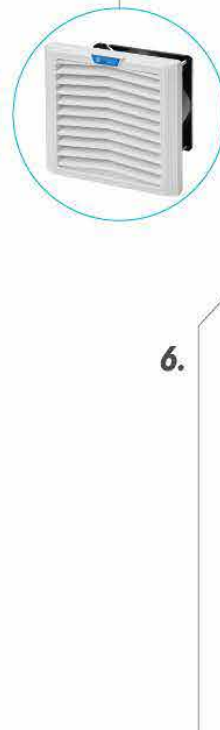

LK3237 .230

LK3237 .300



IP54

CE




RoHS
COMPLY-30 +70
°C

SPECIFICATION

Fan filter model	LK3237.230	LK3237.115	LK3237.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	25/35m³/h	25/35m³/h	35m³/h
Air flow rate, Equipped with standard filter mat	1 x LK3237.300: 20/25m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.07A/0.06A	0.12A/0.11A	0.08A
Power	12/11W	12/11W	1.92W
Noise level	37/41dB(A)	37/41dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3237.300	LK3237.300	LK3237.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		

Power Supply Work
Indicator (optional)Easy Replacement of
Filter PadDifferent Colors Can
Be Customized

DIMENSION (mm)

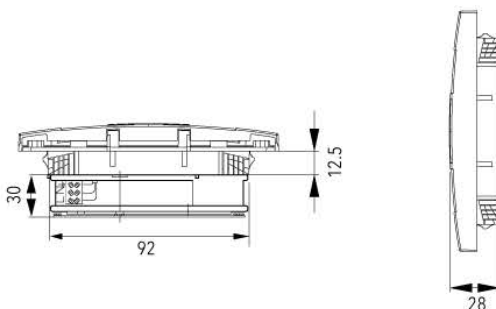


LK3238.230

LK3238.300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C




SPECIFICATION

Fan filter model	LK3238.230	LK3238.115	LK3238.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	65/85m³/h	65/85m³/h	100m³/h
Air flow rate, Equipped with standard filter mat	1 x LK3238.300: 55/70m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.2A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3238.300	LK3238.300	LK3238.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		


Power Supply Work
Indicator (optional)

Easy Replacement of
Filter Pad

Different Colors Can
Be Customized

DIMENSION (mm)


LK3239.230

LK3239.300



IP54

CE




RoHS
COMPLIANT-30 +70
°C

SPECIFICATION

Fan filter model	LK3239.230	LK3239.115	LK3239.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1×LK3239.300:78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.2A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3239.300	LK3239.300	LK3239.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		

Power Supply Work
Indicator (optional)Easy Replacement of
Filter PadDifferent Colors Can
Be Customized

DIMENSION (mm)





LK3240-P.230



LK3240.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK3240-P.230	LK3240-P.115	LK3240.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60 Hz	—
Air flow rate, free blowing	220/240m ³ /h	220/240m ³ /h	300m ³ /h
Air flow rate, Equipped with standard filter mat	1×LK3240.300:155/185m ³ /h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.24A/0.22A	0.45A/0.42A	0.5A
Power	38/36W	38/36W	12W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3240.300	LK3240.300	LK3240.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Power Supply Work
Indicator (optional)






Easy Replacement of
Filter Pad



Different Colors Can
Be Customized

DIMENSION (mm)





LK3240-M .230

LK3240 .300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK3240-M.230	LK3240-M.115
Rated voltage	200-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	230/265m³/h	230/265m³/h
Air flow rate, Equipped with standard filter mat	1×LK3240.300:190/215m³/h	
Axial flow fan	Self starting shaded pole motor	
Rated current	0.22A/0.20A	0.45A/0.5A
Power	37/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3240.300	LK3240.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Power Supply Work
Indicator (optional)




Easy Replacement of
Filter Pad



Different Colors Can
Be Customized

DIMENSION (mm)

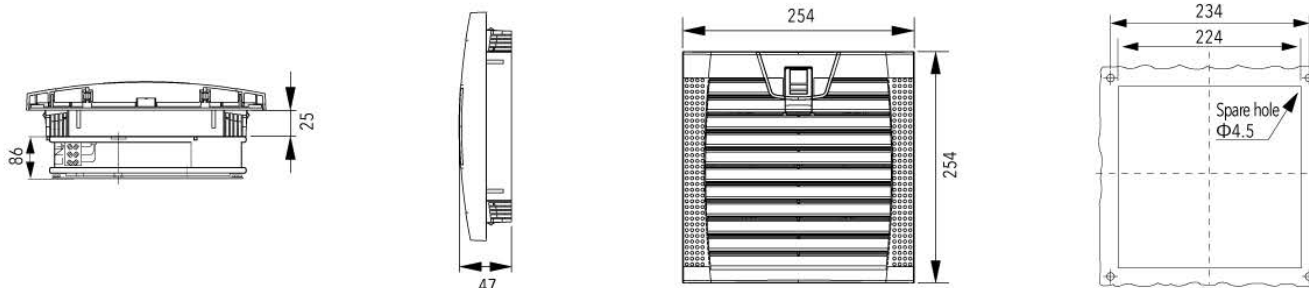


LK3242 .230
LK3243 .300


This position can be equipped with a temperature controller


IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK3242.230	LK3242..115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × LK3243.300:380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65A
Power	55/65W	55/65W
Noise level	62/65dB(A)	62/65dB(A)
Operating temperature range	-40°C - +80°C	-40°C - +80°C
Outlet filter model	LK3243.300	LK3243.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-out as standard; air-in optional	






Power Supply Work
Indicator (optional)



Easy Replacement of
Filter Pad



Different Colors Can
Be Customized

DIMENSION (mm)




LK3243 .230

LK3243 .300



This position can be equipped with a temperature controller



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK3243.230	LK3243.115
Rated voltage	200-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m³/h	1150/1350m³/h
Air flow rate, Equipped with standard filter mat	1×LK3243.300:750/950m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.52A/0.65A	1.0A/1.1A
Power	110/120W	110/120W
Noise level	70/72dB(A)	70/72dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3243.300	LK3243.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-out as standard; air-in optional	



Power Supply Work
Indicator (optional)




Easy Replacement of
Filter Pad



Different Colors Can
Be Customized

DIMENSION (mm)

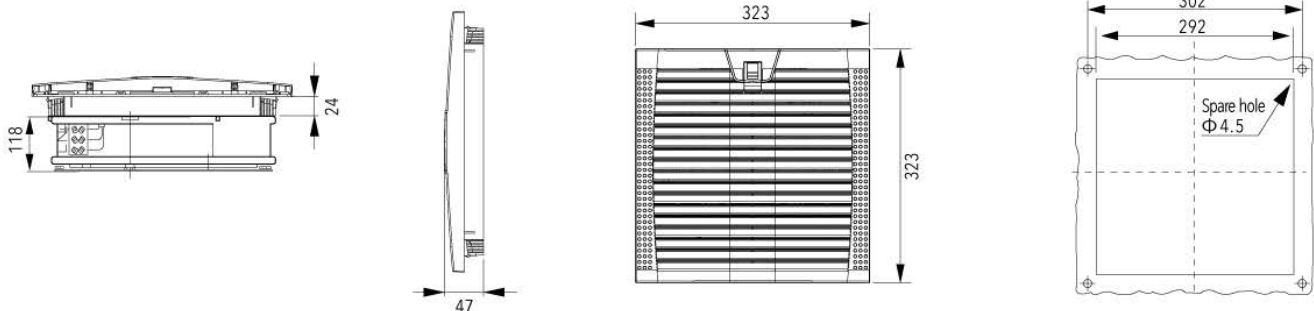


LK3244.230

LK3243.300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C




SPECIFICATION

Fan filter model	LK3244.230	LK3244.115
Rated voltage	200-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × LK3243.300:380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55/0.65A
Power	55/65W	55/65W
Noise level	59/61dB(A)	59/61dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3243.300	LK3243.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	


 Power Supply Work
Indicator (optional)

 Easy Replacement of
Filter Pad

 Different Colors Can
Be Customized

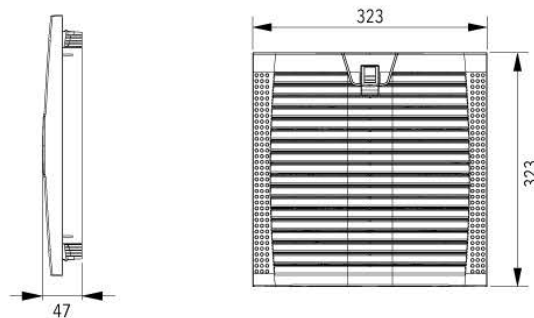DIMENSION (mm)




LK3245 .230

LK3243 .300



IP54

CE




RoHS
COMPLIANT-30 +70
°C

SPECIFICATION

Fan filter model	LK3245.230	LK3245.115
Rated voltage	200-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m³/h	1150/1350m³/h
Air flow rate, Equipped with standard filter mat	1×LK3243.300:790/950m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.55A/0.65A	1.0/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK3243.300	LK3243.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	

Power Supply Work
Indicator (optional)Easy Replacement of
Filter PadDifferent Colors Can
Be Customized

DIMENSION (mm)



LK6621 .230

LK6621 .300


IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6621.230	LK6621.115	LK6621.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60 Hz	50/60 Hz	–
Air flow rate, free blowing	25/35 m ³ /h	25/35 m ³ /h	35 m ³ /h
Air flow rate, Equipped with standard filter mat	1×LK6621.300:20/25 m ³ /h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.07A/0.06A	0.12A/0.11A	0.08A
Power	12/11W	12/11W	1.92W
Noise level	37/41dB(A)	37/41dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6621.300	LK6621.300	LK6621.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		







Straight Line Grill Design



Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)


LK6622 .230

LK6622 .300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6622.230	LK6622.115	LK6622.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60 Hz	50/60 Hz	—
Air flow rate, free blowing	65/85 m³/h	65/85 m³/h	100 m³/h
Air flow rate, Equipped with standard filter mat	1 × LK6622.300: 55/70 m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6622.300	LK6622.300	LK6622.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Straight Line Grill Design







Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)





LK6623 .230



LK6623 .300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6623.230	LK6623.115	LK6623.024
Rated voltage	200-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	–
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1 × LK6623.300: 78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6623.300	LK6623.300	LK6623.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		







Straight Line Grill Design



Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)


LK6624.230

LK6624.300



IP54

CE

RoHS
COMPLIANT-30 +70
°C

SPECIFICATION

Fan filter model	LK6624.230	LK6624.115	LK6624.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	220/240m³/h	220/240m³/h	300m³/h
Air flow rate, Equipped with standard filter mat	1 × LK6624.300: 155/185m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.24A/0.22A	0.45A/0.42A	0.50A
Power	38/36W	38/36W	12W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6624.300	LK6624.300	LK6624.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Straight Line Grill Design







Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)




LK6625 .230
LK6625 .300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6625.230	LK6625.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	230/265m³/h	230/265m³/h
Air flow rate, Equipped with standard filter mat	1 × LK6625.300:190/215m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.22A/0.20A	0.45A/0.50A
Power	67/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6625.300	LK6625.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	







Straight Line Grill Design



Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)




LK6625-D .230

LK6624 .300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6625-D.230	LK6625-D.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	330/370m³/h	330/370m³/h
Air flow rate, Equipped with standard filter mat	1×LK6625.300:230/260m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.35A/0.32A	0.54A/0.52A
Power	42/40W	42/40W
Noise level	60dB(A)	60dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6625.300	LK6625.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Straight Line Grill Design







Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)





LK6625-E.230



LK6625.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6625-E.230	LK6625-E.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	420/430m³/h	420/430m³/h
Air flow rate, Equipped with standard filter mat	1 × LK6625.300:295/300m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.35A/0.32A	0.60A/0.58A
Power	45/42W	45/42W
Noise level	60dB(A)	60dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6625.300	LK6625.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Straight Line Grill Design




Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)

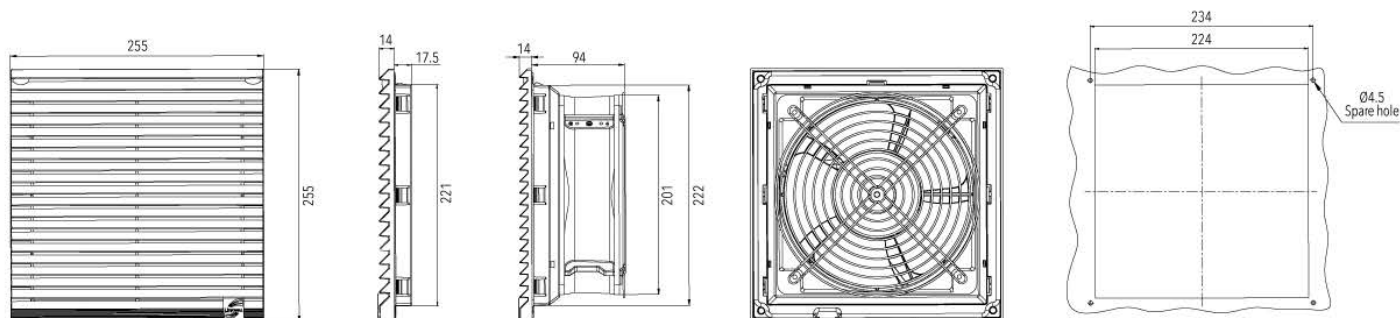



LK6625-F.230

LK6625.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6625-F.230	LK6625-F.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	700/750m³/h	700/750m³/h
Air flow rate, Equipped with standard filter mat	1×LK6625.300:490/525m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.60A/0.70A
Power	60/80W	60/80W
Noise level	60dB(A)	60dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6625.300	LK6625.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Straight Line Grill Design








Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)




LK6626 .230
LK6626 .300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	LK6626.230	LK6626.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × LK6626.300:380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65A
Power	55/65W	55/65W
Noise level	62/65dB(A)	62/65dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6626.300	LK6626.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	







Straight Line Grill Design



Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)


LK6627 .230

LK6626 .300



IP54

CE

RoHS
COMPLIANT-30 +70
°C

SPECIFICATION

Fan filter model	LK6627.230	LK6627.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m³/h	1150/1350m³/h
Air flow rate, Equipped with standard filter mat	1×LK6626.300:750/950m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.55/0.65A	1.0/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	LK6626.300	LK6626.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Straight Line Grill Design







Thinner Cover



Premium Sealing Gasket

DIMENSION (mm)



FF109.230

EF109



IP54

CE

RoHS
COMPLIANT

UL94-V0

-40 ~ +80
°C

SPECIFICATION




Fan filter model	FF109.230	FF109.115	FF109.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	28/38m³/h	28/38m³/h	38m³/h
Air flow rate, Equipped with standard filter mat	1×EF109:22/28m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.09/0.08A	0.16/0.14A	0.85A
Power	13/12W	13/12W	2.04W
Noise level	28/32dB(A)	28/32dB(A)	36dB(A)
Operating temperature range	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C
Outlet filter model	EF109	EF109	EF109
Material	PC alloy plastic, material meets UL94V0		
Air flow direction	Air-in as standard; air-out optional		



Straight Design


Easy Replacement
of Filter Pad


Premium Sealing Gasket

DIMENSION (mm)


mm		X	Y	Z1	Z2	A ¹	B ¹
FF109	AC	109	109	4	62	92	92
	DC	109	109	4	62	92	92
EF109		109	109	4	62	92	92

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF145.230

EF145



IP54

CE

RoHS
COMPLIANT

UL94-V0

-40 +80
°C

SPECIFICATION

Fan filter model	FF145.230	FF145.115	FF145.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	-
Air flow rate, free blowing	65/85m³/h	65/85m³/h	100m³/h
Air flow rate, Equipped with standard filter mat	1 × EF145: 55/70m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-40°C - +80°C	-40°C - +80°C	-40°C - +80°C
Outlet filter model	EF145	EF145	EF145
Material	PC alloy plastic, material meets UL94V0		
Air flow direction	Air-in as standard; air-out optional		






Straight Design

Easy Replacement
of Filter Pad

Premium Sealing Gasket

DIMENSION (mm)

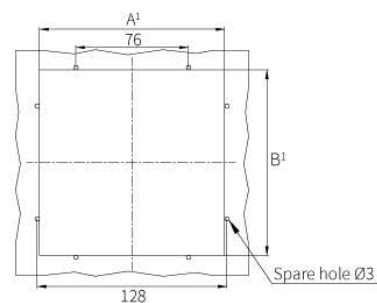

mm		X	Y	Z1	Z2	A ¹	B ¹
FF145	AC	145	145	5	70	125	125
	DC	145	145	5	70	125	125
EF145		145	145	5	70	125	125

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF202 .230

FF202


IP54
CE
RoHS
COMPLIANT

UL94-V0

-40 ~ +80
°C

SPECIFICATION




Fan filter model	FF202.230	FF202.115	FF202.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60 Hz	50/60 Hz	—
Air flow rate, free blowing	105/126m ³ /h	105/126m ³ /h	126m ³ /h
Air flow rate, Equipped with standard filter mat	1×EF202:78/90m ³ /h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C
Outlet filter model	EF202	EF202	EF202
Material	PC alloy plastic, material meets UL94V0		
Air flow direction	Air-in as standard; air-out optional		



Straight Design


Easy Replacement
of Filter Pad


Premium Sealing Gasket

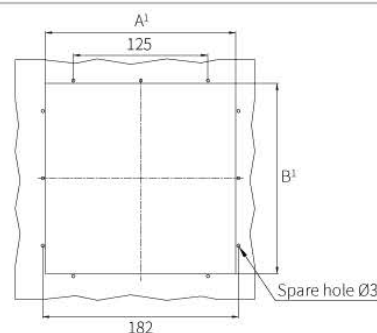DIMENSION (mm)


mm		X	Y	Z1	Z2	A ¹	B ¹
FF202	AC	202	202	6.5	87	177	177
	DC	202	202	6.5	87	177	177
EF202		202	202	6.5	87	177	177

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF252-P .230

EF252



SPECIFICATION

Fan filter model	FF252-P.230	FF252-P.115	FF252-P.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	-
Air flow rate, free blowing	220/240m³/h	220/240m³/h	300m³/h
Air flow rate, Equipped with standard filter mat	1 × EF252:155/185m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.24A/0.22A	0.45A/0.42A	0.50A
Power	38/36W	38/36W	12W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-40°C - +80°C	-40°C - +80°C	-40°C - +80°C
Outlet filter model	EF252	EF252	EF252
Material	PC alloy plastic, material meets UL94V0		
Air flow direction	Air-in as standard; air-out optional		



Straight Design






Easy Replacement
of Filter Pad



Premium Sealing Gasket

DIMENSION (mm)

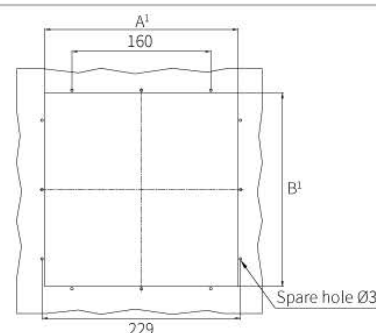

mm		X	Y	Z1	Z2	A¹	B¹
FF252-P	AC	252	252	6.5	111	223	223
	DC	252	252	6.5	111	223	223
EF252		252	252	6.5	33	223	223

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm

FF252-M.230

EF252


IP54
CE
RoHS
COMPLIANT

UL94-V0

-40 ~ +80
°C

SPECIFICATION




Fan filter model	FF252-M.230	FF252-M.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	230/265m³/h	230/265m³/h
Air flow rate, Equipped with standard filter mat	1×EF252:190/215m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.22A/0.20A	0.45A/0.50A
Power	37/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-40°C ~ +80°C	-40°C ~ +80°C
Outlet filter model	EF252	EF252
Material	PC alloy plastic, material meets UL94V0	
Air flow direction	Air-in as standard; air-out optional	



Straight Design


Easy Replacement
of Filter Pad


Premium Sealing Gasket

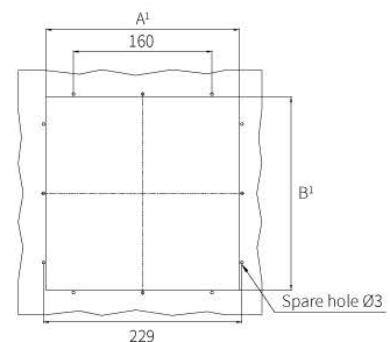DIMENSION (mm)


mm	X	Y	Z1	Z2	A¹	B¹
FF252-M	252	252	6.5	114	223	223
EF252	252	252	6.5	33	223	223

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF320 .230

EF320



This position can be equipped with a temperature controller



IP54

CE

RoHS
COMPLIANT

UL94-V0

-40 +80
°C

SPECIFICATION

Fan filter model	FF320.230	FF320.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × EF320:380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.55A	0.55A/0.65A
Power	55/65W	55/65W
Noise level	62/65dB(A)	62/65dB(A)
Operating temperature range	-40°C - +80°C	-40°C - +80°C
Outlet filter model	EF320	EF320
Material	PC alloy plastic, material meets UL94V0	
Air flow direction	Air-out as standard; air-in optional	





Straight Design

Easy Replacement
of Filter Pad

Premium Sealing Gasket

DIMENSION (mm)

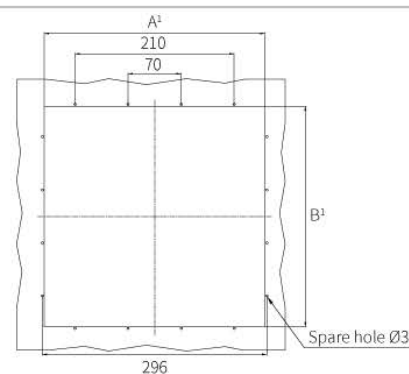

mm	X	Y	Z1	Z2	A ¹	B ¹
FF320	320	320	7	162	291	291
EF320	320	320	7	36	291	291

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF320-D.230

EF320



This position can be equipped with a temperature controller


IP54
CE
RoHS
COMPLIANT

UL94-V0

-40 ~ +80
°C

SPECIFICATION

Fan filter model	FF320-D.230	FF320-D.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m³/h	1150/1350m³/h
Air flow rate, Equipped with standard filter mat	1×EF320:750/950m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.55A/0.65A	1.0A/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-40°C ~ +80°C	-40°C ~ +80°C
Outlet filter model	EF320	EF320
Material	PC alloy plastic, material meets UL94V0	
Air flow direction	Air-out as standard; air-in optional	





Straight Design



Easy Replacement of Filter Pad



Premium Sealing Gasket

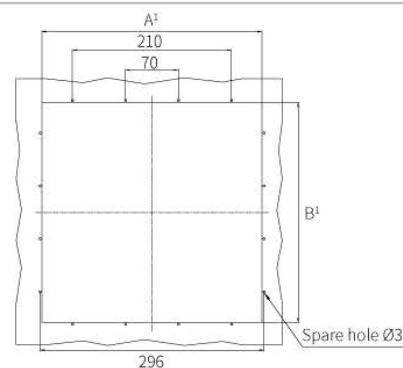DIMENSION (mm)


mm	X	Y	Z1	Z2	A¹	B¹
FF320-D	320	320	7	162	291	291
EF320	320	320	7	36	291	291

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF5000 .230

EF320



IP54

CE

RoHS
COMPLIANT

UL94-V0

-40 +80
°C

SPECIFICATION

Fan filter model	FF5000.230	FF5000.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × EF320:380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65A
Power	55/65W	55/65W
Noise level	62/65dB(A)	62/65dB(A)
Operating temperature range	-40°C - +80°C	-40°C - +80°C
Outlet filter model	EF320	EF320
Material	PC alloy plastic, material meets UL94V0	
Air flow direction	Air-in as standard; air-out optional	





Straight Design

Easy Replacement
of Filter Pad

Premium Sealing Gasket

DIMENSION (mm)

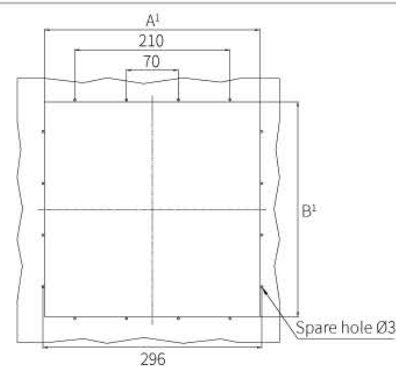

mm	X	Y	Z1	Z2	A ¹	B ¹
FF5000	320	320	7	125	291	291
EF320	320	320	7	36	291	291

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm

FF7000.230

EF320


IP54
CE
RoHS
COMPLIANT

UL94-V0

-40 ~ +80
°C

SPECIFICATION




Fan filter model	FF7000.230	FF7000.115
Rated voltage	200V-240V AC	100-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m³/h	1150/1350m³/h
Air flow rate, Equipped with standard filter mat	1×EF320:750/950m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.55A/0.65A	1.0A/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-40°C ~ +80°C	-40°C ~ +80°C
Outlet filter model	EF320	EF320
Material	PC alloy plastic, material meets UL94V0	
Air flow direction	Air-in as standard; air-out optional	



Straight Design


Easy Replacement
of Filter Pad


Premium Sealing Gasket

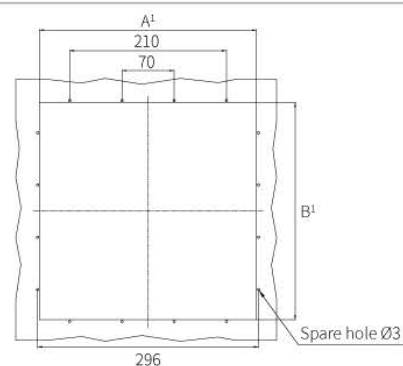DIMENSION (mm)


mm	X	Y	Z1	Z2	A¹	B¹
FF7000	320	320	7	127	291	291
EF320	320	320	7	36	291	291

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



FF130.230

EF130



IP54

CE

RoHS
COMPLIANT

UL94-V0

-40 +80
°C

SPECIFICATION

Fan filter model	FF130.230	FF130.115	FF130.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	–
Air flow rate, free blowing	80/110m³/h	80/110m³/h	110m³/h
Air flow rate, Equipped with standard filter mat	1×EF130:60/72m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.27A/0.24A	0.48A/0.42A	0.26A
Power	39/36W	39/36W	6.12W
Noise level	35/38dB(A)	35/38dB(A)	38dB(A)
Operating temperature range	-40°C - +80°C	-40°C - +80°C	-40°C - +80°C
Outlet filter model	EF130	EF130	EF130
Material	PC alloy plastic, material meets UL94V0		
Air flow direction	Air-in as standard; air-out optional		





Straight Design

Easy Replacement
of Filter Pad

Premium Sealing Gasket

DIMENSION (mm)



mm		X	Y	Z1	Z2	A¹	B¹
FF130	AC	130	290	5	74	105	265
	DC	130	290	5	74	105	265
EF130		130	290	5	74	105	265

Suitable for cabinet wall thickness not exceeding 2mm. When 2mm < material thickness ≤ 3mm, the opening size should be increased by 1mm



IP54
CE
RoHS
COMPLIANT

UL94-V0

-40 ~ +80
°C

SPECIFICATION

Model	EF363
Dimension	363*483*42mm
Operating temperature	-20~+60°C
Combination weight	~
Single weight	1.1kg
Dust removal rate	87%
Colour	RAL7035
Available fan	~
Grade of filter cotton	G4
IP code	IP54
Certificate	CE, EMC, ROHS

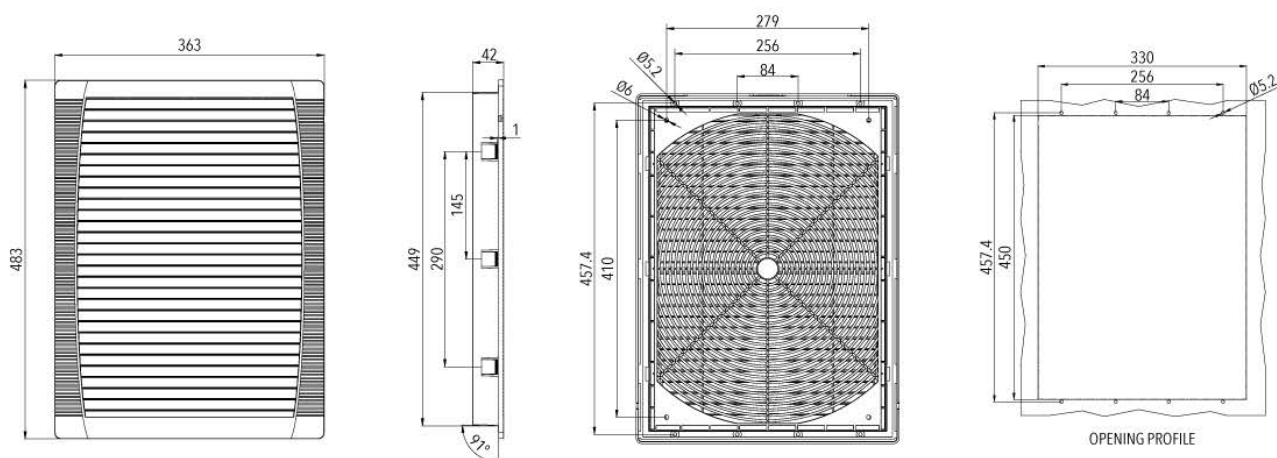DIMENSION (mm)


FK5521 .230

FK5521 .300



IP54

CE

RoHS
COMPLIANT-30 +70
°C

SPECIFICATION

Fan filter model	FK5521.230	FK5521.115	FK5521.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	28/38m³/h	28/38m³/h	38m³/h
Air flow rate, Equipped with standard filter mat	1×FK5521.300:22/28m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.09A/0.08A	0.16A/0.14A	0.085A
Power	13/12W	13/12W	2.04W
Noise level	28/32dB(A)	28/32dB(A)	36dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5521.300	FK5521.300	FK5521.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)



FK5522 .230

FK5522 .300


IP54
CE
RoHS
COMPLIANT

 -30 +70
°C

SPECIFICATION

Fan filter model	FK5522.230	FK5522.115	FK5522.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	65/85m³/h	65/85m³/h	100m³/h
Air flow rate, Equipped with standard filter mat	1 × FK5522.300: 55/70m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5522.300	FK5522.300	FK5522.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		







Curve Line Grill Design



Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)


FK5523 .230

FK5523 .300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5523.230	FK5523.115	FK5523.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1×FK5523.300:78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5522.300	FK5522.300	FK5522.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)




FK5524.230

FK5524.300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5524.230	FK5524.115	FK5524.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	220/240m³/h	220/240m³/h	300m³/h
Air flow rate, Equipped with standard filter mat	1×FK5524.300: 155/185m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.24A/0.22A	0.45A/0.42A	0.50A
Power	38/36W	38/36W	12W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5524.300	FK5524.300	FK5524.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		






Curve Line Grill Design



Premium Sealing Gasket



High Quality Filter Cotton

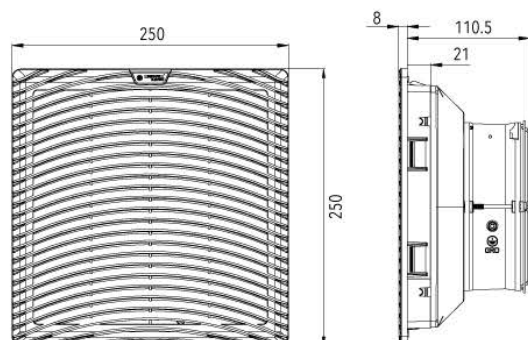DIMENSION (mm)


FK5524-S.230

FK5525.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5524-S.230	FK5524-S.115	FK5524-S.024
Rated voltage	200V-240V AC	100-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1×FK5525.300:78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5525.300	FK5525.300	FK5525.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)




FK5525.230

FK5525.300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5525.230	FK5525.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	230/265m³/h	230/265m³/h
Air flow rate, Equipped with standard filter mat	1 × FK5525.300:190/215m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.22A/0.20A	0.45A/0.50A
Power	37/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5525.300	FK5525.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	






Curve Line Grill Design



Premium Sealing Gasket



High Quality Filter Cotton

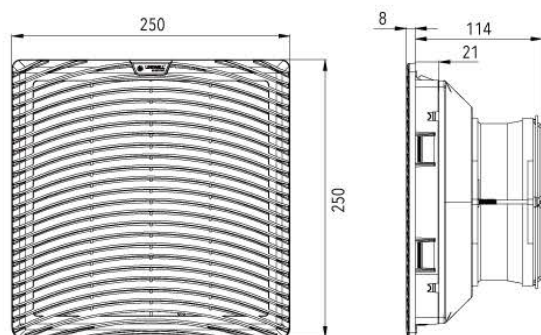DIMENSION (mm)


FK5525-D.230

FK5525.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5525-D.230	FK5525-D.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	330/370m³/h	330/370m³/h
Air flow rate, Equipped with standard filter mat	1×FK5525.300:231/259m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.22A/0.20A	0.45A/0.50A
Power	37/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5525.300	FK5525.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)



FK5525-E.230

FK5525.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5525-E.230	FK5525-E.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	420/430m³/h	420/430m³/h
Air flow rate, Equipped with standard filter mat	1 × FK5525.300:294/301m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.22A/0.20A	0.45A/0.50A
Power	37/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5525.300	FK5525.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Curve Line Grill Design






Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)

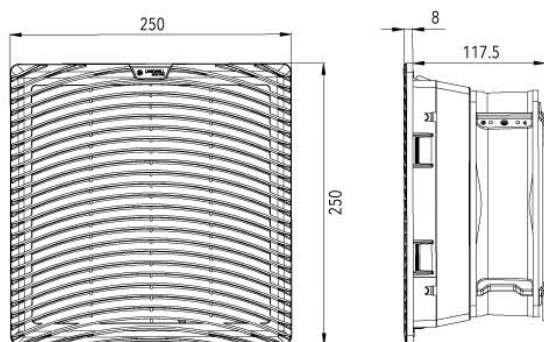

FK5525-F.230

FK5525.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5525-F.230	FK5525-F.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	700/750m³/h	700/750m³/h
Air flow rate, Equipped with standard filter mat	1×FK5525.300:490/525m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.22A/0.20A	0.45A/0.50A
Power	37/35W	37/35W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5525.300	FK5525.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)




FK5526.230

FK5526.300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5526.230	FK5526.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × FK5526.300:380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65A
Power	55/65W	55/65W
Noise level	62/65dB(A)	62/65dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5526.300	FK5526.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	







Curve Line Grill Design



Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)


FK5527.230

FK5526.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5527.230	FK5527.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	380/400m³/h	
Air flow rate, Equipped with standard filter mat	1×FK5526.300:248/260m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.35A/0.32A	0.58A/0.54A
Power	45/42W	45/42W
Noise level	63/65dB(A)	63/65dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5526.300	FK5526.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)




FK5528.230

FK5526.300

IP54
CE
RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5528.230	FK5528.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m ³ /h	
Air flow rate, Equipped with standard filter mat	1 × FK5526.300:750/950m ³ /h	
Axial flow fan	Capacitor operated	
Rated current	0.55A/0.65A	1.0A/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5526.300	FK5526.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	






Curve Line Grill Design



Premium Sealing Gasket



High Quality Filter Cotton

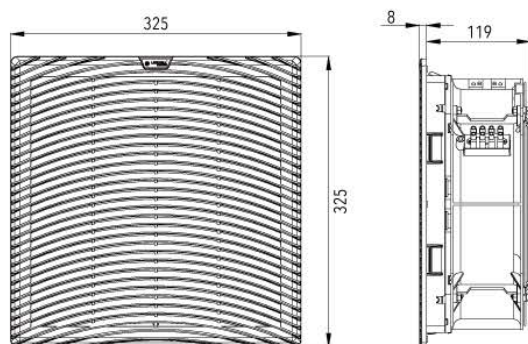DIMENSION (mm)


FK5529.230

FK5526.300



IP54

CE

RoHS
COMPLIANT

-30 +70
°C

SPECIFICATION

Fan filter model	FK5529.230	FK5529.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m³/h	
Air flow rate, Equipped with standard filter mat	1×FK5526.300:750/950m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.55A/0.65A	1.0A/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FK5526.300	FK5526.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Curve Line Grill Design







Premium Sealing Gasket



High Quality Filter Cotton

DIMENSION (mm)

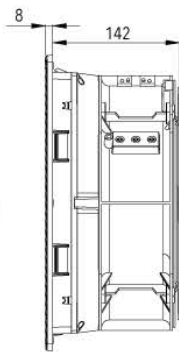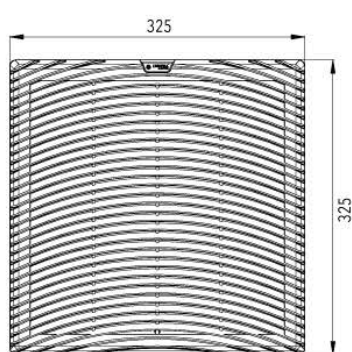

FU95-9225.230

FU95.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C




SPECIFICATION

Fan filter model	FU95-9225.230	FU95-9225.115	FU95-9225.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	25/35m³/h	25/35m³/h	35m³/h
Air flow rate, Equipped with standard filter mat	1×FU95.300: 20/25m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.07A/0.06A	0.12A/0.11A	0.08A
Power	12/11W	12/11W	1.92W
Noise level	37/41dB(A)	47/41dB(A)	41dB(A)
Operating temperature range	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
Outlet filter model	FU95.300	FU95.300	FU95.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		


New Designed Grill,
better Ip Rating

Easy-open Structure, quicker
Maintenance Of Filter Mat


Snap-in Assembly Or Bolts Fasten

DIMENSION (mm) Optional Fan Size:92 x 92mm


FU122-12038.230

FU122.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU122-12038.230	FU122-12038.115	FU122-12038.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	65/85m³/h	65/85m³/h	100m³/h
Air flow rate, Equipped with standard filter mat	1×FU122.300: 55/70m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU122.300	FU122.300	FU122.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



New Designed Grill,
better Ip Rating






Easy-open Structure, quicker
Maintenance Of Filter Mat



Snap-in Assembly Or Bolts Fasten

DIMENSION (mm) Optional Fan Size: 120 x 120mm



FU175-AD-12038.230

FU175.300


IP54
CE
RoHS
COMPLIANT

-20 +70
°C



SPECIFICATION

Fan filter model	FU175-AD-12038.230	FU175-AD-12038.115	FU175-AD-12038.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1 × FU175.300: 78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU175.300	FU175.300	FU175.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		


New Designed Grill,
better Ip Rating

Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 120 x 120/150x150/172x150mm


FU223-AD-12038.230

FU223.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU223-AD-12038.230	FU223-AD-12038.115	FU223-AD-12038.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1 × FU223.300: 78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU223.300	FU223.300	FU223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



New Designed Grill,
better Ip Rating







Easy-open Structure, quicker
Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

DIMENSION (mm)



FU223-AD-17251.230

FU223.300


IP54
CE
RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION




Fan filter model	FU223-AD-17251.230	FU223-AD-17251.115	FU223-AD-17251.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	220/240m³/h	220/240m³/h	300m³/h
Air flow rate, Equipped with standard filter mat	1×FU223.300: 115/185m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.24A/0.22A	0.45A/0.42A	0.50A
Power	38/36W	38/36W	12W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU223.300	FU223.300	FU223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



Air Duct Options For Bigger Air Flow


Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 180 x60/205x72/220x60/172x51/172 x55/225x80mm


FU223-AD-18060.230

FU223.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU223-AD-18060.230	FU223-AD-18060.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	330/370m³/h	330/370m³/h
Air flow rate, Equipped with standard filter mat	1 × FU223.300: 230/260m³/h	
Axial flow fan	Self starting shaded pole motor	
Rated current	0.35A/0.32A	0.54A/0.52A
Power	42/40W	42/40W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU223.300	FU223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Air Duct Options For Bigger Air Flow







Easy-open Structure, quicker
Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

DIMENSION (mm)



FU223-AD-20060.230

FU223.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU223-AD-20060.230	FU223-AD-20060.115	FU223-AD-20060.24
Rated voltage	200V-240V AC	100V-125V AC	24V AC
Rated frequency	50/60Hz	50/60Hz	-
Air flow rate, free blowing	420/430m³/h	420/430m³/h	290m³/h
Air flow rate, Equipped with standard filter mat	1×FU223.300: 295/300m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.35A/0.32A	0.60A/0.58A	1.6A
Power	45/42W	45/42W	38W
Noise level	50/52dB(A)	50/52dB(A)	64dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +65°C
Outlet filter model	FU223.300	FU223.300	FU223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		







Air Duct Options For Bigger Air Flow


Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

DIMENSION (mm)



FU223-AD-20572.230

FU223.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU223-AD-20572.230	FU223-AD-20572.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	700/750m³/h	700/750m³/h
Air flow rate, Equipped with standard filter mat	1 × FU223.300: 490/525m³/h	
Axial flow fan	Self starting shaded pole motor	
Rated current	0.30A/0.35A	0.60A/0.70A
Power	60/80W	60/80W
Noise level	50/52dB(A)	50/52dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU223.300	FU223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Air Duct Options For Bigger Air Flow







Easy-open Structure, quicker
Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

DIMENSION (mm)




FU283-AD-22580.230

FU283.300

IP54
CE
RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION



Fan filter model	FU283-AD-22580.230	FU283-AD-22580.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m ³ /h	550/600m ³ /h
Air flow rate, Equipped with standard filter mat	1×FU283.300: 380/410m ³ /h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65 A
Power	55/65W	55/65W
Noise level	59/61dB(A)	59/61dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU283.300	FU283.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Air Duct Options For Bigger Air Flow


Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 205 x72/220x60/254x89/220x60/225 x80/280x80mm




FU292-AD-22580.230

FU292.300



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU292-AD-22580.230	FU292-AD-22580.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × FU292.300: 380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65A
Power	55/65W	55/65W
Noise level	59/61dB(A)	59/61dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU292.300	FU292.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



Air Duct Options For Bigger Air Flow





Easy-open Structure, quicker
Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 205 x 72/220x60/254x89/220x60/225 x80/280x80mm




FU292-D.230

FU292.300

IP54
CE
RoHS
COMPLIANT

-20 +70
°C




SPECIFICATION

Fan filter model	FU292-D.230	FU292-D.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	1150/1350m ³ /h	1150/1350m ³ /h
Air flow rate, Equipped with standard filter mat	1×FU292.300: 750/950m ³ /h	
Axial flow fan	Capacitor operated	
Rated current	0.55A/0.65A	1.0A/1.1A
Power	110/150W	110/150W
Noise level	68/71dB(A)	68/71dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU292.300	FU292.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	


New Designed Grill,
better Ip Rating

Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 205 x72/220x60/254x89 /220x60/225 x80/280x80mm


FU392-12038.230



IP54

CE

RoHS
COMPLIANT

-20 +70
°C

SPECIFICATION

Fan filter model	FU392-12038.230	FU392-12038.115	FU392-12038.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	280/305m³/h	280/305m³/h	300m³/h
Air flow rate, Equipped with standard filter mat	1 × FU392.300: 196/213m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.36A/0.33A	0.70A/0.65A	0.60A
Power	57/54W	57/54W	12W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FU392.300	FU392.300	FU392.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



New Designed Grill,
better Ip Rating




Easy-open Structure, quicker
Maintenance Of Filter Mat



Snap-in Assembly Or Bolts Fasten

DIMENSION (mm)

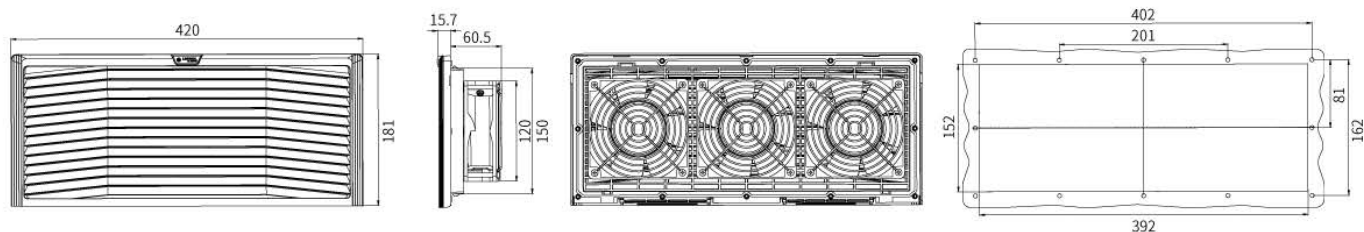

FK95-9225.230

FK95.300



IP54

CE

RoHS
COMPLIANT-20 +65
°C

SPECIFICATION

Fan filter model	FK95-9225.230	FK95-9225.115	FK95-9225.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	-
Air flow rate, free blowing	25/35m³/h	25/35m³/h	35m³/h
Air flow rate, Equipped with standard filter mat	1 × FK95.300: 20/25m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.07A/0.06A	0.12A/0.11A	0.08A
Power	12/11W	12/11W	1.98W
Noise level	37/41dB(A)	32/35dB(A)	35dB(A)
Operating temperature range	-20°C - +65°C	-20°C - +65°C	-20°C - +65°C
Outlet filter model	FK95.300	FK95.300	FK95.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		







New Designed Grill, better Ip Rating

Easy-open Structure, quicker
Maintenance Of Filter Mat

Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 92 x 92mm



FK122-12038.230

FK122.300



IP54

CE

RoHS
COMPLIANT

-20 +65
°C

SPECIFICATION





Fan filter model	FK122-12038.230	FK122-12038.115	FK122-12038.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	-
Air flow rate, free blowing	65/85m³/h	65/85m³/h	100m³/h
Air flow rate, Equipped with standard filter mat	1×FK122.300: 55/70m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.2A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-20°C - +65°C	-20°C - +65°C	-20°C - +65°C
Outlet filter model	FK122.300	FK122.300	FK122.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



New Designed Grill, better Ip Rating


Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

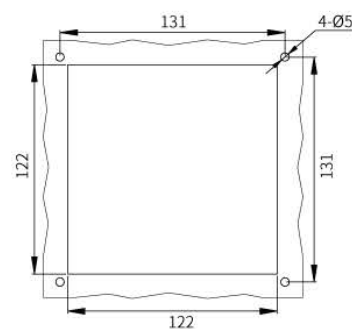DIMENSION (mm) Optional Fan Size:120 x120mm


FK175-AD-12038.230

FK175.300



IP54

CE

RoHS
COMPLIANT-20 +65
°C

SPECIFICATION

Fan filter model	FK175-AD-12038.230	FK175-AD-12038.115	FK175-AD-12038.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	105/126m³/h	105/126m³/h	126m³/h
Air flow rate, Equipped with standard filter mat	1 × FK175.300: 78/90m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.12A/0.11A	0.24A/0.22A	0.20A
Power	19/18W	19/18W	4.8W
Noise level	41/42dB(A)	41/42dB(A)	41dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FK175.300	FK175.300	FK175.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		




New Designed Grill, better Ip Rating

Easy-open Structure, quicker
Maintenance Of Filter Mat

Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 120x120/150x150/172x150mm

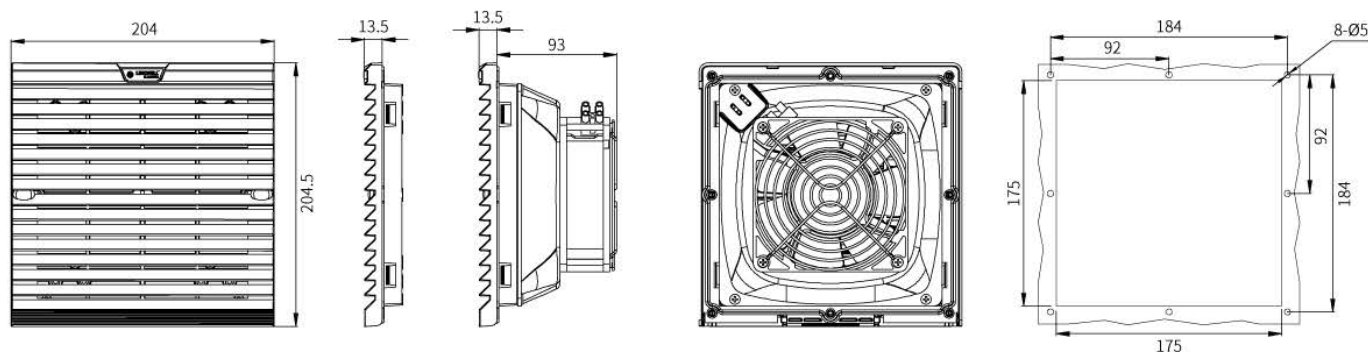


FK223-AD-17251.230

FK223.300

IP54
CE
RoHS
COMPLIANT

-20 +65
°C

SPECIFICATION





Fan filter model	FK223-AD-17251.230	FK223-AD-17251.115	FK223-AD-17251.024
Rated voltage	200V-240V AC	100V-125V AC	24V DC
Rated frequency	50/60Hz	50/60Hz	—
Air flow rate, free blowing	220/240m³/h	220/240m³/h	300m³/h
Air flow rate, Equipped with standard filter mat	1×FK223.300: 115/185m³/h		
Axial flow fan	Self starting shaded pole motor		
Rated current	0.24A/0.22A	0.45A/0.42A	0.50A
Power	38/36W	38/36W	12W
Noise level	50/52dB(A)	50/52dB(A)	50dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FK223.300	FK223.300	FK223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)		
Air flow direction	Air-in as standard; air-out optional		



New Designed Grill, better Ip Rating


Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

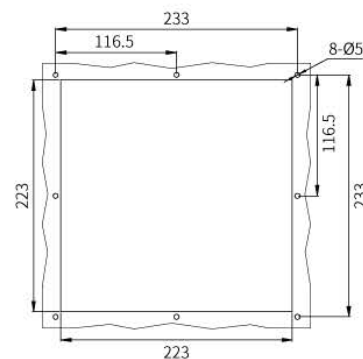DIMENSION (mm) Optional Fan Size: 172x51/172x55/180x60/205x72/Ø220x60mm


FK223-AD-18060.230

FK223.300



IP54

CE

RoHS
COMPLIANT

-20 +65
°C

SPECIFICATION

Fan filter model	FK223-AD-18060.230	FK223-AD-18060.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	330/370m³/h	330/370m³/h
Air flow rate, Equipped with standard filter mat	1 × FK223.300: 230/260m³/h	
Axial flow fan	Self starting shaded pole motor	
Rated current	0.35A/0.32A	0.54A/0.52A
Power	42/40W	42/40W
Noise level	63/65dB(A)	63/65dB(A)
Operating temperature range	-20°C - +65°C	-20°C - +65°C
Outlet filter model	FK223.300	FK223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



New Designed Grill, better Ip Rating




Easy-open Structure, quicker
Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

DIMENSION (mm)

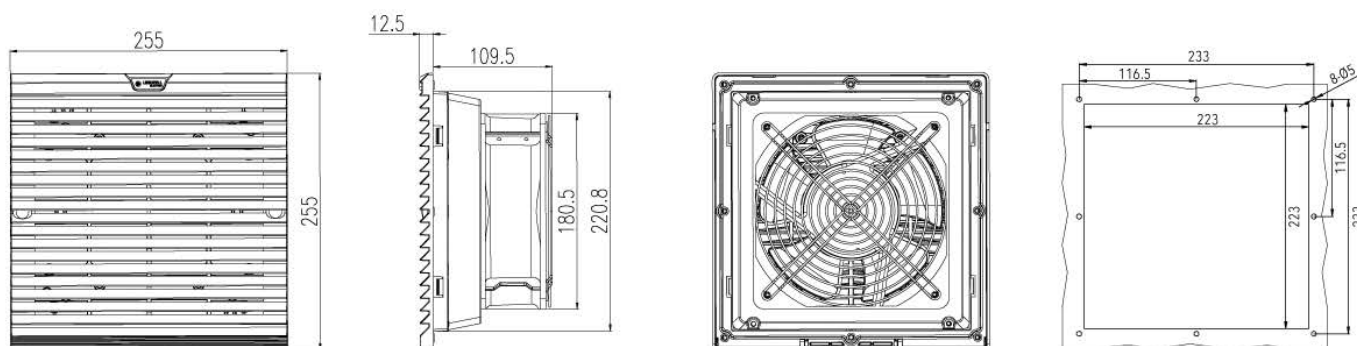



FK223-AD-20060.230



FK223.300



IP54

CE

RoHS
COMPLIANT

-20 +65
°C

SPECIFICATION

Fan filter model	FK223-AD-20060.230	FK223-AD-20060.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	420/430m³/h	420/430m³/h
Air flow rate, Equipped with standard filter mat	1 × FK223.300: 295/300m³/h	
Axial flow fan	Self starting shaded pole motor	
Rated current	0.35A/0.32A	0.60A/0.58A
Power	45/42W	45/42W
Noise level	63/65dB(A)	63/65dB(A)
Operating temperature range	-20°C - +65°C	-20°C - +65°C
Outlet filter model	FK223.300	FK223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	




New Designed Grill, better Ip Rating


Easy-open Structure, quicker
Maintenance Of Filter Mat


Flexible Fan Size By Embedded Nuts

DIMENSION (mm)

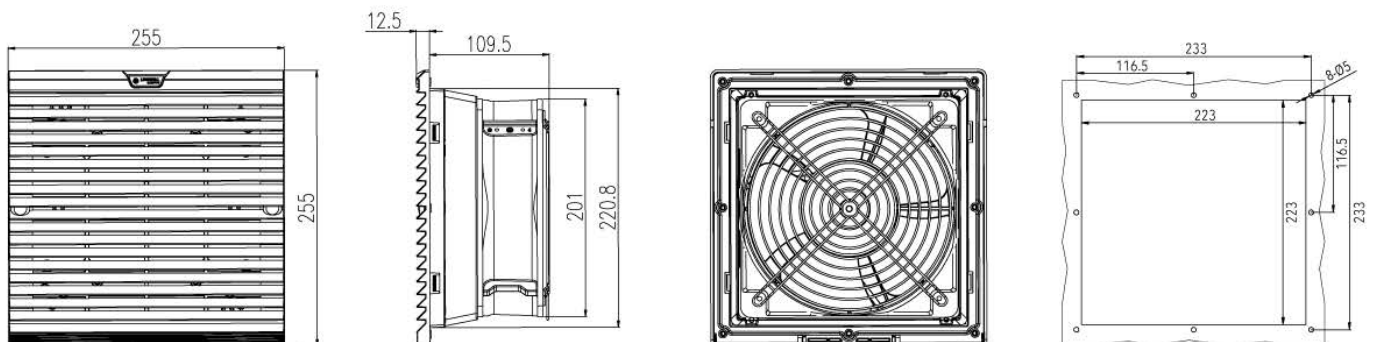

FK223-AD-20572.230

FK223.300



IP54

CE

RoHS
COMPLIANT-20 +65
°C

SPECIFICATION

Fan filter model	FK223-AD-20572.230	FK223-AD-20572.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	700/750m³/h	700/750m³/h
Air flow rate, Equipped with standard filter mat	1 × FK223.300: 490/525m³/h	
Axial flow fan	Self starting shaded pole motor	
Rated current	0.30A/0.35A	0.60A/0.70A
Power	60/80W	60/80W
Noise level	63/65dB(A)	63/65dB(A)
Operating temperature range	-20°C - +65°C	-20°C - +65°C
Outlet filter model	FK223.300	FK223.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	







New Designed Grill, better Ip Rating

Easy-open Structure, quicker
Maintenance Of Filter Mat

Flexible Fan Size By Embedded Nuts

DIMENSION (mm)





FK283-AD-22580.230

FK283.300



IP54

CE

RoHS
COMPLIANT

-20 +65
°C

SPECIFICATION

Fan filter model	FK283-AD-22580.230	FK283-AD-22580.115
Rated voltage	200V-240V AC	100V-125V AC
Rated frequency	50/60Hz	50/60Hz
Air flow rate, free blowing	550/600m³/h	550/600m³/h
Air flow rate, Equipped with standard filter mat	1 × FK283.300: 380/410m³/h	
Axial flow fan	Capacitor operated	
Rated current	0.30A/0.35A	0.55A/0.65 A
Power	55/65W	55/65W
Noise level	59/61dB(A)	59/61dB(A)
Operating temperature range	-20°C - +70°C	-20°C - +70°C
Outlet filter model	FK283.300	FK283.300
Material	Made of injection-moulded thermoplastic, self-extinguishing UL94V0 (optional)	
Air flow direction	Air-in as standard; air-out optional	



New Designed Grill, better Ip Rating







Easy-open Structure, quicker
Maintenance Of Filter Mat



Flexible Fan Size By Embedded Nuts

DIMENSION (mm) Optional Fan Size: 205x72/220x60/254x89/220x60/225x80/280x80mm

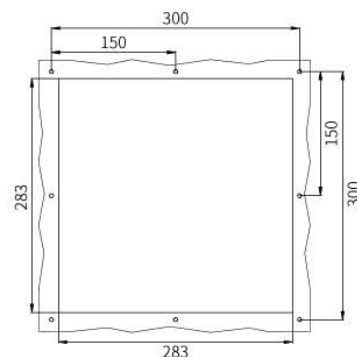



IP55
CE
RoHS
COMPLIANT

-15 ~ +55
°C

SPECIFICATION

Model	RC9802.230	RC9802.110	RC9802.024
Voltage/Frequency	230V AC 50/60Hz	110V AC 50/60Hz	24V DC
Power	13W	13W	6W
Electric current	0.09A	0.17A	0.085A
Dimension-Including fans	119x119x98mm		
Dimension	119x119x60mm		
Noise	33dB(A)		
Combined airvolume	18m³/h		
Operating temperature range	-15~+55°C		
Combination weight	0.7kg		
Single weight	0.2kg		
Dust removal rate	87%		
Colour	RAL7035		
Available fan	80x80		
Filter Grade	G4		
IP code	IP55		

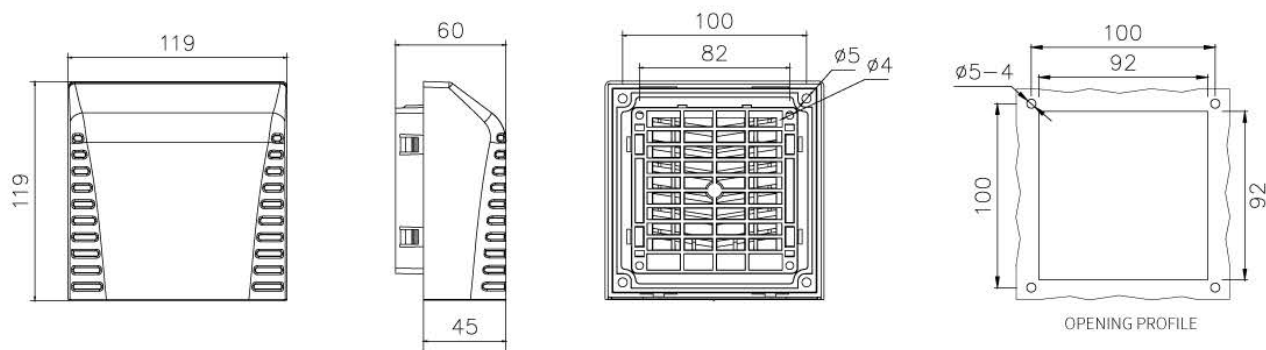DIMENSION (mm)




IP55

CE


RoHS

-15 +55
°C

SPECIFICATION

Model	RC9803.230	RC9803.110	RC9803.024
Voltage/Frequency	230V AC 50/60Hz	110V AC 50/60Hz	24V DC
Power	19W/18W	19W/18W	4.8W
Electric current	0.12A/0.11A	0.24A/0.22A	0.20A
Dimension-Including fans	152x152x108mm		
Dimension	152x152x70mm		
Noise	44dB(A)		
Combined airvolume	35m³/h		
The use of bearing	-15~+55°C		
Combination weight	0.9kg		
Single weight	0.33kg		
Dust removal rate	87%		
Colour	RAL7035		
Available fan	120x120	80x80	92x92
Filter Grade	G4		
IP code	IP55		

DIMENSION (mm)

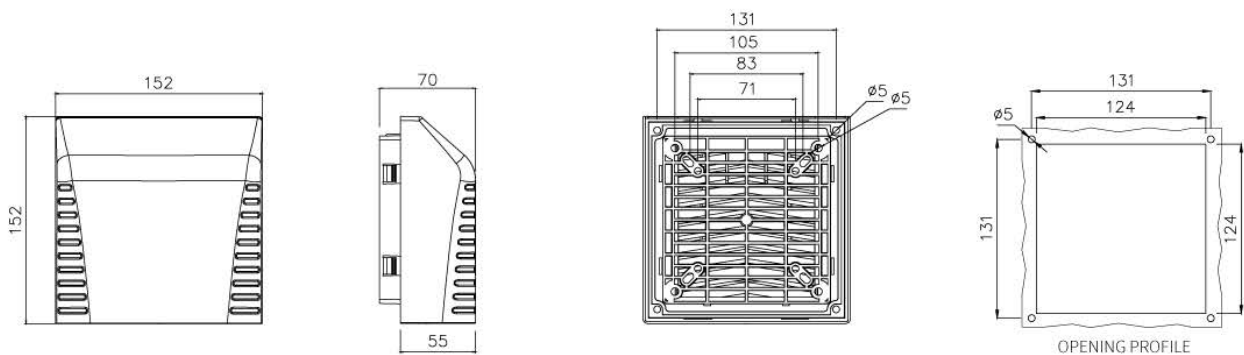



IP55
CE
RoHS
COMPLIANT

-15 ~ +55
°C

SPECIFICATION

Model	RC9804.230	RC9804.110	RC9804.024
Voltage/Frequency	230V AC 50/60Hz	110V AC 50/60Hz	24V DC
Power	38W/36W	38W/36W	12W
Electric current	0.57A	0.45A/0.42A	0.5A
Dimension-Including fans	206x206x142mm		
Dimension	206x206x85mm		
Noise	62dB(A)		
Combined airvolume	93m³/h		150m³/h
The use of bearing	-15~+55°C		
Combination weight	1.7kg		
Single weight	0.55kg		
Dust removal rate	87%		
Colour	RAL7035		
Available fan	120x120, 150x150, 172x150		
Filter Grade	G4		
IP code	IP55		

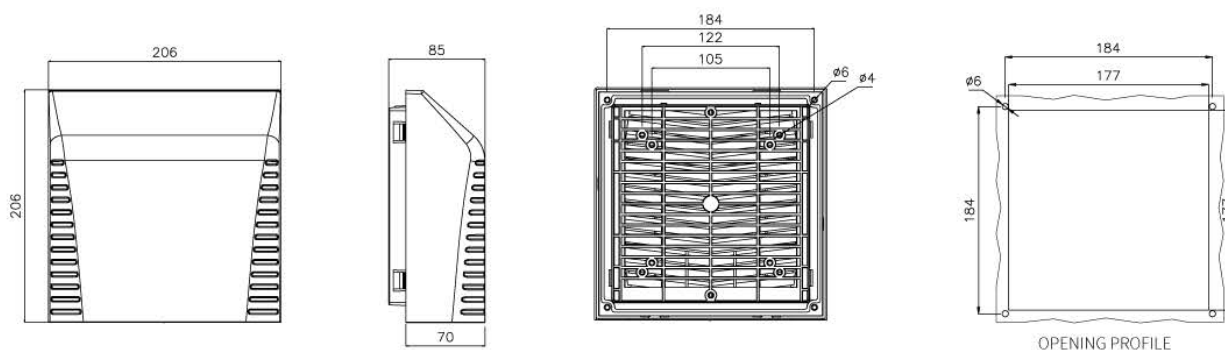DIMENSION (mm)




IP55

CE


RoHS
COMPLIANT

-15 +55
°C

SPECIFICATION

Model	RC9805.230	RC9805.110	RC9805.024
Voltage/Frequency	230V AC 50/60Hz	110V AC 50/60Hz	24V DC
Power	45W	45W	35W
Electric current	0.35A	0.60A	1.4A
Dimension-Including fans	258x258x151mm		
Dimension	258x258x91mm		
Noise	44dB(A)		
Combined airvolume	90m³/h		
The use of bearing	-15~+55°C		
Combination weight	1.5kg		
Single weight	0.86kg		
Dust removal rate	87%		
Colour	RAL7035		
Available fan	172x150, 180x180, 150x150, 200x200		
Filter Grade	G4		
IP code	IP55		

DIMENSION (mm)

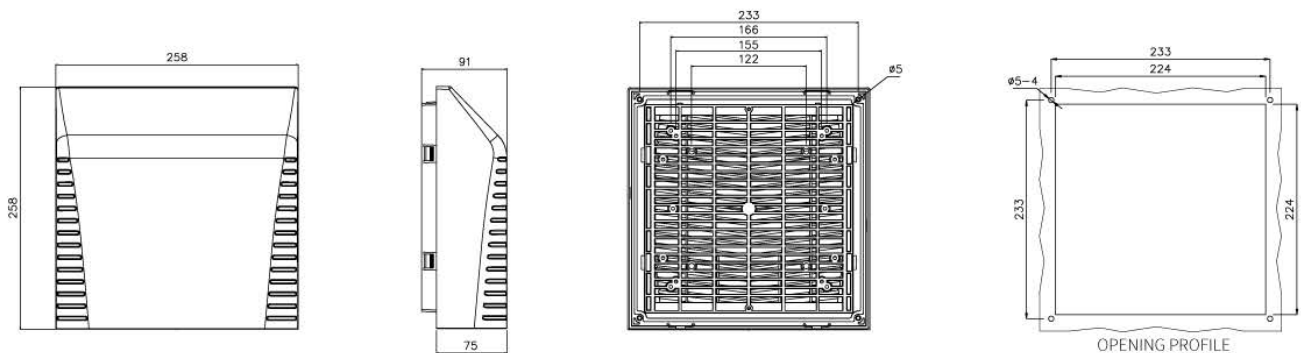



IP55
CE
RoHS
COMPLIANT

-15 ~ +55
°C

SPECIFICATION

Model	RC9806.230	RC9806.110	RC9806.024
Voltage/Frequency	230V AC 50/60Hz	110V AC 50/60Hz	24V DC
Power	110W/150W	110W/150W	96W
Electric current	0.55A/0.65A	1.0A/1.1A	4.0A
Dimension-Including fans	323x323x175mm		
Dimension	323x323x95mm		
Noise	65dB(A)		
Combined airvolume	470m ³ /h		
The use of bearing	-15~+55°C		
Combination weight	3.2kg		
Single weight	1.1kg		
Dust removal rate	87%		
Colour	RAL7035		
Available fan	172x150, 200x200, Φ254, 280x280		
Filter Grade	G4		
IP code	IP55		

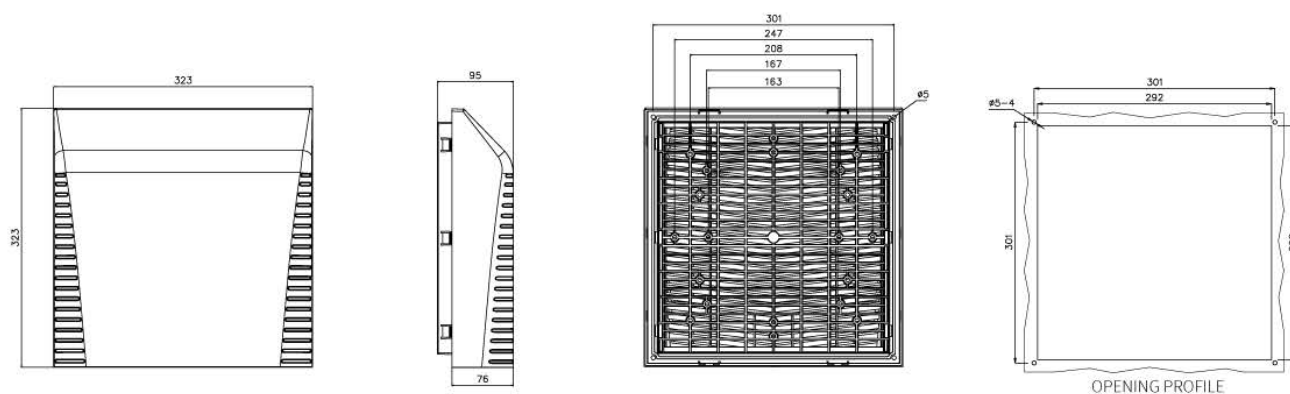DIMENSION (mm)




LKF184



LKF240

IP54

CE

RoHS
COMPLIANT


-20 +60
°C

SPECIFICATION


Model	LKF184	LKF240
Dimension	186x184x68mm	242x240x68mm
The use of bearing	-20~+60°C	-20~+60°C
Single weight	0.18kg	0.29kg
Dust removal rate	87%	87%
Colour	RAL7035	RAL7035
IP code	IP54	IP54
Certificate	CE, ROHS	CE, ROHS

DIMENSION (mm)

LKF184

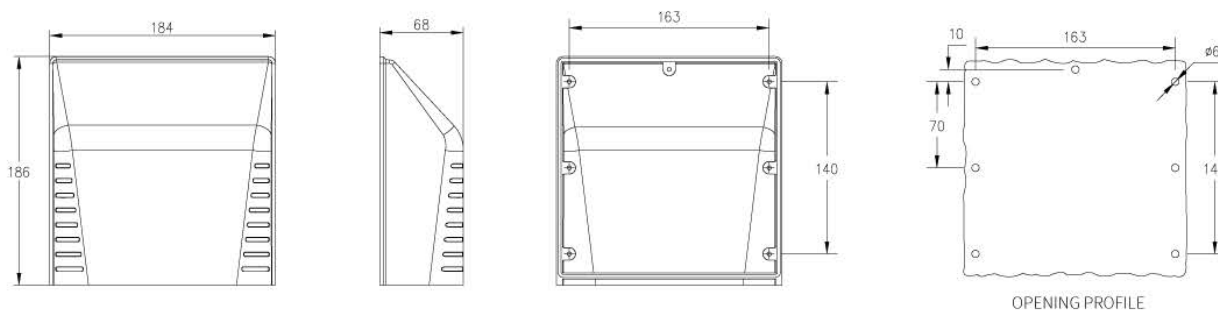

LKF240

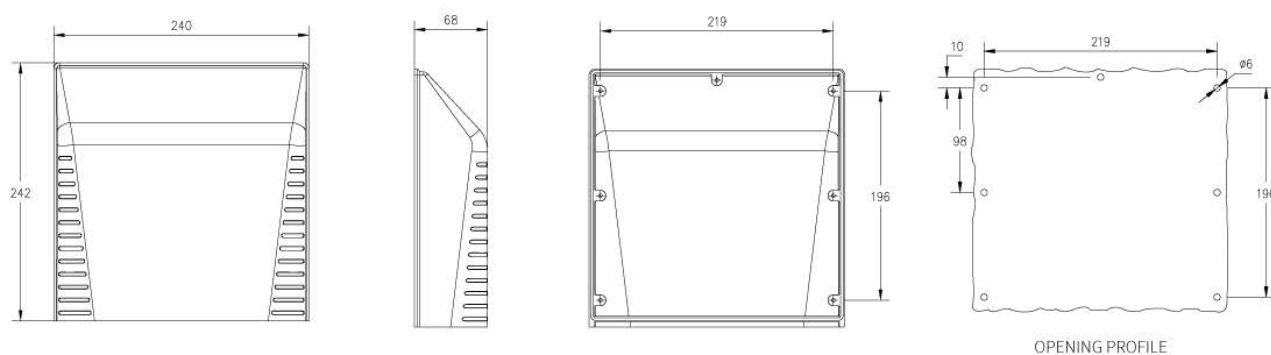


LKF290







LKF357


IP54
CE
RoHS
COMPLIANT

-20 ~ +60
°C

SPECIFICATION

Model	LKF290	LKF357
Dimension	292x290x68mm	360x357x69mm
The use of bearing	-20~+60°C	-20~+60°C
Single weight	0.43kg	0.62kg
Dust removal rate	87%	87%
Colour	RAL7035	RAL7035
IP code	IP54	IP54
Certificate	CE, ROHS	CE, ROHS

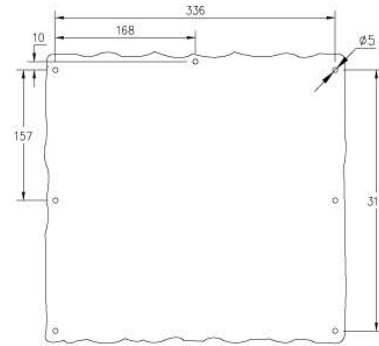DIMENSION (mm)
LKF290

OPENING PROFILE
LKF357

OPENING PROFILE



ROOF VENTILATOR








Installation conditions

- Small size and light weight
- Not occupying excess space
- Adopting high-performance, industrial grade ball bearing fans
- Completely reduce the internal temperature of the cabinet in a short period of time

SPECIFICATION

Fan model	F2E190-230-DH	F2E220-230-DH	F2E225-230-DH
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	570/620m³/h	860/900m³/h	1200/1340m³/h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m³/h	1xLK6626.300: 688/540m³/h	1xLK6626.300: 960/1072m³/h
Rated current	0.26/0.34A	0.38/0.40A	0.60/0.88A
Power	58/75W	85/90W	120/180W
Noise level	62/64dBA	73/74dBA	69/71dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

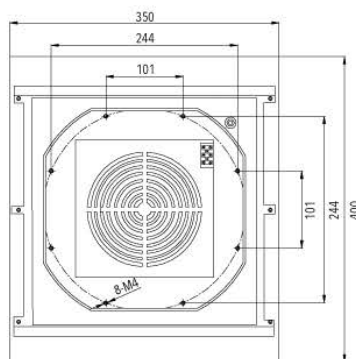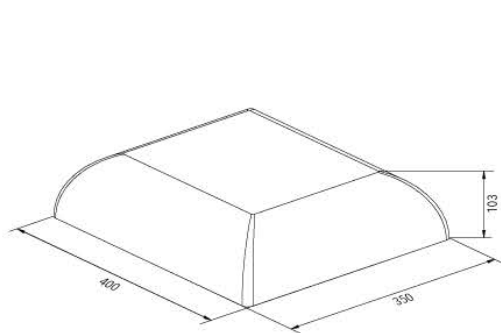



IP32

CE

-20 ~ +80
°C



Installation conditions

- Small size and light weight
- Not occupying excess space
- Adopting high-performance, industrial grade ball bearing fans
- Completely reduce the internal temperature of the cabinet in a short period of time

SPECIFICATION

Fan model	F2E190-230-DP (115V,400V Customizable)	F2E220-230-DP (115V,400V Customizable)	F2E225-230-DP (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	570/620m³/h	860/900m³/h	1200/1340m³/h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m³/h	1xLK6626.300: 688/540m³/h	1xLK6626.300: 960/1072m³/h
Rated current	0.28/0.31A	0.38/0.40A	0.60/0.88A
Power	58/75W	85/90W	120/180W
Noise level	59/61dBA	67/70dBA	68/71dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

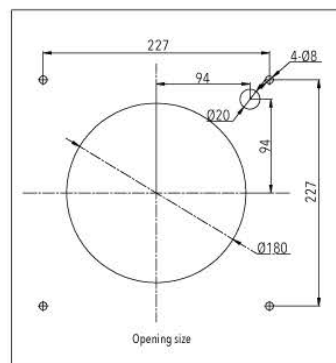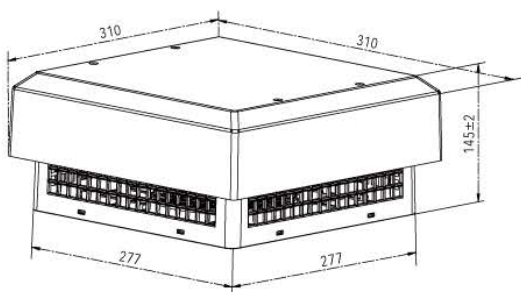



CHARACTERISTIC




- Large output range and high efficiency,
Air volume output range: 570-1340m³/h
- Color: RAL 7035
- High protection level
- International certification and licensing
- IP32; IP54(With filter)

Installation and maintenance are very simple
Innovative snap fasteners support flexible locking of fans from the outside or inside
Easy electrical connection through plugs
Easy to maintain, allowing users to quickly replace the filter pad of the fan

SPECIFICATION

Fan model	KTF3139.230 (115V,400V Customizable)	KTF3140.230 (115V,400V Customizable)	KTF3141.230 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	570/620m ³ /h	860/900m ³ /h	1200/1340m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m ³ /h	1xLK6626.300: 688/540m ³ /h	1xLK6626.300: 960/1072m ³ /h
Rated current	0.28/0.31A	0.38/0.40A	0.60/0.88A
Power	58/75W	85/90W	120/180W
Noise level	59/61dBA	67/70dBA	68/71dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)



Opening size



IP32

CE

-25 +55
°C



Installation conditions

- Installation and maintenance are very simple
- Innovative snap fasteners support flexible locking of fans from the outside or inside
- Easy electrical connection through plugs
- Easy to maintain, allowing users to quickly replace the filter pad of the fan

SPECIFICATION

Fan model	KTF21.230 (115V,400V Customizable)	KTF21.048	KTF20.230 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	48V DC	230V AC 50/60Hz
Air flow rate, free blowing	570/620m ³ /h	570m ³ /h	440/480m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m ³ /h	1xLK6626.300: 456m ³ /h	1xLK6626.300: 352/384m ³ /h
Rated current	0.28/0.31A	1.0A	0.27/0.28A
Power	58/75W	51W	56/62W
Noise level	59/61dBA	33dBA	58/61dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

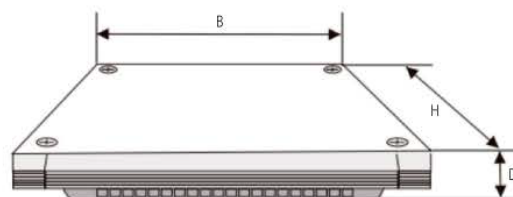


IP43
CE

-10 +60
°C




Installation conditions

- Quick installation, can be directly buckled without the need for screws to fix
- Adjustable buckle, suitable for cabinets with different thicknesses of 1.5-3.5mm
- IP43, standard g3 grade filter cotton
- Quickly replace the filter cotton without the need for tools, directly open the top knob
- Ac voltage is a standard configuration and dc voltage can be customized

SPECIFICATION

Fan model	REF600.230	REF600.115	REF600.024
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz	24V DC
Air flow rate, free blowing	480/520m³/h	480/520m³/h	500m³/h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 384/416m³/h	1xLK6626.300: 384/416m³/h	1xLK6626.300: 544m³/h
Rated current	0.44/0.48A	0.88/0.96A	0.80A
Power	64/76W	64/76W	19.2W
Noise level	48/52dBA	48/52dBA	48/52dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)





IP32




CE


-20 +80
Characteristic

- Quick installation, can be directly buckled without the need for screws to fix
- Adjustable buckle, suitable for cabinets with different thicknesses of 1.5-3.5mm
- IP32, standard g3 grade filter cotton
- Quickly replace the filter cotton without the need for tools, directly open the top knob
- AC voltage is standard as a standard configuration

SPECIFICATION

Fan model	REF700.230 (115V,400V Customizable)	REF1400.230 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	550/600m ³ /h	1150/1350m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 380/410m ³ /h	1xLK6626.300: 750/950m ³ /h
Rated current	0.30/0.35A	0.55/0.65A
Power	55/65W	110/150W
Noise level	62/65dBA	68/71dBA
Temperature range	-20°C~80°C	-20°C~80°C

DIMENSION (mm)



PTF 29387



PTF 378119

IP32

CE





-25 +55
°C

SPECIFICATION





Fan model	PTF 29387 (115V,400V Customizable)	PTF 378119 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	440/480m³/h	1200/1340m³/h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 352/384m³/h	1xLK6626.300: 960/1072m³/h
Rated current	0.27/0.28A	0.60/0.88A
Power	56/62W	120/180W
Noise level	58/61dBA	68/71dBA
Temperature range	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

PTF 29387



PTF 378119





PTF 398150



PTF 36890

IP32

CE





-25 +55
°C

SPECIFICATION

Fan model	PTF 398150 (115V,400V Customizable)	PTF 36890 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	1200/1340m³/h	700/750m³/h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 960/1072m³/h	1xLK6626.300: 560/600m³/h
Rated current	0.60/0.88A	0.25/0.27A
Power	120/180W	31/33W
Noise level	68/71dBA	65/67dBA
Temperature range	-10°C~60°C	-10°C~60°C





DIMENSION (mm)

PTF 398150



Opening Profile

PTF 36890



Opening Profile



Customizable stainless steel material

IP32

CE

-10 ~ +65
°C


Installation Conditions

- The ambient temperature should be lower than the required temperature inside the control cabinet when there is insufficient space in the cabinet to install a side mounted filter fan, top mounted fans can be considered
- The cabinet top mounted fan extracts the hot air from the top of the control cabinet while dissipating the heat inside the cabinet outside,
- The use of centrifugal fans can not only avoid the formation of vortex like whirlwinds in the discharge of ordinary shielded magnetic pole fans, but also reduce the
- The noise generated by low air friction with each other.


SPECIFICATION

Fan model	PTF60260 (115V,400V Customizable)	PTF60290 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50Hz
Air flow rate, free blowing	2500/2900m ³ /h	3500m ³ /h
Air flow rate, Equipped with standard filter mat	4xLK6626.300: 2000m ³ /h	1xLK6626.300:2800m ³ /h
Rated current	0.78/1.0A	1.2A
Power	170/230W	280W
Noise level	66/69dBA	70dBA
Temperature range	-10°C~65°C	-10°C~65°C

DIMENSION (mm)

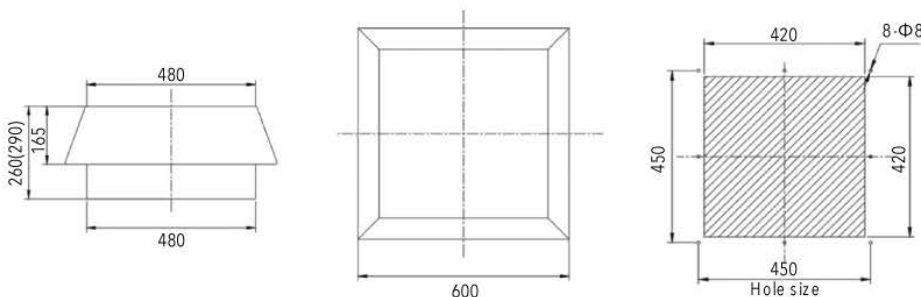

Electrical wiring diagram








Installation conditions

- The ambient temperature should be lower than the required temperature inside the control cabinet.
When there is insufficient space in the cabinet to install a side mounted filter fan Consider using a top mounted fan.
- The cabinet mounted fan extracts the hot air from the top of the control cabinet while dissipating the heat inside the cabinet outside, protecting the electrical components
inside the control cabinet from operating within a controllable temperature range. And it does not occupy internal space,
- Centrifugal fans are mainly capable of discharging high heat loads with maximum efficiency. The use of centrifugal fans can not only avoid the formation of eddy currents
in the discharge of ordinary shielded magnetic pole fans, but also reduce the noise generated by air friction

SPECIFICATION

Fan model	KRF 670 (115V,400V Customizable)	KRF 1410 (115V,400V Customizable)
Rated working voltage v/hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	570/620m ³ /h	1200/1340m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m ³ /h	1xLK6626.300: 960/1072m ³ /h
Rated current	0.28/0.31A	0.60/0.88A
Power	58/75W	120/180W
Noise level	59/61dBA	68/71dBA
Temperature range	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

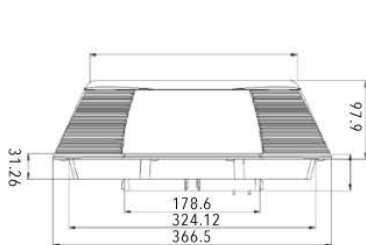


Characteristic


- 1U's small size design, low noise, installed randomly on the 482.6mm(19) plane
- It can be used with the front exhaust outlet filter to achieve the convective effect.


IP33
CE

-20 ~ +55
°C

SPECIFICATION

Model No.	RCF480-230	RCF480-115	RCF480-024
Dimensions (WxHxD)	484 x 44.5 x 205.5mm		
Air flow parameters			
Non resistance air volume	408/450m³/h		650m³/h
Noise level (DIN 45 635)	48/52dB(A)	48/52dB(A)	48dB(A)
Duty cycle	100%		
Electrical data:			
Fan motor	Capacitor motor		Dcmotor
Rated voltage	230VAC	115VAC	24VDC
Range of operation	220-240V	100-125V	20-26VDC
Frequency	50Hz/60 Hz	50Hz/60 Hz	-
Powerconsumption	57/54W	57/54W	14.4W
Rated current	0.36/0.33 A	0.72/0.66 A	0.60 A

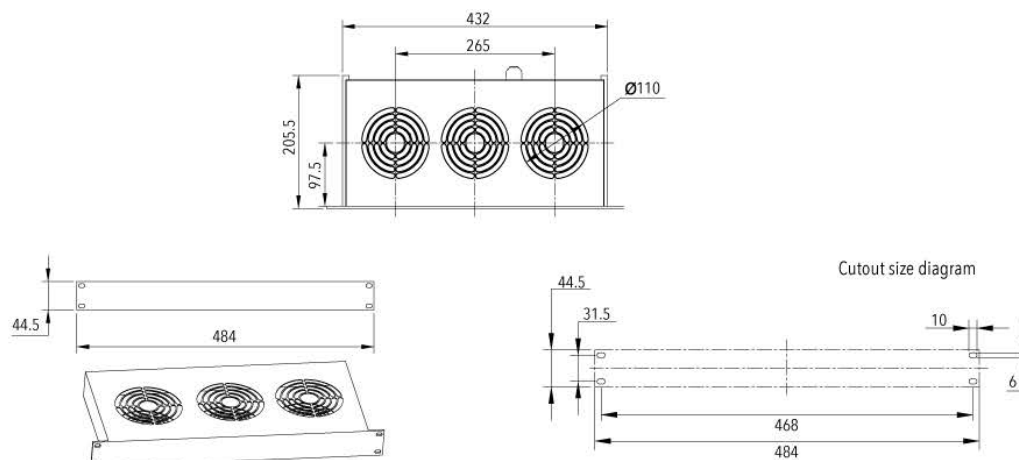DIMENSION (mm)




CABINET AIR CONDITIONER





IP55 CE

Characteristic

- Multiple automatic protection and comprehensive fault self-diagnosis;
- Exquisite craftsmanship and high-quality international brand accessories ensure more stable and reliable products;
- Suitable for T3 high-temperature working conditions and R134a environmentally friendly refrigerant;
- Equipped with RS485 interface as standard, achieving telemetry, remote signaling, and remote adjustment;
- LED Nixie tube display, field parameters can be set;
- Standard heating function, optional hydrogen discharge function;
- Dry contact alarm output, normally open/normally closed optional

SPECIFICATION

Model	LK004AS	LK006AS	LK010AS	LK015AS	LK020AS	LK030AS	LK050AS
Power Supply	230VAC±15% 50Hz/60Hz						
Cooling Capacity	400W@L35/L35	600W@L35/L35	1000W@L35/L35	1500W@L35/L35	2000W@L35/L35	3000W@L35/L35	5000W@L35/L35
Power Consumption	190W@L35/L35	260W@L35/L35	440W@L35/L35	650W@L35/L35	750W@L35/L35	1430W@L35/L35	2000W@L35/L35
Semi-embedded Mounting Dimensions mm (With flange)	H480xW355xD178	H580xW350xD175	H780xW480xD200	H780xW480xD200	H780xW480xD200	H1200xW535xD225	H1350xW650xD300
Side Mounting Dimensions mm (With flange)	—	H550xW320xD175	H750xW450xD200	H750xW450xD200	H750xW450xD200	—	—
IP Grade	IP55						
Refrigerant	R134a						
Net Weight	14kg	15kg	31kg	31kg	34kg	50kg	100kg
Surface Treatment	RAL7035						



IP55 CE

Characteristic

- Multiple automatic protection and comprehensive fault self-diagnosis
- Exquisite craftsmanship and high-quality international brand accessories ensure more stable and reliable products
- Suitable for T3 high-temperature working conditions and R134a environmentally friendly refrigerant
- Equipped with RS485 interface as standard, achieving telemetry, remote signaling, and remote adjustment
- LED Nixie tube display, field parameters can be set
- Standard heating function, optional hydrogen discharge function
- Standard dehumidification function
- Dry contact alarm output, normally open/normally closed optional
- 4-20mA temperature and humidity signal output function

SPECIFICATION

Model	LK006AD	LK010AD	LK015AD	LK020AD	LK030AD	LK050AD
Power Supply	230VAC±15% 50Hz/60Hz					
Cooling Capacity	600W@L35/L35	1000W@L35/L35	1500W@L35/L35	2000W@L35/L35	3000W@L35/L35	5000W@L35/L35
Power Consumption	300W@L35/L35	440W@L35/L35	650W@L35/L35	870W@L35/L35	1430W@L35/L35	2000W@L35/L35
Semi-embedded Mounting Dimensions mm (With flange)	H580xW350xD175	/	/	/	/	/
Side Mounting Dimensions mm (With flange)	/	H795xW495xD195	H795xW495xD195	H795xW495xD195	H1350xW550xD300	H1400xW670xD300
IP Grade	IP55					
Refrigerant	R134a					
Net Weight	15kg	30kg	39kg	41kg	50kg	100kg
Surface Treatment	RAL7035					

CABINET AIR CONDITIONER

Indoor general cabinet air conditioner(300~4000W)

LK-AF series



Side Mounting

IP54 **CE**

Characteristic

- Multiple automatic protection and comprehensive fault self-diagnosis
- Exquisite craftsmanship and high-quality international brand accessories ensure more stable and reliable products
- Suitable for T3 high-temperature working conditions and R134a environmentally friendly refrigerant
- Equipped with RS485 interface as standard, achieving telemetry, remote signaling, and remote adjustment
- LED Nixie tube display, field parameters can be set
- Standard heating function, optional hydrogen discharge function
- Standard dehumidification function
- Dry contact alarm output, normally open/normally closed optional
- Built-in condensate evaporator

SPECIFICATION

Model	LK003AF	LK005AF	LK008AF	LK010AF	LK015AF	LK015AFH	LK020AF	LK030AF	LK040AF
Power Supply	230VAC±15% 50Hz/60Hz								
Cooling Capacity	300W@L35/L35	500W@L35/L35	800W@L35/L35	1000W@L35/L35	1500W@L35/L35	1500W@L35/L35	2000W@L35/L35	3000W@L35/L35	4000W@L35/L35
Power Consumption	180W@L35/L35	210W@L35/L35	345W@L35/L35	600W@L35/L35	650W@L35/L35	650W@L35/L35	870W@L35/L35	1430W@L35/L35	1800W@L35/L35
Side Mounting Dimensions mm (Without flange)	H580x W280xD175	H580x W280xD175	H580x W370xD175	H950x W400xD210	H950x W400xD210	H1105x W405xD220	H1105x W405xD220	H1580x W400xD270	H1580x W400xD270
IP Grade	IP54								
Refrigerant	R134a								
Net Weight	14kg	15kg	20kg	34kg	36kg	38kg	40kg	65kg	68kg
Surface Treatment	RAL7035								



Semi-embedded Mounting

Side Mounting

IP55 **CE**

Characteristic

- The design of the upper air outlet structure ensures a longer air supply distance and better matches the air duct design;
- High air volume to improve the temperature uniformity of the battery environment;
- Standard dehumidification function;
- Standard RS485 interface for telemetry, remote signaling, and remote adjustment;
- Optional internal fan speed control, more energy-efficient;
- Optional C5 high anti-corrosion configuration;
- Optional explosion-proof configuration;

SPECIFICATION

Model	LK020ASE	LK030ADE	LK050ADE	LK075ADE	LK125AE	LK150AE	LK200AE	LK250AE
Power Supply	230VAC±15% 50Hz/60Hz			1~,220VAC 50Hz	3~,380-415VAC 50Hz			
Cooling Capacity	2000W	3000W	5000W	7500W	12500W	15000W	20000W	25000W
Power Consumption	840W	1430W	2000W	2700W	4000W	6000W	8500W	12500W
Semi-embedded (With flange) Dimensions mm	H833x W483xD216	H1350x W550xD300	H1450x W670xD300	H2100x W800xD906	/	/	/	/
Side Mounting (With flange) Dimensions mm	/	/	/	/	H2100x W800xD906	H2100x W800xD906	H2100x W800xD906	H2100x W800xD906
IP Grade	IP55						IPX5	IPX5
Refrigerant	R134A			R410A				
Net Weight	37kg	50kg	100kg	75kg	210kg	220kg	230kg	255kg
Surface Treatment	RAL7035							



Semi-embedded Mounting

IP55 CE

Characteristic

- This product is widely used in applications that require constant temperature control, such as battery cabinets, electrical cabinets, industrial control cabinets, etc;
- Multiple automatic protections and comprehensive fault self diagnosis;
- Exquisite craftsmanship and high-quality international brand accessories ensure that products are more stable and reliable;
- R134a environmentally friendly refrigerant;
- Standard RS485 interface for telemetry, remote signaling, and remote adjustment;
- LED digital display, on-site parameters can be set;
- Dry contact alarm output, normally open/normally closed optional;
- Refrigeration output PID regulation, temperature control accuracy $\leq \pm 0.5^{\circ}\text{C}$

SPECIFICATION

Model	LK010AJ	LK015AJ	LK020AJ
Power Supply	230VAC $\pm$ 15% 50Hz/60Hz		
Cooling Capacity	1000W@L35/L35	1500W@L35/L35	2000W@L35/L35
Power Consumption	450W@L35/L35	650W@L35/L35	870W@L35/L35
Semi-embedded Dimensions mm	H795xW495xD175	H795xW495xD175	H795xW495xD175
IP Grade	IP55		
Refrigerant	R134A		
Net Weight	38kg	40kg	42kg
Surface Treatment	RAL7035		



Top Mounting

IP44 CE

Characteristic

- This product is widely used in indoor machine tools, electrical cabinets, industrial control cabinets and other occasions that require heat dissipation;
- Multiple automatic protections and comprehensive fault self diagnosis;
- Exquisite craftsmanship and high-quality international brand accessories ensure that products are more stable and reliable;
- R134a environmentally friendly refrigerant;
- Standard RS485 interface for telemetry, remote signaling, and remote adjustment;
- LED digital display, on-site parameters can be set;
- Heating function and dehumidification function are optional;
- Dry contact alarm output, normally open/normally closed optional;
- Built in condensate evaporator;

SPECIFICATION

Model	LK010ANT	LK015ANT
Power Supply	220VAC±15% 50Hz	
Cooling Capacity	1000W	1500W
Power Consumption	440W	700W
Top Mounting Dimensions mm	H450xW450xD350	H450xW450xD350
IP Grade	IP44	
Refrigerant	R134A	
Net Weight	30kg	32kg
Surface Treatment	RAL7035	



Semi-embedded Mounting

IP55 CE

Characteristic

- Efficient rotor DC variable frequency compressor and fan: reliable and energy-saving;
- Intelligent communication: RS485 communication port and dry contact alarm output port, convenient for remote monitoring;
- Digital tube display: on-site parameters can be set and display the operating status inside the cabinet;
- High protection level: perfect for outdoor use;
- Easy to maintain design: reduces maintenance difficulty;
- Wide operating temperature range: reliable operation under all environmental conditions;
- Heating function is optional;


SPECIFICATION

Model	LK006DS1	LK010DS1	LK015DS1	LK020DS1
Power Supply	48V DC (DC44-59V)			
Cooling Capacity	500W@L35/L35	1000W@L35/L35	1500W@L35/L35	2000W@L35/L35
Power Consumption	180W@L35/L35	295W@L35/L35	495W@L35/L35	710W@L35/L35
Semi-embedded Dimensions mm	H315xW546xD175	H446xW746xD200	H446xW746xD200	H446xW746xD200
IP Grade	IP55			
Refrigerant	R134A			
Net Weight	14kg	28kg	29kg	30kg
Surface Treatment	RAL7035			




Side Mounting

Cooling mode

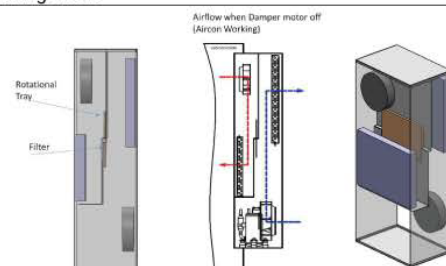

Fresh air mode

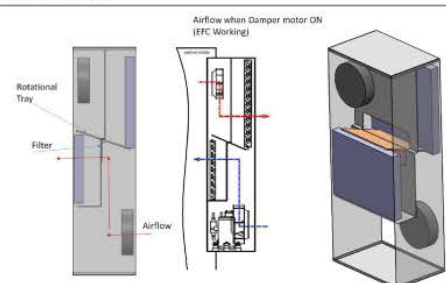

IP44 **CE**

Characteristic

- Multiple automatic protection and comprehensive fault self diagnosis function;
- Exquisite craftsmanship and high-quality international brand accessories ensure that products are more stable and reliable;
- Suitable for T3 high-temperature working conditions and R134a environmentally friendly refrigerant;
- Standard RS485 interface for telemetry, remote signaling, and remote adjustment;
- LED digital display, on-site parameters can be set;
- Built in fresh air system, capable of intelligently selecting modes based on ambient temperature, more energy-efficient;
- Dry contact alarm output, normally open/normally closed optional;

SPECIFICATION

Model	LK015DS2	LK020DS2
Power Supply	48VDC	
Cooling Capacity	1500W@L35/L35	2000W@L35/L35
Power Consumption	395W@L35/L35	405W@L35/L35
Side Mounting Dimensions mm	H1000xW412xD275	H1000xW412xD275
IP Grade	IP44	
Refrigerant	R134A	
Net Weight	45kg	46kg
Surface Treatment	RAL7035	

AIR-WATER HEAT EXCHANGER

Indoor general cabinet air conditioner(1000~4000W)

LK-ANU/AN series



Side Mounting




Operating principle

This series of water heat exchangers is widely used to cool the air inside various electrical cabinets, ensuring reliable operation of electrical components at safe temperatures and extending their service life.

Suitable for various control boxes, distribution cabinets, and other electrical devices with high temperature and humidity requirements in industries such as machinery, electricity, chemical engineering, instrumentation, and textiles.

SPECIFICATION

Model	LK010ANU	LK010AN	LK020ANU	LK020AN	LK030ANU	LK030AN	LK040ANU	LK040AN
Power Supply	110VAC±15% 50Hz/60Hz	1N~230VAC 50Hz/60Hz	110VAC±15% 50Hz/60Hz	1N~230VAC 50Hz/60Hz	110VAC±15% 50Hz/60Hz	1N~230VAC 50Hz/60Hz	110VAC±15% 50Hz/60Hz	1N~230VAC 50Hz/60Hz
Cooling Capacity	1000W	1000W	2000W	2000W	3000W	3000W	4000W	4000W
Power Consumption	79W	79W	122W	122W	122W	122W	172W	172W
Side Mounting Dimensions mm	H530x W300xD140	H530x W300xD140	H950x W400xD145	H950x W400xD145	H950x W400xD145	H950x W400xD145	H857x W455xD226	H857x W455xD226
Temperature range	18-50°C							
Water supply	≥7L/min	≥7L/min	≥7L/min	≥7L/min	≥13L/min	≥13L/min	≥15L/min	≥15L/min
Net Weight	8kg	8kg	17kg	17kg	18kg	18kg	20kg	20kg
Surface Treatment	RAL7035							

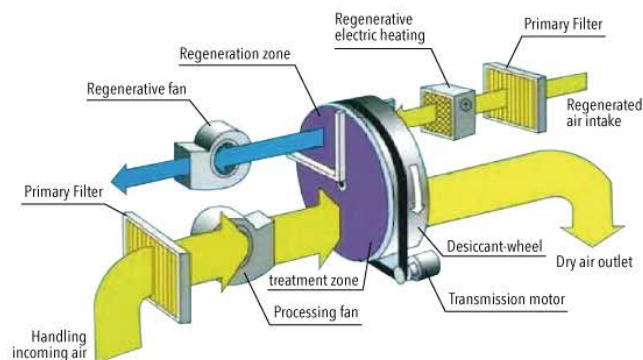

Operating principle

The rotary dehumidifier uses silica gel coated on the rotary wheel to physically adsorb moisture from the air onto the porous synthetic silica gel. Then, in the regeneration zone of the rotary wheel, the water vapor in the adsorbed silica gel pores is heated and vaporized, and sent to the inlet of the AC heat exchanger to form high-temperature and high humidity air. After passing through the heat exchanger that has been cooled by indoor cold and humid air, condensed water is discharged due to dew point differences.

SPECIFICATION

Model	LKH/001
Mounting type	Landing&Wall Mounted
Power Supply	220VAC 50Hz/60Hz
Dehumidification capacity	395W@L35/L35
Power Consumption	high-grade 3L/D (30°C 80 RH), Low end 1.5L/D (30°C 80 RH)
Work Temperature	-15°C~+55°C
Max Noise Level	41dB(A)
Net Weight	6kg
Dimensions	H410XW255XD150 (mm)
Communication method	Optional RS485 communication interface



Industrial air Conditioner Characteristic

- Complete internal and external isolation, dust prevention, oil mist prevention, moisture prevention, etc
- Compact structure, compatible with mainstream models in the industry -15~+55°C flexible setting
- Professional condensate treatment design, effectively solve the problem of condensate discharge
- Nano coating, strong corrosion resistance
- Optional smoke detector, access control and water immersion alarm
- Dust screen plug design, convenient and fast replacement
- 7X24X365 has been running continuously for more than 10 years
- LCD Chinese and English menu display,
- Support MODBUS communication, with call start function


IP54
CE

-15 ~ +55
°C


SPECIFICATION

Model	Unit	EIA05
Height/Width/Depth	mm	550x280x210
Quality	kg	<17
Installation method external		External hanging (side mounted)
Scope of working environment	°C	-15 ~ +55
Noise level	dB(A)	65
Protection level/cryogen		IP54
Cryogen		R134a
Cooling capacity @ I35/I35	W	500-550
Input power @ I35/I35	W	260-280
Input current @ I35/I35	A	1.3-1.35
Rated voltage, frequency	V, Hz	1~220, 50/60




DIMENSION (mm)

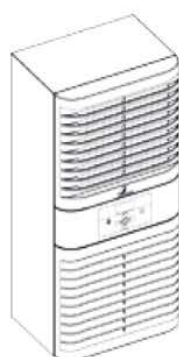

Side

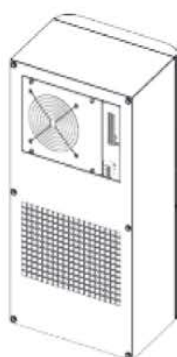

Side mounted opening

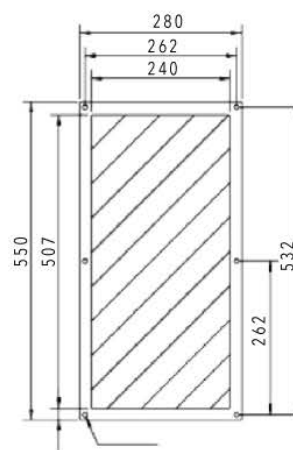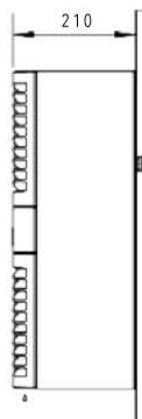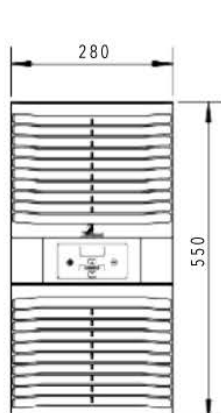



Industrial air Conditioner Characteristic

- Complete internal and external isolation, dust prevention, oil mist prevention, moisture prevention, etc
- Compact structure, compatible with mainstream models in the industry -15~+55°C flexible setting
- Professional condensate treatment design, effectively solve the problem of condensate discharge
- Nano coating, strong corrosion resistance
- Optional smoke detector, access control and water immersion alarm
- Dust screen plug design, convenient and fast replacement
- 7X24X365 has been running continuously for more than 10 years
- LCD Chinese and English menu display,
- Support MODBUS communication, with call start function

IP54


CE



SPECIFICATION

Model	Unit	EIA10	EIA15	EIA20
Height/Width/Depth	mm	950x400x280	950x400x280	950x400x280
Quality	kg	<41	<41	<41
Installation method external				
Scope of working environment	°C	-15 ~ +55	-15 ~ +55	-15 ~ +55
Noise level	dB(A)	65	65	65
Protection level/cryogen		IP54	IP54	IP54
Cryogen		R134a	R134a	R134a
Cooling capacity @ I35/I35	W	1100/1300	1500/1700	2000/2100
Input power @ I35/I35	W	540/680	750/900	1000/1200
Input current @ I35/I35	A	2.5/3.2	3.5/4.2	4.6/5.7
Rated voltage, frequency	V, Hz	1~ ,220,50/60	1~ ,220,50/60	1~ ,220,50/60

DIMENSION (mm)

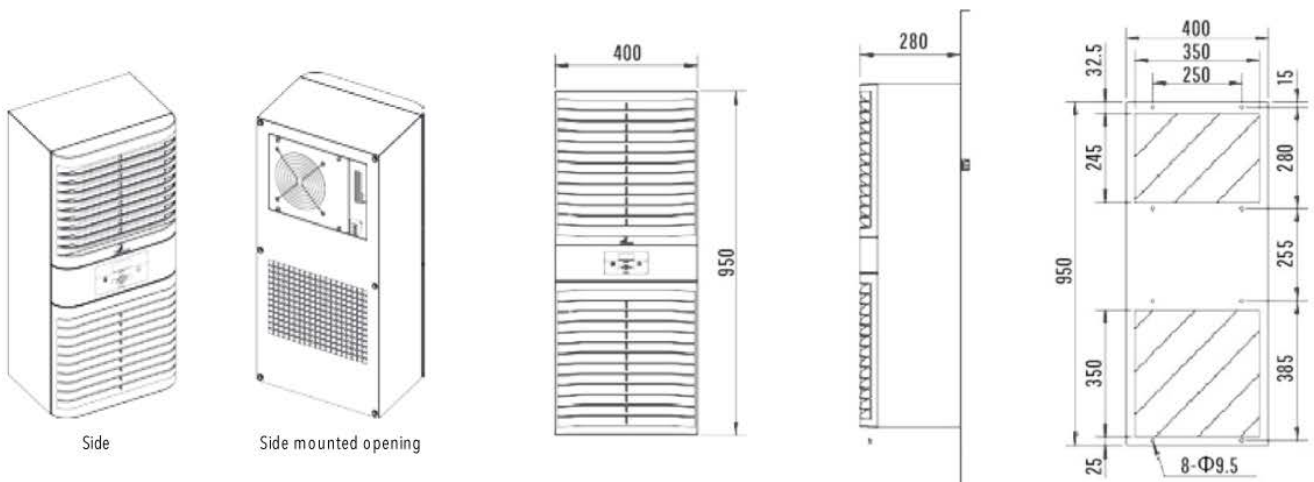



Industrial air Conditioner Characteristic

- Complete internal and external isolation, dust prevention, oil mist prevention, moisture prevention, etc
- Compact structure, compatible with mainstream models in the industry -15~+55°C flexible setting
- Professional condensate treatment design, effectively solve the problem of condensate discharge
- Nano coating, strong corrosion resistance
- Optional smoke detector, access control and water immersion alarm
- Dust screen plug design, convenient and fast replacement
- 7X24X365 has been running continuously for more than 10 years
- LCD Chinese and English menu display,
- Support MODBUS communication, with call start function


IP54
CE


-15 ~ +55
°C

SPECIFICATION

Model	Unit	EIA40
Height/Width/Depth	mm	1580x500x340
quality	kg	89
Installation method	External	Side/door mounted
Scope of working environment	°C	-15~+55
Noise level	dB(A)	65
Protection level		IP54
Refrigerant		R134a
Cooling capacity @ L35/L35	W	4000/4500
Input power @ L35/L35	W	1900/2600
Input current @ L35/L35	A	3.1/4.2
Rated voltage, frequency	V, Hz	3~380, 50/60
Air switch	P, A	3, 10

DIMENSION (mm)

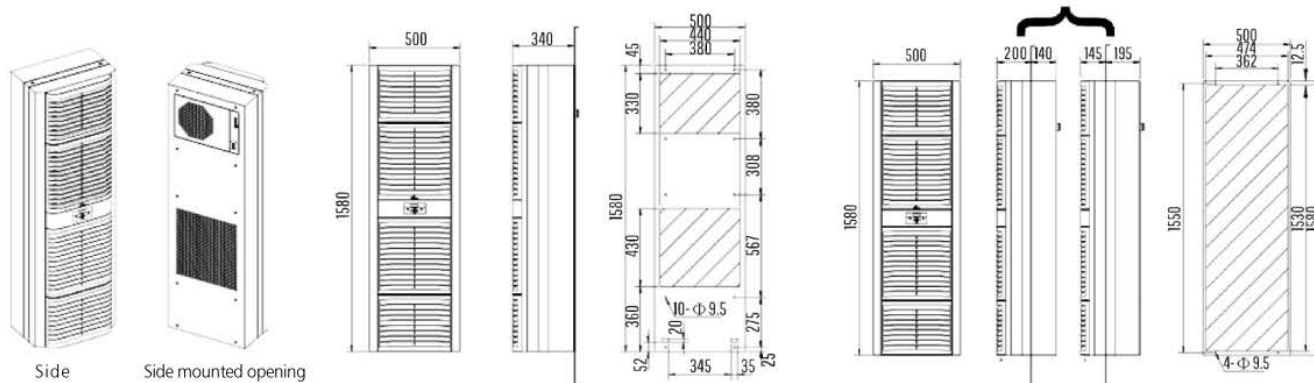



COOLING FAN





LKA08025 80x80x25mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A

Material: Fan blade: PBT, 7 impeller
Bearing: Ball
Motor life: 50000 hours


DIMENSION (mm)



IP42



Air Performance

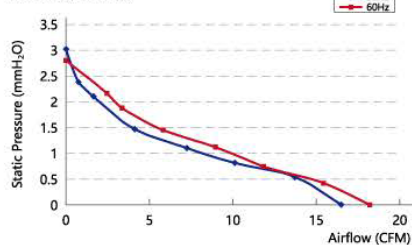

Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m³/h)	CFM	(dB)
LKA08025-115	100/125	50/60	0.12/0.11	12/11	2500/2800	28/30.9	16.5/18.2	26/28
LKA08025-230	200/240	50/60	0.07/0.06	12/11	2500/2800	28/30.9	16.5/18.2	26/28




LKA08038 80x80x38mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A

Material: Fan blade: PBT, 7 impeller
Bearing: Ball
Motor life: 50000 hours


DIMENSION (mm)



IP42



Air Performance

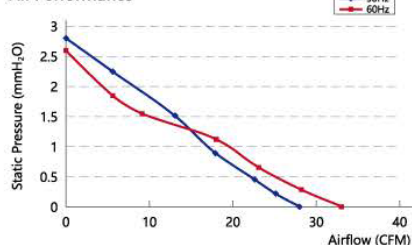

Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m³/h)	CFM	(dB)
LKA08038-115	100/125	50/60	0.16/0.14	13/12	2300/2500	47.6/56.1	28/33	28/33
LKA08038-230	200/240	50/60	0.10/0.08	13/12	2300/2500	47.6/56.1	28/33	28/33

92x92x25mm LKA09225
Motor structure: Shaded pole motor


Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A


Material: Fan blade: PBT, 5 impeller

Bearing: Ball

Motor life: 50000 hours

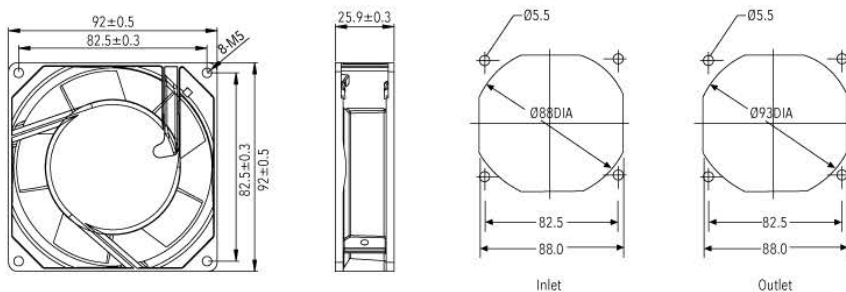DIMENSION (mm)


Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m³/h)	CFM	(dB)
LKA09225.115	100/125	50/60	0.12/0.11	12/11	2350/2700	44.2/52.7	26/31	34/36
LKA09225.230	200/240	50/60	0.07/0.06	12/11	2350/2700	44.2/52.7	26/31	34/36

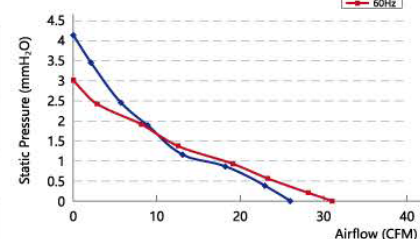
IP42
cULus
CE
CCC
-30 +65
Air Performance

110x110x25mm LKA11025
Motor structure: Shaded pole motor


Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A


Material: Fan blade: PBT, 5 impeller

Bearing: Ball

Motor life: 50000 hours

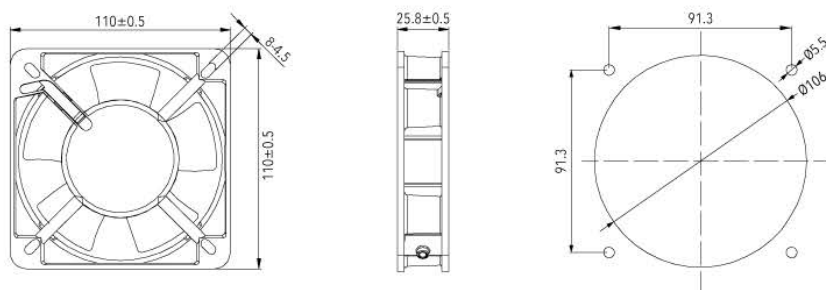DIMENSION (mm)


Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m³/h)	CFM	(dB)
LKA11025.115	100/125	50/60	0.12/0.11	12/11	2000/2200	69.7/76.5	41/45	36/38
LKA11025.230	200/240	50/60	0.07/0.06	12/11	2000/2200	69.7/76.5	41/45	36/38

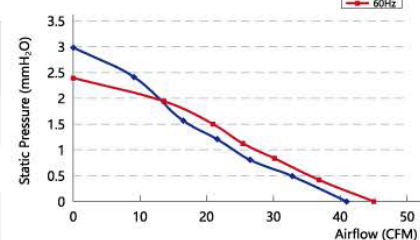
IP42
cULus
CE
CCC
-30 +65
Air Performance


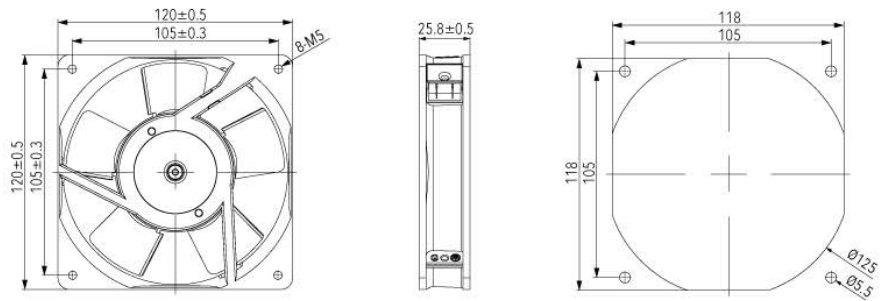
LKA12025 120x120x25mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A


Material: Fan blade: PBT, 5 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)



IP42    -30 +65

Air Performance

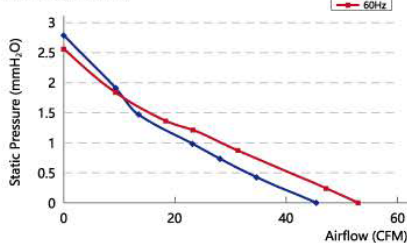

Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m ³ /h)	CFM	(dB)
LKA12025.115	100/125	50/60	0.12/0.11	12/11	1800/2000	76.5/89.7	45/52.8	39/41
LKA12025.230	200/240	50/60	0.07/0.06	12/11	1800/2000	76.5/89.7	45/52.8	39/41


LKA12038 (5 Impeller) 120x120x38mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A


Material: Fan blade: PBT, 5 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)

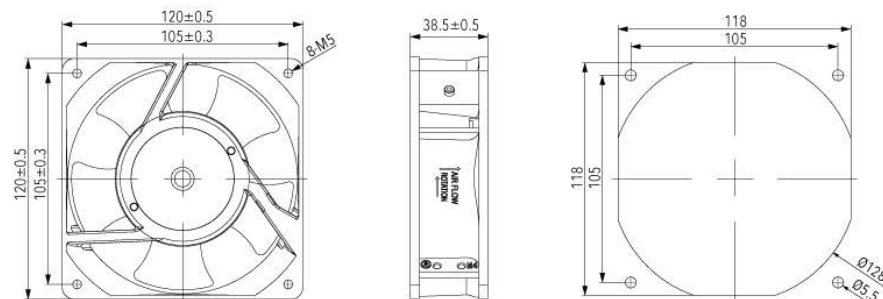

IP42    -30 +65

Air Performance

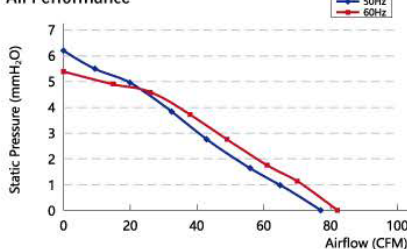

Model	Impeller	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
		(V)	(Hz)	(A)	(W)	(RPM)	(m ³ /h)	CFM	(dB)
LKA12038.115	5	100/125	50/60	0.24/0.22	19/18	2600/2900	130.9/139.4	77/82	42/44
LKA12038.230	5	200/240	50/60	0.12/0.11	19/18	2600/2900	130.9/139.4	77/82	42/44

120x120x38mm (7 Impeller) LKA12038
Motor structure: Shaded pole motor




Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A


Material: Fan blade: PBT, 7 impeller

Bearing: Ball

Motor life: 50000 hours

DIMENSION (mm)

IP42
CE

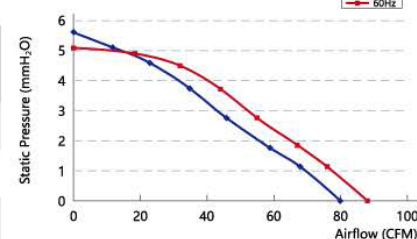-30 ~ +65
°C

Air Performance


Model	Impeller	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m ³ /h)	Max. Air Flow CFM	Noise (dB)
LKA12038.115	7	100/125	50/60	0.24/0.22	19/18	2500/2700	136/149.6	80/88	44/46
LKA12038.230	7	200/240	50/60	0.12/0.11	19/18	2500/2700	136/149.6	80/88	44/46

135x135x38mm LKA13538
Motor structure: Shaded pole motor



Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A


Material: Fan blade: PBT, 5 impeller

Bearing: Ball

Motor life: 50000 hours

DIMENSION (mm)

IP42
CE

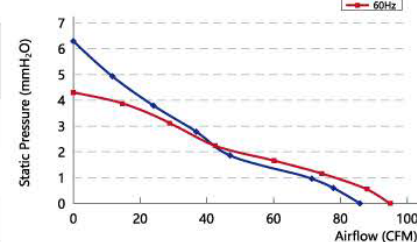-30 ~ +65
°C

Air Performance


Model	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m ³ /h)	Max. Air Flow CFM	Noise (dB)
LKA13538.115	100/125	50/60	0.24/0.22	20/18	2600/2800	146.2/161.5	86/95	45/47
LKA13538.230	200/240	50/60	0.12/0.11	20/18	2600/2800	146.2/161.5	86/95	45/47


LKA15050 (5 Impeller) 150x150x51mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A


Material: Fan blade: PBT, 5 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)

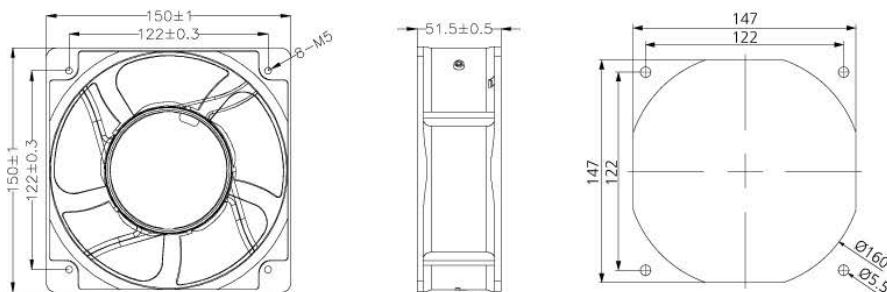

IP42 CULUS CE CCC -30 +65

Air Performance

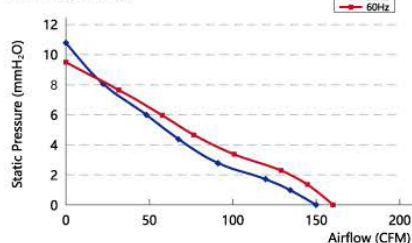

Model	Impeller	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m ³ /h)	Max. Air Flow CFM	Noise (dB)
LKA15050.115	5	100/125	50/60	0.45/0.42	30/28	2700/3000	255/272	150/160	53/59
LKA15050.230	5	200/240	50/60	0.24/0.22	30/28	2700/3000	255/272	150/160	53/59


LKA15050 (7 Impeller) 150x150x51mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A


Material: Fan blade: PBT, 7 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)

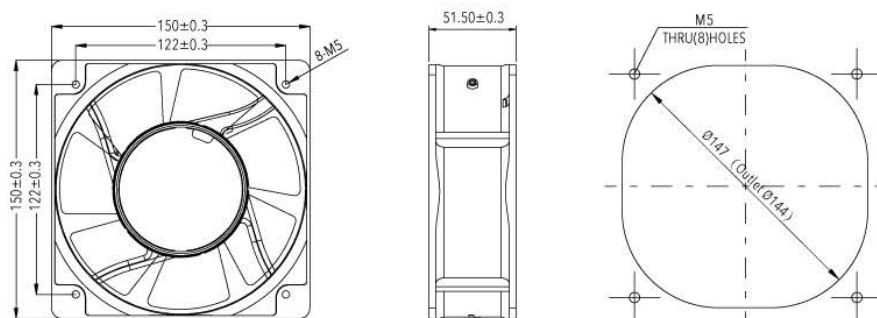

IP42 CE CCC -30 +65

Air Performance

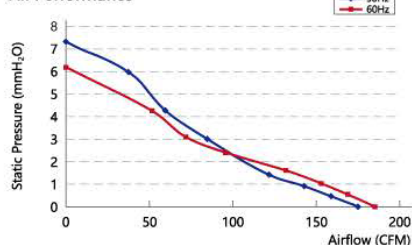

Model	Impeller	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m ³ /h)	Max. Air Flow CFM	Noise (dB)
LKA15050.115	7	100/125	50/60	0.45/0.42	32/30	2500/2600	297.5/314.5	175/185	54/58
LKA15050.230	7	200/240	50/60	0.24/0.22	32/30	2500/2600	297.5/314.5	175/185	54/58

172x150x51mm (5 Impeller) LKA17251
Motor structure: Shaded pole motor



Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A

Material: Fan blade: PBT, 5 impeller

Bearing: Ball

Motor life: 50000 hours

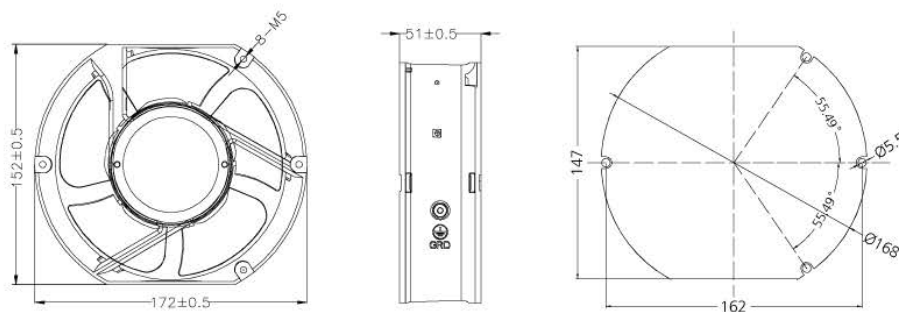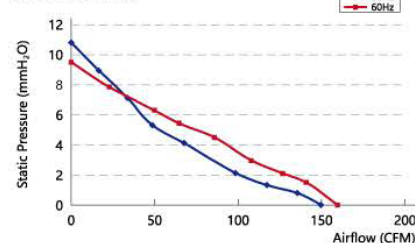DIMENSION (mm)

IP42
UL
CE
CCC
-30 ~ +65
Air Performance


Model	Impeller	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Max. Air Flow CFM	Noise (dB)
LKA17251.115	5	100/125	50/60	0.45/0.42	30/28	2700/3000	255/272	150/160	53/59
LKA17251.230	5	200/240	50/60	0.24/0.22	30/28	2700/3000	255/272	150/160	53/59

172x150x51mm (7 Impeller) LKA17251
Motor structure: Shaded pole motor



Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A

Material: Fan blade: PBT, 7 impeller

Bearing: Ball

Motor life: 50000 hours

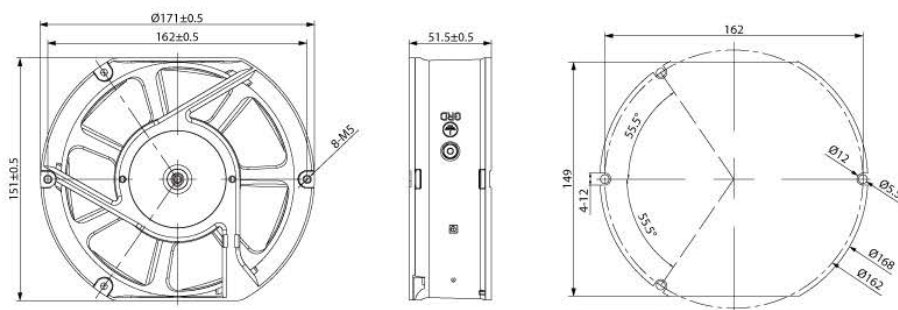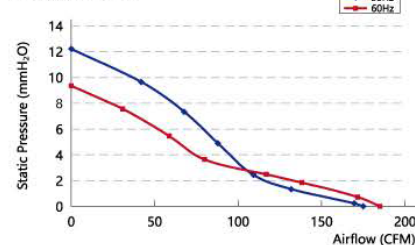
DIMENSION (mm)

IP42
CE
-10 ~ +65
Air Performance


Model	Impeller	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Max. Air Flow CFM	Noise (dB)
LKA17251.115	7	100/125	50/60	0.45/0.42	32/30	2500/2600	297.5/314.5	175/185	54/58
LKA17251.230	7	200/240	50/60	0.24/0.22	32/30	2500/2600	297.5/314.5	175/185	54/58


LKA17255 172x162x55mm


Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A

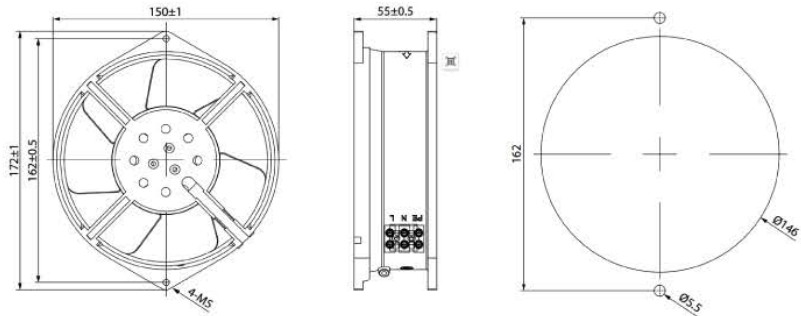Material: Fan blade: Cold rolled plate, 7 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)


IP42    -30 +80 °C

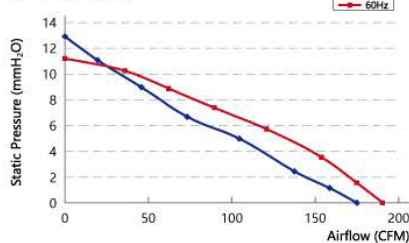
Air Performance


Model	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Max. Air Flow CFM	Noise (dB)
LKA17255.115	100/125	50/60	0.55/0.58	37/35	2800/3100	297.5/323	175/190	48/52
LKA17255.230	200/240	50/60	0.22/0.20	37/35	2800/3100	297.5/323	175/190	48/52


LKA18060 180x180x60mm


Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A

Material: Fan blade: PBT, 5 impeller
Bearing: Ball
Motor life: 50000 hours

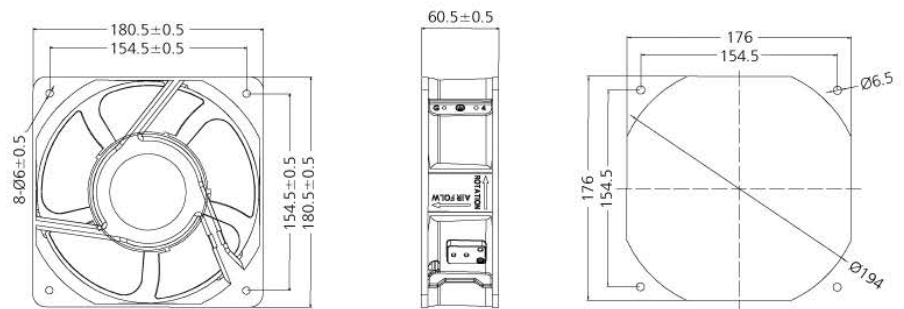DIMENSION (mm)


IP42    -30 +65 °C

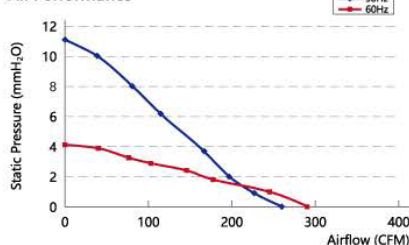Air Performance


Model	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Max. Air Flow CFM	Noise (dB)
LKA18060.115	100/125	50/60	0.54/0.52	42/40	2700/3000	442/439	260/290	61/64
LKA18060.230	200/240	50/60	0.35/0.32	42/40	2700/3000	442/439	260/290	61/64

202x202x60mm LKA20060
Motor structure: Shaded pole motor



Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A

Material: Fan blade: PBT, 5 impeller

Bearing: Ball

Motor life: 50000 hours

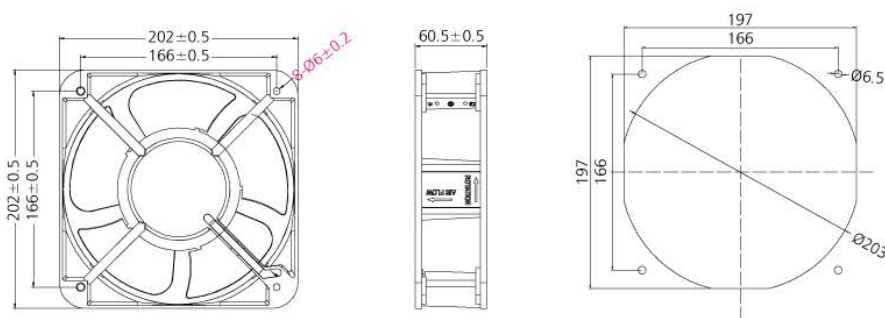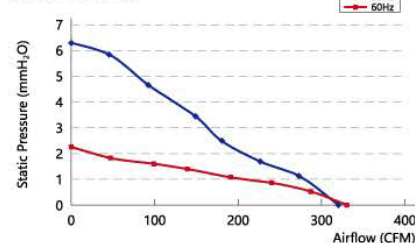DIMENSION (mm)

IP42
UL
CE
CCC
-30 ~ +65
Air Performance


Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m ³ /h)	CFM	(dB)
LKA20060.115	100/125	50/60	0.60/0.58	45/42	2600/2700	544/561	320/330	63/65
LKA20060.230	200/240	50/60	0.35/0.32	45/42	2600/2700	544/561	320/330	63/65

205x205x72mm LKA20572
Motor structure: Shaded pole motor



Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A

Material: Fan blade: PBT, 7 impeller

Bearing: Ball

Motor life: 50000 hours

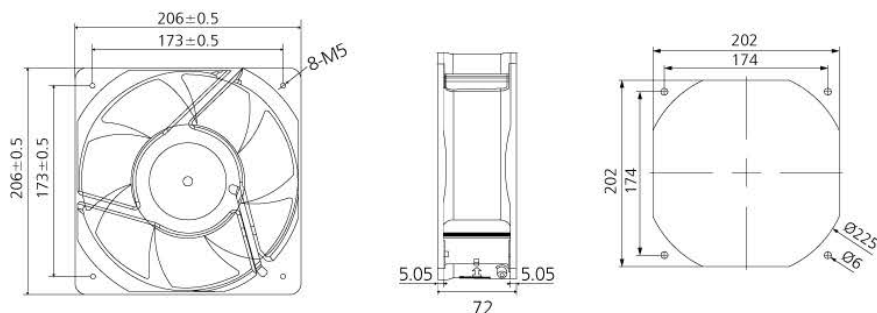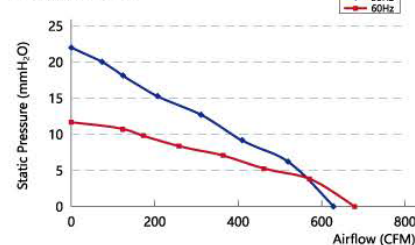DIMENSION (mm)

IP42
CE
CCC
-30 ~ +80
Air Performance


Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m ³ /h)	CFM	(dB)
LKA20572.115	100/125	50/60	0.60/0.70	60/80	2800/3200	1071/1156	630/680	67/69
LKA20572.230	200/240	50/60	0.30/0.40	60/80	2800/3200	1071/1156	630/680	67/69


LKA22060 220x60mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A


Material: Fan blade: PBT, 5 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)

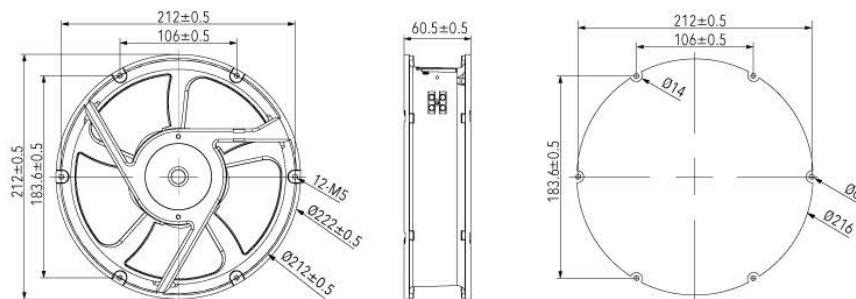

IP42 CULUS CE CCC -30 +65

Air Performance

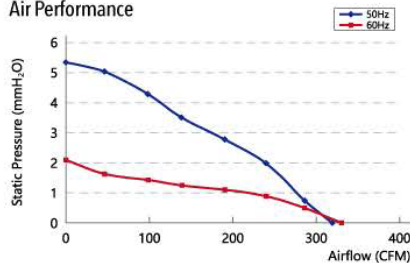

Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m³/h)	CFM	(dB)
LKA22060.115	100/125	50/60	0.60/0.58	45/42	2600/2700	544/561	320/330	63/65
LKA22060.230	200/240	50/60	0.35/0.32	45/42	2600/2700	544/561	320/330	63/65


LKA22580 225x225x80mm



Motor structure: Shaded pole motor
Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz
Insulation level: Class A


Material: Fan blade: Cold rolled plate, 9 impeller
Bearing: Ball
Motor life: 50000 hours

DIMENSION (mm)

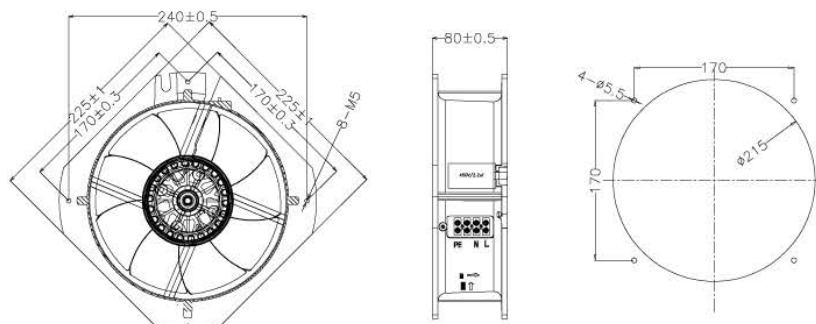

IP42 CULUS CE CCC -30 +65

Air Performance

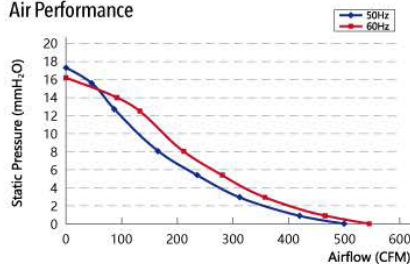

Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m³/h)	CFM	(dB)
LKA22580.115	100/125	50/60	0.55/0.65	55/65	2600/2800	850/926.5	500/545	59/61
LKA22580.230	200/240	50/60	0.30/0.35	55/65	2600/2800	850/926.5	500/545	59/61

254x89mm LKA25489
Motor structure: Cage motor


Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A


Material: Fan blade: PBT, 3 impeller

Bearing: Ball

Motor life: 50000 hours

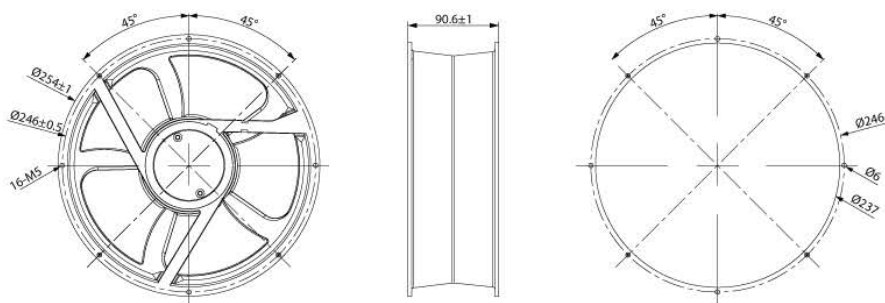DIMENSION (mm)

IP42
CE

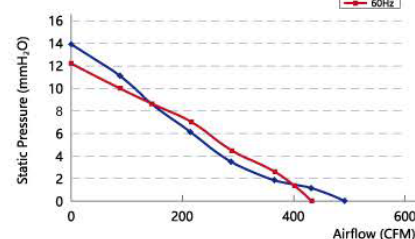-30 +80
°C

Air Performance


Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m ³ /h)	CFM	(dB)
LKA25489.115	100/125	50/60	0.60/0.70	50/70	2550/2450	836.4/736.1	492/433	170
LKA25489.230	200/240	50/60	0.25/0.30	50/70	2550/2450	836.4/736.1	492/433	170

280x280x80mm LKA28080
Motor structure: Cage motor


Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A


Material: Fan blade: Cold rolled plate, 7 impeller

Bearing: Ball

Motor life: 50000 hours

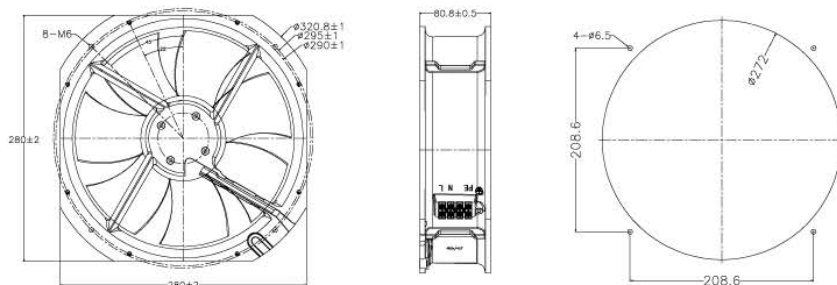DIMENSION (mm)

IP42
cULus
CE

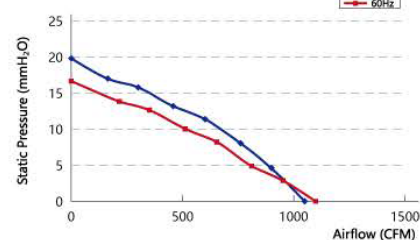-30 +65
°C

Air Performance


Model	Voltage	Freq	Current	Power	Speed	Air Volume	Max. Air Flow	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(m ³ /h)	CFM	(dB)
LKA28080.115	100/125	50/60	1.00/1.10	110/150	2550/2700	1785/1870	1015/1050	69/71
LKA28080.230	200/240	50/60	0.55/0.65	110/150	2550/2700	1785/1870	1015/1050	69/71

LKA17238-M 172X150X38mm



UP TO
IP42

CE



-30 +80
°C

Air Performance

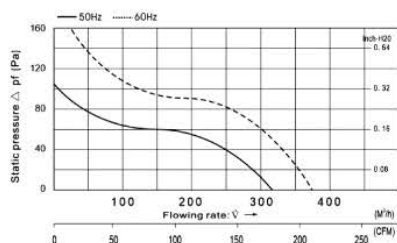

Motor structure: Motor with external rotor inducted by a running capacitor

Dielectric strength: Ac 1500v, at 0.5mA, 50/60Hz


Insulation level: Class F

Material: Cold rolled plate, 7 impeller

Bearing: Ball

Motor life: 50000 hours

DIMENSION (mm)

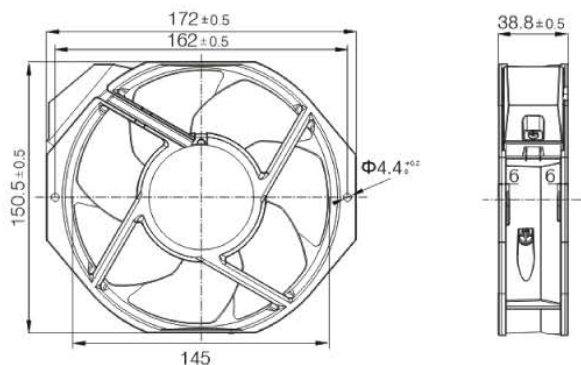

Model	Rated Voltage	Freq	Rated Current	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
LKA17238-M	230	50/60	0.13/0.125	30/29	2800/3300	184/225	314/382	51/55

LKA17252-M 172x172x52mm



UP TO
IP42

CE



-30 +80
°C

Air Performance

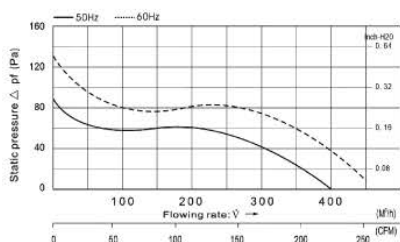

Motor structure: Motor with external rotor inducted by a running capacitor

Dielectric strength: Ac 1500v, at 0.5mA, 50/60Hz


Insulation level: Class F

Material: Cold rolled plate, 7 impeller

Bearing: Ball

Motor life: 50000 hours

DIMENSION (mm)

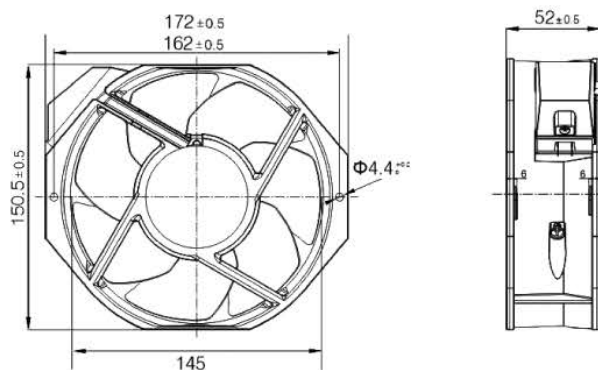

Model	Rated Voltage	Freq	Rated Current	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
LKA17252-M	230	50/60	0.17/0.17	40/39	2700/3200	233/281	398/478	53/57

220x220x60mm LKA22060-M

Motor structure: Motor with external rotor inducted by a running capacitor

Dielectric strength: Ac 1500v, at 0.5mA, 50/60Hz

Insulation level: Class F

Material: Cold rolled plate, 7 impeller

Bearing: Ball

Motor life: 50000 hours





UP TO
IP42

CE

CCC

-30 +80
°C

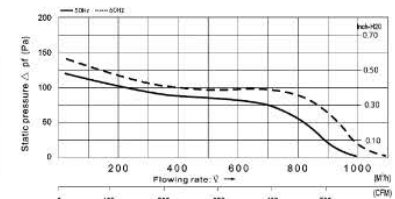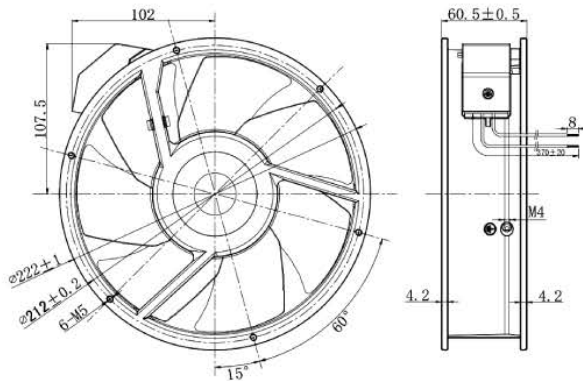Air Performance

DIMENSION (mm)


Model	Rated Voltage	Freq	Rated Current	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
LKA22060-M	230	50/60	0.28/0.33	61/77	2550/2780	585/649	990/1100	62/66

254x254x90mm LKA25490-M

Motor structure: Motor with external rotor inducted by a running capacitor

Dielectric strength: Ac 1500v, at 0.5mA, 50/60Hz

Insulation level: Class F

Material: Cold rolled plate, 7 impeller

Bearing: Ball

Motor life: 50000 hours





UP TO
IP42

CE

CCC

-30 +80
°C

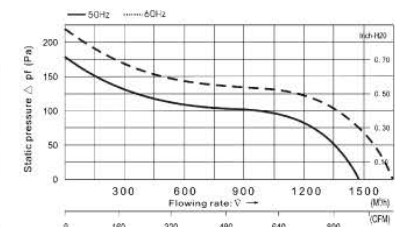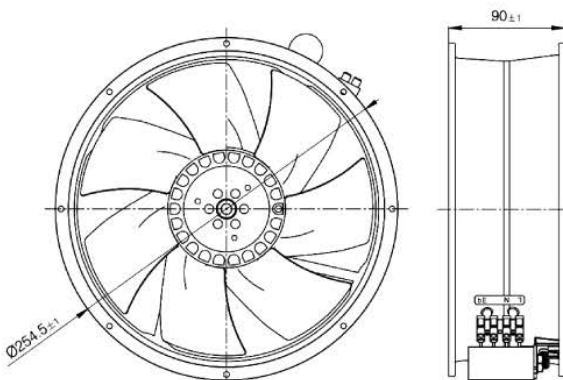Air Performance

DIMENSION (mm)


Model	Rated Voltage	Freq	Rated Current	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
LKA25490-M	230	50/60	0.45/0.46	86/104	2660/3000	860/1003	1460/1700	66/70

60x60x25mm LKE6025
Bearings: Ball bearings


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)


Working temperature: -10~70°C

Weight: 85g

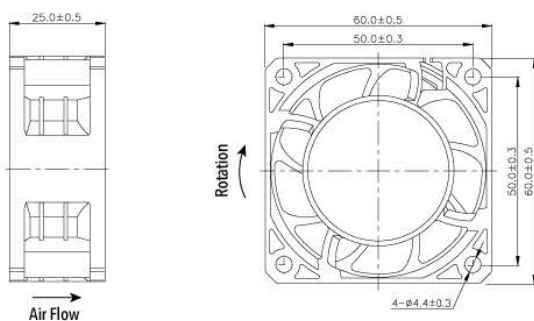DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE6025HB	110/240	0.09/0.06			6	8000	14.4	28.7	45
LKE6025MB	110/240	0.05/0.03	50/60	90-265	4	6000	7.9	20.6	32
LKE6025LB	110/240	0.03/0.02			2	4000	3.7	14.1	22


UP TO
IP42
UK
CA
CE
RoHS
COMPLIANT

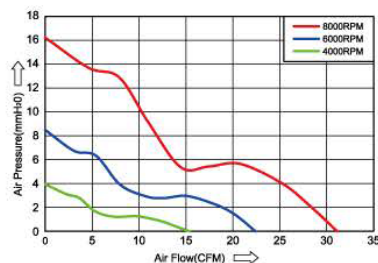-10 ~70
°C

70x70x25mm LKE7025
Bearings: Ball bearings


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)


Working temperature: -10~70°C

Weight: 70g

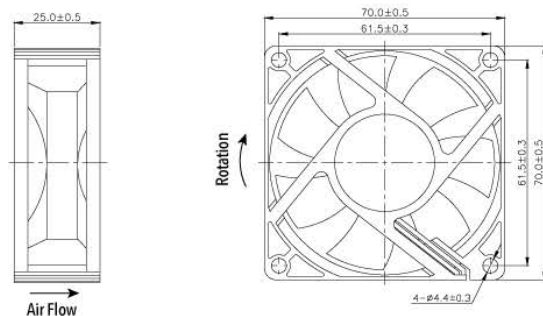DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE7025HX	110/240	0.10/0.05			4	3500	4.0	29.9	27
LKE7025MX	110/240	0.08/0.04	50/60	90-265	3	3000	2.6	24.5	21
LKE7025LX	110/240	0.06/0.03			2	2500	1.8	21.6	17


UP TO
IP42
UK
CA
CE
RoHS
COMPLIANT

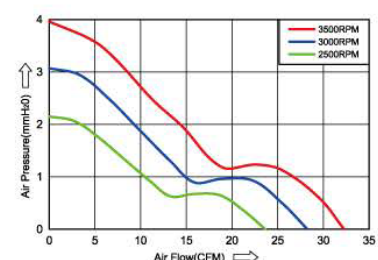-10 ~70
°C


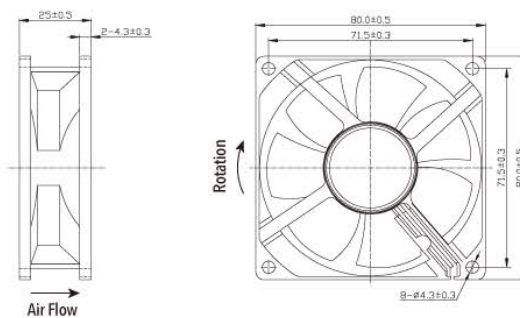
LKE8025 80x80x25mm




Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 76g

DIMENSION (mm)



UP TO IP42 UK CA CE RoHS COMPLIANT -10 ~70 °C

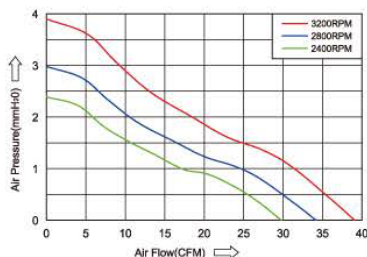

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE8025HB	110/240	0.10/0.05	50/60	90-265	5	3200	3.8	35.2	32
LKE8025MX	110/240	0.08/0.04			4	2800	2.9	31.2	25
LKE8025LX	110/240	0.06/0.03			3	2400	2.2	26.3	20


LKE8038 80x80x38mm




Bearings: Ball bearings
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 140g

DIMENSION (mm)

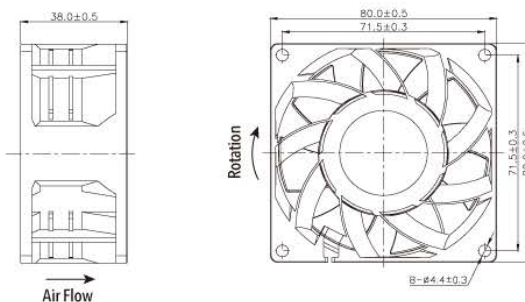

UP TO IP42 UK CA CE RoHS COMPLIANT -10 ~70 °C

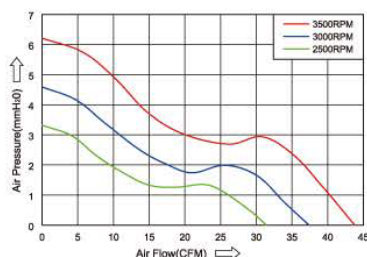

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE8038HB	110/240	0.12/0.06	50/60	98-265	6	3500	7.1	44.2	39
LKE8038MB	110/240	0.08/0.04			4	3000	4.8	36.3	33
LKE8038LB	110/240	0.06/0.03			3	2500	3.2	29.7	29

92x92x25mm LKE9225
Bearings: Sleeve or ball bearing


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C

Weight: 85g

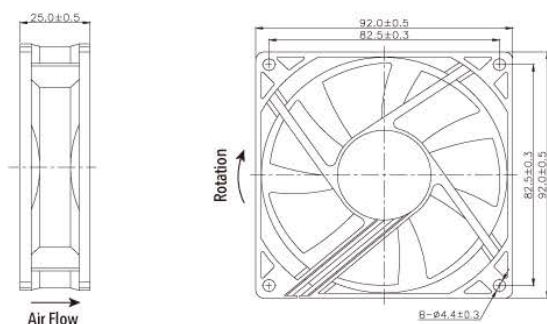
DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE9225HB	110/240	0.12/0.06	50/60	98-265	6	2800	2.7	42.1	27
LKE9225MX	110/240	0.10/0.05			5	2500	2.2	37.2	24
LKE9225LX	110/240	0.06/0.03			3	2000	1.5	30.1	19


UP TO
IP42

UK
CA
CE

RoHS
COMPLIANT

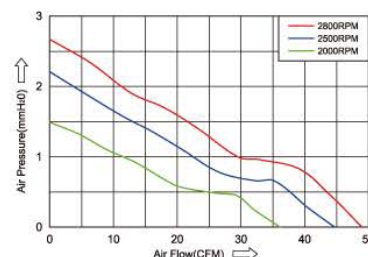-10 ~ +70
°C

92x92x38mm LKE9238
Bearings: Ball bearings


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C

Weight: 175g

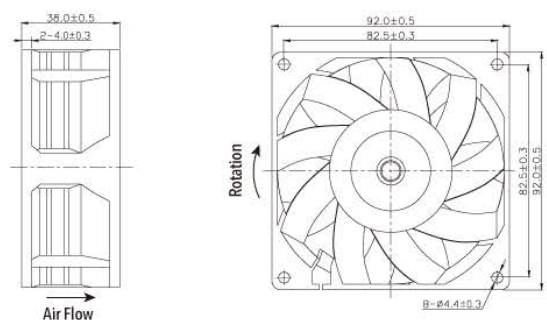
DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE9238HX	110/240	0.14/0.07	50/60	90-265	7	3500	8.8	71.0	38
LKE9238MX	110/240	0.10/0.05			5	3000	6.5	60.5	34
LKE9238LX	110/240	0.06/0.03			4	2500	4.5	50.1	31


UP TO
IP42

UK
CA
CE

RoHS
COMPLIANT

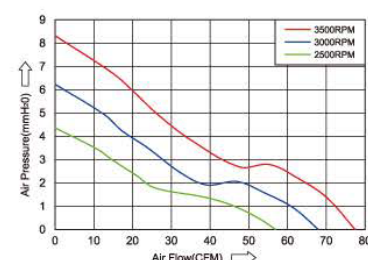-10 ~ +70
°C


LKE12025 120x120x25mm

Bearings: Sleeve or ball bearing



Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C

Weight: 140g

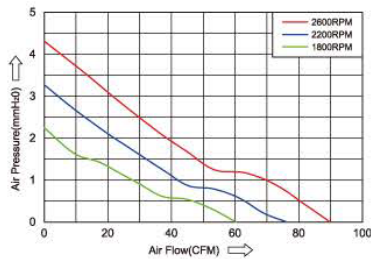DIMENSION (mm)

UP TO **IP42** **UK** **CE** **RoHS** **COMPLIANT** **-10 ~ 70**


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE12025HB	110/240	0.16/0.08	50/60	90-265	7	2600	4.5	79.6	33
LKE12025MX	110/240	0.12/0.06			4	2200	3.4	68.0	28
LKE12025LX	110/240	0.10/0.05			3	1800	2.5	55.6	23

LKE12038-7 120x120x38mm

Bearings: Ball bearings




Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C

Weight: 260g

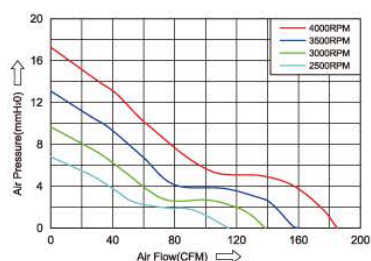DIMENSION (mm)

UP TO **IP42** **UK** **CE** **RoHS** **COMPLIANT** **-10 ~ 70**


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE12038DB-7	110/240	0.26/0.13	50/60	90-265	18	4000	18.1	170.6	49
LKE12038HX-7	110/240	0.20/0.10			12	3500	13.9	149.7	46
LKE12038MX-7	110/240	0.16/0.08			8	3000	10.3	128.3	42
LKE12038LX-7	110/240	0.12/0.08			6	2500	7.3	110.7	38

120x120x38mm LKE12038-5
Bearings: Sleeve or ball bearing


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)


Working temperature: -10~70°C

Weight: 360g

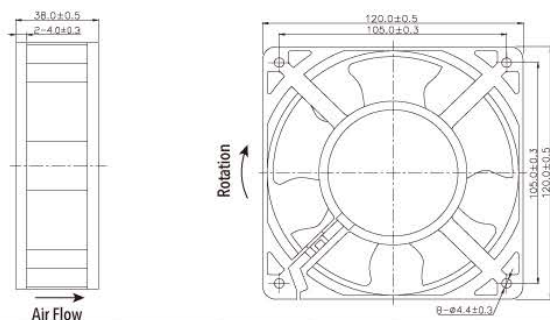DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE12038DB-5	110/240	0.26/0.13	50/60	90-265	18	4000	13.0	125.0	47
LKE12038HX-5	110/240	0.20/0.10			12	3500	10.3	111.0	43
LKE12038MX-5	110/240	0.16/0.08			8	3000	7.8	95.8	38
LKE12038LX-5	110/240	0.12/0.06			6	2500	5.6	79.3	33


UP TO
IP42
UK
CA
CE
RoHS
COMPLIANT

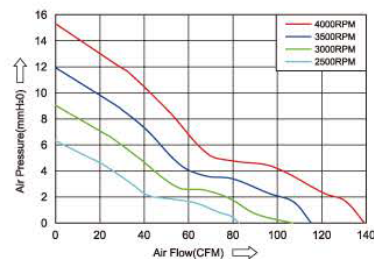-10 ~ +70
°C

150x150x51mm LKE15051
Bearings: Sleeve or ball bearing


Lead Wire: UL Type

Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)


Working temperature: -10~70°C

Weight: 750g

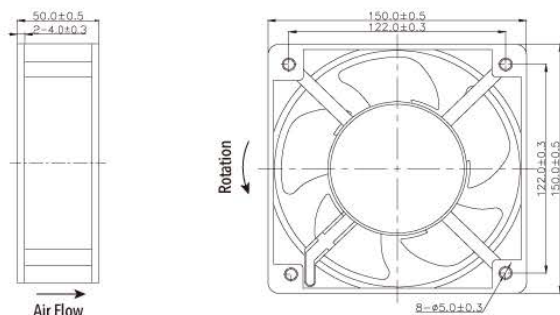DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE15051HX	110/240	0.70/0.35	50/60	90-265	35	3500	20.0	258.1	52
LKE15051MX	110/240	0.50/0.25			22	3000	15.0	219.7	47
LKE15051LX	110/240	0.36/0.18			16	2500	10.6	182.2	42


UP TO
IP42
UK
CA
CE
RoHS
COMPLIANT

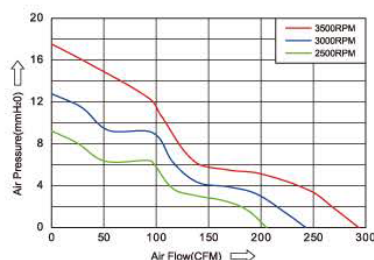-10 ~ +70
°C


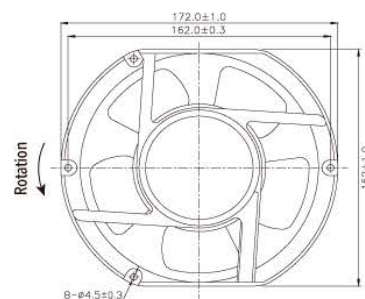
LKE17251-A 172x150x51mm




Bearings: Sleeve or ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 740g

DIMENSION (mm)



UP TO **IP42** **UK CA** **CE** **RoHS COMPLIANT** **-10 +70**

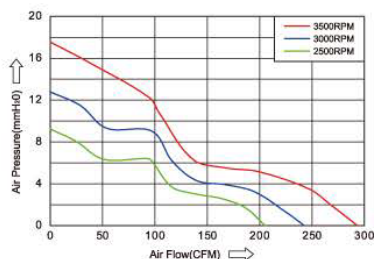

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE17251HX-A	110/240	0.70/0.35	50/60	90-265	35	3500	18.7	253.9	52
LKE17251MX-A	110/240	0.50/0.25			22	3000	13.5	211.8	46
LKE17251LX-A	110/240	0.36/0.18			16	2500	9.5	177.4	42



LKE 17251-B 172x51mm




Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 760g

DIMENSION (mm)



UP TO **IP42** **UK CA** **CE** **RoHS COMPLIANT** **-10 +70**

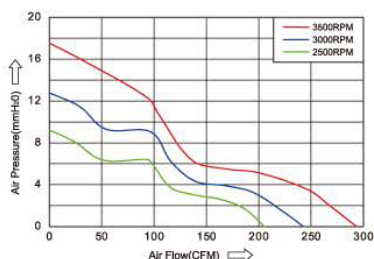

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE17251HB-B	110/240	0.70/0.35	50/60	90-265	35	3500	20.2	254.8	48
LKE17251MB-B	110/240	0.50/0.25			22	3000	14.9	219.7	44
LKE17251LB-B	110/240	0.36/0.18			15	2500	10.5	179.6	38

200x200x60mm LKE 20060
Bearings: Ball bearing


Lead Wire: UL Type

Insulation level: Class B


Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C

Weight: 1300g

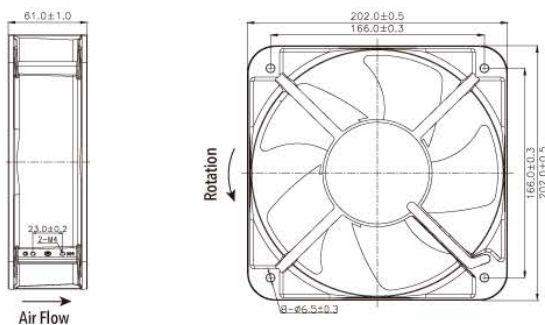DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE20060MB	110/240	0.80/0.40	50/60	90-265	45	2500	15.2	493.3	50
LKE20060LB	110/240	0.40/0.20			25	2000	10.0	392.8	44

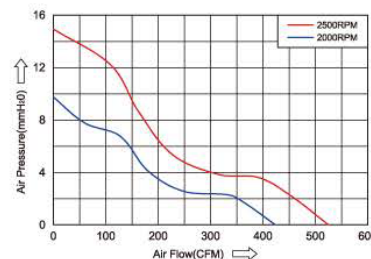UP TO **IP42** **UK CA** **CE** **RoHS COMPLIANT** -10 ~70 °C

205x205x72mm LKE20572
Bearings: gs: Ball bearing


Lead Wire: UL Type

Insulation level: Class B


Material: Impeller & Frame: Plastic (UL94-V0)

Working temperature: -10~70°C

Weight: 1880g

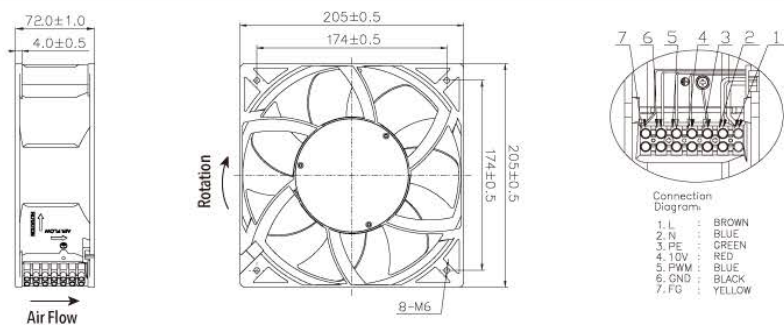DIMENSION (mm)


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE20572HB	110/240	2.02/1.10	50/60	90-265	145	3600	42.8	851.7	64
LKE20572MB	110/240	1.60/0.80			95	3000	31.7	728.4	59
LKE20572LB	110/240	1.0/0.50			60	2500	21.9	602.7	56

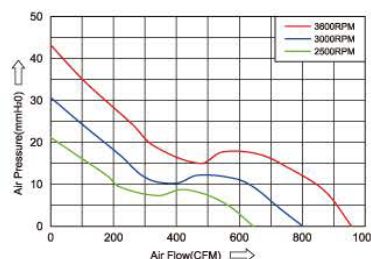UP TO **IP42** **UK CA** **CE** **RoHS COMPLIANT** -10 ~70 °C


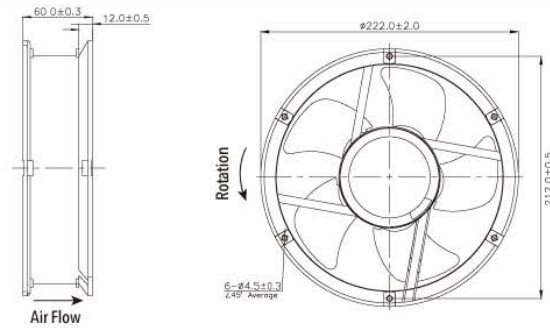
LKE22060 220x60mm




Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 1350g

DIMENSION (mm)



UP TO **IP42** **UK** **CE** **RoHS** **COMPLIANT** **-10 +70**

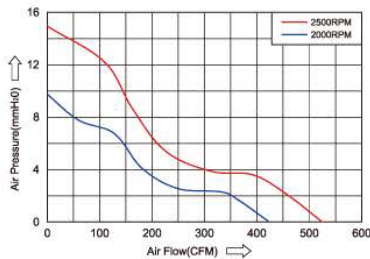

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE22060MB	110/240	0.80/0.40	50/60	90-265	45	2500	14.0	490.8	50
LKE22060LB	110/240	0.40/0.20			25	2000	9.9	396.6	44


LKE 22580 225x225x80mm




Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 2000g

DIMENSION (mm)

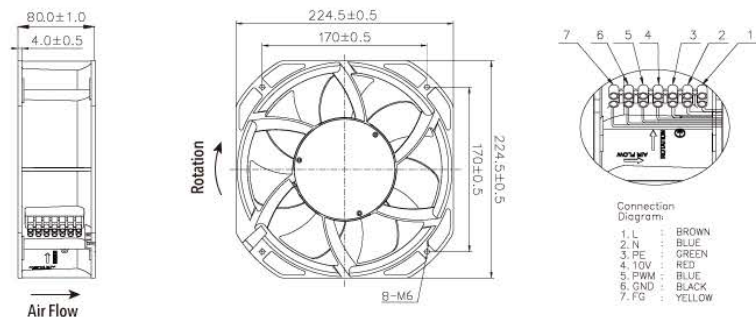

UP TO **IP42** **UK** **CE** **RoHS** **COMPLIANT** **-10 +70**

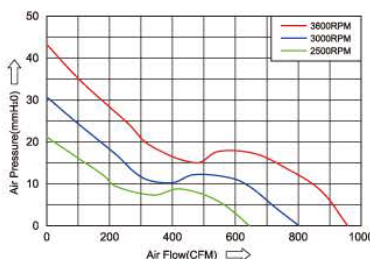


Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE22580HB	110/240	2.02/1.10	50/60	90-265	145	3600	43.6	869.5	63
LKE22580MB	110/240	1.60/0.80			95	3000	32.2	730.8	58
LKE22580LB	110/240	1.0/0.50			60	2500	22.3	619.2	54

254x89mm LKE 25489

Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 2100g

DIMENSION (mm)

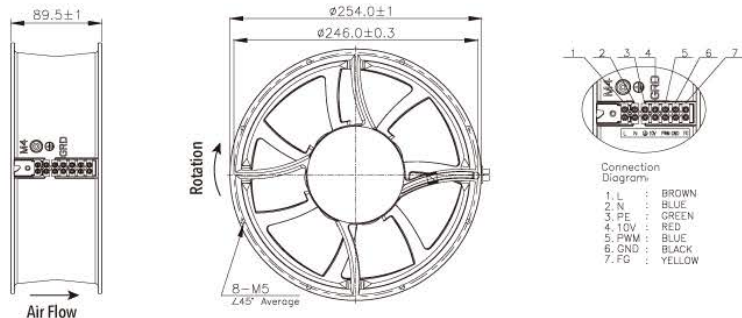

UP TO
IP42

UK
CA


CE

RoHS
COMPLIANT

-10 ~ +70
°C



Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE25489HB	110/120	2.0/1.10			145	3200	27.1	981.6	60
LKE25489MB	110/120	1.80/0.90	50/60	90-135	115	2500	24.8	796.7	55
LKE25489LB	110/120	1.60/0.80			110	2000	15.8	628.3	48
LKE25489H2B	220/240	1.10			145	3200	27.1	981.6	60
LKE25489M2B	220/240	0.90	50/60	190-265	115	2500	24.8	796.7	55
LKE25489L2B	220/240	0.80			100	2000	15.8	628.3	48

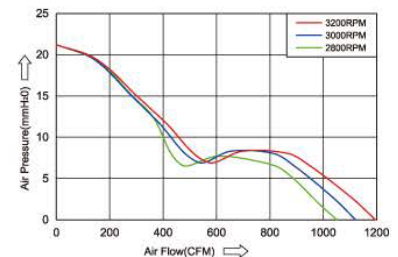


280x280x80mm LKE28080

Bearings: Ball bearing
Lead Wire: UL Type
Insulation level: Class B

Material: Impeller & Frame: Plastic (UL94-V0)
Working temperature: -10~70°C
Weight: 2400g

DIMENSION (mm)

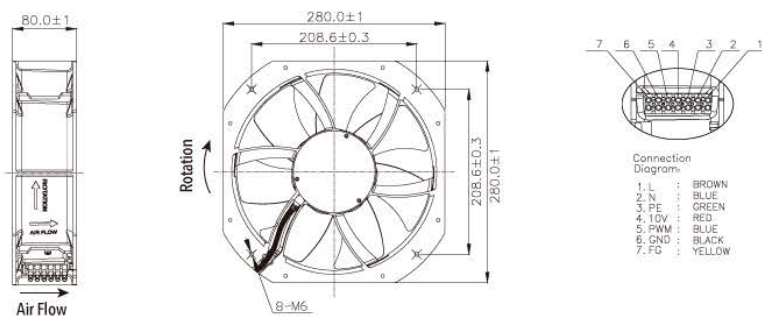

UP TO
IP42


UK
CA

CE

RoHS
COMPLIANT

-10 ~ +70
°C

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE28080HB	110/240	2.0/4.0			145	3200	31.6	1225.7	63
LKE28080MB	110/240	1.40/0.70	50/60	90-265	75	2500	31.6	994.6	58
LKE28080LB	110/240	1.0/0.50			45	2000	21.7	790.1	54

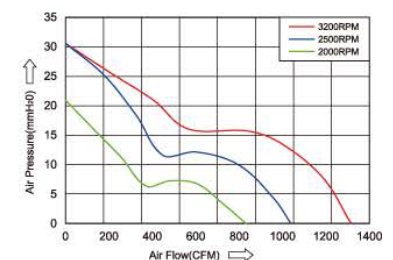


LK4020 40x40x20mm




PARAMETER

Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 70,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 24.5g

DIMENSION (mm)

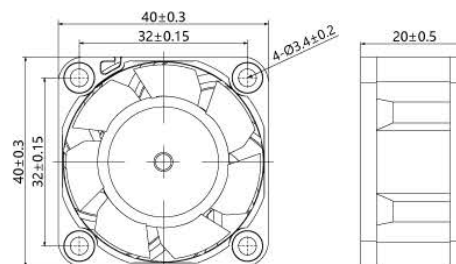

Air Performance

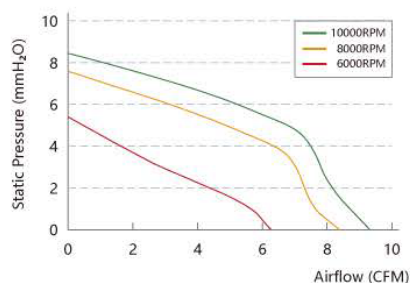

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK4020L05	5	0.15	0.75	6000	8.27	31.0
LK4020L12	12	0.07	0.84			
LK4020L24	24	0.03	0.72			
LK4020M05	5	0.38	1.90	8000	11.02	37.9
LK4020M12	12	0.16	1.92			
LK4020M24	24	0.08	1.92			
LK4020H12	12	0.31	3.72	10000	13.78	43.2
LK4020H24	24	0.16	3.84			


LK6025 60x60x25mm




PARAMETER

Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 70,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 61.2g

DIMENSION (mm)

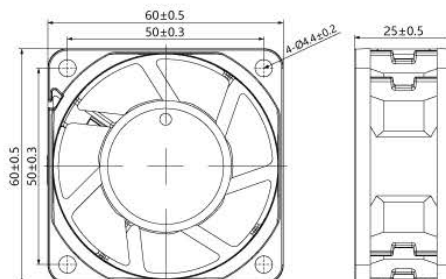

Air Performance

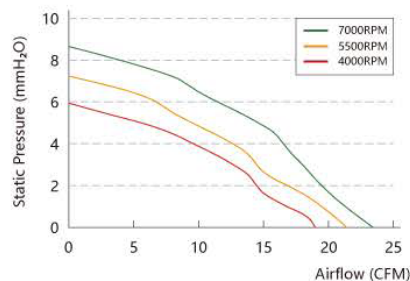


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK6025L12	12	0.15	1.8	4000	19.158	36.9
LK6025L24	24	0.08	1.92			
LK6025L48	48	0.04	1.92			
LK6025M12	12	0.3	3.6	5500	21.62	38
LK6025M24	24	0.15	3.6			
LK6025M48	48	0.08	3.84			
LK6025H12	12	0.45	5.4	7000	23.596	41.1
LK6025H24	24	0.25	6			
LK6025H48	48	0.12	5.76			

LK8025 80x80x25mm



PARAMETER

Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 50,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 72g

DIMENSION (mm)

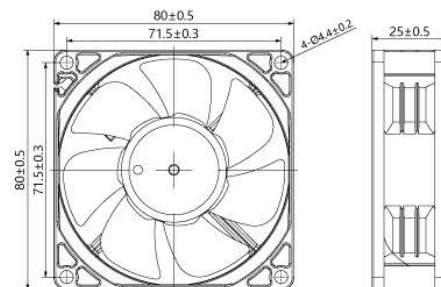

Air Performance

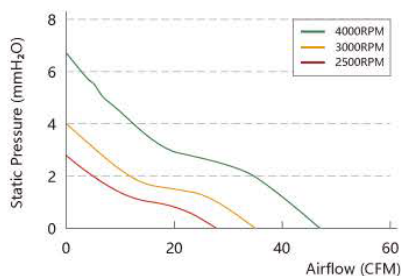


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK8025L12B	12	0.08	0.96	2500	26.67	29.2
LK8025L24B	24	0.04	0.96			
LK8025M12B	12	0.13	1.56	3000	33.46	33.5
LK8025M24B	24	0.07	1.68			
LK8025H12B	12	0.25	3.00	4000	44.05	41.2
LK8025H24B	24	0.12	2.88			
LK8025H48B	48	0.06	2.88			

LK8038-HP 80x80x38mm


PARAMETER

Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 50,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 177.6g


DIMENSION (mm)

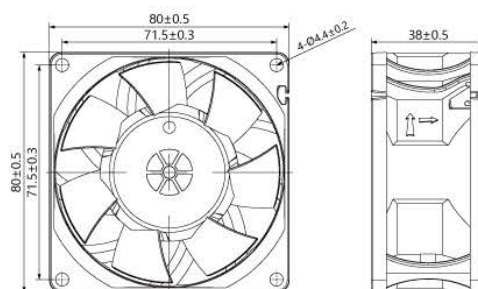

High Pressure series




Air Performance

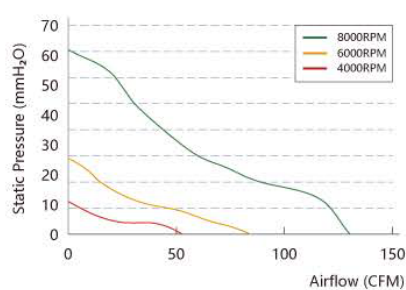

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK8038L12B-HP	12	0.24	2.88	4000	46.54	48.5
LK8038L24B-HP	24	0.12	2.88			
LK8038L48B-HP	48	0.07	3.36			
LK8038M12B-HP	12	0.80	9.60	6000	69.81	58.2
LK8038M24B-HP	24	0.40	9.60			
LK8038M48B-HP	48	0.20	9.60			
LK8038H12B-HP	12	1.80	21.60	8000	102.23	65.8
LK8038H24B-HP	24	0.90	21.60			
LK8038H48B-HP	48	0.45	21.60			

92x92x25mm **LK9225**
PARAMETER


Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 50,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 102g

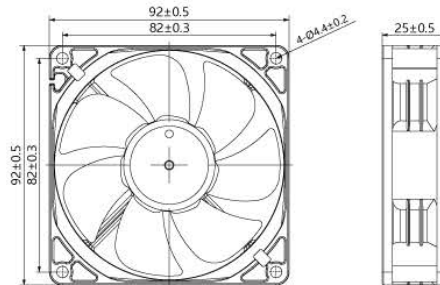DIMENSION (mm)


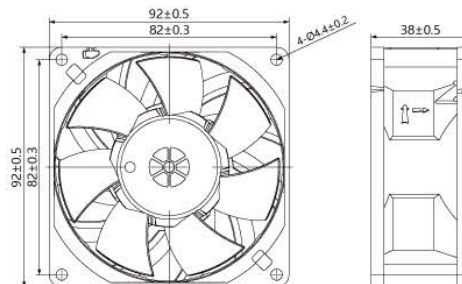
Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK9225L12B	12	0.13	1.56	2500	38.12	31.7
LK9225L24B	24	0.06	1.44			
LK9225L48B	48	0.04	1.92			
LK9225M12B	12	0.25	3.00	3500	53.3	38.5
LK9225M24B	24	0.12	2.88			
LK9225M48B	48	0.06	2.88			
LK9225H12B	12	0.52	6.24	4500	73.2	45.8
LK9225H24B	24	0.25	6.00			
LK9225H48B	48	0.13	6.24			



Air Performance

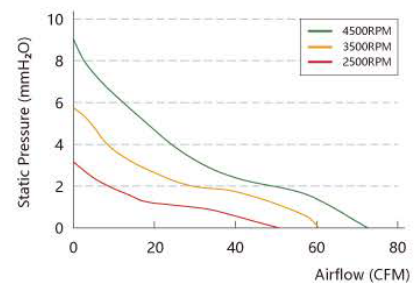
92x92x38mm **LK9238-HP**
PARAMETER


Bearings: Sleeve or ball bearings
Material: PBT 7 fan blade
Motor life: 30,000h (Sleeve) / 50,000h (ball)
Insulation level: Class A
Working temperature: -20~60°C
Weight: 202g

DIMENSION (mm)


High Pressure series



Air Performance

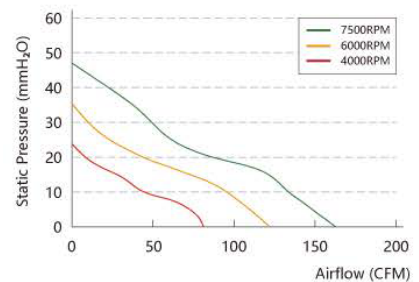

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK9238L12B-HP	12	0.27	3.24	4000	67.27	46.9
LK9238L24B-HP	24	0.15	3.60			
LK9238L48B-HP	48	0.08	3.84			
LK9238M12B-HP	12	0.90	10.80	6000	100.98	56.6
LK9238M24B-HP	24	0.50	12.00			
LK9238M48B-HP	48	0.25	12.00			
LK9238H12B-HP	12	1.80	21.60	7500	126.12	61.9
LK9238H24B-HP	24	0.90	21.60			
LK9238H48B-HP	48	0.45	21.60			


LK12025 120x120x25mm




PARAMETER

Bearings: Ball bearings
Material: PBT 7 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 121.3g

DIMENSION (mm)

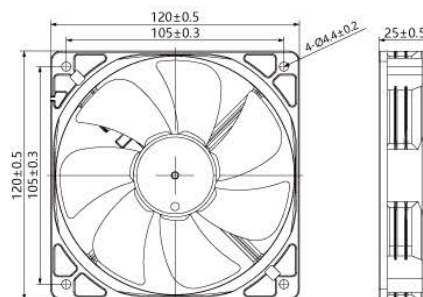

Air Performance

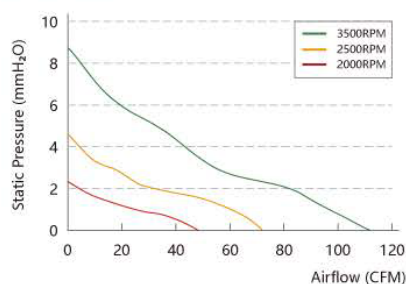

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK12025L12B	12	0.15	1.80	2000	60.23	37.1
LK12025L24B	24	0.09	2.16			
LK12025L48B	48	0.04	1.92			
LK12025M12B	12	0.27	3.24	2500	75.29	42.4
LK12025M24B	24	0.13	3.12			
LK12025M48B	48	0.07	3.36			
LK12025H12B	12	0.60	7.20	3500	105.4	50.5
LK12025H24B	24	0.30	7.20			
LK12025H48B	48	0.15	7.20			


LK12038 120x120x38mm




PARAMETER

Bearings: Ball bearings
Material: PBT 7 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 301.5g

DIMENSION (mm)

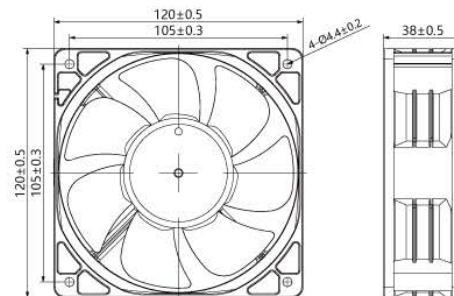


Air Performance

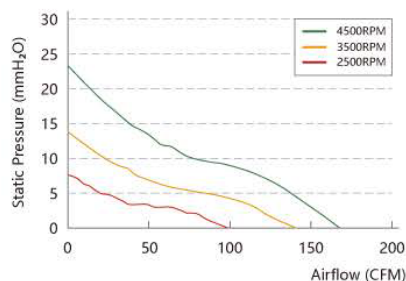


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK12038L12B	12	0.30	3.60	2500	95.54	41.8
LK12038L24B	24	0.12	2.88			
LK12038L48B	48	0.08	3.84			
LK12038M12B	12	0.70	8.40	3500	133.54	50.4
LK12038M24B	24	0.32	7.68			
LK12038M48B	48	0.18	8.64			
LK12038H12B	12	1.50	18.00	4500	171.7	56.4
LK12038H24B	24	0.70	16.80			
LK12038H48B	48	0.40	19.20			

120x120x38mm LK12038-HP
PARAMETER

Bearings: Ball bearings
Material: PBT 9 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 301.5g


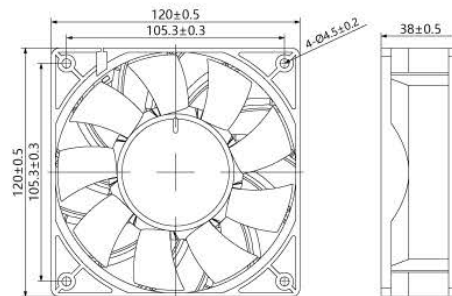
DIMENSION (mm)

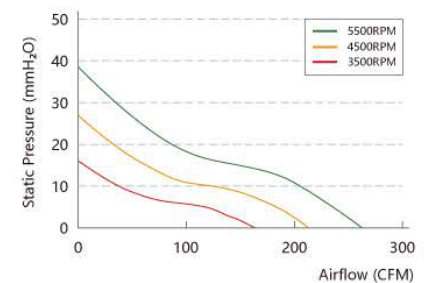High Pressure series

Air Performance


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK12038L12B-HP	12	0.80	9.60	3500	155.64	55.6
LK12038L24B-HP	24	0.40	9.60			
LK12038L48B-HP	48	0.20	9.60			
LK12038M12B-HP	12	1.80	21.60	4500	200.15	63.6
LK12038M24B-HP	24	0.90	21.60			
LK12038M48B-HP	48	0.45	21.60			
LK12038H12B-HP	12	3.00	36.00	5500	244.57	68.4
LK12038H24B-HP	24	1.50	36.00			
LK12038H48B-HP	48	0.75	36.00			

150x150x50mm LK15050
PARAMETER

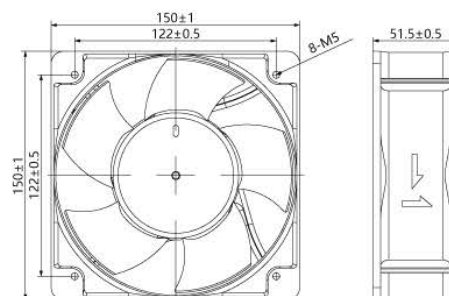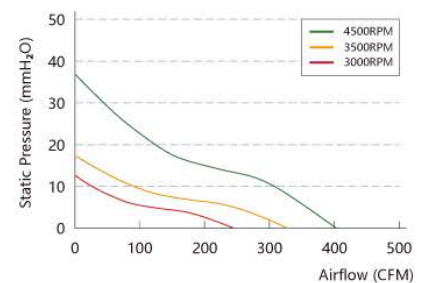Bearings: Ball bearings
Material: PBT 5 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 700g

DIMENSION (mm)

Air Performance


Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK15050L12B	12	1.10	13.20	3000	220.94	56.7
LK15050L24B	24	0.52	12.48			
LK15050L48B	48	0.27	12.96			
LK15050M12B	12	1.70	20.40	3500	257.76	60.4
LK15050M24B	24	0.82	19.68			
LK15050M48B	48	0.40	19.20			
LK15050H12B	12	3.60	43.20	4500	331.41	66.4
LK15050H24B	24	1.74	41.76			
LK15050H48B	48	0.88	42.24			


LK17250 172x150x51mm




PARAMETER

Bearings: Ball bearings
Material: PBT 5 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 655g

DIMENSION (mm)

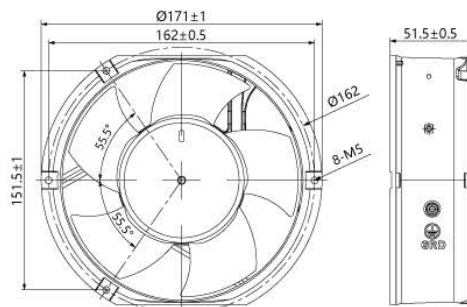

Air Performance

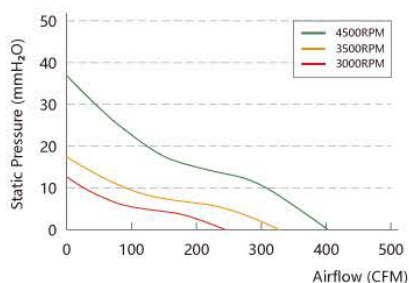

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK17250L12B	12	1.20	14.40	3000	215.64	54.2
LK17250L24B	24	0.50	12.00			
LK17250L48B	48	0.30	14.40			
LK17250M12B	12	1.60	19.20	3500	238.33	57.8
LK17250M24B	24	0.80	19.20			
LK17250M48B	48	0.40	19.20			
LK17250H12B	12	3.50	42.00	4500	306.42	63.5
LK17250H24B	24	1.70	40.80			
LK17250H48B	48	0.90	43.20			


LK17250D 172x150x51mm




PARAMETER

Bearings: Ball bearings
Material: PBT 7 fan blade
Motor life: 70,000 h
Insulation level: Class A
Working temperature: -30~70°C
Weight: 820g

DIMENSION (mm)

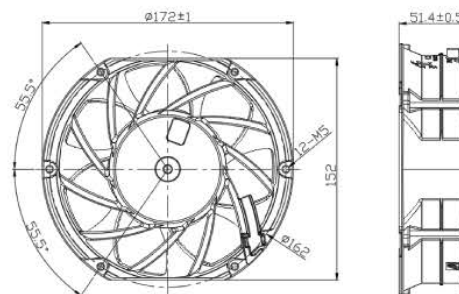

Air Performance

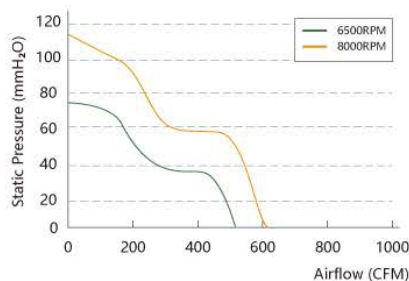



Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK17250DM24B	24	6.5	156	6500	490	71
LK17250DH48B	48	5.1	245	8000	605	75

200x200x60mm **LK20060**

PARAMETER

Bearings: Ball bearings
Material: PBT 5 fan blade
Motor life: 50,000 h
Insulation level: Class A
Working temperature: -20~60°C
Weight: 2400g


DIMENSION (mm)

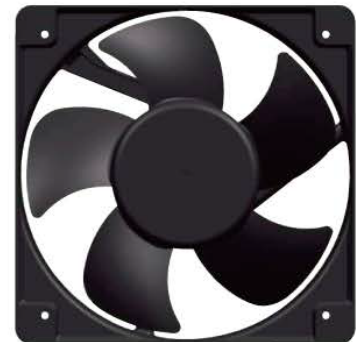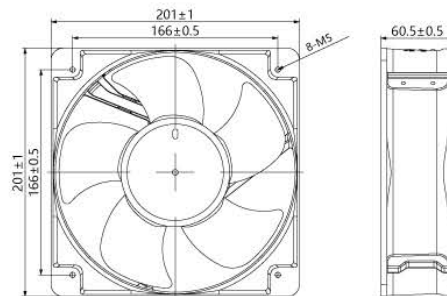

Model	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Noise (dB)
LK20060L12B	12	2.15	25.80	2500	380.17	57.7
LK20060L24B	24	1.00	24.00			
LK20060L48B	48	0.52	24.96			
LK20060M12B	12	3.60	43.20	3000	518.41	62.9
LK20060M24B	24	1.76	42.24			
LK20060M48B	48	0.90	43.20			
LK20060H12B	12	5.70	68.40	3500	532.24	65.7
LK20060H24B	24	2.80	67.20			
LK20060H48B	48	1.37	65.76			




Air Performance

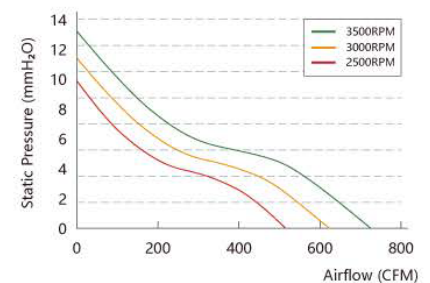
205x205x72mm **LK20572**

PARAMETER

Bearings: Ball bearings
Lead Wire: UL Type
Material: Impeller: Plastic; Frame: Aluminum Alloy
Insulation level: Class B
Working temperature: -10~70°C
Weight: 1800g


DIMENSION (mm)

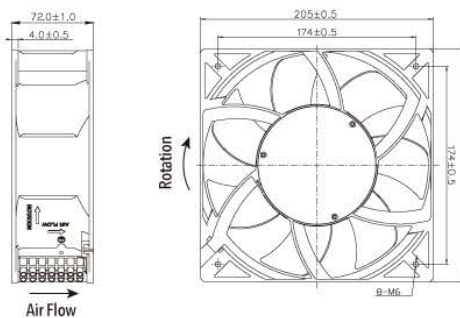

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air volume (CFM)	Noise (dB)
LK20572H12B	12	8.0	3000	31.7	728.4	59
LK20572H24B	24	5.0	3300	36.6	798.3	62
LK20572M24B	24	4.0	2700	25.2	646.3	57
LK20572L24B	24	3.0	2200	16.9	531.3	51
LK20572H48B	48	2.0	3300	36.6	798.3	62
LK20572M48B	48	1.50	2700	25.2	646.3	57
LK20572L48B	48	1.20	2200	16.9	531.3	51



Air Performance

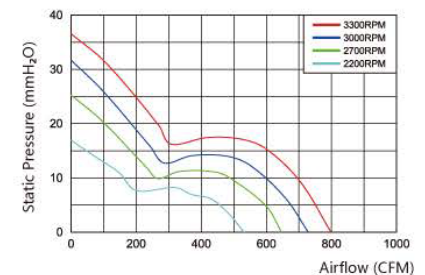


LK22060 220x60mm




PARAMETER

Bearings: Ball bearings
Lead Wire: UL Type
Material: Impeller: Plastic; Frame: Aluminum Alloy
Insulation level: Class B
Working temperature: -10~70°C
Weight: 1350g

DIMENSION (mm)

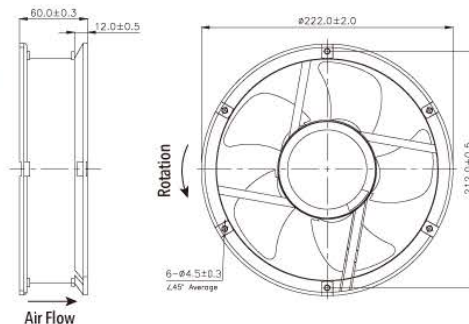

Air Performance

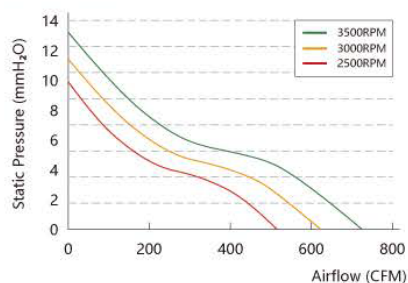

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH2O)	Air volume (CFM)	Noise (dB)
LK22060H12B	12	3.50	3000	19.7	581	55
LK22060M12B	12	2.80	2500	14.0	490.8	50
LK22060L12B	12	2.0	2000	9.9	396.7	44
LK22060H24B	24	2.0	3000	19.7	581.0	55
LK22060M24B	24	1.50	2500	14.0	490.8	50
LK22060L24B	24	1.0	2000	9.9	396.7	44
LK22060H48B	48	1.20	3000	19.7	581.0	55
LK22060M48B	48	0.80	2500	14.0	490.8	50
LK22060L48B	48	0.50	2000	9.9	396.7	44


LK22580 225x225x80mm




PARAMETER

Bearings: Ball bearings
Lead Wire: UL Type
Material: Impeller: Plastic; Frame: Aluminum Alloy
Insulation level: Class B
Working temperature: -10~70°C
Weight: 2000g

DIMENSION (mm)

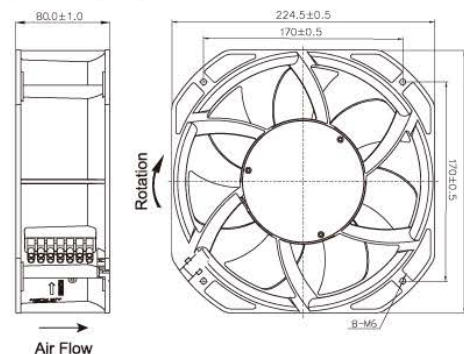

Air Performance

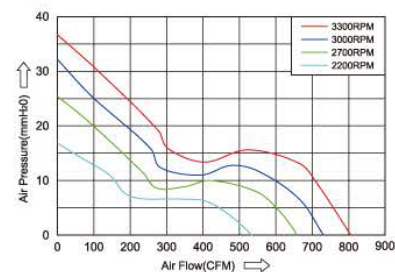

Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH2O)	Air volume (CFM)	Noise (dB)
LK22580H12B	12	8.0	3000	32.2	730.8	58
LK22580H24B	24	5.0	3300	36.7	806.0	61
LK22580M24B	24	4.0	2700	25.4	656.5	55
LK22580L24B	24	3.0	2200	16.9	533.5	50
LK22580H48B	48	2.0	3300	36.7	806.0	61
LK22580M48B	48	1.50	2700	25.4	656.5	55
LK22580L48B	48	1.20	2200	16.9	533.5	50

254x89mm **LK25489-7**
PARAMETER
Bearings: Ball bearings


Lead Wire: UL Type

Material: Impeller: Plastic; Frame: Aluminum Alloy


Insulation level: Class B

Working temperature: -10~70°C

Weight: 2100g

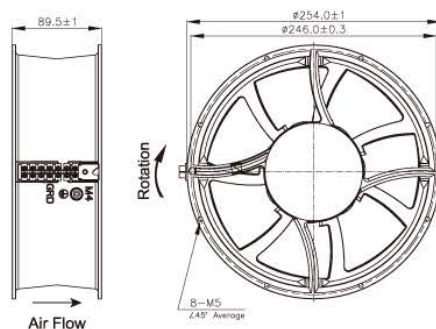DIMENSION (mm)


Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air volume (CFM)	Noise (dB)
LK25489H12B-7	12	8.0	2500	24.8	796.7	55
LK25489H24B-7	24	4.0	2800	26.9	894.9	58
LK25489M24B-7	24	2.0	2400	22.8	762.2	53
LK25489L24B-7	24	0.80	2000	15.8	628.3	48
LK25489H48B-7	48	2.0	3000	26.9	970.1	59
LK25489M48B-7	48	1.0	2500	24.8	796.7	55
LK25489L48B-7	48	0.60	2000	15.8	628.3	48

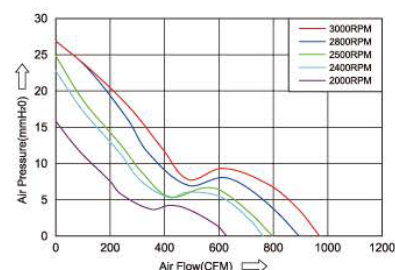
Air Performance

280x280x80mm **LK28080**
PARAMETER
Bearings: Ball bearings


Lead Wire: UL Type

Material: Impeller: Plastic; Frame: Aluminum Alloy


Insulation level: Class B

Working temperature: -10~70°C

Weight: 2400g

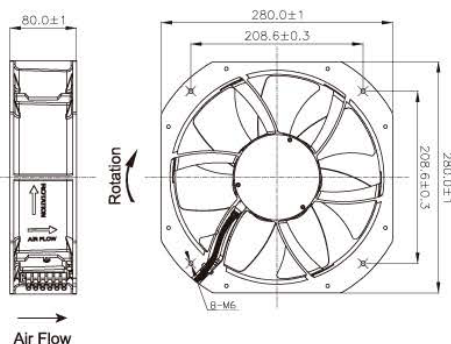DIMENSION (mm)


Model	Voltage (V)	Current (A)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LK28080H12B	12	8.0	2500	31.6	994.6	58
LK28080H24B	24	5.0	2800	31.6	1110.4	61
LK28080M24B	24	4.0	2400	31.6	955.5	57
LK28080L24B	24	3.0	2000	21.7	790.1	54
LK28080H48B	48	3.50	3000	31.6	1209.1	62
LK28080M48B	48	2.50	2500	31.6	994.6	58
LK28080L48B	48	1.20	2000	21.7	790.1	54

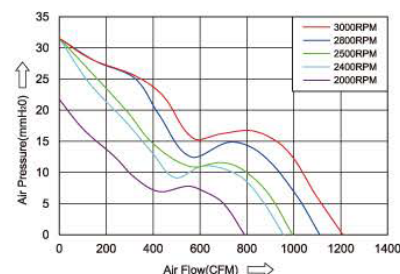
Air Performance


EXTERNAL SIZE 133x41mm

Motor structure: outer rotor motor 72mm

Safety: thermal protection

Operating system: high-precision double ball bearing

Withstand voltage: AC 1800V, at 0.5mA, 50/60Hz

Allowable ambient temperature and humidity: -25~+75°C
10%~+80%F

Insulation level: F (IEC61858 standard)

IP level: IP44

Weight: 0.66Kg

Material: Fan blade: PA nylon, 7 blades

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44

CE





-25 +75
°C



SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
						(CFM)	(m³/h)	
C2S-133.41C	115	50	0.51	38	2650	159	270	52
		60	0.42	35	2700	177	300	55
C2E-133.41C	230	50	0.26	39	2550	159	270	52
		60	0.23	39	2670	177	300	55
C2D-133.41C	380	50	0.13	35	2550	159	270	52
		60	0.11	34	2670	177	300	55

DIMENSION (mm)

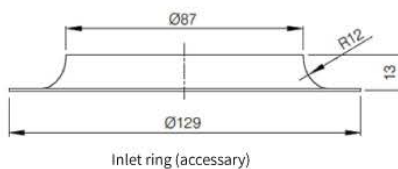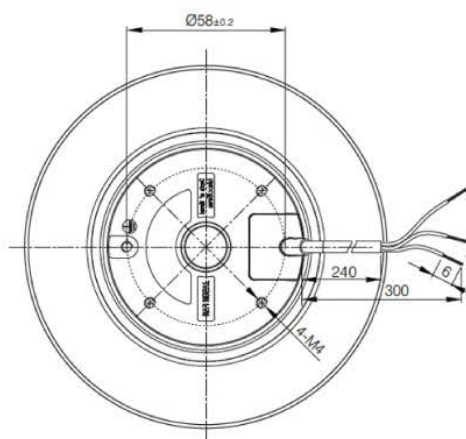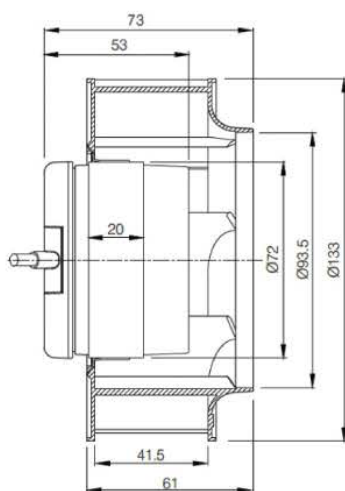

EXTERNAL SIZE 175x42mm

Motor structure: outer rotor motor 92mm**Safety:** thermal protection**Operating system:** high-precision double ball bearing**Withstand voltage:** AC 1800V, at 0.5mA, 50/60Hz**Allowable ambient temperature and humidity:** -25~+75°C
10%~+80%F**Insulation level:** F (IEC61858 standard)**IP level:** IP44**Weight:** 1.24Kg**Material:** Fan blade: PA nylon, 7 blades

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44


CE

-25 +75
°C

SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
C2S-175.45C	115	50	0.57	56	2500	324	550	58
		60	0.53	59	2850	348	590	61
C2E-175.45C	230	50	0.27	56	2500	324	550	58
		60	0.28	59	2850	348	590	61
C2S-175.45C	380	50	0.16	57	2550	296	500	59
		60	0.17	64	2900	325	550	62

DIMENSION (mm)

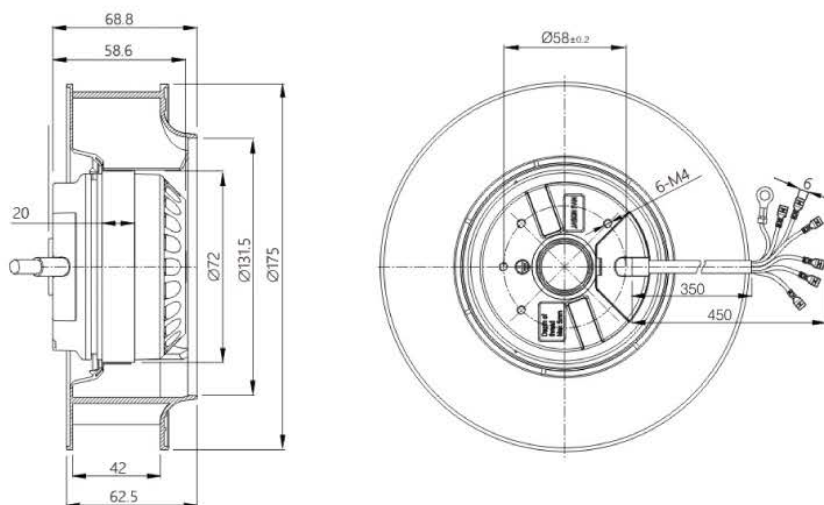

EXTERNAL SIZE **190x45mm**

Motor structure: outer rotor motor 92mm

Safety: thermal protection

Operating system: high-precision double ball bearing

Withstand voltage: AC 1800V, at 0.5mA, 50/60Hz

Allowable ambient temperature and humidity: -25~+75°C
10%~+80%°F

Insulation level: F (IEC61858 standard)

IP level: IP44

Weight: 1.27Kg

Material: Fan blade: PA nylon, 7 blades

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44

CE


-25 ~ +75
°C



SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
						(CFM)	(m³/h)	
C2S-190.45A	115	50	0.64	65	2500	336	570	59
		60	0.65	71	2700	366	620	61
C2E-190.45A	230	50	0.26	58	2500	336	570	59
		60	0.33	74	2700	366	620	61
C2D-190.45A	400	50	0.17	63	2500	336	570	59
		60	0.19	73	2700	366	620	61
C4E-190.45A	230	50	0.13	27	1400	182	310	48
		60	0.12	27	1600	212	360	51

DIMENSION (mm)

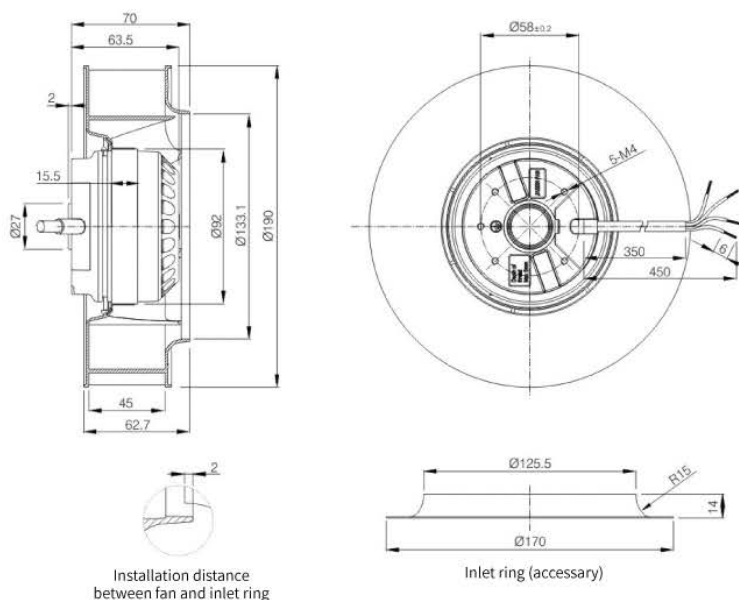

EXTERNAL SIZE 220x44mm

Motor structure: outer rotor motor 92mm**Safety:** thermal protection**Operating system:** high-precision double ball bearing**Withstand voltage:** AC 1800V, at 0.5mA, 50/60Hz**Allowable ambient temperature and humidity:** -25~+75°C
10%~+80%F**Insulation level:** F (IEC61858 standard)**IP level:** IP44**Weight:** 1.80Kg**Material:** Fan blade: PA nylon, 7 blades

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44


CE

-25 +75
°C

SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
C2S-220.44B	115	50	1.00	98	2600	507	860	67
		60	1.17	120	2900	578	980	70
C2E-220.44B	230	50	0.46	98	2600	507	860	67
		60	0.51	118	2900	578	980	70
C2D-220.44B	400	50	0.29	100	2600	507	860	67
		60	0.35	125	2900	578	980	70
C4E-220.44B	230	50	0.23	48	1400	273	463	52
		60	0.24	58	1670	325	552	56

DIMENSION (mm)

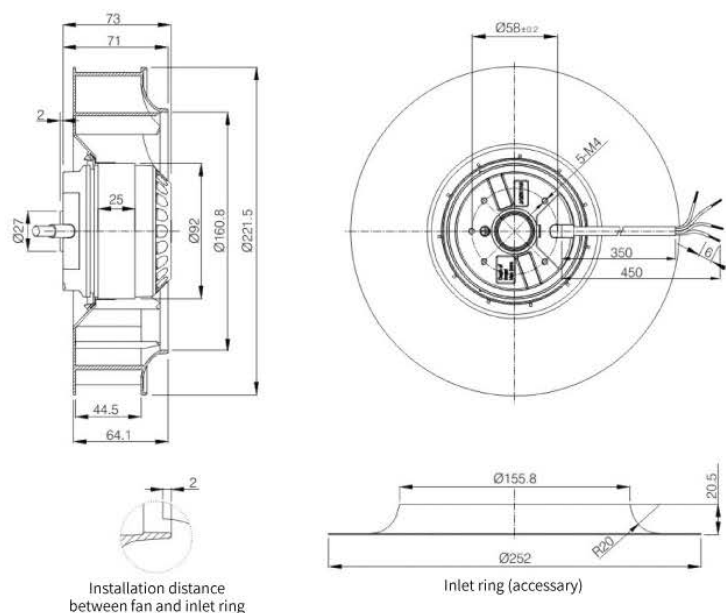

EXTERNAL SIZE 225x63mm

Motor structure: outer rotor motor 92mm

Safety: thermal protection

Operating system: high-precision double ball bearing

Withstand voltage: AC 1800V, at 0.5mA, 50/60Hz

Allowable ambient temperature and humidity: -25~+75°C
10%~+80%F

Insulation level: F (IEC61858 standard)

IP level: IP44

Weight: 2.30Kg

Material: Fan blade: PA nylon, 7 blades

Bearing: NSK ball bearing


Motor life: 60000 hours at 25°C


IP44
CE

 -25 ~ +75
°C

SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
						(CFM)	(m³/h)	
C2S-225.63C	115	50	1.18	130	2650	708	1200	68
		60	1.53	168	2950	791	1340	71
C2E-225.63C	230	50	0.62	135	2650	708	1200	68
		60	0.77	170	2950	791	1340	71
C2D-225.63C	400	50	0.34	120	2500	708	1200	68
		60	0.44	180	2700	791	1340	71
C4E-225.63C	230	50	0.30	65	1480	419	710	61
		60	0.37	80	1650	483	818	63

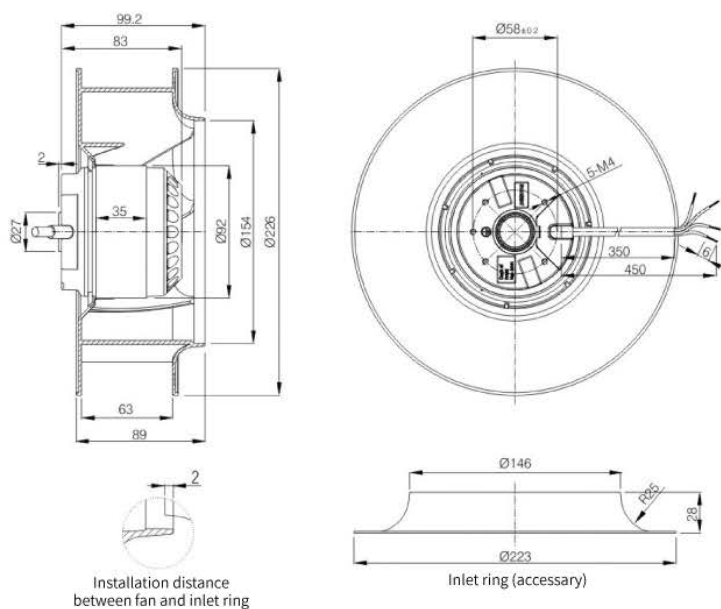DIMENSION (mm)


EXTERNAL SIZE 250x56mm

Motor structure: outer rotor motor 92mm**Safety:** thermal protection**Operating system:** high-precision double ball bearing**Withstand voltage:** AC 1800V, at 0.5mA, 50/60Hz**Allowable ambient temperature and humidity:** -25~+75°C
10%~+80%F**Insulation level:** F (IEC61858 standard)**IP level:** IP44**Weight:** 2.90Kg**Material:** Fan blade: Metal

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44




CE

-25 +75
°C

SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
C2S-250.56A	115	50	1.38	155	2600	856	1450	74
		60	1.90	208	2800	897	1520	76
C2E-250.56A	230	50	0.70	152	2550	856	1450	74
		60	0.93	205	2750	897	1520	76
C4S-250.56B	115	50	0.64	70	1400	478	810	61
		60	0.81	89	1600	548	930	64
C4E-250.56B	230	50	0.32	70	1450	484	820	61
		60	0.39	88	1650	555	940	64

DIMENSION (mm)

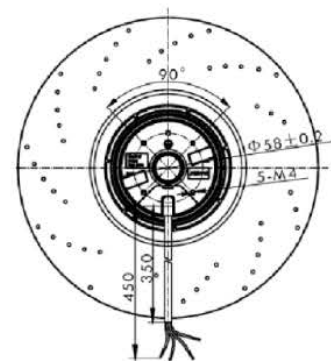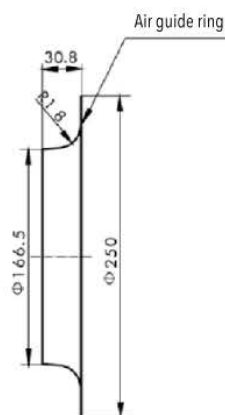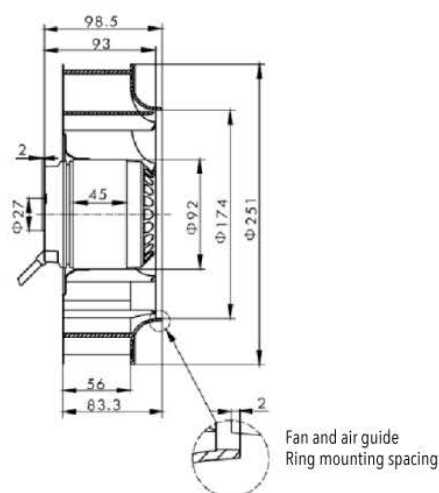

EXTERNAL SIZE 280x51mm

Motor structure: outer rotor motor 92mm

Safety: thermal protection

Operating system: high-precision double ball bearing

Withstand voltage: AC 1800V, at 0.5mA, 50/60Hz

Allowable ambient temperature and humidity: -25~+75°C
10%~+80%F

Insulation level: F (IEC61858 standard)

IP level: IP44

Weight: 1.27Kg

Material: Fan blade: Metal

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44

CE




-25 ~ +75
°C



SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
C2E-280.51C	230	50	1.03	230	2550	1174	1990	72
		60	1.30	305	2700	1245	2110	75
C4E-280.51C	230	50	0.48	110	1400	649	1100	63
		60	0.64	145	1650	760	1290	65
C4S-280.51C	115	50	0.98	115	1400	649	1100	63
		60	1.27	145	1650	760	1290	65

DIMENSION (mm)

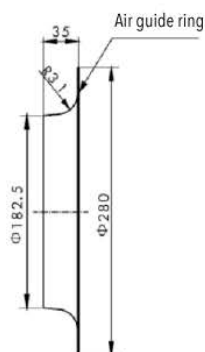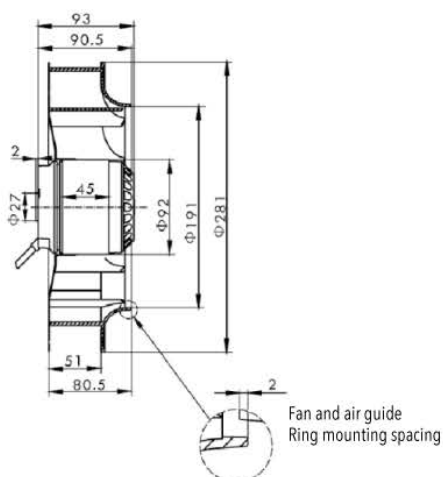

EXTERNAL SIZE 316x102mm

Motor structure: outer rotor motor 102mm**Safety:** thermal protection**Operating system:** high-precision double ball bearing**Withstand voltage:** AC 1800V, at 0.5mA, 50/60Hz**Allowable ambient temperature and humidity:** -25~+75°C
10%~+80%F**Insulation level:** F (IEC61858 standard)**IP level:** IP44**Weight:** 3.80Kg**Material:** Fan blade: Metal

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44


CE

-25 +75
°C

SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
C4E-315.101	230	50	0.50	110	1360	1250	2120	59
		60	0.65	150	1540	1390	2370	62
C4ED-315.101	230/400	50	0.62/0.33	136	1380	1250	2120	59
		60	0.58/0.32	137	1600	1390	2370	62
C4S-315.101	115	50	1.18	130	1370	1250	2120	59
		60	1.52	170	1550	1390	2370	62
C6E-315.101	230	50	0.32	68	940	826	1400	48
		60	0.37	83	1100	968	1640	54

DIMENSION (mm)

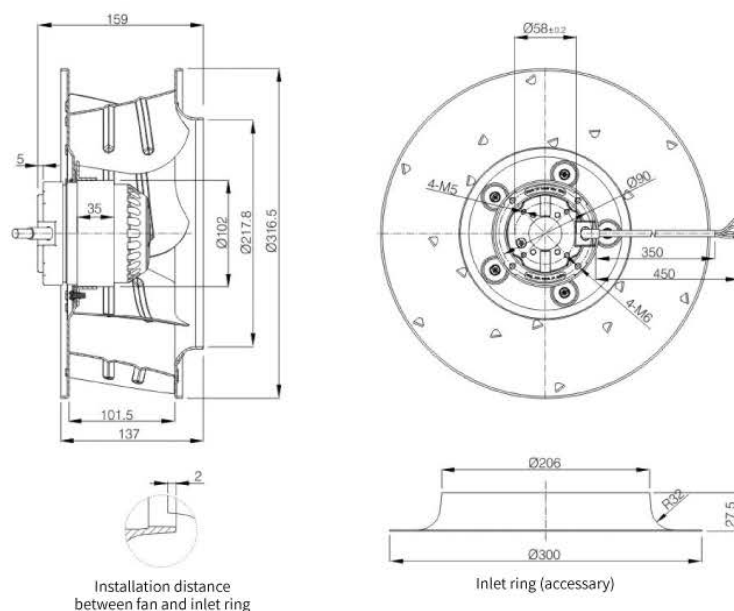

EXTERNAL SIZE 355x60mm

Motor structure: outer rotor motor 102mm

Safety: thermal protection

Operating system: high-precision double ball bearing

Withstand voltage: AC 1800V, at 0.5mA, 50/60Hz

Allowable ambient temperature and humidity: -25~+75°C
10%~+80%F

Insulation level: F (IEC61858 standard)

IP level: IP44

Weight: 3.90Kg

Material: Fan blade: Metal

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44

CE


-25 +75
°C



SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m³/h)	(dB)
C4E-355.60	230	50	0.46	105	1400	1091	1850	63
		60	0.63	145	1600	1247	2115	66
C4ED-355.60	230/400	50	0.62/0.33	136	1400	1091	1850	63
		60	0.58/0.32	137	1600	1247	2115	66
C6E-355.60	230	50	0.32	68	940	649	1240	45
		60	1.37	83	1100	760	1450	52

DIMENSION (mm)

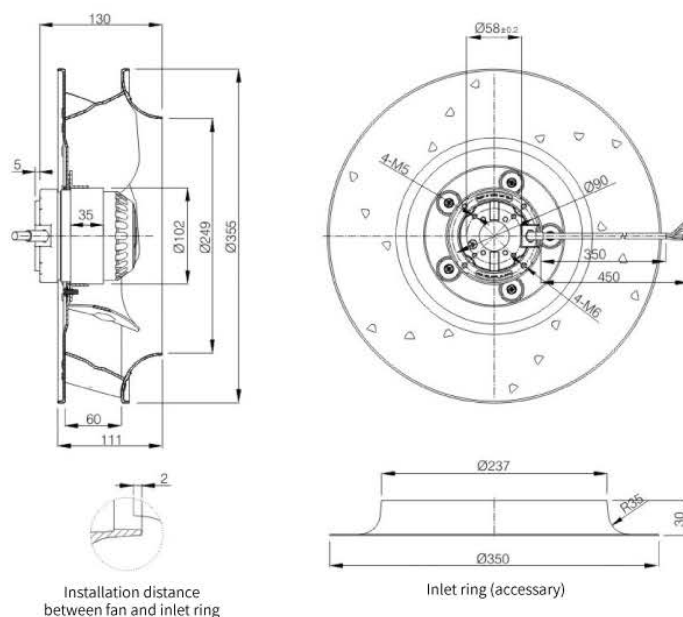

EXTERNAL SIZE 355x95mm

Motor structure: outer rotor motor 102mm**Safety:** thermal protection**Operating system:** high-precision double ball bearing**Withstand voltage:** AC 1800V, at 0.5mA, 50/60Hz**Allowable ambient temperature and humidity:** -25~+75°C
10%~+80% ϕ **Insulation level:** F (IEC61858 standard)**IP level:** IP44**Weight:** 4.70Kg**Material:** Fan blade: Metal

Bearing: NSK ball bearing

Motor life: 60000 hours at 25°C



IP44


CE


-25 +75
°C

SPECIFICATION

Model	Voltage	Frequency	Current	Input power	Speed	Air volume		Noise
	(V)	Hz	(A)	(W)	(RPM)	(CFM)	(m ³ /h)	(dB)
C4E-355.95	230	50	0.80	175	1400	1522	2580	65
		60	1.00	250	1600	1735	2940	69
C4ED-355.95	230/400	50	0.76/0.44	166	1400	1522	2580	65
		60	0.75/0.43	225	1600	1735	2940	69
C6E-355.95	230	50	0.29	65	910	1003	1700	54
		60	0.37	85	1050	1115	1890	57

DIMENSION (mm)

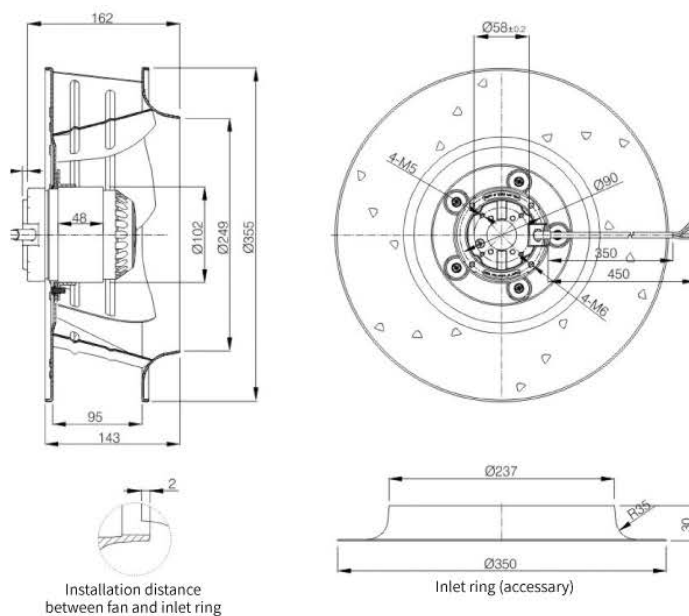



REGULATING

Thermostat, Hygrostat



JTO 011:

Thermostat (Normally Closed): Commonly used to connect heaters and disconnect the circuit when the temperature reaches the set value.

JTS 011:

Thermostat (Normally Open): Commonly used to monitor filter fans, heat exchangers, or close circuit output signals when the temperature exceeds the set value.

- Small and compact
- Long electrical life
- Easy to install with 35mm DIN rail
- High switching performance
- Convenient wiring and simple setup
- Small size



JTO 011




JTS 011

IP20
CE

-20 ~ 80
°C

SPECIFICATION

Model	JTO 011	JTS 011
Contact	NC	NO
Temperature	0~60°C	
Switching temperature difference	7k (± 4k tolerance)	
Sensing element	Bimetallic temperature sensing material	
Service life	>100000 cycles	
Maximum switching load	250VAC, 10A, 120VAC, 15A, DC15A	
Connection method	Screw Terminal	
Shell	UL94-V-0	
Install	Installation of 35mm din rail	
Size	64x33x44mm	
Weight	40g	

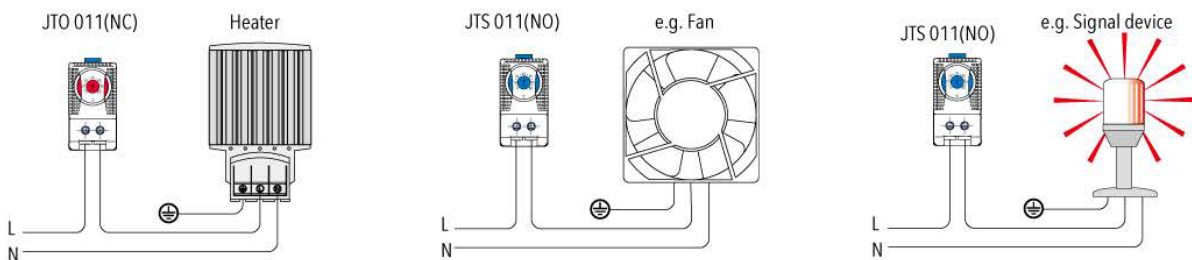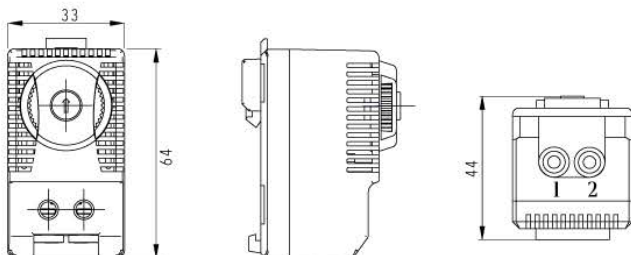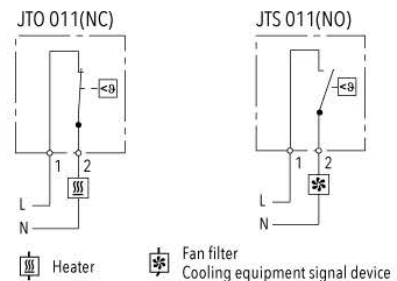
Connection Example

DIMENSION (mm)

WIRING DIAGRAM


KTO 011:

Thermostat (Normally Closed): Commonly used to connect heaters and disconnect the circuit when the temperature reaches the set value.

KTS 011:

Thermostat (Normally Open): Commonly used to monitor filter fans, heat exchangers, or close circuit output signals when the temperature exceeds the set value.

- Small and compact
- Long electrical life
- Easy to install with 35mm DIN rail
- High switching performance
- Convenient wiring and simple setup,
- Small size



KTO 011



KTS 011

IP20

CE


-20 +80
°C

SPECIFICATION



Model	KTO 011	KTS 011
Contact	NC	NO
Temperature	0~60°C	
Switching temperature difference	7k (± 4k tolerance)	
Sensing element	Bimetallic temperature sensing material	
Service life	>100000 cycles	
Maximum switching load	250VAC, 10A, 120VAC, 15A, DC15A	
Connection method	Screw Terminal	
Shell	UL94-V-0	
Install	Installation of 35mm din rail	
Size	64x33x44mm	
Weight	40g	




Connection Example

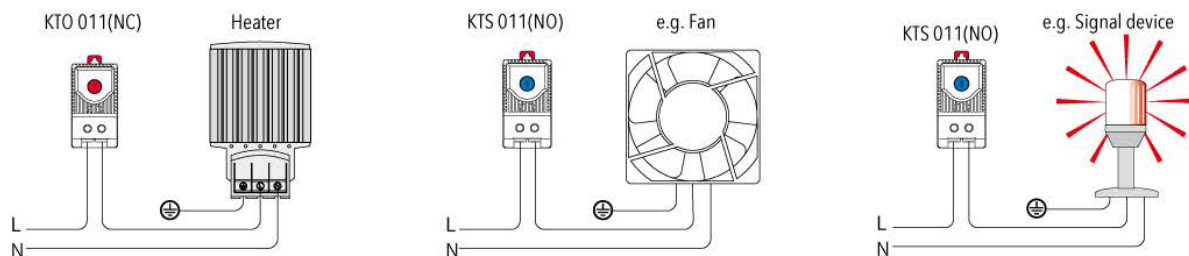

DIMENSION (mm)

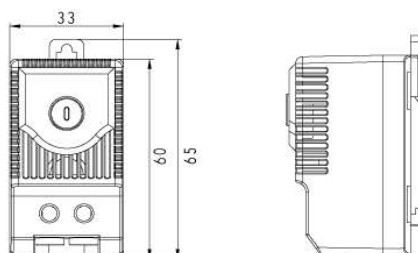

WIRING DIAGRAM

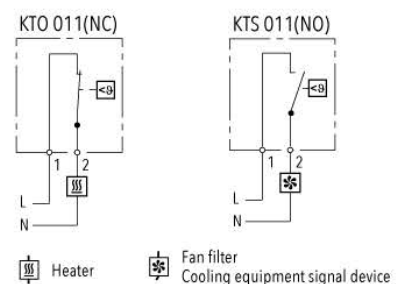

A temperature controller with two temperature settings

• **Normally open contact:** commonly used to monitor filter fans, heat exchangers, or close circuit output signals when the temperature exceeds the set value.

• **Normally closed contact:** commonly used to connect heaters and disconnect the circuit when the temperature reaches the set value.

The heater and refrigeration equipment can be independently switched to avoid temperature deviation caused by traditional switching.





- Wide setting range
- NO and NC integrated together
- Bimetallic temperature sensing material
- Easy to install with 35mm DIN rail
- High switching performance
- Independent temperature setting


IP20
CE

-20 +80
°C

SPECIFICATION

Model	ZR 011
Contact	NC+NO
Temperature	0~60°C
Switching temperature difference	7k (± 4k tolerance)
Sensing element	Bimetallic temperature sensing material
Service life	>100000 cycles
Maximum switching load	250VAC, 10A, 120VAC, 15A, DC15A
Connection method	Screw Terminal
Shell	UL94-V-0
Install	Installation of 35mm din rail
Size	67x50x46mm
Weight	88g


DIMENSION (mm)

WIRING DIAGRAM


Features:

Four working modes are optional, and the ambient temperature and humidity thresholds can be set.

- Capacitive humidity sensor, low power consumption, stable performance;
- Passive relay output, can be used to drive cooling fan, TEC, heating wire and other devices;
- The working status of the relay is indicated by the LED indicator;
- Working power supply voltage AC 85-240V;
- Ultra small size, only 18mm width, 35mm card rail installation;
- Used to control the temperature and humidity range of power distribution cabinets.



SPECIFICATION


Model	KTEMF012
Dimensions	90x18x50mm
Voltage	AC 100-240V 50/60Hz
Power	1W
Weight	65g
Power terminal	A1-A2
Temperature range	10°C~60°C
Humidity range	50%~90%RH
Working temperature	-20°C~+80°C
Installation mode	35mm din rail
Connection	1*2.5mm ² / 2*1.5mm ² 0.4N·m

IP20


CE

-20 +80
°C


DIMENSION (mm)

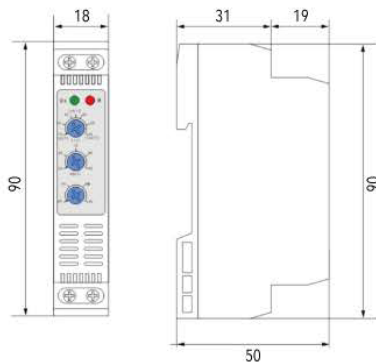

WIRING DIAGRAM



PANEL DIAGRAM



Control heater-

When the temperature inside the cabinet is lower than the minimum set value, close the circuit to increase temperature; When the temperature exceeds the set value, Disconnect the line.

Control fan filter-

When the temperature inside the cabinet exceeds the maximum set value, close the circuit to cool down; When the temperature is below the set value, Disconnect the line.

- Small and compact
- Long electrical life
- Easy to install with 35mm DIN rail
- Jump type metal temperature sensing contact
- Convenient wiring and simple setup,
- Wide setting range

Outline Drawing

Alarm output contact, passive contact, AC 250V 5A

NC normally open, closed when dehumidification function fails

Definition of dehumidification function failure: Temperature or humidity sensor failure;

The dehumidifier operates continuously for 24 hours,

The relative humidity is still not less than 80%



IP20

CE

-30 ~ +70
°C

SPECIFICATION





Model	KNC 011	KNO 011
Contact	NC	NO
Temperature	0~60°C	
Switching temperature difference	7k(± 4k tolerance)	
Sensing element	Bimetallic temperature sensing material	
Service life	>100000 cycles	
Maximum switching load	250VAC, 10A, 120VAC, 15A, DC15A	
Connection method	Screw Terminal	
Shell	UL94-V-0	
Install	Installation of 35mm din rail	
Size	84x17.5x47.8mm	
Weight	40 g	



DIMENSION (mm)

HEATING CONTROL

VENTILATION CONTROL



Panel Thermo-Hygrostat

- Compact design
- Electronic control
- LED status indication contact ON
- 35 mm rail (EN 60715) mount



IP20


CE

-20 +80
°C**SPECIFICATION**


Model	KNMF012
Contact	NO
Rated current/Maximum peak current	10/15A
Rated voltage/Maximum switching voltage	250/400V AC
Service life	>100000 cycles
Size	89x17.5x48mm
Temperature specifications	
Setting range (ventilation)	-20~+80°C
Switch differential	4 ± 2K
Setting accuracy full range	-1...+3K
Humidity specifications	
Setting range (humidity)	50...90%
Hysteresis	4 ± 2%
Setting accuracy	5%

DIMENSION (mm)

Screw terminal

**WIRING DIAGRAM**

P7T.51

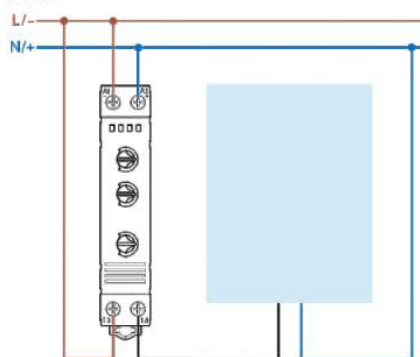

Especially suitable for controlling filter fans, heaters, and heat exchangers,
As a signal generator, this temperature regulator is also suitable for monitoring the
internal temperature of the control cabinet.

- Small and compact
- Easy to install with 35mm DIN rail
- Convenient wiring, terminal wiring method
- Wide voltage range
- Dynamic heating, high temperature limitation
- Long service life

Performance

Bi-metal controller as a temperature sensitive element with thermal feedback

Contact population: Single-pole change-over contact as a quick-break contact

Voltage scope is wide, any type could be used from 24- 230 V

Time-saving connection terminal block could be installed screw from outside

Easy installation, could be installed to 35mm din rail vertically or horizontally according
to EN50 022 it could be clipped to TS/35 cabinet profile with its accessory adapter.



IP20

CE

-20 +80
°C


SPECIFICATION

Temperature measurement range	-20~80 °C	
Rated working voltage	230/115/60/48/24V (AC) 60/48/24V (DC)	
Temperature sensing element	Bimetallic temperature sensing material	
Size	71x71x33.5mm	
Weight	About 105g	
Switch difference	Approximately 1K ± 0.8K	
Permissible contact load	K1.5-3 (heating)	K1.5-4 (cooling)
(1)=inductive load	Communication 10 (4) 1) A,	Communication 5 (4) 1) A,
At cos φ = at 0.6 hours	DC=30W	DC=30W


TERMINAL NUMBER

3	4	(1) L	(L2*) 250V N

DIMENSION (mm)

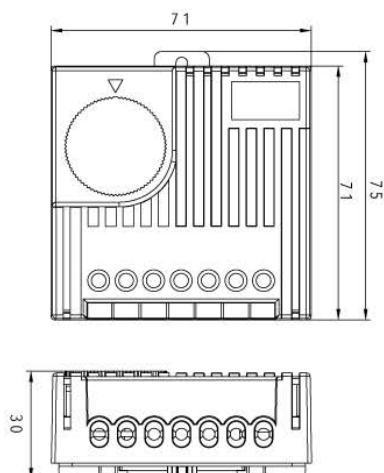

WIRING DIAGRAM

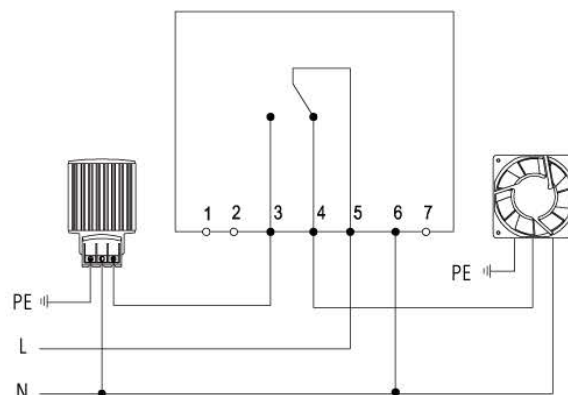



IP20

CE




-20 +80
°C

SPECIFICATION

Model	THR011
Contact	NC+NO
Voltage	230VAC
Temperature	-20~80°C
Switching temperature difference	7k(± 4k tolerance)
Sensing element	Electronic components
Service life	>100000 cycles
Maximum switching load	250VAC, 5A
Connection method	Screw Terminal
Shell	UL94-V-0
Install	Installation of 35mm din rail
Size	72X58X32mm
Weight	65g



DIMENSION (mm)

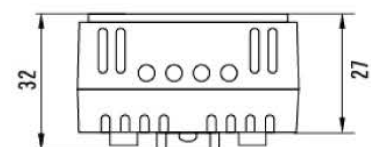

Controlling

Working principle: By adjusting the range knob, the working range of the humidifier is determined, and the humidity sensor detects it. When the actual humidity value in the air is less than the set value, the output power is supplied. When the actual value is greater than the set value, the output power is cut off. When setting the value; Output power outage. To prevent the load from frequently turning on at the set point, this product increases by 5% to 10% Afterwards, work again.

Load selection: The product can choose different sizes and types of loads according to customer requirements.

- 35% to 95% adjustable relative humidity
- Easy to install with 35mm DIN rail
- High switching performance
- Long service life
- Three contact conversion



SPECIFICATION

Switching error	4% relative humidity ($\pm 3\%$ tolerance)
Relative humidity range	35%~95%
Allowable wind speed	15m/sec
Contactor type	Conversion contact
Contactor resistance	$< 10m\ \Omega$
Service life	> 50000 cycles
Minimum switching capacity	20VAC/DC 100mA
Maximum switching load	250VAC, 5 (1)A, DC 20W
Connection method	3-pole wiring terminal, maximum clamping torque 0.5Nm: 2.5mm ² for steel wire, 1.5mm ² for multi-stranded glued wire (end)
Shell	UL94 V-0 plastic, light gray,
Install	Installation of 35mm DIN rail
Size	67x50x38mm
Weight	60g
Protection level	IP20

Model	Set Range
MFR 012	35~95% RH



IP20

CE



-20 +80
°C




CONNECTION EXAMPLE

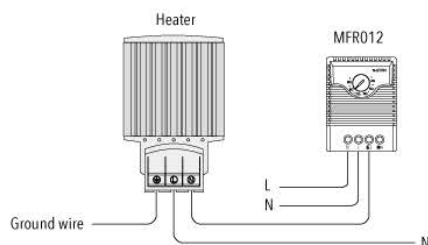

DIMENSION (mm)

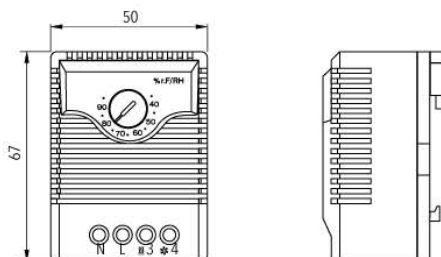

WIRING DIAGRAM

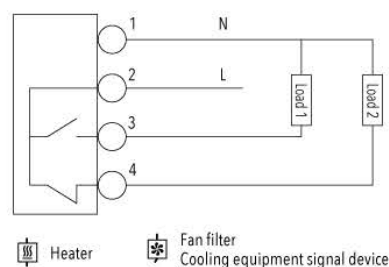

The humidistat MFR 012-2 is designed to control the heater in the switch box, which is wet when the humidity exceeds 65%. Gas will be expelled, and this method can effectively prevent water droplets and rust.

- Adjustable relative humidity
- Transition contact
- High conversion capacity
- Easy access
- Rail clamp
- Long service life



SPECIFICATION

Switching error	4% relative humidity ($\pm 3\%$ tolerance)
Relative humidity range	35%~95%
Allowable wind speed	15m/sec
Contactor type	Conversion contact
Contactor resistance	$< 10m\Omega$
Service life	> 50000 cycles
Minimum switching capacity	20VAC/DC 100mA
Maximum switching load	250VAC, 5 (1)A, DC 20W
Connection method	Screw terminal
Shell	UL94 V-0 plastic, light gray,
Install	Installation of 35mm DIN rail
Size	67x50x38mm
Weight	60g
Operating/storage temperature	0~+60°C (+32~+140 ° F)/-20~+80°C (-4~+176 ° F)
Protection level	IP20

IP20


CE

-20 ~ +80 °C






Model	Set Range
MFR 012-2	35~95% RH


CONNECTION EXAMPLE

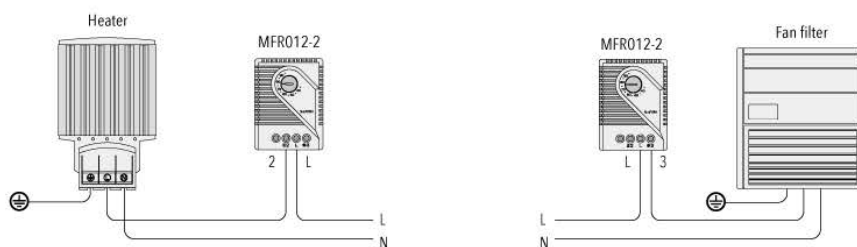

DIMENSION (mm)



WIRING DIAGRAM



Heater

Fan filter
Cooling equipment signal device

The electronic humidity controller can sense the relative humidity inside the electrical box and turn on the heater at the set point to prevent the formation of water droplets inside the box. The LED screen at the adjustment knob will light up when the heater is working.

- Adjustable and preset relative humidity
- Optional working display (LED)
- High switching performance
- Easy to install with 35mm DIN rail
- Temperature compensation
- Long service life



SPECIFICATION

Switch differences	5% relative humidity ($\pm 1\%$ tolerance) at 25 °C / 77 °F (50% relative humidity)	
Reaction time	About 5 seconds	
Contact method	Switching contact (relay)	
Service life	>50000 cycles	
Maximum switching capacity (relay output)	240VAC, 8 (1.6) A: 120VAC, 8 (1.6) A: 24VDC, 4A	
Electromagnetic compatibility	Complies with EU standards EN 55014-1-2, EN 61000-3-2, EN 61000-3-3	
Optical indicator	LED	
Connection method	Screw terminal	
Install	35mm DIN rail clamp (EN50022)	
Shell	UL94 V-0 light gray plastic	
Weight	About 70g	
Fixed position	Vertical installation	
Applicable temperature	0~+60°C (+32~+140 °F) / -20~+80°C (-4~+158 °F)	
Protection level	IP20	

Model	Working voltage	Setting Range
01245.0-00	230v ac, 50/60hz	40 ~ 90% RH
01246.9-00	120v ac, 50/60hz	40 ~ 90% RH


IP20

CE


-20 +80 °C






CONNECTION EXAMPLE



WIRING DIAGRAM



DIMENSION (mm)



Used to control heating and cooling equipment, filter fans, or signal devices. During operation, the LED screen will On (e.g. heater working).

- Adjustable and preset relative humidity
- Optional working display (LED)
- High switching performance
- Easy to install with 35mm DIN rail
- Temperature compensation
- Long service life



SPECIFICATION

Switch differences	5% relative humidity (± 1% tolerance) at 25 °C / 77 ° F (50% relative humidity)
Sensor element	NTC
Reaction time	5 seconds
Contact method	Conversion contact (relay)
Service life	>50000 cycles
Maximum switching capacity (relay output)	240V AC, 8 (1.6) A 120V AC, 8 (1.6) A` 100WDC at 24V DC
Maximum inrush current	16AAC in 10 seconds
Optical indicator	LED
Connection method	Screw terminal
Install	35mm DIN rail clamp, compliant with EU EN60715 standard
Shell	Light gray plastic, symbol UL 94 V-0 standard
Size	64.5x42x38mm
Weight	About 70g
Installation position	Vertical
Operating/Storage Temperature	-20~+80°C (-40~+185°F)
Operating/Storage Humidity	Maximum humidity 90% (non condensing)




IP20

CE




Model	Working voltage	Setting Range
01131.0-00	230V AC, 50/60Hz	-20~60°C


CONNECTION EXAMPLE



DIMENSION (mm)

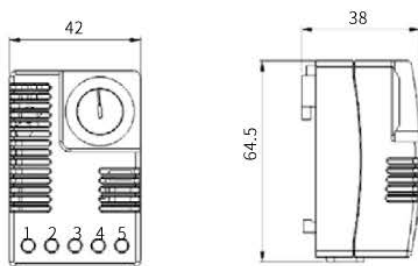

WIRING DIAGRAM



KTOMF012 humidity controller+temperature controller (heating)
KTSMF012 humidity controller+temperature controller (refrigeration)

- Integrated temperature and humidity control
- With work indicator light
- Miniaturization suitable for various applications
- Stable and reliable long-term work
- Easy to install with 35mm DIN rail
- ROHS compliant

Advantage

- Integrated temperature and humidity control, with AC input and output for easy use
- Equipped with a work indicator light for easy identification of whether it is working properly
- Miniaturization suitable for various applications
- Stable and reliable long-term work
- Complies with ROHS standards

Performance:

- Temperature control: Reach the set temperature point automatic power off, $\pm 1 \sim 3^{\circ}\text{C}$
- Humidity control: Reach the set humidity point automatic power off, 5%-10%RH return difference value-
- Power supply: AC220V (other voltage optional)
- Power consumption: about MAX 46mA
- Working range: temperature $-10 \sim +50^{\circ}\text{C}$; Humidity 40-90%RH
- Storage conditions: temperature $-20 \sim +60^{\circ}\text{C}$; Humidity 20-95%RH
- Temperature sensitive element: bimetal sensor
- Temperature sensitive element: bimetal sensor



KTOMF012

KTSMF012

IP20

CE




RoHS
COMPLIANT

$-20 \sim +80$
 $^{\circ}\text{C}$


SPECIFICATION

Switching temperature error	7k(± 4 k)
Switching humidity error	4% relative humidity, $\pm 3\%$ error
Temperature control sensor	Bimetallic temperature sensitive material
Relative humidity range	35% - 95%
Temperature controlled contact form	Jump contact point
Humidity contact form	Transfer contact
Service life	750,000 cycles
Minimum switching capacity	110VAC/DC 100mA
Maximum switching capacity	240VAC 5(1)A DC30W
Electrical connection	Screw terminal
Install	35mm DN guide rail installation
Shell	Flame retardant UL94V-0 plastic, light gray RAL7035
Dimension	70 x 63 x 40mm
Weight	90g
Fixed position	Above cabinet
Operating temperature	$0 \sim +60^{\circ}\text{C}$ ($+32 \sim +140^{\circ}\text{F}$)
Storage temperature	$-20 \sim +80^{\circ}\text{C}$ ($-4 \sim +176^{\circ}\text{F}$)
Class of protection	IP20

DIMENSION (mm)



WIRING DIAGRAM

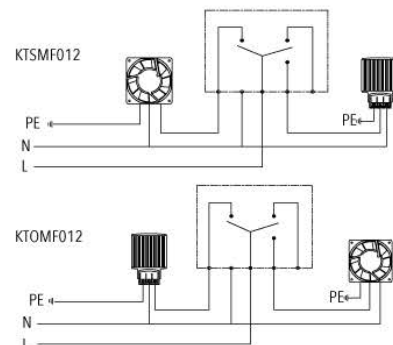

Performance:

The electronic humidity controller can sense the temperature and relative humidity inside the electrical box and turn on the heater at the set point (or replace with a fan) to prevent the generation of water droplets inside the box, and adjust the LED at the knob when the connecting device is working. The screen will light up.

- Temperature and humidity adjustable
- Easy to install with 35mm DIN rail
- Optical operating display (LED)
- High switching capacity
- Long service life

**SPECIFICATION**





Switching differences (temperature)	2K(±1% tolerance) at 25 °C/77°F (50% relative humidity)
Switching differences (humidity)	4% relative humidity (±1% tolerance) at 25 °C/77°F (50% relative humidity)
Reaction time (humidity)	About 5 seconds
Contact method	Switching contact (relay)
Contact impedance	<10m Ω
Service life	NC: >50000 cycles NO: >100000 cycles
Maximum switching capacity (relay output)	NC: 240VAC, 6(1)A NO: 240VAC, 8(1.6)A, NC: 120VAC, 6(1)A NO: 120VAC, 8(1.6)A 24VDC, 4A
Electromagnetic compatibility	Acc.to EN 55014-1-2, EN 61000-3-2, EN 61000-3-3
Optical indicator	LED
Connection method	5-pole terminal
Install	35mm DIN rail clamp (EN50022)
Shell	UL94 V-0 light gray plastic
Size	77x60x43mm
Weight	About 0.20kg
Applicable temperature	0~+60°C (+32~+140°F)/-20~+80°C (-4~+176°F)
Protection level	IP20

IP20

CE



Model	Working voltage	Setting temperature	Setting Range
01230.0-00	230VAC, 50/60Hz	0~60 °C	50 ~ 90% RH
01230.9-01	120VAC, 50/60Hz	0~60 °C	50 ~ 90% RH

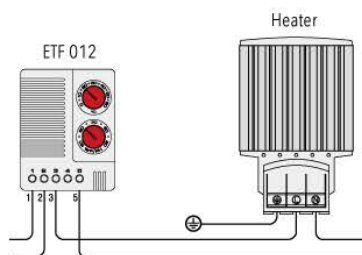CONNECTION EXAMPLE**WIRING DIAGRAM****DIMENSION (mm)**



External sensor



Overview

The product adopts MCU control system, respectively real-time temperature and humidity detection, and achieve real-time control, in order to ensure Verify that the temperature and humidity in the environment are in an appropriate range. Intelligent communication function, the temperature and humidity measurement value through the microprocessor 485 signal directly transmitted to the background computer, the user You can observe the environment of the remote control cabinet in real time.

1. Function description

The temperature and humidity values are displayed on a high definition LCD screen. Displaying diagram as below, i.e. (Figure A):

- Displaying humidity measurement by 2 digits, i.e.: 60%RH
- Displaying humidity set value: In the set state, 500ms/time, humidity set value is blinking, i.e.: 40%RH
- Displaying temperature measurement value by 2 digits, i.e.: 25°C
- Displaying temperature set value: In set state, 500ms/time, temperature set value is blinking: i.e.: 25°C
- Dehumidifying mode indication, i.e. (Figure B): When the equipment is in dehumidifying mode, it display the status by the dynamic fan
- Heating mode indication, i.e. (Figure C): when the equipment is in heating mode, it display the status by heating signal



(Figure A)



(Figure B)




(Figure C)




(Figure D)

SPECIFICATION

Supply voltage	AC220V $\pm$ 10%, other voltages can be customized
Humidity measurement range	20-90% RH (without condensation)
Humidity measurement accuracy	$\pm$ 5% RH (tested at 25°C)
Temperature measurement range	5~60°C
Temperature measurement accuracy	$\pm$ 1°C (tested at 25°C)
Humidity setting range	10-80% RH
Product Work Environment	Temperature 5~60°C, humidity 10~95% RH (no condensation)
Product storage environment	Temperature -10~40°C, humidity 10~90% RH (no condensation)
Humidification load size	Pure resistance load AC250V/10A, DC30V/5A
Power down memory	In the event of a power outage, the product's set parameters are automatically memorized.



(Figure 1)



(Figure 2)

1.2 Keys, as shown in Figure D

- "POWER" key: Press this key to switch the machine cycle.
- "SET" key: under the boot state, press the key, the product is in the humidity or temperature parameter setting State, when the humidity (or temperature) display digital tube flashes. No key pressed, 10 seconds later since Move out of setting state, display the current humidity measurement value.
- "Plus" key: in the setting state, press the key, according to each press, set value plus one, wetThe maximum set value of degree is 80%, and the maximum set value of temperature is 60
- No key pressed, 10 seconds later since Move to exit the setting state.
- "Minus" key: in the setting state, press the key, according to each press, set value minus one, wetThe minimum set value of degree is 10%, and the minimum set value of temperature is 5
- No key pressed, 10 seconds later since Move to exit the setting state.

2. Control the output

2.1 Humidity control output when the humidity measurement value is greater than the humidity set value, the output relay is closed and the dehumidification work begins when, the running indicator - fan rotation; when The humidity measurement value is less than (set value -5), stop dehumidify, and the running indicator is off. Humidity return difference is 5%rh to prevent load from opening frequently at zero cut-off point. Affect the service Life. During the initial power-on, the output delay is 3 seconds, that is, after 3 seconds, the output is wet after the Degree condition, the control dehumidification relay starts to operate and the display starts to run.

2.2 Temperature control output when the temperature measurement value is less than the humidity set value, the output relay closes and starts heating (dehumidification).work, at this time, the running indicator -- heating wire display; when the temperature measurement is greater than (set value +2), stop heating, and the running Indicator is off. The temperature return difference is 2 to prevent the load at zero boundary points open frequently, Affecting the service life. During the initial power-on, the output delay is 3 seconds, that is, 3 seconds later, When the humidity condition is satisfied, the control heating relay starts to operate and the display starts to run.

2.3 Power failure memory to ensure that user parameter settings remain unchanged after power failure, memory protection power is added.

2.4 communication part this product adopts 485 communication mode, temperature, humidity and running status parameters are uploaded to the remote calculation on board.


3. Overall dimensions and wiring drawings, as shown in Figure 1.

KTH082 remote intelligent monitor for temperature and humidity www.cnlinkwell.com

3.1 The installation mode of this product is embedded, and the opening size is 82.5*82.5(unit: mm).

3.2 Schematic diagram of wiring terminals on the back of controller, as shown in Figure 2

- (1) AC220V/50Hz: Connect terminals L and N;
- (2) Load terminal: normally open point heater, normally closed point fan;
- (3) 485 communication terminal: Connect A and B.



HEATING



Performance:

These heaters are used in enclosures where damage from condensation must be prevented or where the temperature may not fall below a minimum value. The aluminium profile heater body design has a chimney effect and distributes the heat evenly. The pressure clamp connector save time and simplify installation.

- Pressure clamp connectors
- Dynamic heating up
- Wide voltage range
- Temperature limiting
- Energy saving
- Clip fixing, Quick installation



HG140-15W



HG140-150W

SPECIFICATION


Operating voltage	110-250V AC/DC
Thermal element	PTC thermistor (PTC)
Heater body	Aluminium profile, anodised black
Connecting type	Push-in terminal
Connecting case	UL94 V-0, black plastic
Fitting position	Vertical
Operating	-30 °C ~ +70 °C
Protection	IP20
Certificate	CE

IP20 CE -30 +70 °C

Heater burn protective cover (optional)



(15W-75W) Universal





(100W-150W) Universal



Operating voltage below 140V AC/DC will reduce the heat output by about 10%

Model	Heat output (W) 20°C ambient temperature	Maximum allowable current (A)	L (mm)	Weight (kg)
HG140-15W	15W	1.5	70	0.25
HG140-30W	30W	2.5	70	0.25
HG140-45W	45W	3.0	70	0.25
HG140-60W	60W	3.5	70	0.25
HG140-75W	75W	4.0	70	0.25
HG140-100W	100W	4.5	140	0.40
HG140-150W	150W	9.0	140	0.40

DIMENSION (mm)

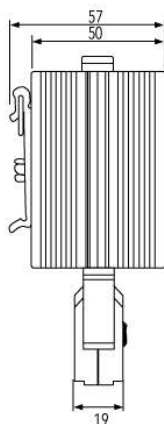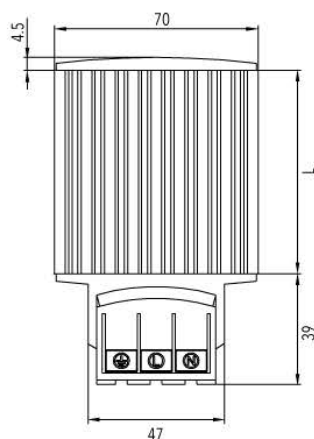

WIRING DIAGRAM



Performance:

These heaters are used in enclosures where damage from condensation must be prevented or where the temperature may not fall below a minimum value. The aluminium profile heater body design has a chimney effect and distributes the heat evenly. The pressure clamp connectors save time and simplify installation.

- Screw terminal connector
- Dynamic heating up
- Wide voltage range
- Temperature limiting
- With indicator showing on/off
- Energy saving
- Clip fixing
- Quick installation



LK 140-15W



LK 140-150W

SPECIFICATION

Operating voltage	110-250V AC/DC
Thermal element	PTC thermistor (PTC)
Heater body	Aluminium profile, anodised silver
Connecting type	Screw terminal
Connecting case	UL94 V-0, black plastic
Fitting position	Vertical
Operating	-30 °C ~ +70 °C
Protection	IP20
Certificate	CE



Heater burn protective cover (optional)







(15W-75W) Universal



(100W-150W) Universal

Operating voltage below 140V AC/DC will reduce the heat output by about 10%

Model	Heat output (W) 20°C ambient temperature	Maximum allowable current (A)	L (mm)	Weight (kg)
LK140-15W	15W	1.5	70	0.25
LK140-30W	30W	2.5	70	0.25
LK140-45W	45W	3.0	70	0.25
LK140-60W	60W	3.5	70	0.25
LK140-75W	75W	4.0	70	0.25
LK140-100W	100W	4.5	140	0.40
LK140-150W	150W	9.0	140	0.40

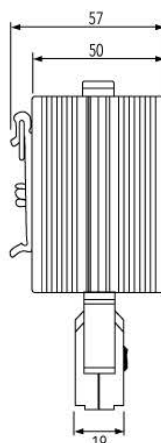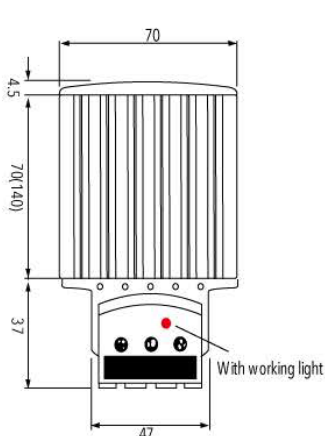DIMENSION (mm)

WIRING DIAGRAM


Performance:

- Adopt ceramic semiconductor PTC heating element;
- Aluminum alloy heat sink with high thermal conductivity;
- Modular heaters specially designed to accommodate limited installation space;
- 49/70/100mm three widths, uniform thickness, length can be customized;
- Customizable power and table temperature;
- Standard configuration of high temperature resistant silicone cable length 2 meters;
- Each face is designed with a structure for installation
- 35mm DIN rail mounting;

- Wide voltage(18~36V/110~240V AC/DC)
- High thermal efficiency
- Dynamic temperature rise
- Long service life
- Constant surface temperature
- High safety factor



SPECIFICATION


Operating voltage	AC/DC 110~240V (Min. 110V, Max. 265V) AC/DC 18~36V (Min. 16V, Max. 40V)
Heating element	Ceramic semiconductor PTC
Heat sink material	Aluminium alloy
Connection mode	Standard configuration high temperature resistant silicone cable 2×0.5mm ² length 2 meters
Installation mode	Surface screw mounting / 35mm DIN rail mounting (additional accessories)
Dielectric withstand voltage	1500VAC 50/60Hz time 1 minute
Insulation resistance	100MΩ @500VDC
Ambient humidity	≤90%RH
Ambient temperature	-30°C~+70°C(storage -45°C~+120°C) no condensation, no icing
Protection/safety level	IP20

IP20
CE

-30 +70
°C

Model	Rated voltage	Heat sink size	Length	Power	Weight
	VAC/DC	mm	mm	W	g
LKP805-2050	110~240	W49×H21	110	50	277
LKP805-4015	18~36				
LKP807-2075	110~240	W70×H20	130	90	375
LKP807-4075	18~36				
LKP807-2100	110~240	W70×H20	160	120	435
LKP807-4100	18~36				
LKP810-2120	110~240	W49×H20	160	150	585
LKP810-4120	18~36				
LKP810-2150	110~240	W49×H20	200	165	685
LKP810-4150	18~36				

DIMENSION (mm)

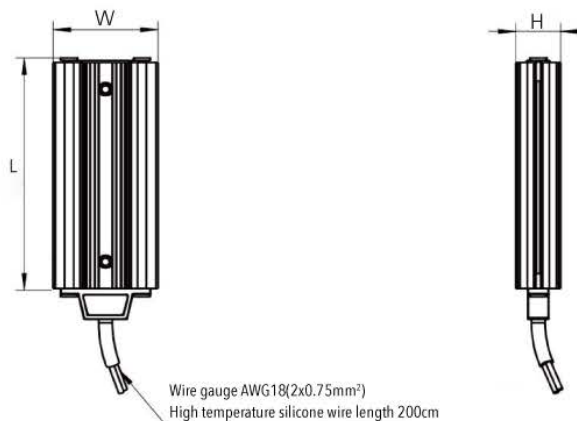

Performance:

- Adopt ceramic semiconductor PTC heating element;
- Aluminum alloy heat sink with high thermal conductivity;
- Ultra-thin, specially designed to fit in limited Spaces,
- Only 8.2mm thickness, 60/100mm two widths, length can be customized
- Customizable power and table temperature
- Wide operating voltage 18~36V/110~240V AC/DC universal
- Surface screw mounting

- Wide voltage(18~36V/110~240V AC/DC)
- Dynamic temperature rise
- Constant surface temperature
- High thermal efficiency
- Long service life
- High safety factor




SPECIFICATION

Operating voltage	AC/DC 110~240V (Min. 110V, Max. 265V) AC/DC 18~36V (Min. 16V, Max. 40V)
Heating element	Ceramic semiconductor PTC
Heat sink material	Aluminium alloy
Connection mode	Wire gauge AWG20(2×0.5mm ²) High temperature resistant silicone wire length 300mm
Installation mode	Surface screw mounting / 35mm DIN rail mounting (additional accessories)
Dielectric withstand voltage	1500VAC 50/60Hz time 1 minute
Insulation resistance	100MΩ @500VDC
Ambient humidity	≤90%RH
Ambient temperature	-30°C~+70°C(storage -45°C~+120°C) no condensation, no icing
Protection/safety level	IP20

IP20
CE

-30 ~ +70
°C

Model	Rated voltage	Power	Surface temperature	Heat sink size	Length	Weight
	VAC/DC	W	°C	mm	mm	g
LKP506-2008	110~240	8	55	W60×H8	100	90
LKP506-2017	110~240	17	90			
LKP506-2022	110~240	22	115			
LKP506-4005	18~36	5	45			
LKP506-4016	18~36	16	95			
LKP506-4038	18~36	38	175	W100×H8	160	215
LKP510-2031	110~240	31	90			
LKP510-2043	110~240	43	110			
LKP510-2055	110~240	55	135			
LKP510-4010	18~36	10	45			
LKP510-4029	18~36	29	85			
LKP510-4069	18~36	69	160			

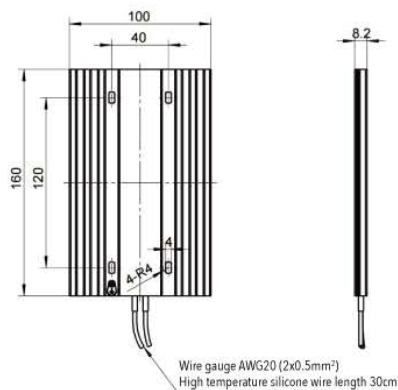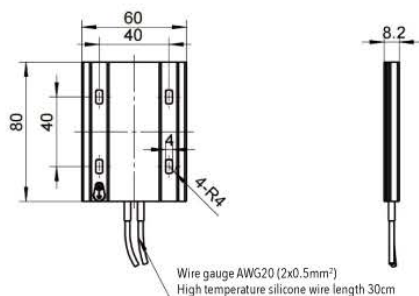DIMENSION (mm)


- Compact design
- Clip fixing
- Dynamic heating-up
- Over-heating cut-off
- Long service life
- Simple installation



IP20


CE

-30 ~ +70
°C

SPECIFICATION

Heating element	PTC Resistor
Input	AC220V 50/60Hz 75W
Dielectric strength	Input 1500V/0.5mA/5s
Safety protection	Fan over-heat cut-off
Axial Fan	13.8/17.4m ³ /h (50/60Hz)
Service Life	50000H at 25°C
Heater	AC220V
Axial Fan	DC24V
Cable Holder {black}	UL94V-0 plastic
Mounting	35mm DIN rail (vertical)
Operation Temperature	-30 ~ +70°C
Protection class	IP20

DIMENSION (mm)

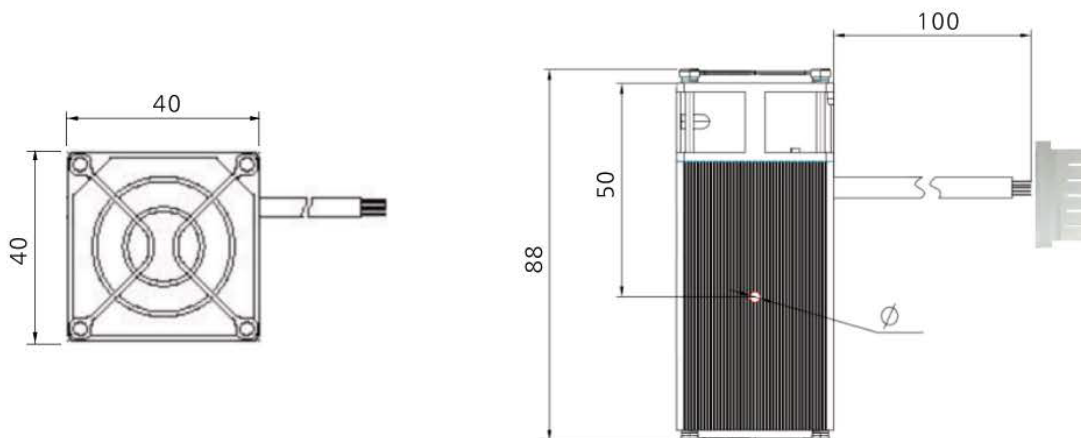

Performance:

Compact fan heater prevents formation of condensation. The integrated high performance axial fan provides forced air circulation and so guarantees an even temperature in enclosures. With internal terminal connector.



- Compact Design
- Clip fixing
- Long service life
- Maintenance free
- Temperature safety cut-out


SPECIFICATION

Operating voltage	230VAC 50/60Hz
Heating element	PTC resistor, self regulating and temperature limiting
Temperature safety cut-out	To protect against overheating in case of fan failure
Heater body	Anodised extruded aluminium profile
Surface temperature	Max.75°C(400W)
Axial fan	Airflow, free flow AC: 45m³/h 50Hz or 54m³/h(60Hz)
Mean life	50 000h at 25C
Connection	Push-in terminal
Connection casing	Plastic according to UL94 V-0, black
Mounting	Clip for 35mm DIN rail, EN 50022
Fitting position	Vertical
Operating temperature	-30~+70°C
Protection class	IP20



Model	Operating voltage	Heat production	Width/height/depth	Weight(kg)
LK046-100W	230VAC, 50/60HZ	100W	85x130x85mm	0.77kg
LK046-150W	230VAC, 50/60HZ	150W	85x130x85mm	0.77kg
LK046-200W	230VAC, 50/60HZ	200W	85x130x85mm	0.77kg
LK046-250W	230VAC, 50/60HZ	250W	85x183x85mm	1.10kg
LK046-400W	230VAC, 50/60HZ	400W	85x216x85mm	1.40kg

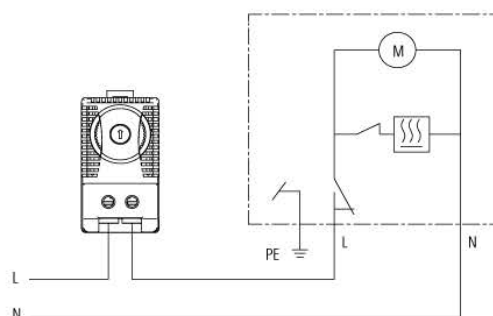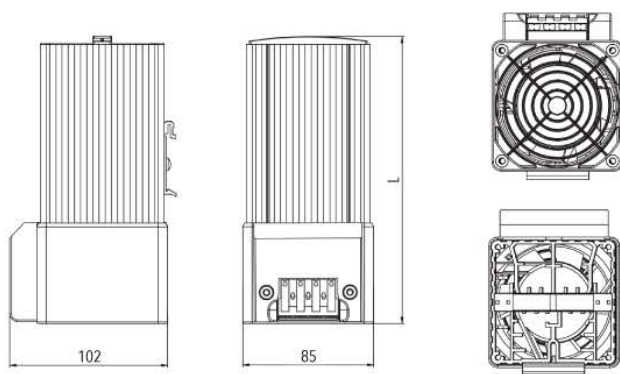DIMENSION (mm)
WIRING DIAGRAM


Performance:

Compact fan heater prevents formation of condensation. The integrated high performance axial fan provides forced air circulation and so guarantees an even temperature in enclosures. With internal terminal connector.

- Compact Design
- Clip fixing
- Long service life
- Maintenance free
- Temperature safety cut-out



HGL046-200W

HGL046-250W



HGL046-500W

SPECIFICATION

Operating voltage	230VAC 50/60Hz
Heating element	PTC resistor, self regulating and temperature limiting
Temperature safety cut-out	To protect against overheating in case of fan failure
Heater body	Anodised extruded aluminium profile
Surface temperature	Max.75°C(400W)
Axial fan	Airflow, free flow AC: 45m³/h 50Hz or 54m³/h(60Hz)
Mean life	50 000h at 25C
Connection	Push-in terminal
Connection casing	Plastic according to UL94 V-0, black
Mounting	Clip for 35mm DIN rail, EN 50022
Fitting position	Vertical
Operating temperature	-30~+70°C
Protection class	IP20



Model	Operating voltage	Heat production	Width/height/depth	Weight(kg)
HGL046-100W	230VAC, 50/60HZ	100W	86x135x107mm	0.77kg
HGL046-150W	230VAC, 50/60HZ	150W	86x135x107mm	0.77kg
HGL046-200W	230VAC, 50/60HZ	200W	86x135x107mm	0.77kg
HGL046-250W	230VAC, 50/60HZ	250W	86x180x107mm	1.10kg
HGL046-400W	230VAC, 50/60HZ	400W	86x220x107mm	1.40kg
HGL046-500W	230VAC, 50/60HZ	500W	86x220x107mm	1.40kg

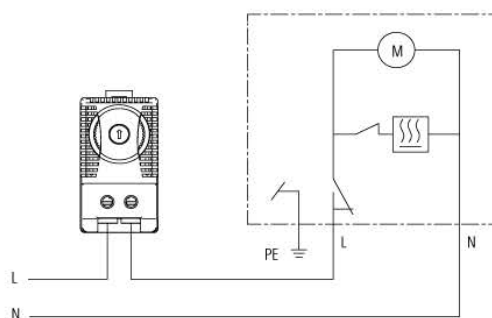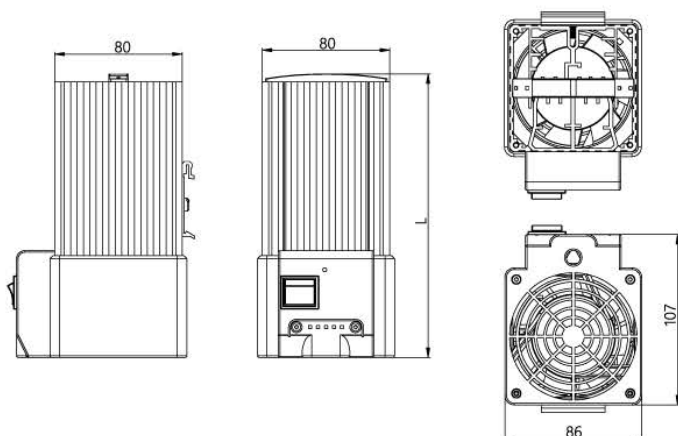DIMENSION (mm)
WIRING DIAGRAM


Performance:

These heaters are used in enclosures where damage from condensation must be prevented or where the temperature may not fall below a minimum value. The aluminium profile heater body design has a chimney effect and distributes the heat evenly. The pressure clamp connectors save time and simplify installation.

- Pressure clamp connectors
- Dynamic heating up
- Wide voltage range
- Temperature limiting
- Energy saving
- Clip fixing, Quick installation



LK047-30W

LK047-20W

SPECIFICATION


Operating voltage	110-250V AC/DC
Thermal element	PTC thermistor (PTC)
Heater body	Aluminium profile, anodised silver
Connecting type	Lead wire
Connecting case	UL94 V-0, black plastic
Fitting position	Vertical
Operating	-30 °C ~ +70 °C
Protection	IP44
Certificate	CE



Operating voltage below 140V AC/DC will reduce the heat output by about 10%

Model	Heating capacity	Maximum current (A)	L(mm)	Weight(kg)
LK047-20W	20W	1.5	60	0.2
LK047-30W	30W	2.5	70	0.21

DIMENSION (mm)

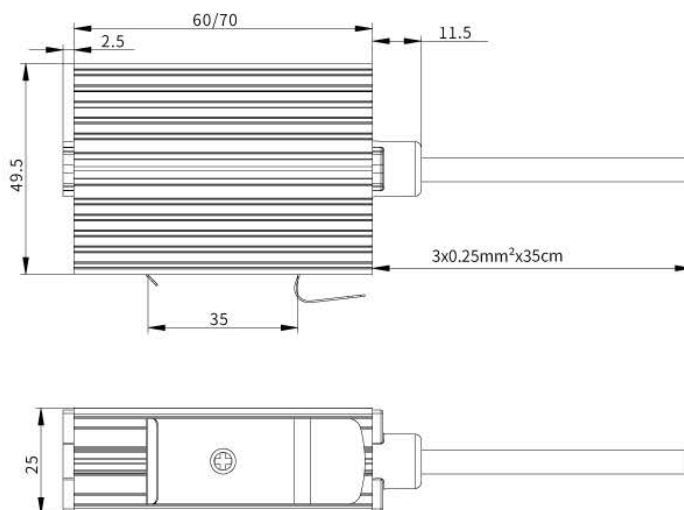

Performance:

Compact high-performance fan heater prevents formation of condensation and frost and provides an evenly distributed interior air temperature in enclosures with electric/electronic components. This fan heater is available without fan (HV 031) and with fan (HVL 031).

- Compact
- Flat design
- High air through-flow
- Clip fixing
- Temperature safety cut-out
- UL (Option)



HVL031-100W



HVL031-200W

SPECIFICATION

HVL 031/HV 031	Heater without fan/ Heater with fan
Heating element	High performance cartridge
Temperature safety cut-out	To protect against overheating in case of fan failure
Heater body	Die-cast aluminium
Connection	Screw terminal
Connection casing	Plastic according to UL94 V-0, BLACK
Mounting	Clip for 35mm DIN rail
Fitting position	Vertical
Operating/ temperature	-30~+70°C
Protection type/Protection class	IP20
HVL 031	Heater with fan
Service life	50,000h at 25°C
Connection(axial fan)	2-pole screw connector 2.5mm ² (L2/N2)



IP20

CE

-30 +70
°C


Art.no.HVL031 (with fan)	Heating wattage	Air flow rate	Size	Weight(kg)
230VAC,50/60Hz		Free Blow		
HVL031-100W	100W	35m ³ /h	80X112X47mm	0.60kg
HVL031-150W	150W	35m ³ /h	80X112X47mm	0.60kg
HVL031-200W	200W	108m ³ /h	119X151X47mm	0.90kg
HVL031-300W	300W	108m ³ /h	119X151X47mm	0.90kg
HVL031-400W	400W	108m ³ /h	119X151X47mm	0.90kg

Art.no.HV 031 (W/O fan)	Heating wattage	Size	Weight(kg)
230VAC,50/60Hz			
HV031-100W	100W	80X112X47mm	0.40kg
HV031-150W	150W	80X112X47mm	0.40kg
HV031-200W	200W	119X151X47mm	0.50kg
HV031-300W	300W	119X151X47mm	0.50kg
HV031-400W	400W	119X151X47mm	0.50kg

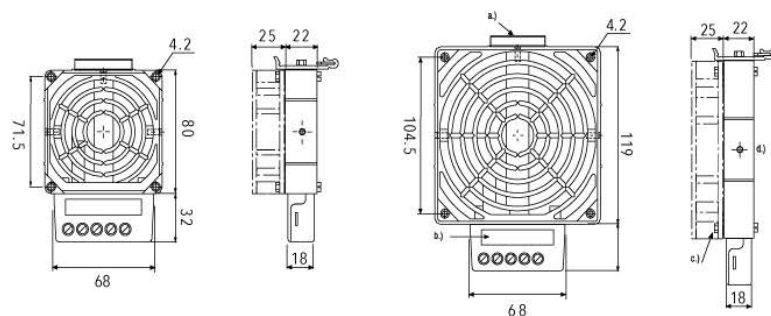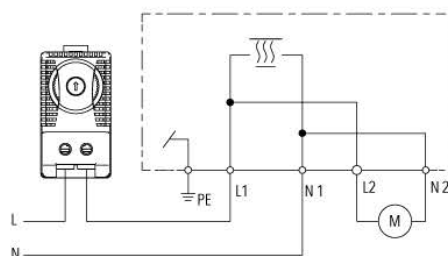DIMENSION (mm)

WIRING DIAGRAM


Performance:

Compact high-performance fan heater prevents formation of condensation and frost and provides an evenly distributed interior air temperature in enclosures with electric components.

- Compact design
- Clip fixing
- Long service life
- Maintenance free
- UL(Optional)




IP20 CE -30 +70 °C


SPECIFICATION

Model	LK143			
Rated output voltage (+5/-10%) at 10°C	150W	300W	400W	500W
Input voltage	110-240V AC			
Flat ratio	50-60Hz			
Maximum surface temperature (ambient temperature 25°C)	74°C			
Link method (cage connection)	Push-in			
Operating/storage temperature	-30~+70°C(RH<20%)			
Air flow rate (zero static pressure)	30m³/hr (18 CFM)			
Weight	300g			
Protection	IP20			
Mounting	DIN 35 Vertical			

DIMENSION (mm)

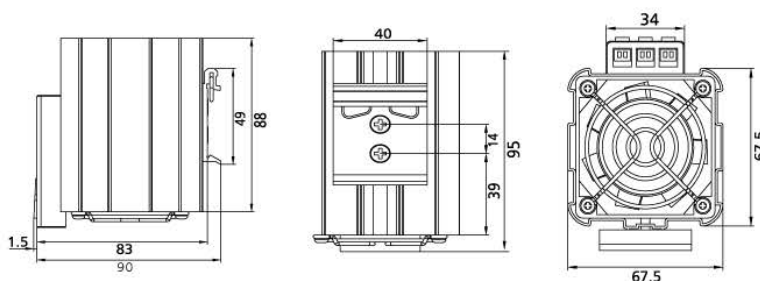

WIRING DIAGRAM

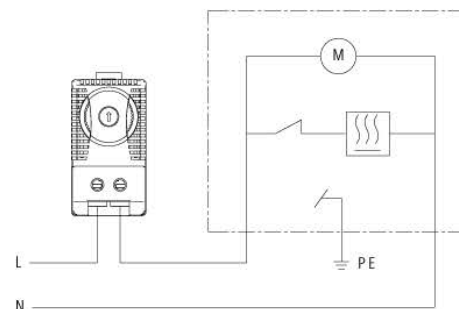

Performance:

Compact high-performance fan heater prevents formation of condensation and frost and provides an evenly distributed interior air temperature in enclosures with electric components.


- Switchable power levels
- Push-in terminal connection
- Compact design
- Clip fixing
- Long service life


SPECIFICATION

Model	LK145					
Power（switchable）	200/300W	200/400W	300/400W	500/800W	900/1200W	1000/1800W
Fan Air Flow	30 m³/h			50 m³/h	150 m³/h	150 m³/h
Rated Voltage	200-240V AC					
Frequency	50/60 Hz					
Housing Material	Plastic UL94-V0					
Connection	Push in terminal					
Working Tempreature	-30~+70℃					
Protection	IP20					
Mounting	DIN 35 Vertical					

IP20
CE

-30 ~ +70
°C

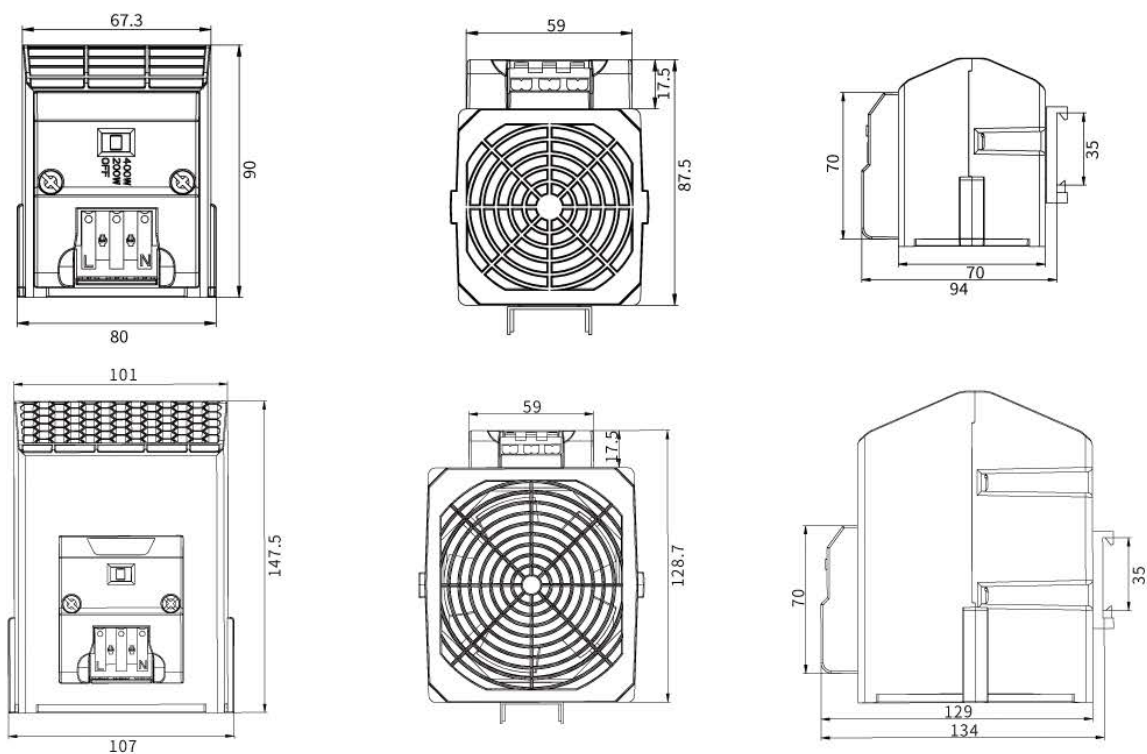DIMENSION (mm)


Performance:

Compact fan heater prevents formation of condensation. The integrated high performance axial fan provides forced air circulation and so guarantees an even temperature in enclosure.

- Compact design
- Long service life
- Maintenance free
- Built in high air flow axial fan
- PTC resistor, self regulating
- Guide rail installation, one card is closed





IP20

CE

-30 +70
°C**SPECIFICATION**

Feature	Unit	KHL120075.0-00	KHL120100.0-00	KHL120150.0-00	KHL120230.0-00	KHL120300.0-00
Heating capacity*	W	75	100	150	230	300
Voltage	V/Hz	110-250VAC/DC-Fan 24VAC/DC				
Maximum current	A	4	4	6	6	8
Heating element	-	PTC resistor, self regulating				
Radiator	-	Extruded aluminium profile, anodized				
	-	Ball bearing, service life 50000 h at 25°C (77°F) Fair flow rate 11m³/h, free flow				
Axial flow fan		Air flow rate 11m³/h, free flow				
						Air flow rate 33m³/h Free flow
Electrical connections	-	Silicone cable, 4x0.5m³, length 400mm				
Protection level iec	-	Class I				
Protection level en60529	-	IP20				
Operating temperature	°C(°F)	-30~+70 (-4~+158)				
Storage temperature	°C(°F)	-30~+70 (-13~+158)				
Card slot installation	-	Clip for mounting on DIN rail 35mm EN50022				
Installation position	-	Best performance in vertical installation				
Size hxxwxd	mm	97x40x40	97x40x40	132x40x40	142x40x40	157x40x40
Cable length	mm	400	400	400	400	400
Weight (packaging)	kg	0.20(0.21)	0.20(0.21)	0.26(0.28)	0.28(0.30)	0.40(0.42)
Certificate	-	CE				

*Environmental temperature 20°C (68 °)

DIMENSION (mm)**WIRING DIAGRAM**

- Compact design
- Clip fixing
- Temperature safety cut-out

- Long service life
- Maintenance free

Performance

Compact fan heater prevents formation of condensation. The integrated high performance axial fan provides forced air circulation and so guarantees an even temperature in enclosure.






IP20
CE

-30 ~ +70
°C

SPECIFICATION

Heating element	PTC
Temperature safety cut-out	To protect against overheating in case of fan failure
Heater body	Anodised extruded aluminium profile
Axial fan, ball bearing	Airflow, free flow, air volume: 35m³/h, service life: 50000h at 25°C
Connection	5-pole screw connector 2.5mm²
Mounting	Clip for 35mm din rail
Fitting position	Vertical
Operating temperature	-30 ~ +70°C
Storage temperature	-30 ~ +70°C
Protection class	IP20

Model No.	Heating capacity	Dimensions	Weight
230vac, 50/60Hz			
150.0-00	150W	110x116x118mm	0.6kg
200.0-00	200W	110x116x118mm	0.6kg
250.0-00	250W	110x116x118mm	0.6kg
300.0-00	300W	110x116x118mm	0.6kg
400.0-00	400W	110x116x118mm	0.6kg
650.0-00	650W	110x116x129mm	1.1kg
800.0-00	800W	167x132x132mm	1.5kg
1000.0-00	1000W	167x132x132mm	1.5kg
1200.0-00	1200W	167x132x132mm	1.5kg
1500.0-00	1500W	167x132x132mm	1.5kg

DIMENSION (mm)


- Compact
- DesignClip fixing
- Temperature safety cut-out
- Long service life
- Maintenance free



IP20


CE

-30 +70
°C


SPECIFICATION

KHP300	With Fan
Heating element	PTC
Input voltage,frequency, power	AC 230V 50/60Hz 300-350W
Insulating property	2000V/0.5mA/5s
Surface Temperature	60°C (at 30°C room temperature)
Axial fan,ball bearing	Air flow: AC: 24m³/h (50Hz) or 31m³/h (60Hz)
RPM	2400
Heater body	Aluminium alloy castings+PPS profile
Cooling methoed	Natural cooling
Connection Casing	Plastic according to UL94V-0 ,black
Mounting	Clip for 35mm DIN rail
Fitting position	Vertical
Operating/Storage temperature	-30~+70°C
Protection class	IP20
Mean life	50000h at 25°C

DIMENSION (mm)

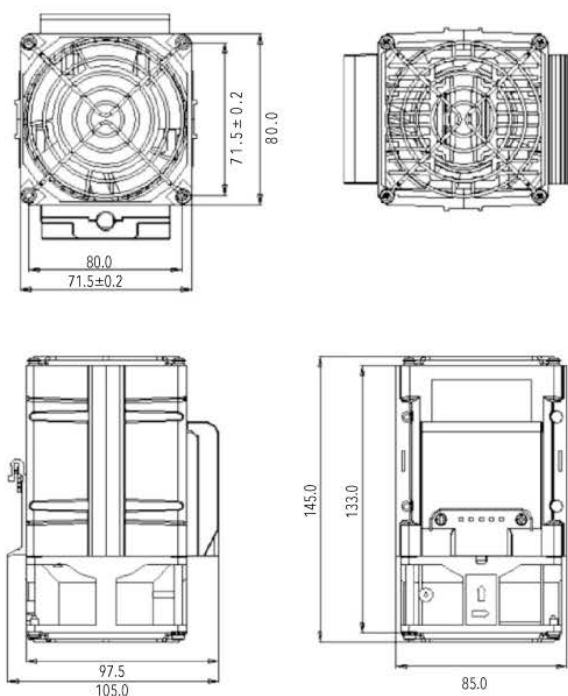

WIRING DIAGRAM

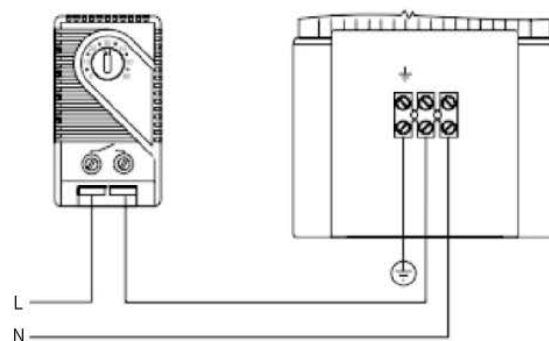



The product is composed of high-quality nickel-chromium alloy heat pipe, die-casting aluminum structure heat sink, high-performance axial fan, and temperature control switch. The electric heat pipe is placed in the center of the radiator body. The temperature control switch is near the electric heat pipe and hidden in the radiator body. The axial flow fan is close to the radiator body.



IP20
CE

-30 ~ +70
°C

SPECIFICATION

LKHB 300	With fan
Heating element	High performance core
Input voltage, frequency, power	AC 230V 50/60HZ 300W
Insulating property	2000V/0.5mA/5s
Temperature safety cut-out	to protect against overheating in case of fan failure
Heating body	Die-cast aluminium (glass bead blasted)
Speed	2700Rpm
Mounting	Use M6 screws for fixation
Connection	WAGO terminal, Standard male and female
Fitting position	Vertical
Operating/storage temperature	-30 ~ +70°C
Protection class	IP20
Mean life	50000h at 25°C
Cooling mode	Automatic cooling

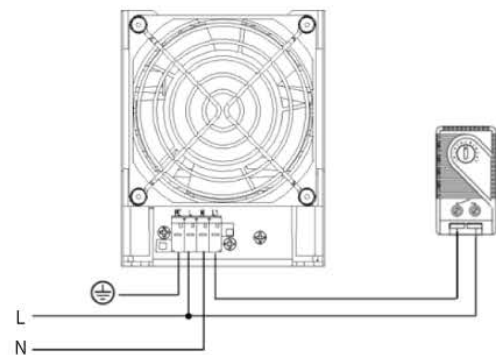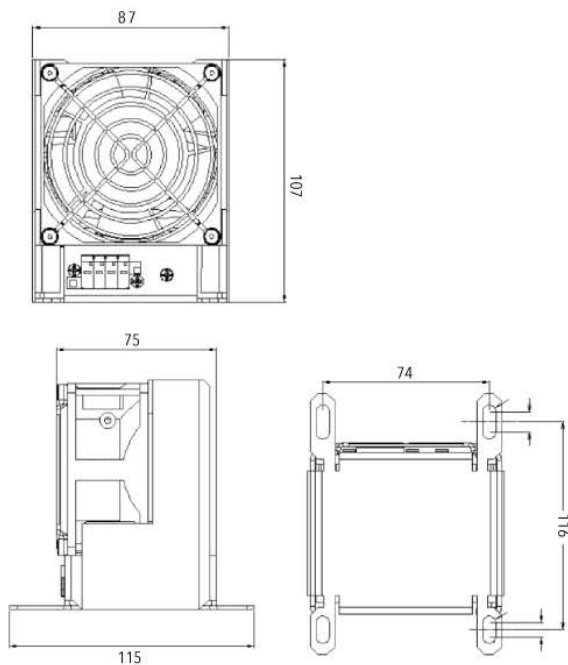Connection Example
WIRING DIAGRAM




LIGHTING



PL263



- Ear mounting
- Double strong magnetic system
- Lithium battery
- Multi light mode
- Function of power bank

PL233/400



- Ear mounting
- Multi light mode
- Double strong magnetic system
- Function of power bank
- Lithium battery





SPECIFICATION

Model	PL263
Dimensions	263x43.6x41mm
Voltage	DC5V
Power	5W
Electric current	1A
Weight	0.2kg
Screw installation	250mm
Light quantity	500LM
Color temperature	6000K
The use of bearing	-20~+40°C
Installation mode	Magnet tightening/screw installation
Working life	50000h
IP code	Button Switch
Switch mode	The first level main light has a brightness of 10%, the second level main light has a brightness of 50%, the third level main light has a brightness of 100%, the fourth level flashlight has a brightness of 50%, the fifth level flashlight has a brightness of 100%, the sixth level flashlight has SOS flashing, and the seventh level flashlight has burst flashing
Certificate	CE、EMC、ROHS

SPECIFICATION

Model	PL233	PL400
Dimensions	272*38*21mm	448*38*21mm
Voltage	USB 5V	USB 5V
Power	6W	10W
Charging time	3.5h	4h
Weight	0.22kg	0.28kg
Screw installation	250mm	425mm
Light quantity	>650LM	
Color temperature	5000-6500K	
The use of bearing	-10~+45°C	
Induction distance	2m(The human body automatically shuts off after 20 seconds of leaving)	
Installation mode	Magnet tightening/screw installation	
Working life	50000h	
IP code	Constant light mode/human body sensing mode	
Certificate	CE、EMC、ROHS	

DIMENSION (mm)

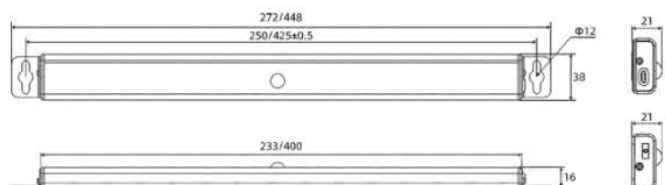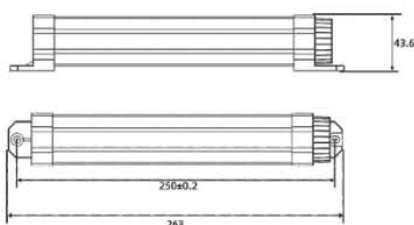

PL233/400



Installation accessories



Switch & Cable

Part # Definition

LCL - 6W. 230. M - C (G)

Sensor (optional)

C : Cable

P : Plug

M : (Magnet)

S : (Screw)

 012: DC 12V,
024: DC 24-48V,
230: AC 85-265V

6W, 9W, 12W, 15W

IP20



CE

-20 ~ +60 °C



SPECIFICATION

Model	LCL-6W	LCL-9W	LCL-12W	LCL-15W
Material	Aluminum+PC			
Power	6W	9W	12W	15W
Voltage	AC85-265V / DC12V / DC12-48V			
Luminous Flux	640LM	910LM	1440LM	1520LM
Mounting	Screw or Magnet			
Power Connection	Cable or Plug			
Color Temperature	6500K			
Rendering Index	Ra > 75%			
Operation Temperature	-20 ~ +60°C			
Additional Feature	Sensor Optional			
IP Rating	IP20			

DIMENSION (mm)



LCL-6W

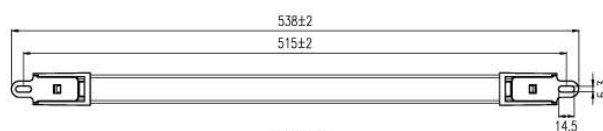


LCL-12W

Installation accessories

IP20
CE
-20 ~ 60
°C

SPECIFICATION

Model	LK026-AC.M (Magnet Mounting)	LK026-DC.M (Magnet Mounting)
	LK026-AC.S (Screw Mounting)	LK026-DC.S (Screw Mounting)
Power	6W	
Voltage	AC 85-265V	DC 12-72V
Luminous Flux	690LM	
Power Connection	Push-in terminal	
Color Temperature	6500K	
Rendering Index	Ra>72%	
Operation Temperture	-40~60°C	
Additional Feature	Sensor Optional	
IP Rating	IP20	

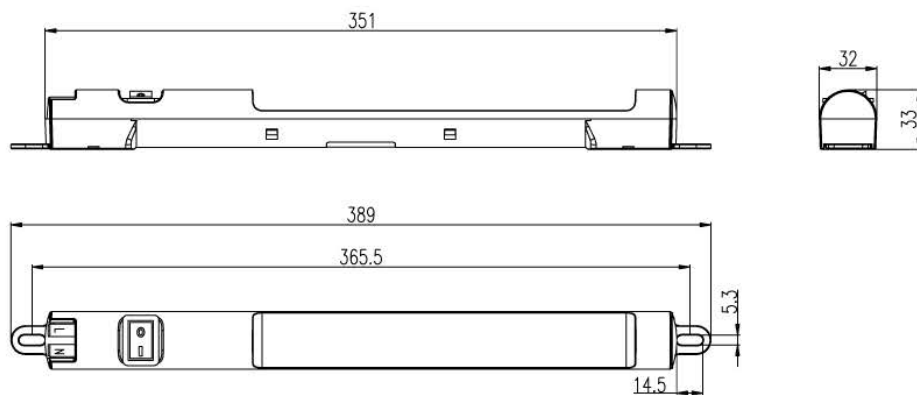DIMENSION (mm)




PL315.220

PL365.220

PL415.220

PL442.220

PL442S.220



IP20 **CE**

SPECIFICATION


Model	PL315.220	PL365.220	PL415.220	PL442.220	PL442S.220
Dimensions	315x24x55mm	365x24x55mm	415x24x55mm	442.4x79x26.4mm	444x80x50mm
Power	4W	6W	8W	12W	8W
Input voltage	96-265V	96-265V	96-265V	220V-240V	220V-240V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
LED luminous	320LM	480LM	640LM	1100LM	800LM
Color temperature	6500K	6500K	6500K	6500 ± 200K	6500 ± 200K
Induction time	30 S	30 S	30 S	30 S	30 S
Sensor distance	3 meters	3 meters	3 meters	3 meters	3 meters
IP Grade	IP 20	IP 20	IP 20	IP 20	IP 20

DIMENSION (mm)


PL315.220/PL365.220/PL415.220

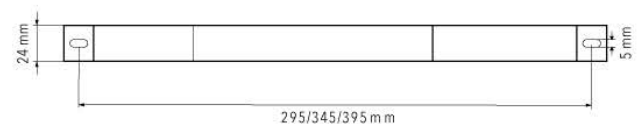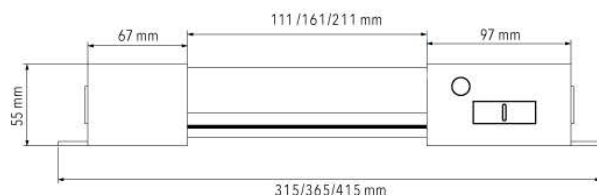

PL442.220

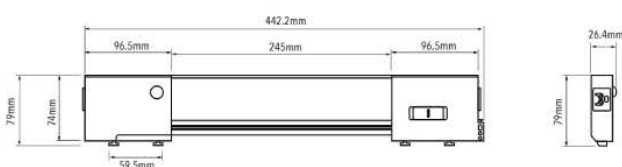

PL442S.220

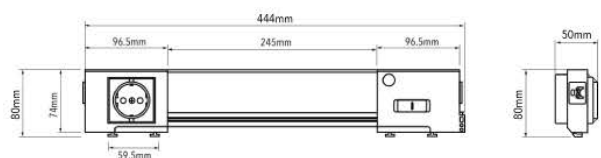



IP20


CE



SPECIFICATION

Model No.	PCLS LED40
Rated voltage	AC 180-230V
Rated power	1.5W
Luminous flux	>600LM
Color temperature	6000-6500K
Mean life	20,000h
Operating temperature range	-10~+70°C
Weight	176g
Dimensions	W37xD35xH100mm
Switch Mode	Stroke (gated) switch
Mounting	Screw fixing
Cable length	2000mm
Protection degree	IP20
Power interface	Positive and negative pole (L/N)
Operation frequency	Mechanical 120 operations/min, Electrical 30 operations/min

Connection Example

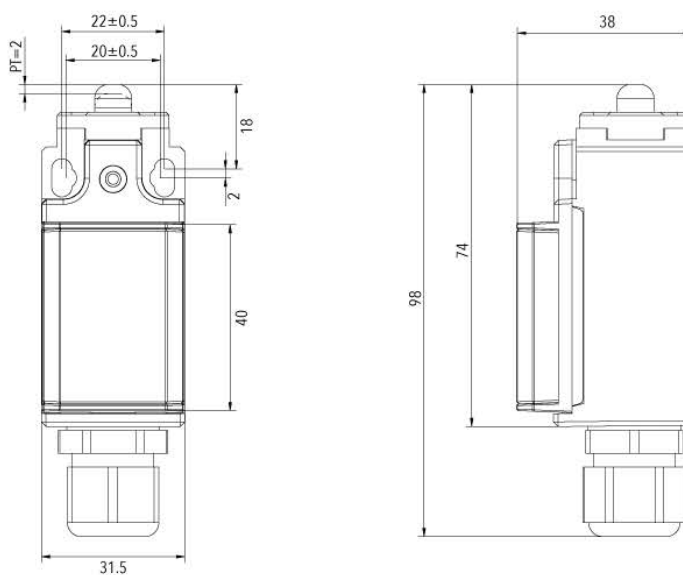



IP20


CE

-10 ~ +70
°C

SPECIFICATION

Model No.	PCLS LED40(131)
Rated voltage	AC 180-230V
Rated power	1.5W
Luminous flux	>200LM
Color temperature	6000-6500K
Mean life	20,000h
Operating temperature range	-10~+70°C
Weight	176g
Dimensions	W37xD35xH100mm
Switch Mode	Stroke (gated) switch
Mounting	Screw fixing
Cable length	2000mm
Protection degree	IP20
Power interface	Positive and negative pole (L/N)
Operation frequency	Mechanical 120 operations/min, Electrical 30 operations/min

Connection Example

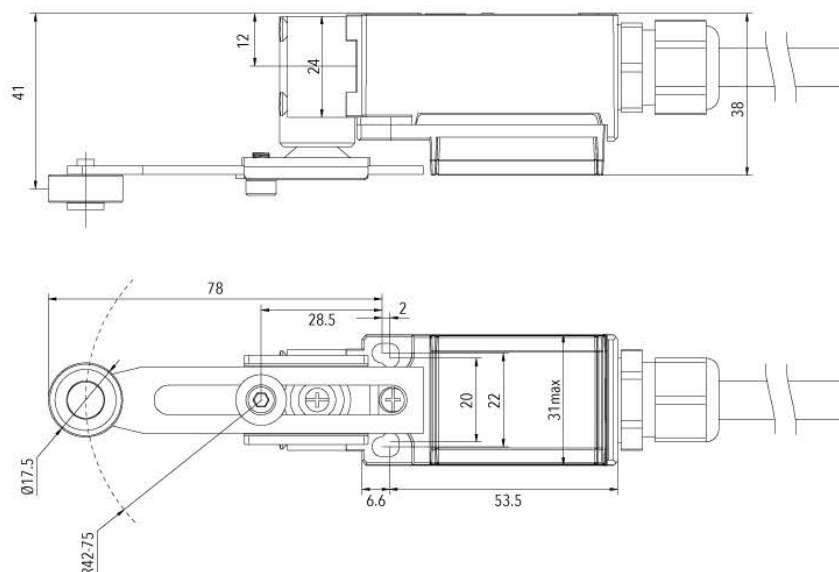


Application

LK12-W Series LED light is designed for instrument cabinet illumination of various switchgear, built in infrared sensor switch, and simplify the user's application design.

Features and advantage



- Built in infrared sensor switch, the user do not install additional switch.
- Economize on energy, In the case of illuminate effect same alike the traditional light, economizing on energy is 75% above.
- Life span is long, the LED light source, someone call it the longevity light, meaning to extinguish never. It's the solid cold light source, adopt a special electric circuit design, the life span can reach to for 100,000 hours, comparing traditional light source life span to grow 1000% above.
- The environmental protection performance is better, without ultraviolet ray and infrared rays in the spectrum, without calories and radiate, the dizzy light is small, and the castoff can recover, without pollution and do not contain the mercury chemical Element. The cold light source, can be touched, belong to typical model of the green illuminate light source.
- Special circuit design, if anyone LED is bad, it isn't without influence to normal illumination of others LED.
- Special structure design, light body position can be adjusted, that solves the problem of less illumination angle of LED.

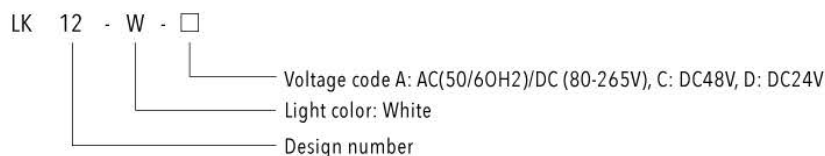Model Explanation

IP20
CE

-25 ~ +55
°C

SPECIFICATION

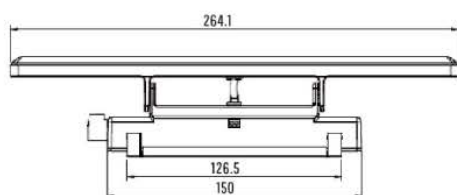Model	LK-12W(sensor)	LK-13W
Power supply	AC(50/60hz)/DC (80-265v), or other voltage customer demand.	
Average illuminance at 300mm from lamp	>300lx	
Color rendering index Ra	> 85	
Switch	Built in infrared switch, active distance 20-80mm	Build in switch
Terminal	Screw terminal, 0.5-2.5mm ²	
Working environment temperature	-25-55 °C	
Fix method	Two hole fixation	
Color of the light	White	
Protection class	IP20	
Withstand voltage	AC2500v, imin	
luminescence component	Led	
Rated humidity	25~95%	
Mean life	More than 100,000h	
Power	6W	

DIMENSION (mm)


LKL10-W series cabinet instrument room lighting is designed for all kinds of switchgear instrument room lighting applications.

Features and advantage

- Economize on energy, In the case of illuminate effect same alike the traditional light, economizing on energy is 75% above.
- Life span is long, the LED light source, someone call it the longevity light, meaning to extinguish never. It's the solid cold light source, adopt a special electric circuit design, the life span can reach to for 100,000 hours, comparing traditional light source life span to grow 1000% above.
- The environmental protection performance is better, without ultraviolet ray and infrared rays in the spectrum, without calories and radiate, the dizzy light is small, and the castoff can recover, without pollution and do not contain the mercury chemical Element. The cold light source, can be touched, belong to typical model of the green illuminate light source.
- Special circuit design, if anyone LED is bad, it isn't without influence to normal lumination of others LED.
- Special structure design, light body position can be adjusted, that solves the problem of less lumination angle of LED.
- The power supply adapt to AC/DC110~230V,suitable in application case of switchgear especially .

Install

It can be assembled by pins or screws. When assembling, fix the mounting bracket first. After connecting the power cord to the lamp body terminal, insert one end of the wiring terminal of the lamp body into the assembly hole on one side of the mounting bracket. At the other end, use a tool (using a straight screw batch) to open the other side of the mounting bracket and insert it.

The Angle between the mounting bracket and the lamp body can be adjusted according to lighting requirements.



LKL10-W




LKL10-W-3

IP20

CE

-25 +55
°C



Model number	LKL10-W	LKL10-W-3
Light source color	White	black
power	1.2 W	3W

SPECIFICATION

Housing material	Power supply	Wire connection	Insulation strength	Light-emitting element	Relative humidity	Life cycle	Protection class
PC-ABS (Halogen free)	AC(50/60Hz) DC 110V~230V	1×4mm ² 2×1.5 mm ²	AC2500V, 1Min	LED	25~95%	More than 100000 hours	IP20



LKL10-W lamp body




LKL10-W support





LKL10-W assembly

DIMENSION (mm)



LKL10-W



LKL10-W-3

PLS-101




PLS-103




PLS-131


IP20



Model	PLS	101	103	131
Operating force	OF[Max.]	700g	700g	500g-cm
Release force	RF[Min.]	200g	200g	100g-cm
Pre-Travel	PT[Max.]	1.8mm	1.8mm	20°
Tripping position	Tp±10%	2.0mm	2.0mm	22.5°
Movement differential	MD[Max.]	1.2mm	1.2mm	10°
After travel	OT[Min.]	4.0mm	4.0mm	75°
Total travel	TT[Min.]	5.8mm	5.8mm	95°
Angle of rotary lever	—	—	—	22.5°

DIMENSION (mm)


PLS-101

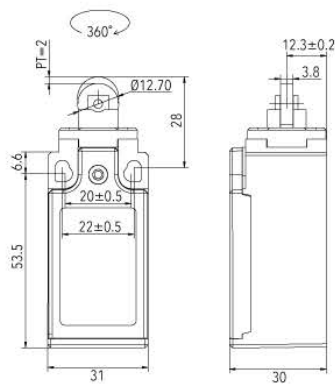

PLS-103

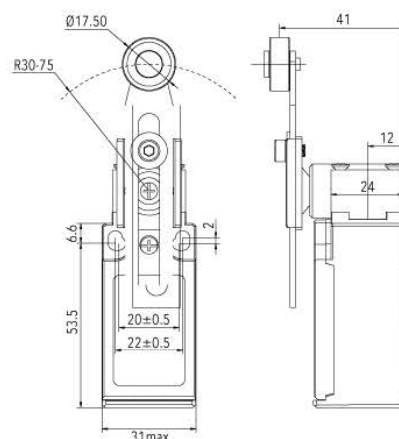
 PLS-131
(optional plastic roller)



Features

- Economic thermoplastic
- Stainless steel roller, punch, and Spring
- Max. $\pm 95^\circ$ rotary lever
- Cable gland size M20*1.5

PLS-101 is a commonly used model, with wire models:


PLS-101-1 (With 1m cable)

PLS-101-2 (With 2m cable)

PLS-101-3 (With 3m cable)

Note: The above is the overall model of the door control switch with wires and mounting base. The default wire length is 2m.

Contact configurations

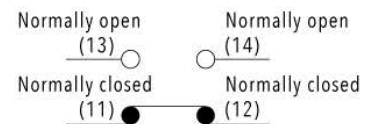

SPECIFICATION

Operating speed	0.5 mm/s to 50cm/s (in case of pin plunger)
Operating frequency	Mechanical: 120 operations/ min Electronic: 30 operations/ min
Contact Resistance	25m Ω (mm) (Initial)
Insulation resistance	100m Ω Min. at 500VDC
Dielectric strength	1000VAC, 50/60Hz/ 1 min between terminals of same polarity 1500VAC, 50/60Hz/ 1 min between current-carrying metal parts and ground 1500VAC, 50/60Hz/ 1 min between each terminal and non- current-carrying metal part
Vibration resistance	10-55 Hz, 1.5mm double amplitude
Shock resistance	Mechanical durability: 1,000m/Sec ² (approx.100G'S) False action durability: 300m/Sec ² (approx.30G'S)
Ambient operating temperature	Operating -10 ~+ 70°C (no icing)
Ambient operating Humidity	95%RH Max
Service life	Mechanical >10,000,000 operations, Electrical > 500,000 operations
Degree of protection	IP65 (IEC standard)

RATINGS

Rated voltage	Non-inductive load (A)				Inductive load (A)			
	Resistive load		Lamp load		Inductive load		Motor load	
	NC	NO	NC	NO	NC	NO	NC	NO
125VAC	5	5	1.5	0.7	3	3	2	1
250VAC	5	5	1	0.5	3	3	1.5	0.8
8VDC	5	5	3	3	5	4	3	3
14VDC	5	5	3	3	4	4	3	3
30VDC	5	5	3	3	4	4	3	3
125VDC	0.4	0.4						
250VDC	0.2	0.2						
Inrush current	N.C.:24A max.、 N.O.:12A max.							

Note: 1. Inductive loads have a power factor of 0.4 min. (AC) and a time constant of 7 msec max. (DC).

2. Lamp loads have an inrush current of 10 times the steady-state current. Motor loads have an inrush current of 6 times the steady-state current.



3. For the products with spring, the operating range is limited to the part from the front of the spring to the 1/3 full length of the spring .


SPECIFICATION

Model	LKP3 1801
Dimensions	85x85x112.5mm
Voltage	PP plastic
Power	2-bit lock+1-bit automatic return
Air volume	10A
Noise	1NO+1NC
Weight	295g
Installation Direction	3000000/time
Installation mode	vertical
The use of bearing	25°~+70°C
IP code	IP65

DA 084

DIMENSION (mm)



IP55

CE



UL94-V0

-45 ~ +70 °C

Model	Overall dimension	Installation mode	Ventilation interface	Assembly position	Operation/storage temperature	Weight
DA 084	65.5x30.5mm	PG 29 threaded with nuts	~7cm ²	Vertical	-45 ~ +70°C	31g

DA 284

DIMENSION (mm)



IP66

CE


UL94-V0

-35 ~ +70 °C

Model	Overall dimension	Installation mode	Torque	Shell depth	Air permeability	Operation/storage temperature	Weight
DA 284	60x37mm	M40x1.5 threaded with nuts	5Nm (Max.10Nm)	~16mm	1200L/h, 70mbar per minute	-45 ~ +70°C	45g

LK 705

DIMENSION (mm)






IP54

CE

UL94-V0

-45 ~ +70 °C

Feature	Unit	Feature
Material	-	Self extinguishing abs
Colour	-	Grey (ral7035), black (ral9005)
Fixed	-	Screw with sealing ring
Size hxxxd	mm	70x50x21
Weight	kg	Zero point zero three

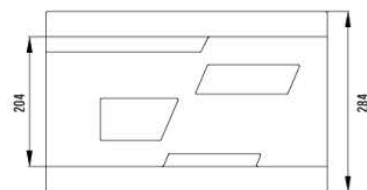WJ - 1
DIMENSION (mm)

WJ - 3
DIMENSION (mm)

WJ - 4
DIMENSION (mm)

Product back
Material:

Plastic ABS with self-adhesive fastening trips 3M adhesive tape

Installation:

Plastic Documents Pocket for affixing to the inside surfaces of panel doors, Screw mounting or adhesive tape mounting

Color:

Similar to RAL7035



WJ-1(A4)