



175W Waterproof Flexible Monocrystalline Solar Panel For Curved Flexible Surfaces

Basic Information


Place of Origin: ChinaBrand Name: LinksunCertification: CE

Model Number: LS-SF175M
 Minimum Order Quantity: 100PCS
 Packaging Details: 2 pcs/carton
 Delivery Time: 5-8days

• Payment Terms: 30% TT in advance, 70% balance before

delivery.

Supply Ability: 1000pieces per week



Product Specification

Product Name: Semi Flexible Solar Panel
 Solar Cell: Monocrystalline Silicon Cells

Application:
 RV, Boat And Yacht, Van And Car, Outdoor

Camping


Benefits: High Efficiency, More Flexibility, Higher

Toughness

Back Sheet: White
Warranty: 5 Years
Protection Class: IP65
Front Material: ETFE

• Highlight: 175W Flexible Monocrystalline Solar Panel,

Curved Flexible Monocrystalline Solar Panel, Waterproof Flexible Monocrystalline Solar Panel



More Images



Waterproof 175W Flexible Monocrystalline Solar Panel for Curved and Flexible Surfaces

A waterproof 175W flexible monocrystalline solar panel is designed to be lightweight, durable, and adaptable to various surfaces, including curved ones. These panels are particularly useful for applications where traditional rigid solar panels are not suitable, such as on boats, RVs, tents, and other irregular surfaces. Here are some key features and considerations for such a panel:

Product Features:

- **1.Power Output**: As the name suggests, it has a power output of approximately 175 watts under optimal conditions. This can vary slightly depending on factors such as sunlight intensity, temperature, and shading.
- 2.Flexibility: Unlike rigid solar panels, semi-flexible panels can bend to some extent. This makes them suitable for installation on curved surfaces or surfaces with some flexibility.
- **3.Lightweight**: Semi-flexible panels are generally lighter in weight compared to traditional rigid panels. This can be advantageous for installations where weight is a concern, such as on boats or lightweight structures.


Product Details:

Model	LS-175M
Power Tolerance(Positive)	3%
Protection Class	IP68
Maximum System Voltage	1500V DC-(H)
Temperature Range	-40 ~85
Module Efficiency STC	21.48%
Front Glass	(F)2.0mm ultra clear embossed double layer colorless glass (B)2.0mm semi-tempered glass
Connector Type	MC4
Output Cables	4 mm ² ,Length:1300mm



Product size

The thickness is only 0.1in Weight only 5 lbs

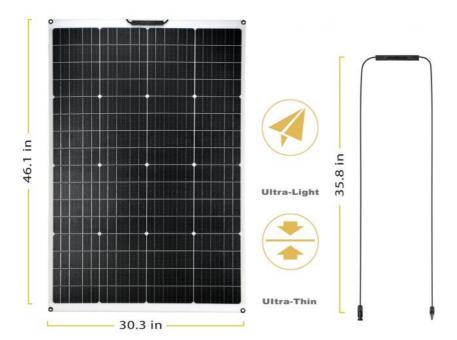

FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty. If you have any questions about our quality during use, you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao, Ningbo. Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China