



Best Solar Charger For Backpacking Solar Panle Backpacking

Basic Information

Place of Origin: ChinaBrand Name: LinksunCertification: CE

Model Number: LS-B100M
 Minimum Order Quantity: 100PCS
 Packaging Details: 1pcs/carton
 Delivery Time: 5-8days

• Payment Terms: 30% TT in advance, 70% balance before

delivery.

• Supply Ability: 1000pieces per week



Product Specification

Product Name: Solar Folding BagSolar Cell: Monocrystalline Cell

• Application: Hiking, Including On Yachts And RVs.

Warranty: 5 YearsProtection Class: IP65

Product Dimension(Folded):545*420*20mm
Product Dimension(Open): 1270*550*5mm


• Highlight: 100W Solar Folding Bag,

hiking Solar Folding Bag, 100 WATT solar travel backpack



More Images







Best Solar Charger For Backpacking Solar Panle Backpacking

The 100W Portable Solar Foldable Bag is ideal for outdoor activities like camping and hiking. Featuring high-efficiency monocrystalline solar cells, it ensures maximum power output. Its lightweight and compact foldable design makes it easy to carry and store. Perfect for charging 12V batteries, phones, and portable power stations, it provides reliable, eco-friendly power on the go. Durable and weather-resistant, this solar bag is a must-have for any outdoor adventure.

Product Features:

1)Folding, outdoor portable more convenient.

It can be used for fishing, camping, picnics, and hiking, including on yachts and RVs.

2) Good waterproof performance

Made of high-quality silicon materials, these coatings have excellent waterproof, anti-corrosion, sun protection and other properties, making solar cloth bags suitable for long-term use in harsh outdoor environments and less susceptible to damage caused by rainwater.

3) Fast charging

Professional design for mobile energy storage, high current charging faster.

Product Details:


| Model | LS-B100M |
|----------------------------|--|
| Maximum Power(Pmax) | 100W (4x25W) |
| Maximum Power Voltage(Vmp) | 17.6V |
| Maximum Power Current(Imp) | 5.68A |
| Open Circuit Voltage(Voc) | 21.6V |
| Short Circuit Current(Isc) | 6.25A |
| Power Tolerance(Positive) | ± 3% |
| Cell Type | Monocrystalline cell |
| Contract Dimensions(mm) | Product Dimension(Folded):545*420*20mm Product Dimension(Open):1270*550*5mm |
| Weight(KGS) | 4.1kg(panel's weight:3.8+Accessories:0.3kg) |
| Protection Class | IP65 |
| Maximum System Voltage | 60V |
| Temperature Range | -20°C - 85°C |
| Standard Test Conditions | 1000W/m2, AM1.5, 25°C |









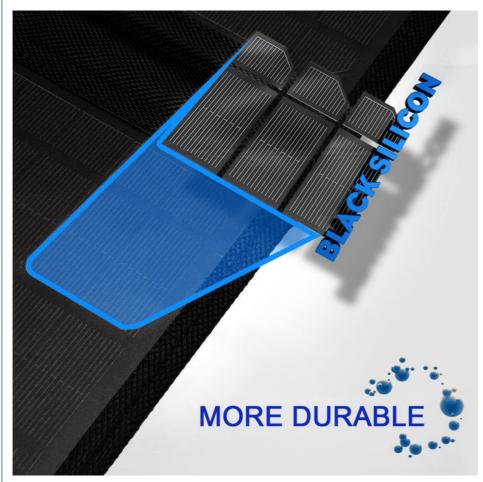





FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty. If you have any questions about our quality during use, you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao, Ningbo. Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China