




330 Watt Polycrystalline Module 9.64A Silicon Solar Pv Module Power Charger

Our Product Introduction

for more products please visit us on monosolarpanel.com


Basic Information

- Place of Origin: China
- Brand Name: Linksun
- Certification: CE
- Model Number: LS-330P
- Minimum Order Quantity: 100PCS
- Packaging Details: 1pcs/carton
- Delivery Time: 5-8days
- Payment Terms: 30% TT in advance, 70% balance before delivery.
- Supply Ability: 1000pieces per week

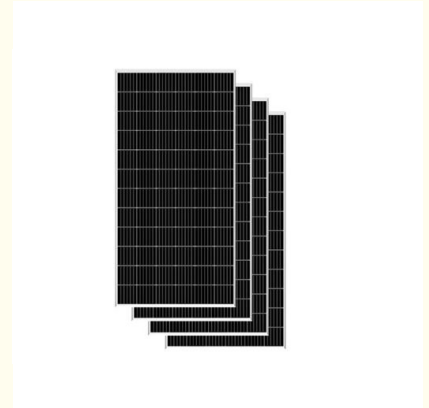

Product Specification

- Connector Type: MC4
- Efficiency: 16.86%
- Material: Polycrystalline
- Maximum System Voltage: 1000V
- Operating Temperature: -40°C To 85°C
- Power: 330W
- Size: 1950*992*40mm
- Warranty: 25 Years
- Weight: 23kg
- Highlight: **330 watt polycrystalline module,
36.89V polycrystalline module,
9.64A silicon solar pv module**

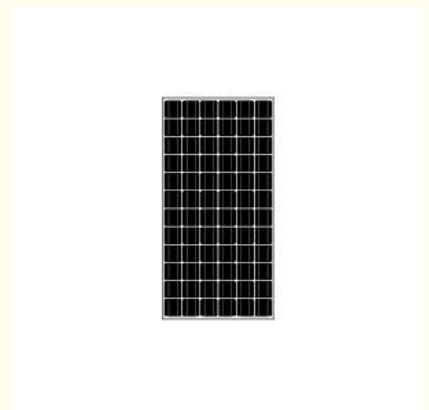

Product Description

330Watt Polycrystalline Module 9.64A Silicon Solar Pv Module Power Charger

This 330W polycrystalline solar module, operating at 36.89V and 9.64A, is designed for efficient power generation. Made from high-quality silicon, it ensures reliable performance and durability. Ideal for various applications, including residential and commercial, it provides a sustainable energy solution. Its robust construction and advanced technology offer excellent energy output, making it perfect for reducing electricity costs and environmental impact. Suitable for powering a range of devices, this solar PV module is a versatile and eco-friendly choice.

Product Features:

1)Durable&Sturdy

The product contains anodized aluminum alloy frame. It can work in the temperature between -40 ~85 and withstand the high winds (2400Pa) and snow loads (5400Pa).

2)Wide application

Common applications include RV, camper, car, marine, residential rooftop, remote farm, traffic signs, etc.

3)eco-friendly

It uses polycrystalline solar cells. A polycrystalline solar panel is economical, eco-friendly, consumes less energy, and can function in all temperatures.

Product Details:

Model	LS-330P
Maximum Power(Pmax)	330W
Maximum Power Voltage(Vmp)	36.89V
Maximum Power Current(Imp)	8.95A
Open Circuit Voltage(Voc)	46.12V
Short Circuit Current(Isc)	9.64A
Power Tolerance(Positive)	3%
Cell Type	Poly-crystalline
Contract Dimensions(mm)	1950*992*40mm
Weight(KGS)	23kg
Protection Class	IP65
Maximum System Voltage	1000V
Temperature Range	-40 ~85
Module Efficiency STC	16.86%
Cell number	72(6x12)
Front Glass	3.2mm High Transmission Tempered Glass
Frame Type	Anodized Aluminum Alloy
Connector Type	MC4
Output Cables	4 mm ² , Length:900mm

FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty. If you have any questions about our quality during use, you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders. Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes, of course. The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao, Ningbo. Welcome your visit if you like.

Q5:Where are your goods exported?

A:We can export to all over the world.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

