




130W Low Light Performance Mono Solar Panel With Increased Sunlight Absorption

Our Product Introduction

for more products please visit us on monosolarpanel.com

Basic Information

- Place of Origin: China
- Brand Name: Linksun
- Certification: CE、BSCI
- Model Number: LS-5M
- Minimum Order Quantity: 100PCS
- Packaging Details: 1pcs/carton
- Delivery Time: 5-8days
- Payment Terms: 30% TT in advance, 70% balance before delivery.
- Supply Ability: 1000pieces per week

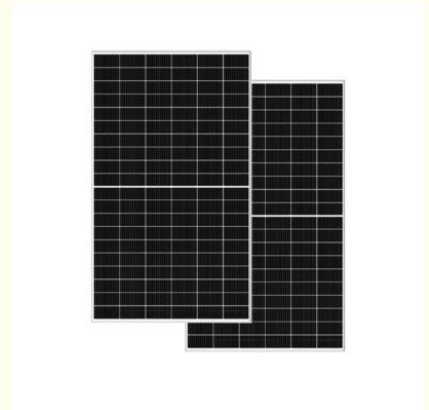

Product Specification

- Cell Type: 130W Low Light Performance Mono Solar Panel With Increased Sunlight Absorption
- Certifications: CE, BSCI
- Product Dimension(mm): 580*505*30mm
- Efficiency: 22%
- Output Cables: 4 Mm²,Length:1300mm
- Protection Class: IP68
- Type Of Connector: MC4
- Warranty: 25 Years
- Highlight: **130W Mono Solar Panel,
Low Light Performance Mono Solar Panel,
Increased Sunlight Absorption Mono Solar Panel**

Product Description

130W Low Light Performance Mono Solar Panel With Increased Sunlight Absorption

Solar panels can increase the value of your property. Studies have shown that homes equipped with solar energy systems tend to have higher resale values, making solar installations an attractive feature for potential buyers.

Product Features:

1)High Efficiency

High modules conversion efficiency. Grade A solar cell and IP68 Rated waterproof solar panel connectors. This solar panel has 5 year 95% output warranty, 10 year 90% output warranty, 25 year 80% output warranty.

2)Reliable and Durable

Corrosion-resistant aluminum frame provides extended outdoor use that ensures the panel can last for decades. The IP68 rated junction box and solar connectors can withstand dirt, dust, debris, and water splashes.

3)High Tolerance

It can tolerate any part of the battery's shading, and performs well in low light conditions due to an increase in the number of batteries receiving more sunlight.

Product Details:

Model	LS-130M
Maximum Power(Pmax)	130W
Maximum Power Voltage(Vmp)	18.3V
Maximum Power Current(Imp)	7.1A
Open Circuit Voltage(Voc)	22.5V
Short Circuit Current(Isc)	7.55A
Power Tolerance(Positive)	3%
Protection Class	IP68
Maximum System Voltage	1500V DC-(H)
Temperature Range	-40 ~85
Module Efficiency STC	21.48%
Front Glass	(F)2.0mm ultra clear embossed double layer colorless glass (B)2.0mm semi-tempered glass
Connector Type	MC4
Output Cables	4 mm ² ,Length:1300mm

FAQ:

Q1:What's the solar panels warranty?

A: 5 year's warranty.If you have any questions about our quality during use,you can contact us at any time.

Q2:Do you accept OEM/ODM orders?

A:We accept OEM/ODM orders.Welcome your inquiry.

Q3:Can I have samples to test?and what's the lead time for the sample order?

A:Yes,of course.The lead time for samples is 7-10 days.

Q4:Are you manufacturer or a trading company?

A:We are manufacturer and our factory is based in Yuyao,Ningbo.Welcome your visit if you like.

Q5:How can we guarantee quality?

A:We always prepare a sample production before bulk production and have a final strict inspection before shipment.



Ningbo Linksun Energy Science & Technology Co., LTD



+8615888168085



sales02@zjlinksun.com



monosolarpanel.com

2nd ,Floor,No.1 Building,Wanyang Entrepreneurial City,Yuyao,Zhejiang Province, China