Integrated Circulating Aquaculture System

Tel: +86-18520739875 (Wechat / Whatsapp)

Email: qlozone@qlozone.com

Web: www.qlozone.com| www.glozone.cn






Protein separation system

Mechanical filtration system

Biochemical filtration system

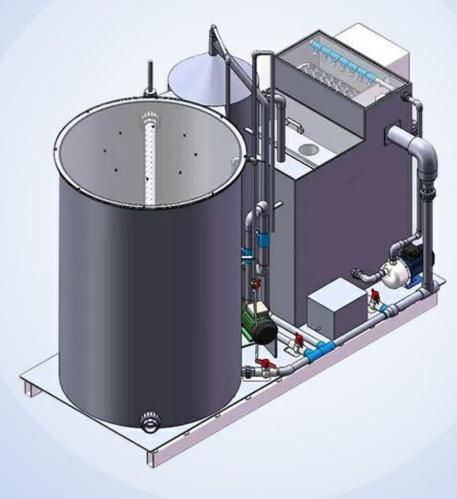

Oxygenation system

Water quality monitoring system (optional)

Thermostatic system (optional)

Electronic control system

Ultraviolet sterilization system

APPLICATION

Customer photo taken











Easy to install Easy to use







Product Overview

Qili integrated circulating water aquaculture equipment, integrating microfiltration, precipitation, ultraviolet disinfection, biochemical + filler, backwash pump, circulating water pump, and electric control cabinet. It is exquisitely designed and simple to install. It only needs to plug in and connect the water in and out. That is, the integrated circulating water system can effectively filter residual bait and fish in the water, effectively degrade ammonia nitrogen and nitrite, and is equipped with automatic backwashing and dirt collection, which can quickly clean and drain.

www.qlozone.com

Workflow

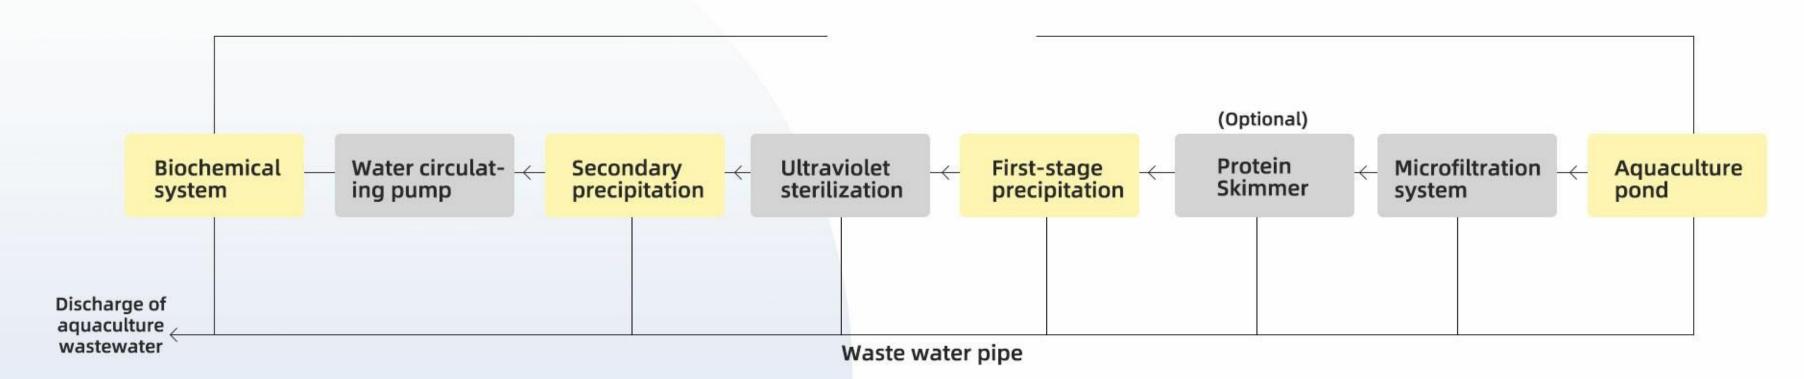

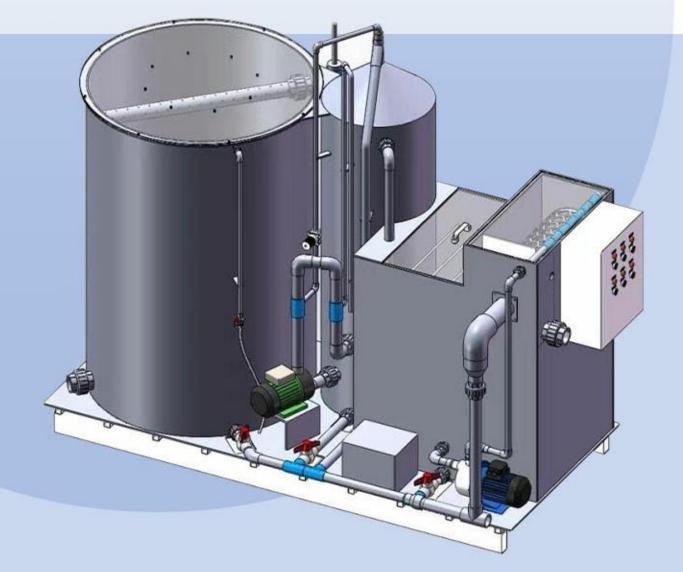



SAVE LABOR COSTS

Easy and easy to construct



DIRECT USE

No excessive consumables required



SPACE SAVING

Integrated design, small footprint



LONG SERVICE LIFE

Thicker PP material for long service life



EFFECTIVE WATER PRES-SURE STABILIZATION

With its own electrical cabinet, only plug in power and approach the water outlet.



EASY INSTALLATION

With its own electrical cabinet, only plug in power and approach the water outlet

INTEGRATED CIRCULATING AQUACULTURE SYSTEM Product parameters

	- V		
Model	QL-10	QL-20	QL-30
Water volum	10m3	20m3	30m3
Temperature		22-30℃	
Size	2.2*1*1.65	2.5*1.4*1.75	3.0*1.55*1.7
Total power	1240w	1395w	1385w
Circulation pump	Water flow rate: 10000L/H Power: 50W	Water flow rate: 20000L/H Power: 75W	Water flow rate: 30000L/I Power: 65W
Power of Backwash pump	1000W	1000W	1000W
Biochemical gas pump	Water flow rate: 120L/min Power: 95W	Water flow rate: 200L/min Power: 160W	Water flow rate: 200L/mi Power: 160W
Aeration pump	Water flow rate: 120L/min Power: 95W	Water flow rate: 200L/min Power: 160W	Water flow rate: 200L/mi Power: 160W
Maximum breeding density		50-80kg/m3	
UV power		60w	
Optional	Ozone machine / Oxygen generator / Dissolved oxygen cone		



OPTIONAL ACCESSORIES







QUALITY DETAILS Customer photo taken



About us



Guangzhou Qili Environmental Equipment Co., Ltd is a high-tech enterprise dedicated to research, development, design, production and sales of ozone equipment. Specializing in ozone technology research, ozone equipment design and manufacturing, ozone application engineering design and ozone system equipment installation, commissioning, operation and maintenance. In the modern fish pond breeding, kitchen cooking fumes, water treatment, air treatment and other related fields have a wealth of experience! Qili air source, oxygen source, pipeline-specific, ozone water machine, oxygen generator, ozone detector and other products are sold at home and abroad.

Professional Team









Factory Show







