



Open the skylight
Give home a window to communicate with nature
Listen to the sounds of the four seasons

PRODUCT ADVANTAGE

Waterproof motor

Mute motor

Machine seamless welding

DC motor without thermal protection

Intelligent rainwater sensing

One-button intelligent control

Electric hollow honeycomb curtain

Electric screen window

Open communication protocol

All-round Smart Home System

Mobile APP

Intelligent voice control




PRODUCT CATALOGUE

Upward-opening skylight series

MDX-98 Aluminum Alloy Electric Skylight (Exposed Motor)	09
MDX-130 Skylight specially for sunrooms (Exposed Motor/Concealed Motor)	10
MDX-73 Floor-flush skylight	11
MDX-150 Aluminum Alloy Electric Skylight (Concealed Motor)	12
MDX-170 Bridge-cut aluminum townhouse skylight	13
MDX-270 Narrow-edge hidden frame skylight	14
MDX-220 Bridge-cut aluminum heavy-duty skylight	15
MDX-390 Narrow-edge rising skylight	16

Sliding skylight series

MDX-200 Small sliding skylight	19
MDX-275 Heavy-duty sliding skylight	20
MDX-230 L-shaped sliding skylight	21
Triangular skylight / Circular skylight	22
MDX-280 Folding and telescoping skylight	23
MDX-400 Heavy-duty Electric Folding and Telescoping Skylight	24
MDX-260 Narrow-edge hidden frame sliding skylight	25
MDX-366 Ultra-heavy-duty Sliding Skylight (with Water Trough)	26
MDX-177 Trackless sliding skylight	27
MDX-S10 Automotive-style sliding skylight	28

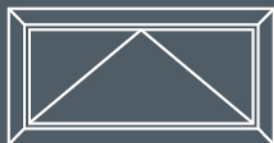

UPWARD-OPENING SKYLIGHT SERIES

Good ventilation performance

When the upward-opening skylight is opened upwards, it can form a large ventilation opening at the top, allowing air to circulate into the room more naturally, promoting air exchange between indoor and outdoor spaces, and effectively improving indoor air quality. It is especially suitable for spaces that require good ventilation, such as kitchens and bathrooms.

High safety performance

The upward-opening mechanism makes the skylight more stable when closed, and it is not easily pushed open by external forces. Compared with some side-hung or sliding windows, it has better anti-theft performance. At the same time, its opening angle is usually limited, which can prevent children or people from accidentally falling through the skylight, thus enhancing the safety of use.



Listen to the patter of rain in summer, soak up the warm sunshine in winter, watch the clouds gather and disperse during the day, and admire the starry sky and the moon at night. Open the skylight in your favorite places, be it the study, the tea room, the living room, or even the master bedroom, above the kitchen, above the washbasin, or above the bathtub. Any place that needs natural light to create a comfortable ambiance.

MDX-98

ALUMINUM ALLOY ELECTRIC SKYLIGHT (EXPOSED MOTOR)

Product Parameters

Profile specifications: 39mm × 98mm
 Profile wall thickness: 1.4mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤1.5m²
 Maximum load-bearing capacity: 30kg
 Maximum width: ≤2m
 Surface treatment: Electrostatic powder coating
 Application scope: Sunrooms / Sloped roofs / Basements
 Opening method: Electric top-hung outward opening

Glass Configuration

5mm+12A+5mm
 5mm+1.14PVB+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control
 LED ambient light



MDX-130

SKYLIGHT SPECIALLY FOR SUNROOMS (EXPOSED MOTOR/CONCEALED MOTOR)

Product Parameters

Profile specifications: 55mm × 130mm
 Profile wall thickness: 1.6mm
 Processing technology: Seamless welding technology
 Product material: Primary aluminum alloy 6063-T5
 Maximum area: ≤2.5m²
 Maximum load-bearing capacity: 70kg
 Maximum width: ≤3m
 Surface treatment: Electrostatic powder coating
 Application scope: Sunrooms / Sloped roofs / Basements
 Opening method: Electric top-hung outward opening

Glass Configuration


5mm+12A+5mm
 5mm+1.14PVB+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control
 LED ambient light

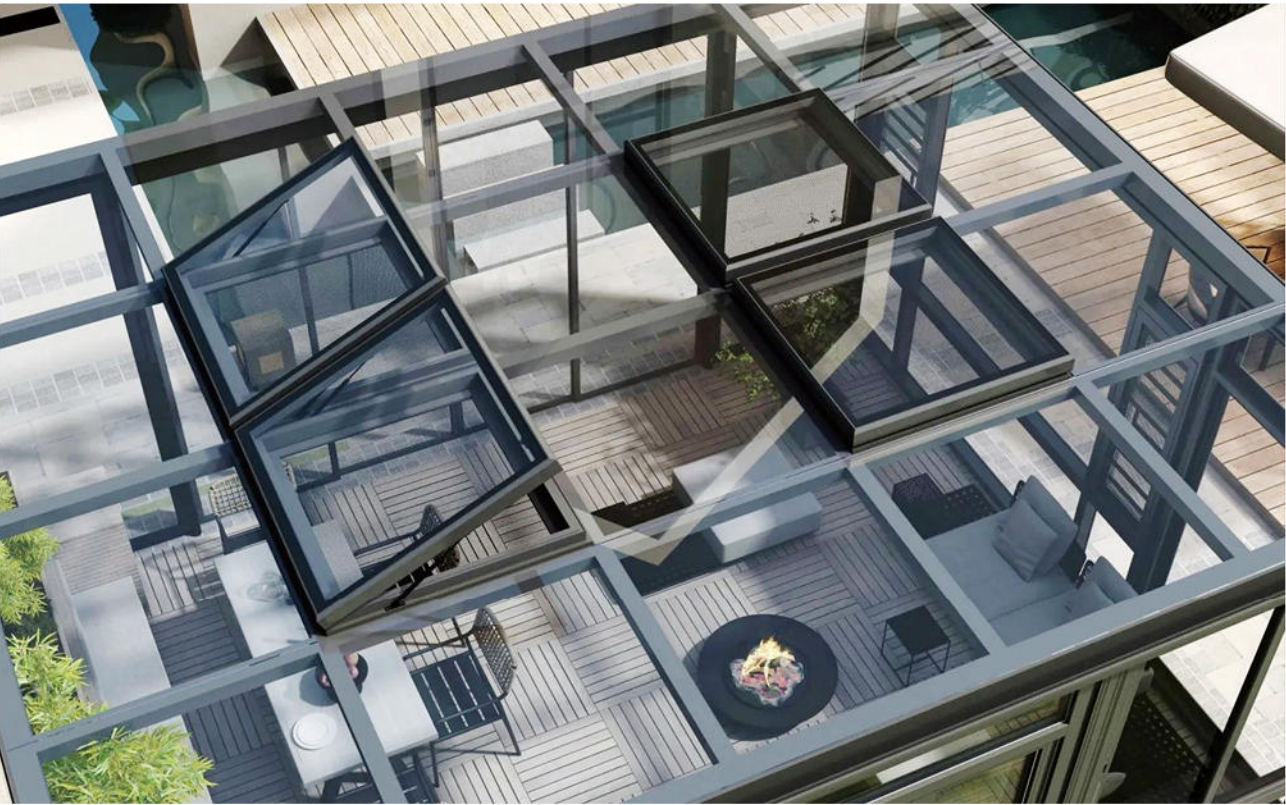

MDX-73

FLOOR-FLUSH SKYLIGHT

Product Parameters

Profile specifications: 87mm × 73mm
 Profile wall thickness: 2.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤2m²
 Maximum load-bearing capacity: 60kg
 Maximum width: ≤2.5m
 Surface treatment: Electrostatic powder coating
 Application scope: Courtyard and basement light wells
 Opening methods: Electric top-hung outward opening, electric lifting

Glass Configuration

5mm+1.14PVB+5mm
 5mm+1.14PVB+5mm+9Ar+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch
 LED ambient light

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control



MDX-150

ALUMINUM ALLOY ELECTRIC SKYLIGHT (CONCEALED MOTOR)

Product Parameters

Profile wall thickness: 2.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤2.5m²
 Maximum load-bearing capacity: 60kg
 Maximum width: ≤2.5m
 Surface treatment: Electrostatic powder coating
 Application scope: Courtyard and basement light wells
 Opening methods: Electric top-hung outward opening, electric lifting

Glass Configuration

5mm+1.14PVB+5mm
 5mm+1.14PVB+5mm+9Ar+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch
 LED ambient light

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control



MDX-170

BRIDGE-CUT ALUMINUM TOWNHOUSE SKYLIGHT

Product Parameters

Profile specifications: 60mm × 170mm
 Profile wall thickness: 2.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤2m²
 Maximum load-bearing capacity: 60kg
 Maximum width: ≤2m
 Surface treatment: Electrostatic powder coating
 Application scope: Light wells/Sloped roofs/Basements
 Opening method: Electric top-hung outward opening

Glass Configuration

5mm+0.76PVB+5mm
 5mm+0.76PVB+5mm+12Ar+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control



MDX-270

NARROW-EDGE HIDDEN FRAME SKYLIGHT

Product Parameters

Profile specifications: 30mm × 270mm
 Profile wall thickness: 4.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤4m²
 Maximum load-bearing capacity: 100kg
 Maximum width: ≤3.5m
 Surface treatment: Electrostatic powder coating
 Application scope: Sunrooms / Staircases / Basements
 Opening method: Electric top-hung outward opening

Glass Configuration

5mm+22Ar+5mm
 5mm+0.76PVB+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control
 LED ambient light



MDX-220

BRIDGE-CUT ALUMINUM HEAVY-DUTY SKYLIGHT

Product Parameters

Profile specifications: 105mm × 220mm
 Profile wall thickness: 2.5mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area per sash: ≤6m²
 Maximum load-bearing capacity: 250kg
 Maximum width: ≤4m
 Surface treatment: Electrostatic powder coating
 Application scope: Sunrooms / Staircases / Basements
 Opening method: Electric top-hung outward opening

Glass Configuration

5mm+1.14PVB+5mm
 5mm+1.14PVB+5mm+12Ar+5mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control
 LED ambient light
 Aluminum alloy handrail



MDX-390

NARROW-EDGE RISING SKYLIGHT

Product Parameters

Profile specifications: 125mm × 390mm
 Profile wall thickness: 4.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤12m²
 Maximum load-bearing capacity: 500kg
 Maximum width: ≤6m
 Surface treatment: Electrostatic powder coating
 Application scope: Light wells / Sunrooms / Basements / Patios
 Opening method: Electric lifting

Glass Configuration

5mm+1.14PVB+5mm
 5mm+1.14PVB+5mm+22Ar+5mm


Standard Configuration

Mingdexu Mute Motor
 Remote Control
 King Kong Mesh Screen
 LED Ambient Light

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Fixed screen window
 Voice remote control
 Mobile APP control



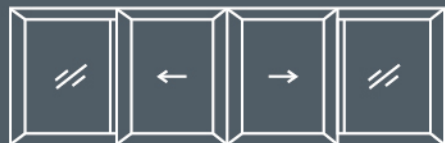

SLIDING SKYLIGHT SERIES


Large lighting area

When the sliding skylight is fully open, it can maximize the introduction of natural light, increase indoor lighting, make the indoor space brighter and more transparent, reduce the reliance on artificial lighting during the day, and lower energy consumption

Broad vision

When the sliding skylight is open, the view outside the window is almost unobstructed, providing a broader vision for the people indoors and allowing them to better enjoy the outdoor scenery.

Simplify the complex. With extremely minimalist frames and lines, it reflects the authenticity and purity of minimalist and light luxury home furnishings.

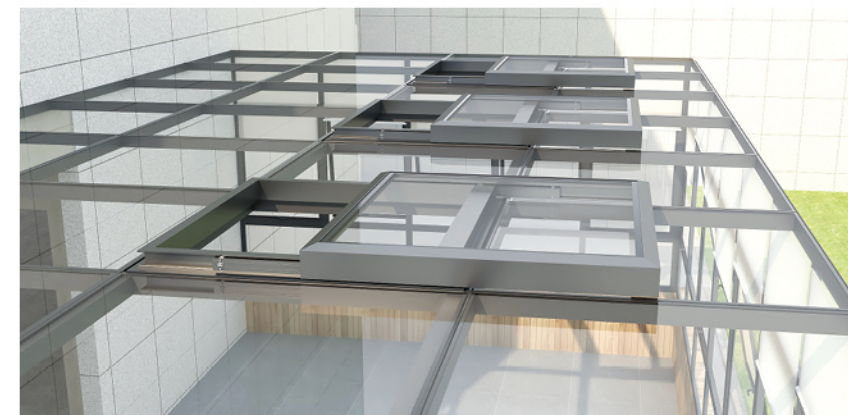

MDX-200

SMALL SLIDING SKYLIGHT

Product Parameters

Profile specifications: 90mm × 220mm
 Profile wall thickness: 2.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤3m²
 Maximum load-bearing capacity: 300kg
 Maximum width: ≤1.5m Maximum length: ≤3m
 Surface treatment: Electrostatic powder coating
 Application scope: House rooftops / Staircases
 Opening method: Electric translation

Glass Configuration

5mm+12Ar+5mm
 6mm+1.52PVB+6mm

Standard Configuration

Mingdexu Motor
 Remote control + wall-mounted switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Voice remote control
 Mobile APP control
 Manual-automatic integrated motor
 Smoke sensor



MDX-275

HEAVY-DUTY SLIDING SKYLIGHT

Product Parameters

Profile specifications: 114mm × 275mm
 Profile wall thickness: 4.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤36m²
 Maximum load-bearing capacity: 1000kg
 Maximum width: ≤6m Maximum length: ≤6m
 Surface treatment: Electrostatic powder coating
 Application scope: House rooftops / Sunrooms / House tops /
 Large basements / Swimming pools
 Opening method: Electric translation

Glass Configuration


5mm+27Ar+5mm
 8mm+1.52PVB+8mm

Standard Configuration

Mingdexu Mute Motor
 Remote Control + Wall-mounted Control Switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Voice remote control
 Mobile APP control
 Manual-automatic integrated motor
 Smoke detector

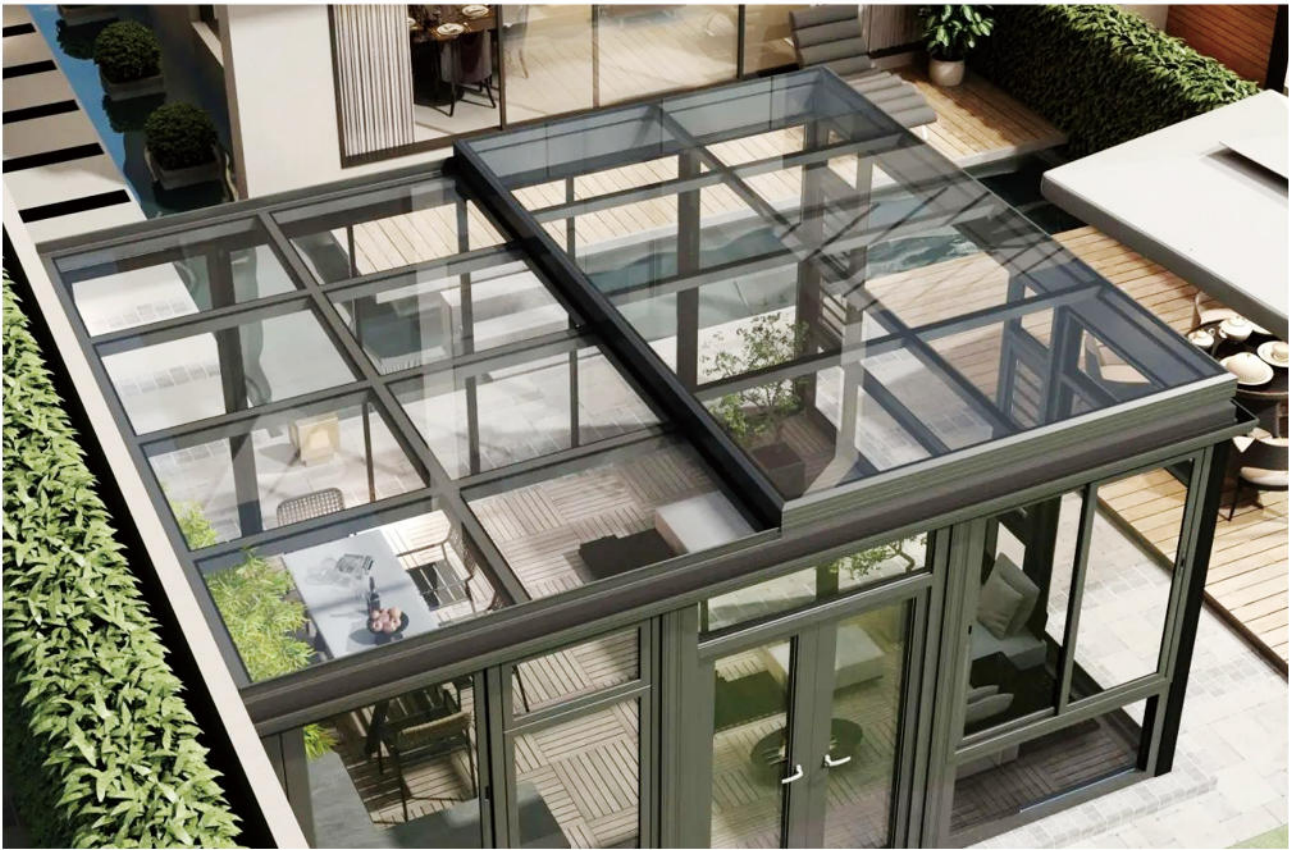

MDX-230

L-SHAPED SLIDING SKYLIGHT

Product Parameters

Profile specifications: 90mm × 230mm
 Profile wall thickness: 2.5mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤4m²
 Maximum load-bearing capacity: 600kg
 Maximum width: ≤2m
 Maximum length: ≤4m
 Surface treatment: Electrostatic powder coating
 Application scope: House rooftops / Staircases
 Opening method: Electric translation

Glass Configuration


5mm+12Ar+5mm
 6mm+1.52PVB+6mm

Standard Configuration

Mingdexu Silent Motor
 Remote Control + Wall-mounted Control Switch

Optional Configuration

Hollow honeycomb blind
 Wireless solar rain sensor
 Electric screen window
 Voice remote control
 Mobile APP control
 Manual-automatic integrated motor
 Smoke sensor

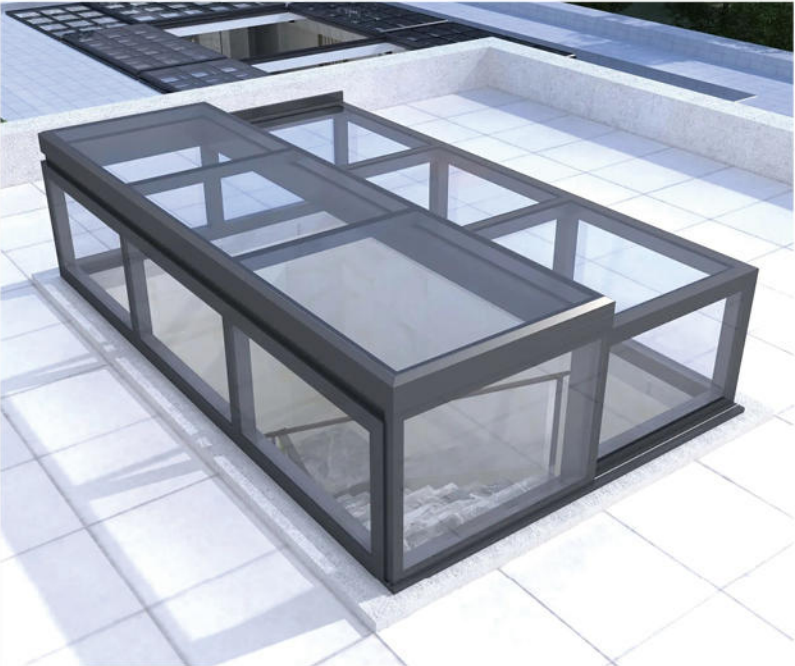

TRIANGULAR SKYLIGHT

Product Parameters

Profile specifications: 120mm × 60mm
 Profile wall thickness: 3.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T6
 Maximum area: ≤50m²
 Maximum load-bearing capacity: 1200kg
 Maximum width: ≤7m Maximum length: ≤7m
 Surface treatment: Electrostatic powder coating treatment

Glass Configuration

5mm+1.52PVB+5mm



CIRCULAR SKYLIGHT

Product Parameters

Profile specifications: 40mm × 155mm
 Profile wall thickness: 3.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T6
 Maximum area: ≤50m²
 Maximum load-bearing capacity: 1200kg
 Maximum diameter: 4m
 Surface treatment: Electrostatic powder coating treatment

Glass Configuration

5mm+1.52PVB+5mm



MDX-280

FOLDING AND TELESCOPING SKYLIGHT

Product Parameters

Profile specifications: 80mm × 280mm
 Profile wall thickness: 3.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤18m²
 Maximum load-bearing capacity: 500kg
 Maximum width: ≤2.5m Maximum length: ≤7m
 Surface treatment: Electrostatic powder coating
 Application scope: House rooftops / Sunrooms / Large basements /
 Swimming pools / Staircases
 Opening method: Electric translation

Glass Configuration

5mm+0.76PVB+5mm
 6mm+1.14PVB+6mm

Standard Configuration

Mingdexu Motor
 Remote Control + Wall-mounted Switch

Optional Configuration

Wireless solar rain sensor
 Electric screen window
 Voice remote control
 Mobile APP control
 Manual-automatic integrated motor
 Smoke sensor



MDX-400

HEAVY-DUTY ELECTRIC FOLDING AND TELESCOPING SKYLIGHT

Product Parameters

Profile specifications: 80mm × 400mm
 Profile wall thickness: 3.0mm
 Processing technology: Seamless welding technology
 Product material: Virgin aluminum alloy 6063-T5
 Maximum area: ≤30m²
 Maximum load-bearing capacity: 1000kg
 Maximum width: ≤4m Maximum length: ≤9m
 Surface treatment: Electrostatic powder coating
 Smart home system: Compatible with smart home
 systems of any brand
 Application scope: Basements / House rooftops / Sunrooms

Glass Configuration

5+5 laminated glass (notch 20mm)

Standard Configuration

Mingdexu High-torque Motor
 Remote Control + Wall-mounted Switch

Optional Configuration

Wireless solar rain sensor
 Electric screen window
 Voice remote control
 Mobile APP control
 Manual-automatic integrated motor
 Smoke sensor



MDX-260

NARROW-EDGE HIDDEN FRAME SLIDING SKYLIGHT

Product Parameters

Profile specifications: 50mm × 260mm
Profile wall thickness: 4.0mm
Processing technology: Seamless welding technology
Product material: Aluminum alloy profile 6063-T5
Maximum area: ≤30m² Maximum load-bearing capacity: 1200kg
Maximum width: ≤6m Maximum length: ≤5m
Surface treatment: Electrostatic powder coating
Application scope: House rooftops / Sunrooms / House tops /
Large basements / Swimming pools
Opening method: Electric translation

Glass Configuration

5mm+20A+5mm
8mm+1.52PVB+8mm

Standard Configuration

Mingdexu Silent Motor
Remote Control + LCD Display Switch

Optional Configuration

Hollow honeycomb blind
Wireless solar rain sensor
Electric screen window
Voice remote control
Mobile APP control
Manual-automatic integrated motor
Smoke sensor



MDX-366

ULTRA-HEAVY-DUTY SLIDING SKYLIGHT (WITH WATER TROUGH)

Product Parameters

Profile specifications: 120mm × 366mm
Profile wall thickness: 4.0mm
Processing technology: Seamless welding technology plus corner code
Product material: Aluminum alloy profile 6063-T5
Maximum area: ≤ 36m² Maximum load-bearing capacity: 2000kg
Maximum width: ≤ 6m Maximum length: ≤ 6m
Surface treatment: Electrostatic powder coating treatment
Application scope: House roof terrace / sunroom / house roof /
large basement / swimming pool
Opening method: Electric translation

Glass Configuration

5mm+20Ar+5mm
8mm+1.52PVB+8mm

Standard Configuration

Mingdexu Mute Motor
Remote Control + LCD Display Switch

Optional Configuration

Hollow Honeycomb Shade
Wireless Solar Rain Sensor
Electric Window Screen
Voice Remote Control
Mobile APP Control
Manual and Automatic Integrated Motor
Smoke Sensor



MDX-177

TRACKLESS SLIDING SKYLIGHT

Product Parameters

Profile specifications: 88mm × 177mm
 Profile wall thickness: 3.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤ 3m² Maximum load-bearing capacity: 150kg
 Maximum width: ≤ 3m Maximum length: ≤ 7m
 Surface treatment: Electrostatic powder coating treatment
 Application scope: House roof terrace / sunroom / large basement / swimming pool / staircase entrance
 Opening method: Electric translation

Glass Configuration


5mm+18Ar+5mm
 5mm+0.76PVB+5mm

Standard Configuration

Mingdexu Motor
 Remote Control + Wall-mounted Switch

Optional Configuration

Hollow honeycomb curtain
 Wireless solar rain sensor
 Electric window screen
 Voice remote control
 Mobile APP control
 Manual and automatic integrated motor
 Smoke sensor

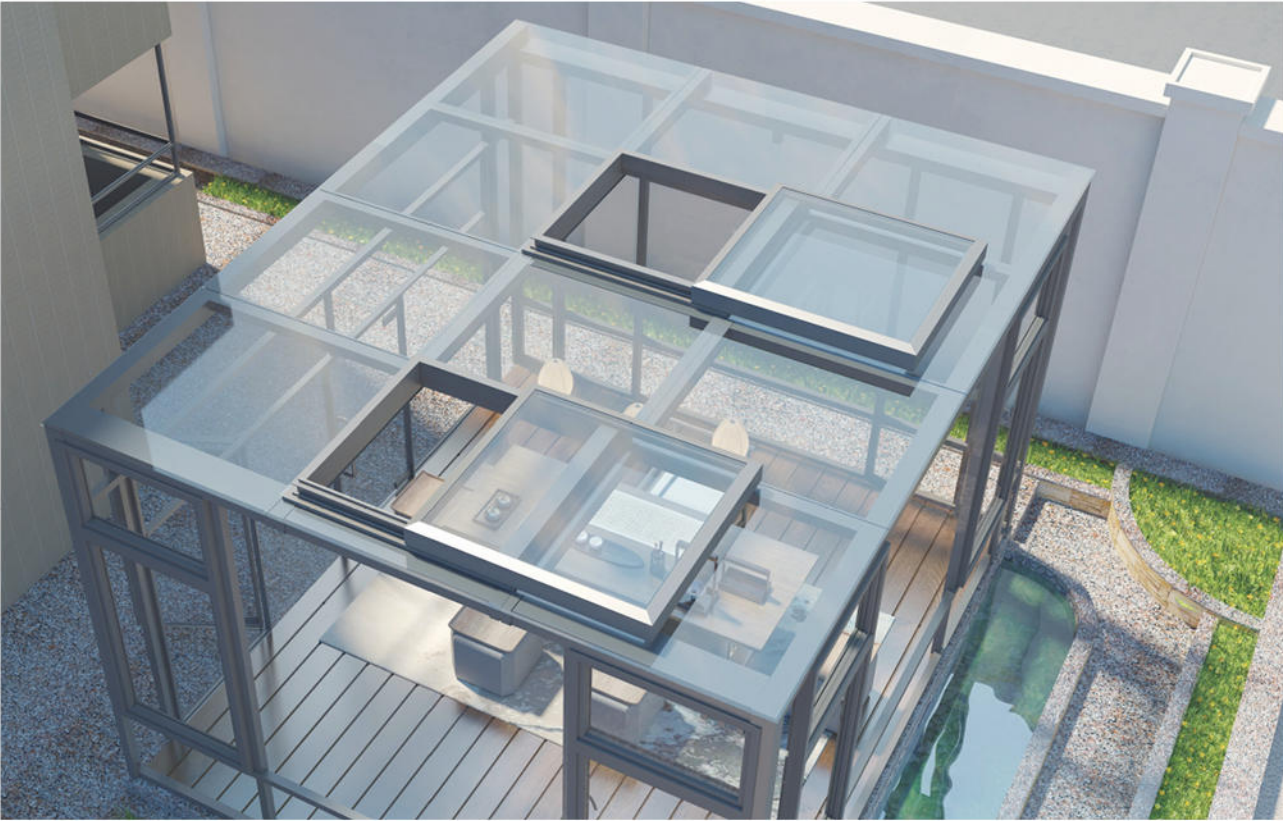

MDX-S10

AUTOMOTIVE-STYLE SLIDING SKYLIGHT

Product Parameters

Profile specifications: 80mm × 210mm
 Profile wall thickness: 3.0mm
 Processing technology: Seamless welding technology
 Product material: Aluminum alloy profile 6063-T5
 Maximum area: ≤ 3m² Maximum load-bearing capacity: 150kg
 Maximum width: ≤ 3m Maximum length: ≤ 7m
 Surface treatment: Electrostatic powder coating treatment
 Application scope: House roof terrace / sunroom / swimming pool / staircase entrance
 Opening method: Electric lifting + translation

Glass Configuration

5mm+18Ar+5mm
 5mm+0.76PVB+5mm

Standard Configuration

Mingdexu Motor
 Remote Control + Wall-mounted Switch

Optional Configuration

Hollow Honeycomb Curtain
 Wireless Solar Rain Sensor
 Electric Window Screen
 Voice Remote Control
 Mobile APP Control
 Smoke Sensor

