

Installation Manual

Compatible Model	CLexus CRX
Year	2016-2023




1. Points to note

- For safety and to ensure the proper use of product, please ask a professional technician to install. Do not disassemble and install it privately in case of damaging product and installation accidents.
- Please arrange each wiring harness according to the wiring method in this manual. Be sure to tie each wiring harness to the vehicle's original wiring harness with cable ties. Make sure the wiring harnesses are not located at the buckle or screw hole to avoid the wiring harnesses crushed by the vehicle interior trim panel buckles and screws during the installation process.
- Because some of the wiring harness terminals (such as the terminals in the red circles below) are not plugged into the wiring harness connectors during manufacture, please insert terminals into the wiring harness connector first to avoid short circuit between terminals after the wiring harnesses have been arranged, then connect other plugs of the wiring harnesses (such as the plugs in the blue circles below) with the original plugs.



- Check the function display of instrument panel before installation, whether the button of the vehicle is working properly, whether the doors and windows work properly while opening and closing, whether there are scratches on the internal and external surfaces of the vehicle; and report to the customers in a timely manner if there are any problems.
- During the process of disassembly and assembly, do not carry metal ornaments and other hard objects with you to prevent damage to the paintwork, seats and interior. Be sure to place the removed trim components properly to avoid scratching them.
- All the pictures in this manual are for reference only, vehicle models with different configurations may have different pictures, but the installation methods are the same.

2. Installation tools

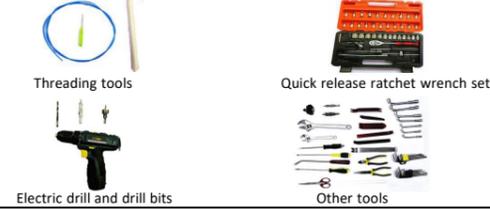

3. Product list


No.	Name	QTY	Picture
①	Strut	2	
②	ECU	1 set	
③	Wiring harness	1 set	
④	Power latch	1	
⑤	Added tailgate switch	1	
⑥	Other accessories (screws, brackets, etc.)	1 set	Omitted



1. Remove the steering column trim panel.



2. Remove the screws on the left and right sides of the steering wheel.

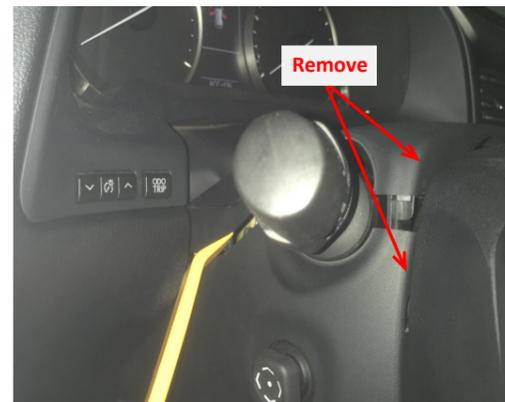

3. Remove the upper and lower trim panels of the steering column.



4. Remove the front left side trim panels and door sill panel.




5. Remove the rear left side door sill panel and B-pillar trim panel.



6. Take out the trunk liner.



7. Remove the trim panel on the left side of the trunk to allow wiring harnesses to pass through.

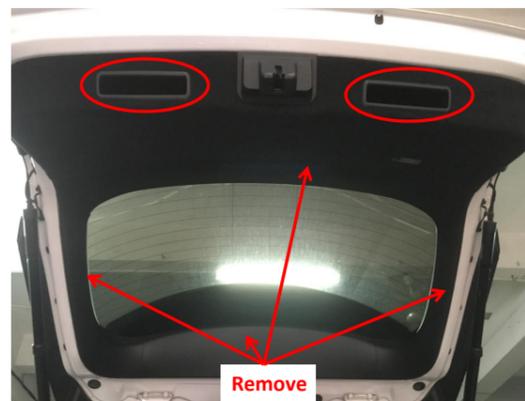


8. Remove the tailgate trim panels.




9. Remove the screws from the power latch.



10. Remove the original lock and install the power latch.

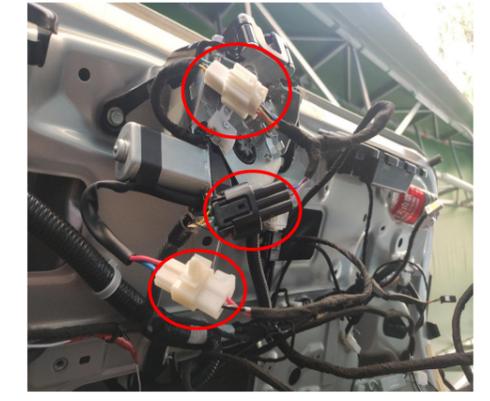


11. Connect the lock signal harness to the plugs of the power latch.

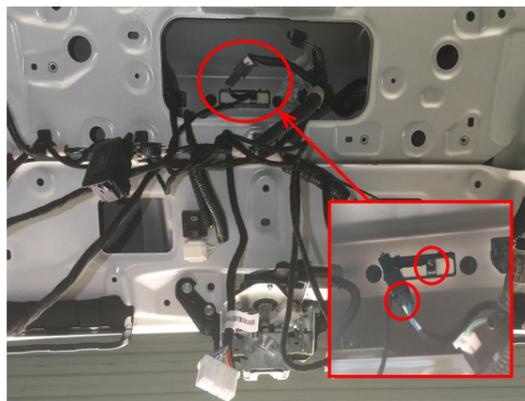


12. Connect the lock signal harness to the original tailgate switch and its plug.




13. Install the added switch at the tailgate handle

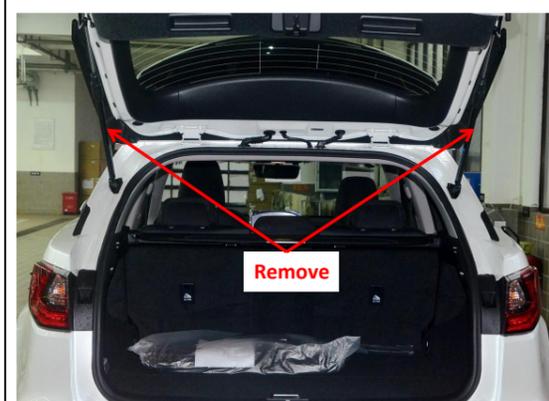

14. Remove the gas struts.

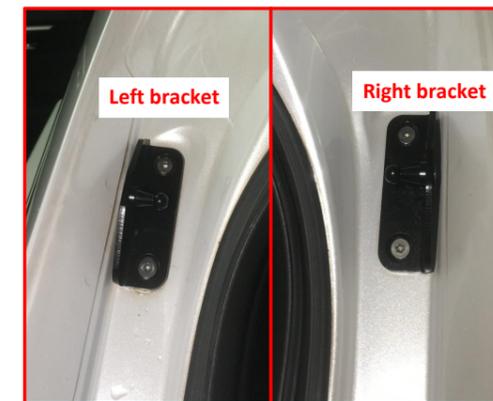


15. Replace the body brackets.

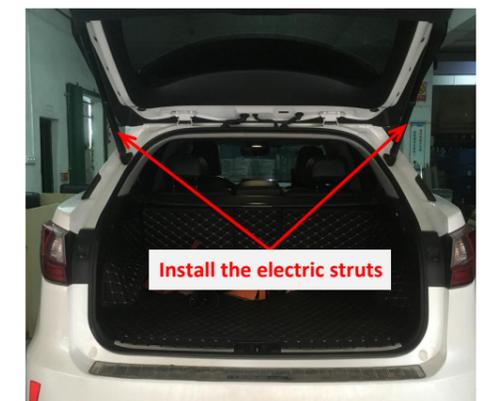


16. Install the electric struts, L on the left and R on the right (the first letter of the strut code).




17. Pass the strut wiring harness through the original square hole and then plug the hole. Both sides are the same.

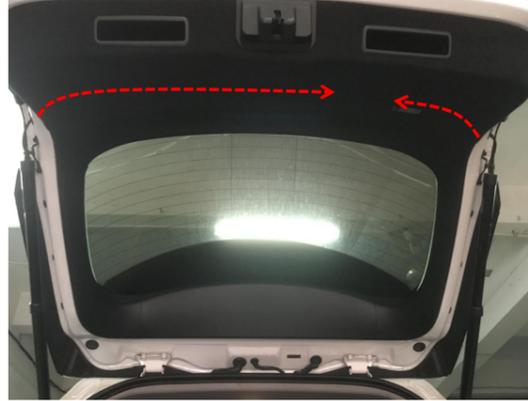

18. Route the strut wiring harnesses.

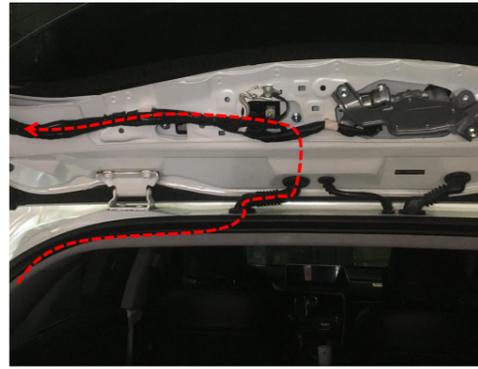

19. Thread the power harness to the tailgate (do not connect plugs before inserting terminals into wiring harness connector).

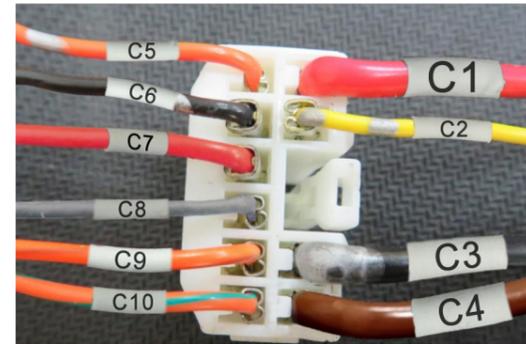

Note: For models with fewer than 10 wires, just insert them according to the corresponding label or color.

20. Insert the power harness terminals into the wiring harness connector as shown above.




21. Route the power harness.




22. Ground at the tailgate.



23. Connect to the blue signal plug and its socket at the steering column.

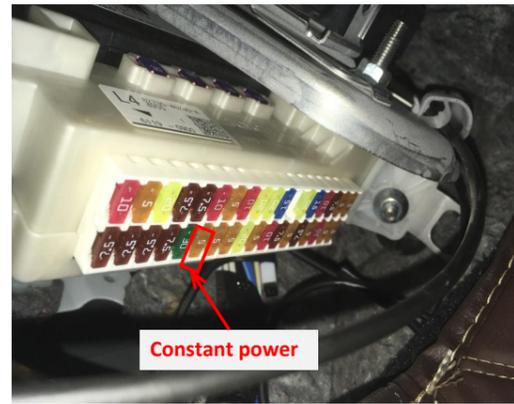


24. The fuse slot of constant power (fifth in the second row).

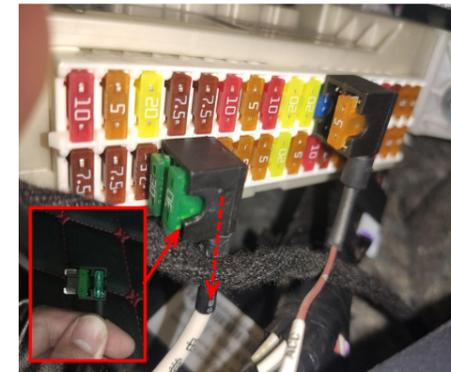

25. Move the original fuse from the fuse box to the fuse tap and then plug the fuse tap into the fuse box. Pay attention to the direction.



26. Insert the strut wiring harnesses ①②, lock signal harness ③, and power harness ④ into the ECU in sequence and mount the ECU onto its bracket.

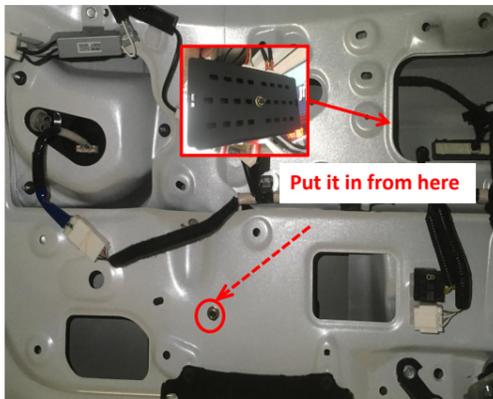

27. Secure the ECU at the indicated hole.



28. Initialize the system once, and then test each function of the electric tailgate.



29. Reinstall all the trim panels.

5. System initialization method

1. Press the added tailgate switch button to make the tailgate close automatically;
2. Press the switch button outside the tailgate to open the tailgate and it will make a long sound of "beep".
3. The system initialization is complete.

6. Instructions for the electric tailgate

1. Methods to open and close the tailgate:
 - Press the unlock button on the remote key 3 times;
 - Press the unlock button at the driver's area 3 times;
 - Press the tailgate handle switch button;
 - Press the added tailgate switch button.

2. Method to pause the tailgate:

During the operation of the tailgate, press the button with any of the above methods, and the tailgate will be paused. Press again, and the tailgate will move in reverse.

3. Method to memorize the height:

Open the tailgate to the height you want to set, long press the added tailgate switch, and release the switch after hearing a long "beep ----". The height memory is complete.

Tip: During the operation of the tailgate, pause the tailgate, and then push the tailgate to the ideal height with your hand.

4. Meanings of the buzzer sound:

"Beep" once: Receiving an open/close or pause signal, the tailgate will immediately open/close or pause;

"Beep" twice: The tailgate has been fully opened or closed;

"Beep" three times: The resistance during opening or closing the tailgate is too large, and the intelligent anti-pinch has been turned on;

Long sound of "beep": The height memory is complete.