



守正创新 智启未来

HAO QUAN
PUMPS
皓泉泵业

温州皓泉泵业有限公司
Wenzhou Haoquan Pump Co., Ltd.



公司简介 Company profile

温州皓泉泵业有限公司是一家集研发、生产、销售为一体的泵系列制造企业。公司座落在温州市龙港东城工业园区，地处位置优越，交通十分便利。

公司以先进的技术与多年实践经验相结合，“开拓进取、精益求精”为精神，走科技路，建设高素质、高技术职工队伍，打造优质的产品质量，真诚的提供给广大客户！公司始终以质量为企业生命的观点，设有先进的质量检测系统和完善的售前、售后服务，遵循质量管理体系稳步发展。产品广泛用于化工、医药、建筑、环保、水利、电力、石油、消防、食品、印刷、彩扩等各个领域，深受用户一致青睐！

“质量、品牌、信誉”是我们永恒的追求，顾客满意是我们的宗旨！公司将始终坚持以顾客为中心，满足市场不断发展、变化的需求，携手与广大朋友一道，精诚合作，实现互利双赢。时代在前进，“皓泉”在腾飞，我们随时欢迎您的光临！欢迎各界朋友莅临参观、指导和业务洽谈。

Wenzhou Haoquan Pump Industry Co., Ltd. is a pump - series manufacturing firm integrating R&D, production and sales. Located in Dongcheng Industrial Park, Longgang, Wenzhou, it has a prime location and convenient transport.

The company combines advanced tech with years of experience, following the spirit of "pioneering and perfecting". It builds a high - quality workforce, makes top - notch products, and offers them sincerely to customers.


Quality is seen as the core of the enterprise. There's an advanced quality inspection system and comprehensive pre - and after - sales service. Products are used widely in chemical, medical, construction and other fields, winning great favor from users.

"Quality, brand, reputation" are our constant pursuits, with customer satisfaction as our aim. We'll always focus on customers, meet market changes, cooperate sincerely with friends, and seek win - win results.

As the times progress, "Haoquan" is soaring. We welcome your visit! Friends from all sectors are welcome to visit, guide and negotiate business.

MP系列

2-7

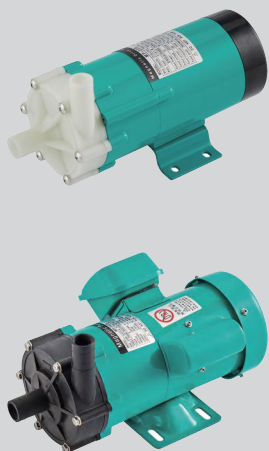

磁力驱动循环泵

Magnetic Drive Circulating Pump

MPH系列

8-11



耐腐蚀磁力泵

Corrosion Resistant Magnetic Pump

MP 系列

12-13



不锈钢磁力泵

Stainless Steel Magnetic Pump

WS系列

14-15



无刷磁力泵

Brushless Magnetic Pump

DP系列

16-17



高压隔膜泵

High Pressure Diaphragm Pump

DZ/DS系列

18-19



波纹管计量泵

Bellows Metering Pump

HQP系列

20



尿素隔膜泵

Urea Diaphragm Pump

JV系列


21



隔膜式计量泵

Diaphragm Metering Pump

结构图 STRUCTURAL DIAGRAM

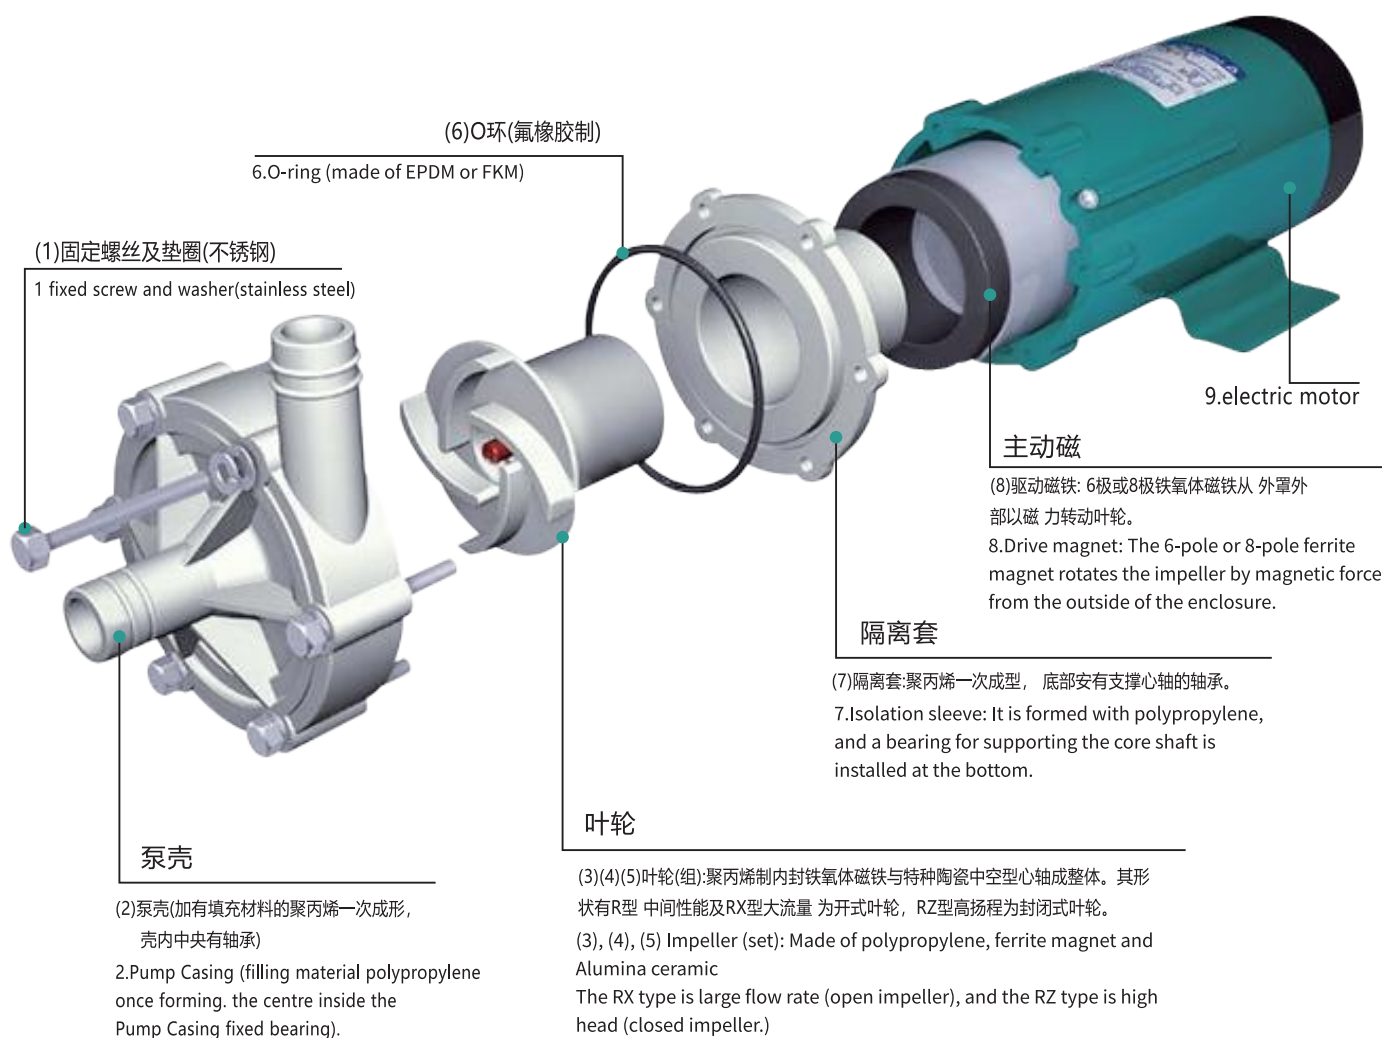

名称 Name

材料Material



(1) 螺 丝	Screws	304不锈钢 304 Stainless steel
(2) 泵 壳	Pump casing	玻璃纤维增强聚丙烯FRPP/PVDF/不锈钢 Glass fiber reinforced polypropylene FRPP/PVDF/ Stainless Steel
(3/4/5) 叶轮 (组)	Impeller (set)	玻璃纤维增强聚丙烯FRPP/PVDF/PPS(氧化铝陶瓷) Glass fiber Reinforced polypropylene FRPP/PVDF/PPS(Alumina Ceramics)
(6) 密封 圈	Sealing ring	氟橡胶(FKM)或三元乙丙橡胶(EPDM) Fluorine rubber (FKM) or ethylene propylene diene (EPDM)
(7) 隔 离 套	Isolation sleeve	玻璃纤维增强聚丙烯FRPP/PVDF/PPS Glass fiber reinforced polypropylene FRPP/PVDF/PPS
(8) 驱动磁铁	Drive magnet	锶铁氧体 Strontium ferrite
(9) 电 机	Motor	纯铜线 Pure copper wire

磁力驱动循环泵 MAGNETIC DRIVE CIRCULATING PUMP

磁力驱动循环泵在连轴和叶轮上装有磁性材料。它通过磁性材料间的相互吸引来运行,无需传统的机械轴封,并且具有完全密封的结构。这种设计消除了传统水泵因液体泄漏而导致的腐蚀和污染问题。采用特殊设计和工艺制造的陶瓷轴承具有高度的耐磨性和耐腐蚀性。由于其高效性和优良品质,该泵成为了工业液体输送领域的理想水泵。

The magnetic drive circulation pump has magnetic materials on the coupling shaft and impeller. It runs via their mutual attraction, needing no traditional mechanical shaft seals and featuring a fully sealed structure. This design eliminates the corrosion and pollution from liquid leakage in traditional pumps. The ceramic bearings, made with special designs and processes, are highly abrasion and corrosion resistant. Thanks to its high efficiency and quality, it's an ideal pump for industrial liquid transportation.

型号注释 MODEL NOTE

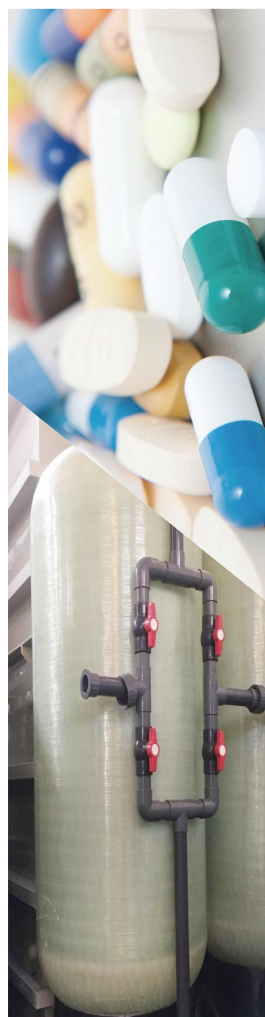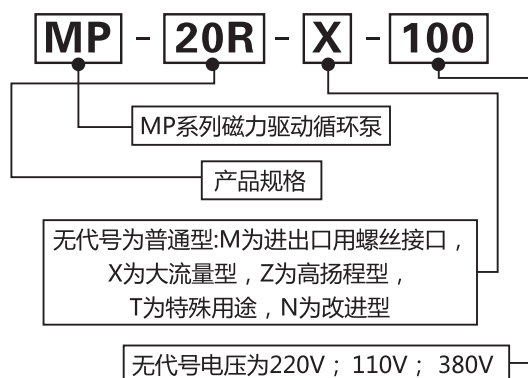

MP系列产品 MP SEVIES PRODUCTS



MP-6R



MP-10RM



MP-10RN



MP-15R



MP-15RM



MP-15RN



MP-20R



MP-20RM



MP-20RX



MP-20RZ



MP-20RZM



MP-30R



MP-30RM



MP-30RX



MP-30RXM



MP-30RZ



MP-30RZM



MP-40R



MP-40RM



MP-40RX



MP-40RXM



MP-55R



MP-55RM



MP-70R



MP-70RM



MP-100R



MP-100RM



MP-100RX




MP-120R

规格 SPECIFICATIC

型 号 Model	软管接口式 Tube interface		螺纹接口式 Thread interface		最大流量 Max. Capacity (L/min)	最高扬程 Max. Head (m)	标准输出量 Standard capacity		比重 Specific gravit	马达 Motor	
	入口 Inlet (mm)	出口 Outlet (mm)	入口 Inlet (inch)	出口 Outlet (inch)	50Hz/60Hz	50Hz/60Hz	流量 Capacity (L/min) 50Hz/60Hz	扬程 (m) Head(m) 50Hz/60Hz		输出 (w) Output (w) 50Hz/60Hz	相 Phase
MP-6R	14	14	-	-	8/9	1/1.4	2.8/5	0.8	<1.2	6	1
MP-6RZ	14	14	-	-	5.5/6	2.1/2.7	3.2/4.5	0.8	<1.1	6	1
MP-10RN	14	14	-	-	11/12	1.5/2.1	5/8	1	<1.1	6	1
MP-10RM	-	-	1/2	1/2	11/12	1.5/2.1	5/8	1	<1.1	6	1
MP-15R	16	16	-	-	16/19	2.7/3.4	8/12	1.5	<1.3	10	1
MP-15RN	16	16	-	-	16/19	2.7/3.4	8/12	1.5	<1.3	10	1
MP-15RM	-	-	1/2	1/2	16/19	2.7/3.4	8/12	1.5	<1.3	10	1
MP-20R	18	18	-	-	27/32	3.1/4.3	17/22	2	<1.2	15	1
MP-20RM	-	-	1/2	1/2	27/32	3.1/4.3	17/22	2	<1.2	15	1
MP-20RX	26	26	-	-	46/52	1.8/2.5	30/40	1	<1.3	15	1
MP-20RZ	18	18	-	-	10/11	4.6/6.9	7/10	4	<1.1	15	1
MP-20RZM	-	-	3/4	3/4	10/11	4.6/6.9	7/10	4	<1.1	15	1
MP-30R	20	20	-	-	33/38	3.8/5.4	16/25	2.5	<1.3	25	1
MP-30RM	-	-	3/4	3/4	33/38	3.8/5.4	16/25	2.5	<1.3	25	1
MP-30RX	26	26	-	-	62/72	2.9/4.1	32/46	2	<1.1	25	1
MP-30RXM	-	-	1	1	62/72	2.9/4.1	32/46	2	<1.1	25	1
MP-30RZ	18	18	-	-	15/17	8/11	10/14	6	<1.1	25	1
MP-30RZM	-	-	3/4	3/4	15/17	8/11	10/14	6	<1.1	25	1
MP-40R	20	20	-	-	45/52	4.6/6.5	22/34	4	<1.1	65	1or3
MP-40RM	-	-	3/4	3/4	45/52	4.6/6.5	22/34	4	<1.1	65	1or3
MP-40RX	26	26	-	-	75/85	3.3/4.7	47/65	2	<1.1	65	1or3
MP-40RXM	-	-	1	1	75/85	3.3/4.7	47/65	2	<1.1	65	1or3
MP-40RZ	18	18	-	-	22/28	10/13.5	10	8	<1.1	65	1or3
MP-40RZM	-	-	3/4	3/4	22/28	10/13.5	10	8	<1.1	65	1or3
MP-55R	26	26	-	-	60/70	5.6/8.2	30/45	4	<1.2	90	1or3
MP-55RM	-	-	1	1	60/70	5.6/8.2	30/45	4	<1.2	90	1or3
MP-55RZ	26	26	-	-	25/28	10/14	15/22	8	<1.1	90	1or3
MP-55RZM	-	-	3/4	3/4	25/28	10/14	15/22	8	<1.1	90	1or3
MP-70R	26	26	-	-	86/97	6.7/9.7	50/72	4	<1.1	150/180	1or3
MP-70RM	-	-	1	1	86/97	6.7/9.7	50/72	4	<1.1	150/180	1or3
MP-70RZ	20	20	-	-	40/43	14.3/20.3	20/24	12	<1.1	150/180	1or3
MP-70RZM	-	-	3/4	3/4	40/43	14.3/20.3	20/24	12	<1.1	150/180	1or3
MP-100R	26	26	-	-	120/130	8.6/11.6	60/70	7/9	<1.3	250/265	1or3
MP-100RM	-	-	1	1	120/130	8.6/11.6	60/70	7/9	<1.3	250/265	1or3
MP-100RX	-	-	1 1/4	1 1/4	170	9.0	100	5.0	<1.3	250	1or3
MP-120R	-	-	1 1/2	1 1/2	220	10.5	140	6.0	<1.3	370	1or3


外型尺寸 DIMENSIONS

MP-6R·10R·15R·20R·30R·40R

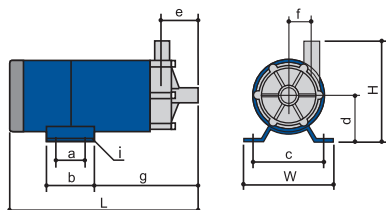


型号	W	H	L	a	b	c	d	e	f	g	i
MP-6R	74	85	129.5	—	30	59	37	32	17	62	2-Ø5.6
MP-10R	74	85	129.5	—	30	59	37	32	17	62	2-Ø5.6
MP-15R	84	101	195	44	70	67	45	36	23	88	4-Ø6*9
MP-20R	86	115	214	30	50	71	54	43	28	112	4-Ø5*8
MP-30R	121	132	250	40	64	101	57	47	32	135	4-Ø9*15
MP-40R	121	132	240	34	64	99	57	46	32	132	4-Ø9*15

MP-20RZ·30RZ·40RZ



MP-20RX·30RX·40RX·100RX




型号	W	H	L	a	b	c	d	e	f	g	i
MP-20RZ	86	125	211	30	59	69	55	40	39	108	4-5×8
MP-30RZ	120	130	234	40	64	100	60			120	4-φ9
MP-40RZ		133	226					39	45	119	
MP-20RX	86	130	220	30	59	69	56	47		117	4-5×8
MP-30RX	120	138	253	40	64	100	60	48	-	138	4-φ9
MP-40RX		137	276								
MP-100RX	156	174	323	70	100	110	74	63	-	196.5	4-9×27

注 NOTE


- 螺纹接口式泵性能及安装尺寸同软管接口式泵；
- G=英国直管螺纹规格；
- 规格和尺寸如有更改恕不另行通知。

- The performance and installation dimensions of the threaded interface pump are the same as those of the hose interface pump;
- G=British straight pipe thread specification;
- Specifications and dimensions are subject to change without prior notice.


MP-55R

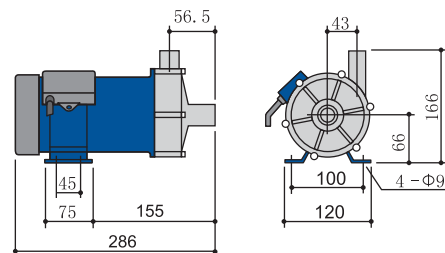


MP-70R

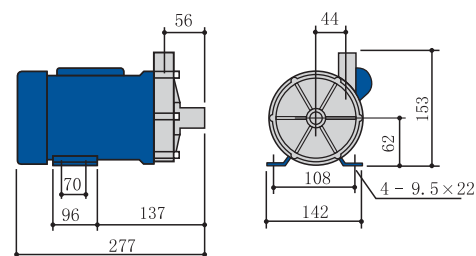


MP-70RZ

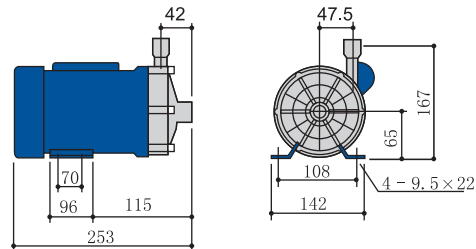

MP-100R






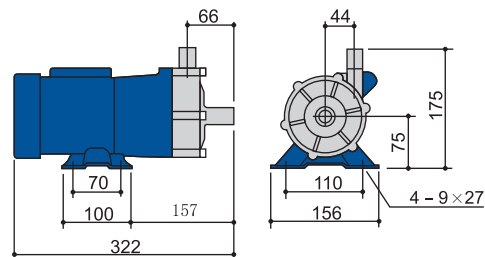


MP-120R

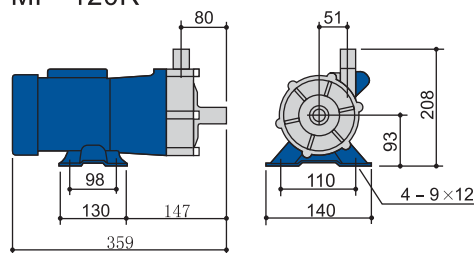


性能曲线 PERFORMANCE CURVES

(以下数据仅供参考, 请索要正规性能曲线。) The below data are for reference only.

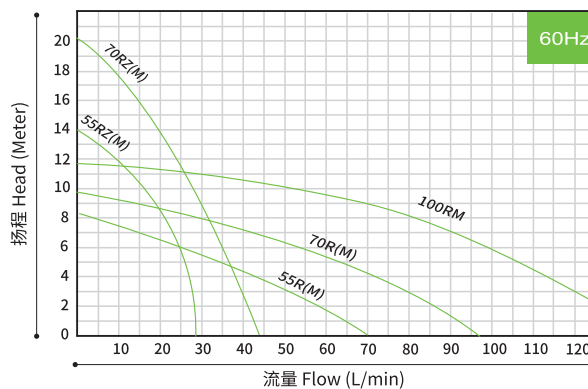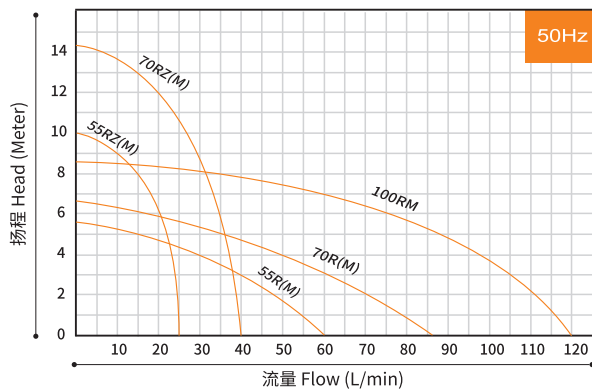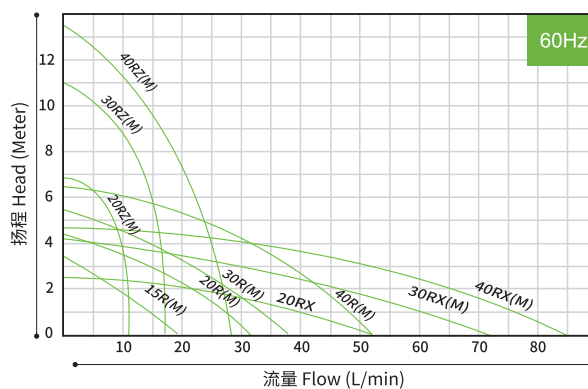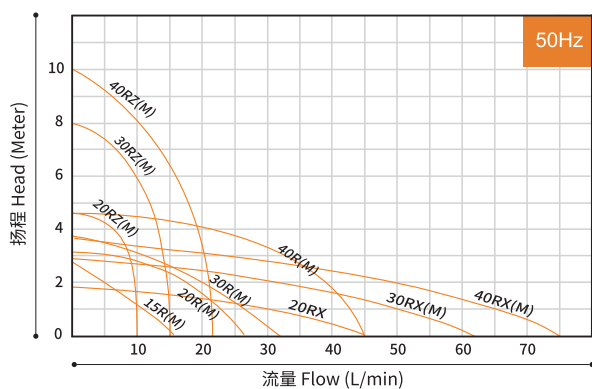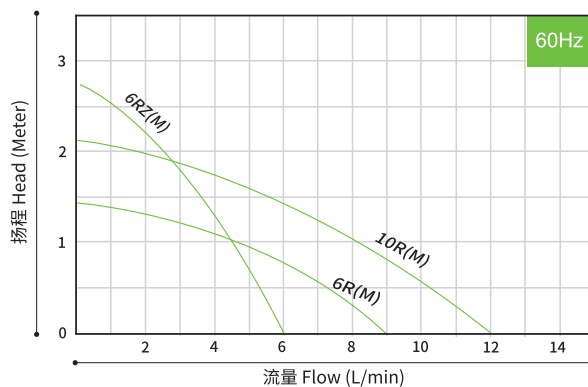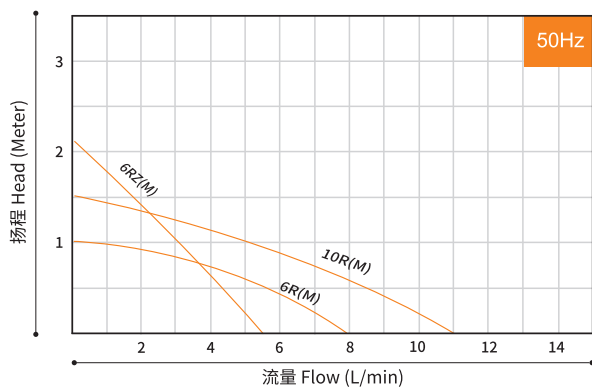

(以下数据仅供参考, 请索要正规性能曲线。) The below data are for reference only.

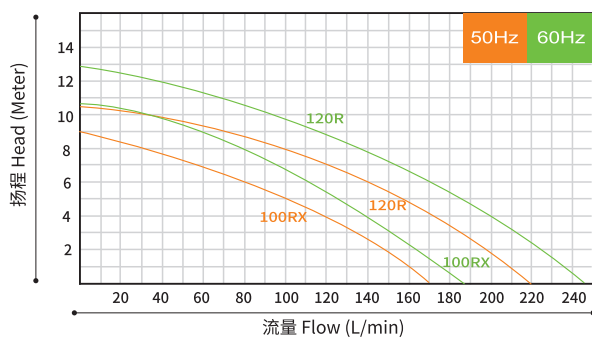

注(Note):

- 常温清水条件下, 最大流量时扬程为0; 最高扬程时流量为0。
- 单相马达工作电压分为100V、110V、220V、240V, 三相马达工作电压为380V。
- 正常的工作温度0-80℃, 如有要求更高工作环境可协商解决, 以满足您的条件。
- (M) 螺纹接口式。
- The flow curves are based on pumping clear water.
- When head is 0, it's max flow, When flow is 0, it's max head.
- Single - phase motors are 100V, 110V, 220V or 240V; three phase motors are 380V.
- Normal working temperature is 0 - 80°C. If you need a higher temperature, please contact our sales staff
- (M) means: Threaded connection.

MPH系列耐腐蚀磁力泵

MPH CORROSION RESISTANT MAGNETIC PUMP

MPH-40-0-F-C-C-V-5-V38

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1、机型编号Model number:MPH
- 2、出入口径Inlet&outlet Size (DN):40:40x40, 42:50x40, 45:65x50
- 3、马力Horsepower:0:1/2HP, 1:1HP, 2:2HP, 3:3HP, 5:5HP
- 4、泵体材质Pump body material:F-CFRPP, P-PVDF
- 5、轴心Axis:C-CERAMIC(陶瓷)、 S-SIC (碳化硅)
- 6、轴承Bearing:C -CARBON(陶瓷)、 P-PTFE (特弗龙)、 S-SIC (碳化硅)
- 7、橡胶材质Rubber material:V-VITON, E-EPDM
- 8、频率Frequency:5:50HZ, 6:60HZ
- 9、电压Voltage:V38:220V V39:380V V40:220V/380V/3

特点 THE CHARACTERISTICS OF

- 采用优质塑胶射出成型，磁力驱动，无轴封设计，
- 不会因泄漏造成危害。
- 适用于酸碱液体的输送，循环作业。
- 配合不同材质供不同药液使用。
- 适应温度: FRPP 80度以下， PVDF 120度以下
- The product is injection - molded with high - grade plastics and magnetic driven, featuring a shaft - seal - free design
- that eliminates leakage hazards.
- suitable for transporting and circulating acid - base liquids.
- Different materials can be selected for various chemical solutions.
- Temperature limits: PP up to 80°C; PVDF up to 120°C.

应用领域 APPLICATION FIELDS


电镀、水处理、酸性、化学液、净化烟雾及清洗液
Electroplating, water treatment, acidity, chemical solution, purification smoke and cleaning solution



规格 SPECIFICATIC

型 号 Model	口径 (DN) Caliber		最大流量 Max. Capacity (L/min)		最高扬程 Max. Head (m)		标准输出量 Rated Head Flow (Meter-L/min)		比重 Specific gravit	马达 Horespower 输出功率 (KW) Output power	重量 Weight (kg)
	入口 Inlet	出口 Outlet									
MPH-400	40	40	260	260	12.5	12.5	8.0-150	8.0-150	1.05	0.37	13
MPH-440	40	40	280	280	12.5	12.5	8.5-150	8.5-150	1.05	0.55	13
MPH-401	40	40	330	330	18	18	12-200	12-200	1.05	0.75	19
MPH-422	50	40	400	400	23	23	18-200	18-200	1.2	1.5	23
MPH-423	50	40	500	500	24	24	20-300	20-300	1.2	2.2	26
MPH-425	50	40	600	600	29	29	25-400	25-400	1.0	4.0	45
MPH-455	65	50	750	850	29.5	29.5	20-630	20-630	1.0	4.0	55



结构图 STRUCTURAL DIAGRAM

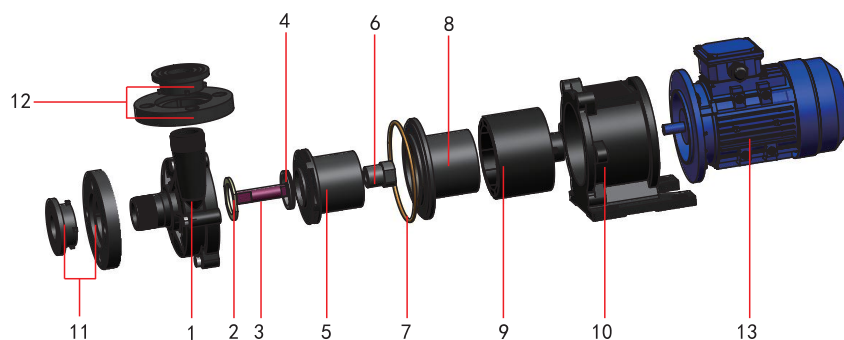


1	2	3	4	5	6	7	8	9	10	11	12	13
泵外壳	止推环	轴	耐磨环	叶轮	轴承	O型圈	隔离套	外磁钢	框架	入口法兰	出口法兰	电机
Housing	Thrust ring	Shaft	Anti-wearing ring	Impeller	Bearing	O-ring	Isolation Sleeve	Drive Magnet	Frame	Inlet Flange	Outlet Flange	Motor

性能曲线 PERFORMANCE CURVES

(以下数据仅供参考, 请索要正规性能曲线。) The below data are for reference only.

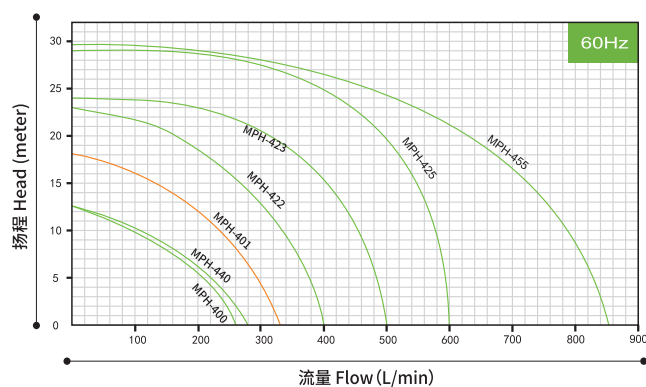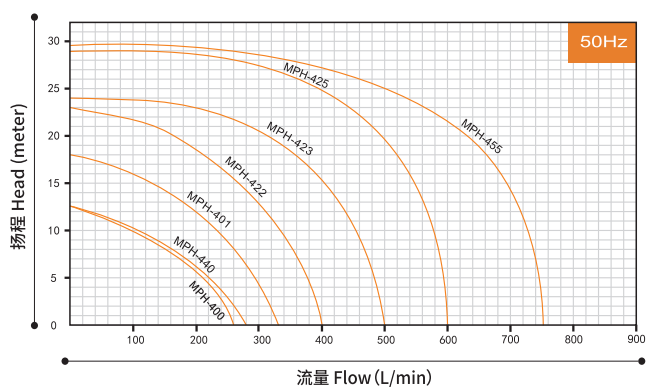

外型尺寸 DIMENSIONS

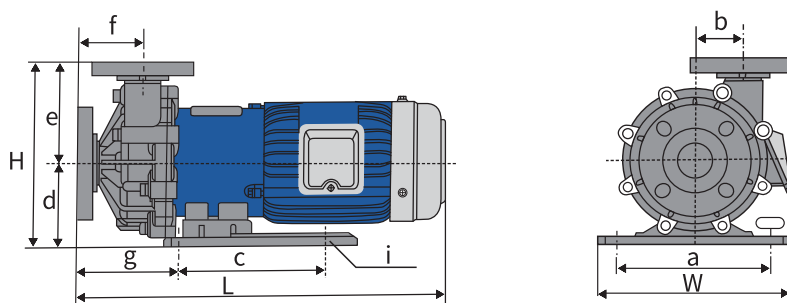

I T E M	W	H	L	a	b	c	d	e	f	g	i
MPH-440	140	218	441	110	63	100	98	120	80	107	4-Ø12*20
MPH-400	140	218	441	110	63	100	98	120	80	136	4-Ø12*20
MPH-401	162	255	457	130	65	130	115	130	90	225	4-Ø12
MPH-422	250	267	520	208	75	200	123	146	92	156	4-Ø12
MPH-423	260	285	555	208	75	200	123	162	105	156	4-Ø12
MPH-425	260	300	638	230	65	261	135	163	91	156	4-Ø14*36
MPH-455	260	295	650	230	70	261	135	161	110	178	4-Ø14*36

产品抗化学腐蚀状况

CHEMICAL RESISTANCE GUIDE

抗化学腐蚀标签注释:

A — 优秀
B — 好
C — 一般
X — 不能承受
— — 不能用

液体最高温度标签注释:

1 — 20度 (68F)
2 — 40度 (104F)
3 — 60度 (140F)
4 — 80度 (176F)
5 — 100度 (212F)
6 — 120度 (248F)

Chemical resistance ratings:

A — Excellent
B — Good
C — Fair
X — Not Recommended
— — Data Not Available

Maximum operating temperature:

1 — 20℃ (68F)
2 — 40℃ (104F)
3 — 60℃ (140F)
4 — 80℃ (176F)
5 — 100℃ (212F)
6 — 120℃ (248F)

化学药品 CHEMICAL		材料 MATERIAL						
		聚丙烯 PP	聚二氟乙烯 PVDF	氟橡胶 FKM	丁腈橡胶 Chemigum	三元乙丙胶 EPDM	95陶瓷 95Ceramic	高密度碳 High density carbon
硫酸 Sulfuric Acid	0~10%	A4	A6	A6	B2	A4	A5	A6
	10~75%	A3	A6	A4	X	A3	A5	A6
	75~100%	B2	A4	A4	-	B2	A5	A4
硝酸 Nitric Acid	10%	A3	A5	A5	X	A2	A5	A6
	30%	A2	A6	A6	X	A2	A5	A6
	50%	B2	A3	A1	X	X	A5	A5
盐酸 Hydrochloric Acid	0~25%	A4	A6	A3	B1	A3	A5	A6
	25~40%	A4	A6	B2	X	C2	A5	A6
氢氟酸 Hydrofluoric Acid	10%	B2	A6	A3	X	A3	-	A3
	30%	C2	A6	A4	-	B3	-	A3
	60%	X	A6	A4	-	C2	-	A2
醋酸 Acetic Acid	20%	A2	A6	B1	B2	A2	A5	A4
	80%	B1	A6	X	-	-	A5	A4
氢氧化钠 Sodium Hydroxide	20%	A3	A6	B1	B2	A4	-	A3
	50%	A3	A6	X	B1	A3	-	A3
溴水 Bromine Water		C1	A3	A2	-	X	A1	A2
乙醇 Ethyl Alcohol		A2	A3	A3	X	B3	A3	A5
丙酮 Acetone		A2	A6	X	-	B2	A3	A5
氟里昂12 Freon 12		X	A6	A1	X	B1	A4	A4
氯化铝 Aluminum Chloride		A4	A6	A5	B4	A4	A4	A5
氨水 Ammonia Liquid		A1	A6	C1	B4	B3	A3	A5
王水 Aqua Regia		C2	A5	B2	-	C2	A4	-
甲醛 Formaldehyde		A4	A6	A4	x	A4	A4	A5
汽油 Gasolines		X	A6	B3	B3	X	A4	A6
煤油 Kerosene		A1	A6	A1	B1	X	A4	A6
甲醇 Methyl Alcohol		A3	A6	B2	B4	A3	A5	A6
甲苯 Toluene		C1	A4	B1	-	X	A5	A4
三氯乙烯 Trichloroethylene		C1	A6	A1	-	X	A4	A6
二甲苯 Xylene		X	A6	B1	-	X	A5	A5
无水硝酸 Nitric Acid Anhydrous		C1	A3	A1	-	X	A5	A2
发烟硫酸 Oleum		X	A6	A4	-	X	A5	A2
氢氧化钾 Potassium Hydroxide		A4	A6	B1	C2	A5	-	A6

注: 95陶瓷——含氧化铝95%的陶瓷 Note: 95ceramic means containing 95 percent of alumina

工作用途

APPLICATIONS

皓泉牌磁力驱动循环泵以聚丙烯为材料制造，具有耐化学药液腐蚀的性能，用途非常广泛。

The "HAOQUAN" Brand magnetic-driven cycle pump, made by polypropylene, excellent performance to endure the corrosion from chemical Liquid, extensive applications.

化学工业	碳酸钠化工业(盐酸、次氯酸、二次化学品的生产); 氟化物、化学肥料的生产; 气体吸收塔反应液体循环; 油脂提炼(硫酸); 废酸类的回收及再生系统; 化工厂和运输车辆间的强酸类输送。
药剂业	半导体用的发光化学物 (EL)、农药、医药、水处理化学剂的生产。
电镀业	循环过滤各类电镀液。
照片业	即现照相系统; X-光片、黑白、彩色、立体照片的冲晒。
电器用具业	电解质电容器的生产 (铝膜的侵蚀); 干电池和蓄电池制造过程中输送电解液; 电路板的蚀刻; 半导体生产过程中输送高纯度化学液。
金属工业	氧化铝膜处理设备; 线材拉伸, 钢铁轧制中除油及酸洗; 车辆喷漆前除油及酸洗处理; 氧化钛, 稀土元素的生产等。
矿业	金属熔炼 (输送及循环电解液); 废液的洗涤处理。
食品工业	葡萄糖酸的生产 (盐酸); 食油的提炼 (硫酸); 罐装水果工业 (盐酸)
医疗	人造肾脏, 心肺、超声波清洗机及各种医疗设备。
水处理	清洗离子交换树脂; 纯水生产设备; 海水淡化设备。
污染控制	添加污水处理化学药剂到药液缸; 收集及输送废液; 废气吸收设备(除臭装置, 排放废气前脱硫)。
其他	应用在银回收、晶片制造、实验工厂, 制冰机, 饮品机、生活锅炉、热交换器、太阳能系统、漂染、激光系统等领域及喷水池、鱼池、观赏鱼缸循环使用。

Chemical industry:	Sodium carbonate industry(production of hydrochloric acid, hypochlorous acids secondary chemical product);production of fluoride,chemical fertilizer;cycle of reactive liquid of gas absorb tower, abstract grease(sulfuric acid);recycle & reactivation system of waste acid substance;transport of strong acid between chemical factory and transport vehicle
Pharmaceuticals industry:	Production of luminophor (EL)for semiconductor,pesticides,medicine ,water treatment agent
Electric plate:	Cycle filter kinds of electroplating liquid.
Photograph processing:	At-once photograph system;Xfilm,wash-out of back andwhite ,colour and solidphotograph
Electric appliance :	Production of chemical capacitor(erosion by alum inurn film) ,Transport electrolyte for manufacture of dry battery and accumulator ;Etching circuit board;Transfer high purity of chemical liquid during the manufacture of semiconductor.
Metal industry :	Treatment device for aluminum oxide film;Wire stretching;Oil elimination and cleaning and acid cleaning for steel rolling ; Oil elimination and acid cleaning before painting of vehicle;production of oxidized titanium and rare-earth element.
Mineral industry :	Fusion metallurgy(Transport and recycle electrolyte);handling waste liquid.
Food industry :	Production of gluconic acid(hydrochloric acid);abstracting cooking oil(sulfuric acid);potted fruit industry(hydrochloric acid).
Medicine remedy:	Man-made kidney and heart,ultrasonic washing machine and various of medical equipment.
Water treatment:	Cleaning ion exchange resin;pure water production equipment ;sea-water desalting equipment.
Pollution controll :	Add waste water treatment agent to medical liquid tank;collect and transport waste liquid;waste gas absorb equipment (deodorization equipment,desulfurisation before waste gas discharge).
Other application:	Applied in silver recycle,wafer manufacture, laboratory-ice making machine,drinking machine,living boiler,heating exchange machine,solar energy system,dyeing,laser system,water spouting pool,rearing pond fish jar etc.

MP 系列不锈钢磁力泵

MPS STAINLESS STEEL MAGNETIC PUMP

MP - 15R - M - SS - 110

1

2

3

4

5



1. 机型号 Model number:MP
2. 产品规格 Product specifications
3. 无代号为普通型直插口 "No Code" represents tube connection
M: 螺纹口represents Thread connection
4. 泵体材质Pump body material:SS-304不锈钢stainless steel,
P-316不锈钢stainless steel
5. 电压Voltage: 110V/115V/220V /380V

特点 THE CHARACTERISTICS OF

- 泵头采用不锈钢材质，磁力驱动，无轴封设计。
- 叶轮及隔离套采用食品级耐高温塑料，温度高达140度。
- 通过CE和食品级认证。
- 可订做不同国家插头EU/US/AU/UK。
- The pump head is made of stainless steel material, driven by magnetic force, and designed without shaft seal.
- The impeller and isolation sleeve are made of food grade high-temperature resistant plastic, with a temperature of up to 140 degrees.
- Passed CE and food grade certification.
- Can customize plugs from different countries EU/US/AU/UK.

应用领域 APPLICATION FIELDS







啤酒酿造、水处理、制药行业、食品和饮料行业。
Beer brewing, water treatment, pharmaceutical industry, food and beverage industry.

规格 SPECIFICATIC


型 号 Model	软管接口式 Tube interface		螺纹接口式 Thread interface		最大流量 Max.Capacity (L/min)	最高扬程 Max.Head (m)	标准输出量 Standard capacity		比重 Specific gravit	马达 Motor	
	入口 Inlet (mm)	出口 Outlet (mm)	入口 Inlet (inch)	出口 Outlet (inch)			流量 Capacity (L/min) 50Hz/60Hz	扬程(m) Head(m) 50Hz/60Hz		输出(w) Output(w)	电压(V) Voltage(V)
MP-10RN	14	14	-	-	11/12	1.5/2.1	5/8	1	<1.1	6	110/220
MP-10RM	-	-	1/2	1/2	11/12	1.5/2.1	5/8	1	<1.1	6	110/220
MP-15R	16	16	-	-	16/19	2.7/3.4	8/12	1.5	<1.3	10	110/220
MP-15RM	-	-	1/2	1/2	16/19	2.7/3.4	8/12	1.5	<1.3	10	110/220
MP-20R	18	18	-	-	27/32	3.1/4.3	17/22	2	<1.2	15	110/220
MP-20RM	-	-	1/2	1/2	27/32	3.1/4.3	17/22	2	<1.2	15	110/220
MP-30R	20	20	-	-	33/38	3.8/5.4	16/25	2.5	<1.3	25	110/220
MP-30RM	-	-	3/4	3/4	33/38	3.8/5.4	16/25	2.5	<1.3	25	110/220
MP-40R	20	20	-	-	45/52	4.6/6.5	23/34	4	<1.1	65	110/220/380
MP-40RM	-	-	3/4	3/4	45/52	4.6/6.5	23/34	4	<1.1	65	110/220/380
MP-55R	26	26	-	-	60/70	5.6/8.2	30/45	4	<1.2	90	110/220/380
MP-55RM	-	-	1	1	60/70	5.6/8.2	30/45	4	<1.2	90	110/220/380
MP-70R	26	26	-	-	86/97	6.7/9.7	50/72	4	<1.1	150/180	110/220/380
MP-70RM	-	-	1	1	86/97	6.7/9.7	50/72	4	<1.1	150/180	110/220/380
MP-100R	26	26	-	-	120/130	8.6/11.6	60/70	7/9	<1.3	250/265	110/220/380
MP-100RM	-	-	1	1	120/130	8.6/11.6	60/70	7/9	<1.3	250/265	110/220/380

性能曲线 PERFORMANCE CURVES

(以下数据仅供参考, 请索要正规性能曲线。) The below data are for reference only.

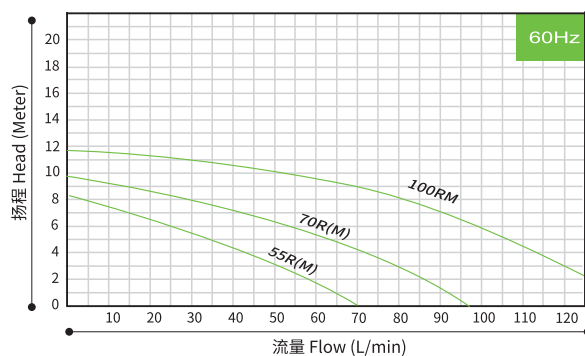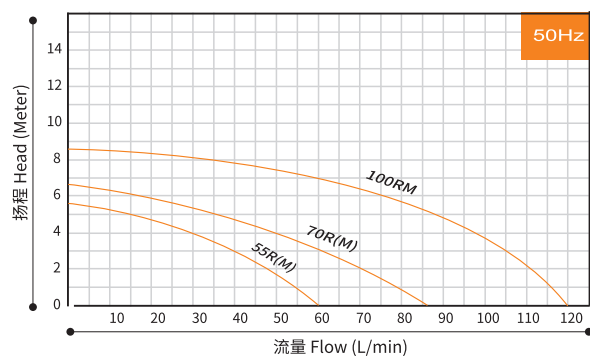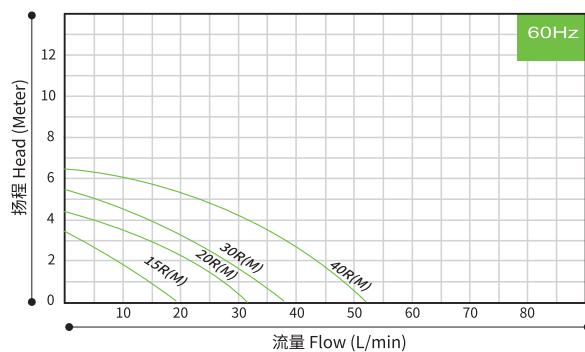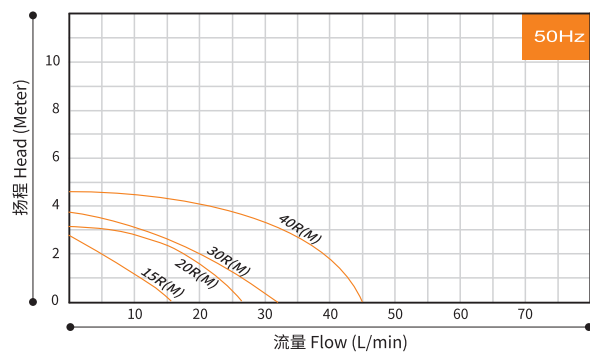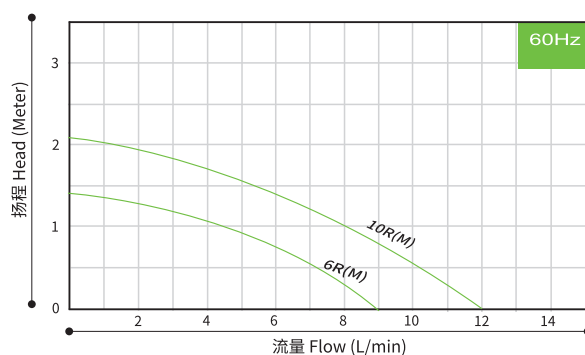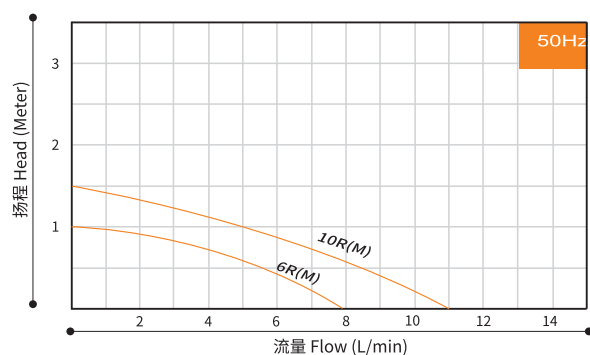

外型尺寸 DIMENSIONS

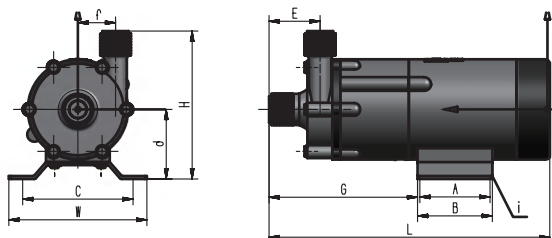

型号	W	H	L	A	B	C	d	E	f	G	i
MP-10RM	73.5	88.5	131.5	—	30.5	59.6	38	32	16	63	2-Ø9.8*5.8
MP-15RM	83.5	97	195	41.9	65.3	67.3	43	34	24	87.5	4-Ø10.5*5.6
MP-20RM	87	116	233	30.3	50.5	67	56.8	38.5	28	107	4-Ø7.5*5.2
MP-30RM	119	127.5	242	34.5	64.5	99	60	44	32.5	128	4-Ø14.5*9
MP-40RM	119.1	124.5	234	35.1	64.5	98.1	58.5	42.5	33.8	127	4-Ø14.7*10
MP-55RM	123.5	162	278	39.5	76.1	101.7	69	52.5	43.5	146.9	4-Ø8.8*13.8
MP-70RM	142.5	155.5	267.5	70.5	96	69.7	62	51	42.8	126.9	4-Ø9.5*15.6
MP-100RM	156	175	322	70	100	110	75	66	44	157	4-Ø9*27

WS系列无刷磁力泵 WS BRUSHLESS MAGNETIC PUMP



WS - 15R - M - PP - 24V

1

2

3

4

5

1. 机型编号 Model number: WS
2. 产品规格 Product specifications
3. 无代号为普通型直插口 "No Code" represents tube connection
M: 螺纹口 represents Thread connection
X: 大流量 represents High flow type
Z: 高扬程 represents High Head type
4. 泵体材质 Pump body material: S-304 不锈钢 stainless steel
E-316 不锈钢 stainless steel F-CFRPP、P-PVDF
5. 电压 Voltage: 12VDC 24VDC

特点 THE CHARACTERISTICS OF



- 采用无刷电机，小体积，低噪音，寿命长。
- 可通过调速控制流量大小，满足不同场景需求。
- 磁力驱动，动力高，性能稳定。
- 配合不同领域，选用不同材质输送液体，循环作业。
- Adopting brushless motor, small size, low noise, and long service life.
- The flow rate can be controlled through speed regulation to meet the needs of different scenarios.
- Magnetic drive, high power, stable performance.
- Cooperate with different fields, choose different materials to transport liquid, and circulate operation.

规格 SPECIFICATIC



型 号 Model	软管接口式 Tube interface		螺纹接口式 Thread interface		最大流量 Max. Capacity (L/min)	最高扬程 Max. Head (m)	标准输出量 Standard capacity		比重 Specific gravit	马达 Motor	
	入口 Inlet (mm)	出口 Outlet (mm)	入口 Inlet (inch)	出口 Outlet (inch)			流量 Capacity (L/min)	扬程 (m) Head (m)		输出 (w) Output (w)	电压 (V) Voltage (V)
WS-6R	14	14	-	-	9	1.4	5	0.8	<1.2	6	12/24
WS-6RZ	14	14	-	-	6	2.7	4.5	0.8	<1.1	6	12/24
WS-10RN	14	14	-	-	12	2.1	8	1	<1.1	6	12/24
WS-10RM	-	-	1/2	1/2	12	2.1	8	1	<1.1	6	12/24
WS-15R	16	16	-	-	19	3.4	12	1.5	<1.3	10	12/24
WS-15RM	-	-	1/2	1/2	19	3.4	12	1.5	<1.3	10	12/24
WS-20R	18	18	-	-	32	4.3	22	2	<1.2	15	12/24
WS-20RM	-	-	1/2	1/2	32	4.3	22	2	<1.2	15	12/24
WS-20RX	26	26	-	-	52	2.5	40	1	<1.3	15	12/24
WS-30R	20	20	-	-	38	5.4	25	2.5	<1.3	25	12/24
WS-30RM	-	-	3/4	3/4	38	5.4	25	2.5	<1.3	25	12/24
WS-30RX	26	26	-	-	72	4.1	46	2	<1.1	25	12/24
WS-30RXM	-	-	1	1	72	4.1	46	2	<1.1	25	12/24
WS-40R	20	20	-	-	52	6.5	46	4	<1.1	65	12/24
WS-40RM	-	-	3/4	3/4	52	6.5	46	4	<1.1	65	12/24
WS-40RX	26	26	-	-	85	4.7	65	2	<1.1	65	12/24
WS-40RXM	-	-	1	1	85	4.7	65	2	<1.1	65	12/24

性能曲线 PERFORMANCE CURVES

(以下数据仅供参考, 请索要正规性能曲线。) The below data are for reference only.

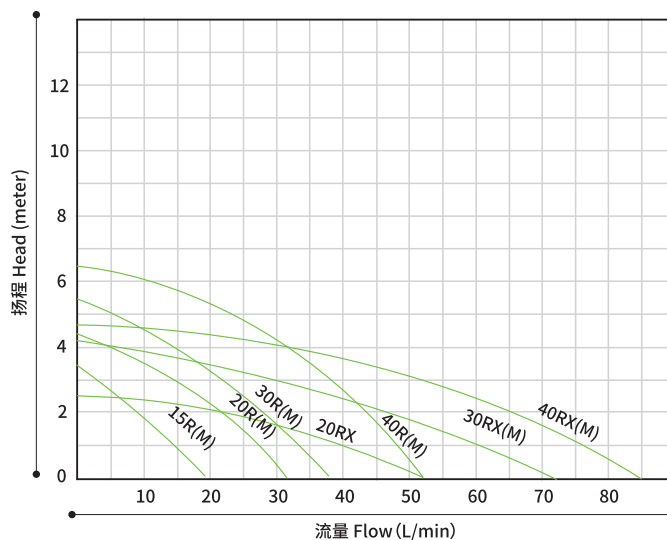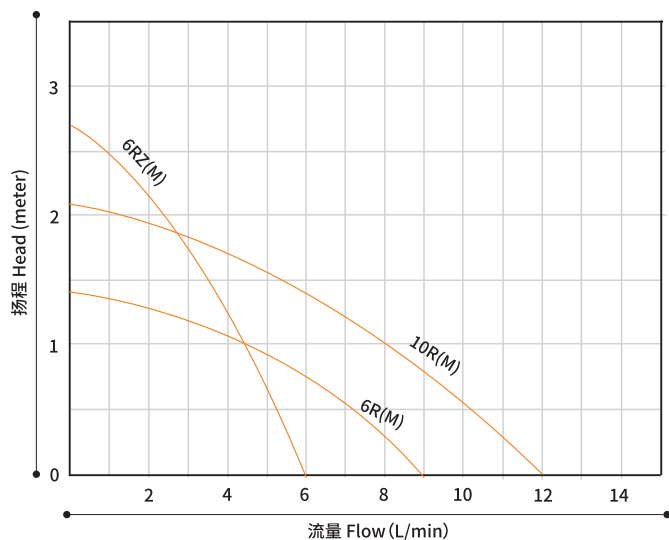

外型尺寸 DIMENSIONS

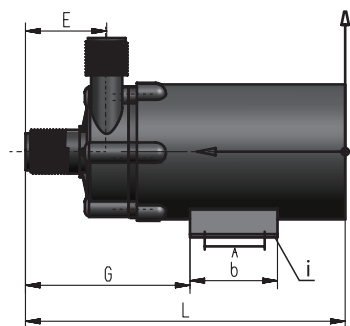

型号	W	H	L	A	b	C	d	E	f	G	i
WS-10RM	75	93	120	—	30.2	42	42.8	32.5	16.1	63	2-11.5*5.9
WS-15RM	88.5	96	148.5	21	42	73.5	42	34	24	74	4-10*5
WS-20RM	84	114	174	30	50	67.7	56	39	27.5	85	4-7.7*5.2
WS-20RX	84	124	183.5	30	50	45.5	56	46.5	—	94.5	4-5.4*5.2
WS-30RM	124	131	229	37	64.5	102	57.5	46.5	32.5	100	4-11.4*8.5
WS-30RXM	124	125	238.5	37	64.5	102	57.5	54.5	—	109.5	4-11.4*8.5
WS-40RM	124	131	229	37	64.5	102	57.5	46.5	32.5	100	4-11.4*8.5
WS-40RXM	124	125	238.5	37	64.5	102	57.5	54.5	—	109.5	4-11.4*8.5

应用领域 APPLICATION FIELDS

科研实验、医疗器械、在线采集、消毒系统、激光领域、制冷系统

Scientific research experiments, medical devices, online collection, disinfection systems, laser fields, refrigeration systems

DP系列隔膜泵 DP Diaphragm Pump

特点 THE CHARACTERISTICS OF

- 移动和安装方便
 - 具有自吸功能
 - 内装压力自动开关控制泵
 - 介质温度可高达60℃
 - 噪音低、耐腐蚀、压力高
- Easy Installation
 - Excellent self suction capability
 - Pump controlled automatically by built-in pressure switch
 - Permissible liquid temperature up to 60℃
 - Low Noise,Excellent Corrosion Resistance,High Pressure



DP-35



DP-60A



DP-70



DP-60/130(BLDC)



DP-35/50(BLDC)



DP-60/100/125

规格 SPECIFICATIC

型号 Model	电压 Voltage (V)	最大电流 Max.current (A)	最大流量 Max.Flow Gallon(L)/min	转速 Speed (r/min)	最高压力 Pressurre(max) Psi(Mpa)	吸程 Suction (m)	调压开关 Pressure switch psi(Mpa)	额定功率 Power (w)
DP-35	24	4.8	3.2(12)	1300	35 (0.24)	5	35 (0.24)	40
	12	7	2.5(9.5)	1200	35 (0.24)	5	35 (0.24)	40
DP-60A	24	3	1.3(5.0)	1200	60 (0.42)	5	/	40
	12	6	1.3(5.0)	1200	60 (0.42)	5	/	40
	220	0.42	1.3(5.0)	1200	60 (0.42)	5	/	40
BLDC DP-60A	12	5	1.3(5.0)	1200	60 (0.42)	5	/	20
DP-60	24	3	1.3(5.0)	1200	60 (0.42)	5	60(0.42)	40
	12	6	1.3(5.0)	1200	60 (0.42)	5	60(0.42)	40
	220	0.42	1.3(5.0)	1200	60 (0.42)	5	60(0.42)	40
BLDC DP-60	24	2.8	1.3(5.0)	1200	60 (0.42)	5	60(0.42)	28
	12	5	1.3(5.0)	1200	60 (0.42)	5	60(0.42)	20
DP-100A	24	1.1	0.32(1.2)	375	100 (0.68)	5	/	10
DP-100	24	1.1	0.32(1.2)	375	100 (0.68)	5	100(0.68)	10
DP-125	24	1	0.26(1.0)	375	125 (0.86)	5	125(0.86)	10
DP-130B	24	1.2	0.45(1.7)	470	130 (0.90)	5	125(0.86)	15
	12	2.2	0.45(1.7)	470	130 (0.90)	5	125(0.86)	15
DP-130	24	1.2	0.45(1.7)	470	130 (0.90)	5	/	15
	12	2.2	0.45(1.7)	470	130 (0.90)	5	/	15
DP-150	12	10	1.4(5.3)	720	150 (1.00)	5	150 (1.00)	40
	24	5	1.4(5.3)	720	150 (1.00)	5	150 (1.00)	40
	220	0.7	1.4(5.3)	720	150 (1.00)	5	/	40
DP-50	24	6	4.2(16)	1800	50(0.35)	5	50(0.35)	65
	12	12	4.2(16)	1500	50(0.35)	5	50(0.35)	65
DP-70	12	17	5.02(19)	1200	70(0.48)	5	70(0.48)	70
	24	9	5.02(19)	1200	70(0.48)	5	70(0.48)	70
	220	1.3	5.02(19)	1200	70(0.48)	5	70(0.48)	70

可根据客户参数要求定制



注:200V电压为交流, 其它电压为直流

Specification can be customized

220V is AC, others are DC


性能曲线 PERFORMANCE CURVES

(以下数据仅供参考, 请索要正规性能曲线。) The below data are for reference only.

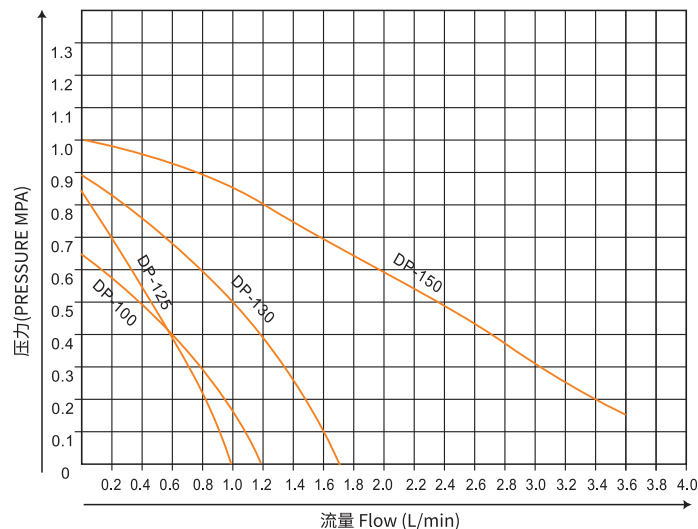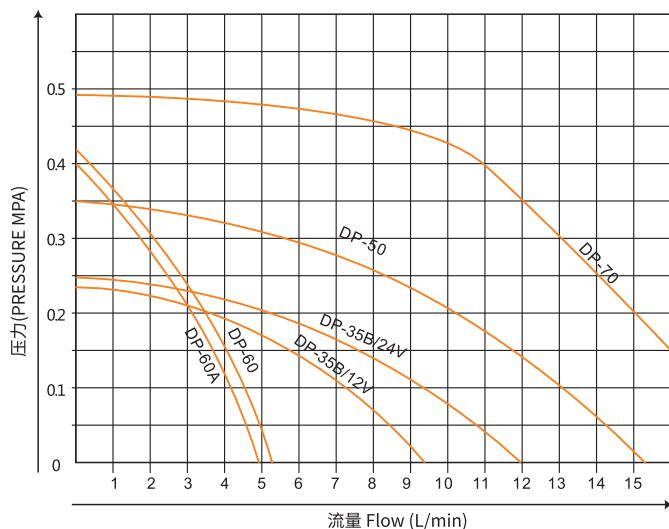


外型尺寸 DIMENSIONS

DP-35 · 50

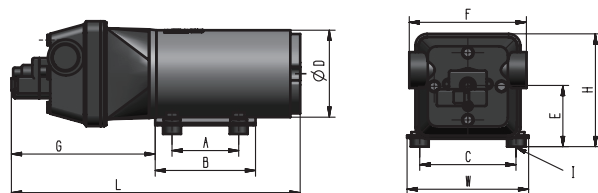


型号 Item NO.	A	B	C	D	H	L	W
DP-35	57.5	86.5	83	Φ75	97	249	105
DP-50							
DP-35/50 (BLDC)	57	86	83	Φ71.5	86	196	105
DP-60 (BLDC)	57	77	84	Φ71.5	83	146	105
DP-70	57	86	83.5	Φ76	126	229.5	105

DP-60A · 100 · 125 · 130 · 150
(无压力开关) No Pressure Switch

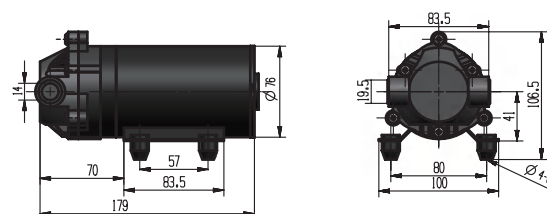

DP-60 · 100 · 125 · 130 · 150
(带压力开关) With Pressure Switch

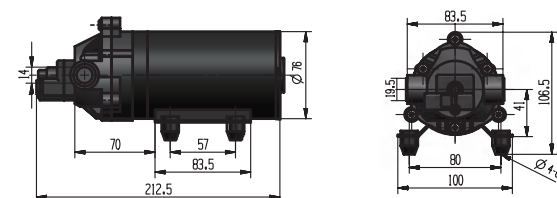


产品用途 PRODUCT PURPOSE

汽车冲洗
反渗透水质净化系统
过滤机
喷雾装置
工业设备
化工计量加液
卫生、环保
印刷行业

Car flushing
Reverse Osmosis Water Purification System
Filter
Spray Equipment
General industrial equipment
Chemical Metering
Hygienic, Pollution control
Printing

型号注释 MODEL NOTE

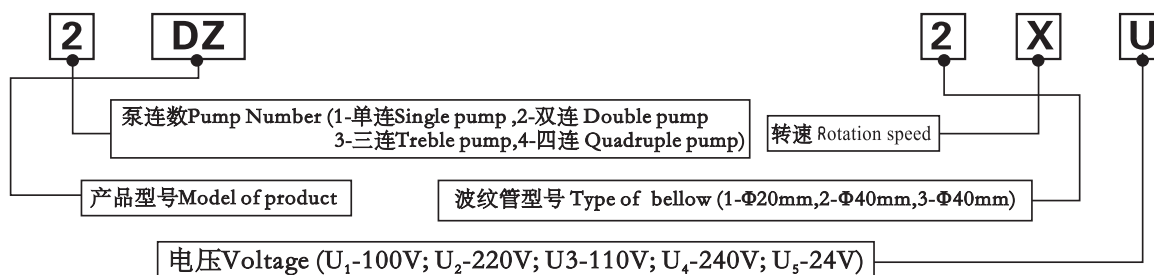


特点:

- ▲ 完全无泄漏……无机械轴封部，所以不存在有泄漏。
- ▲ 输出量精度……清水情况下，可获得 $\pm 1.5\%$ 的高精度。
- ▲ 可以自吸……常温清水条件下，吸程为1米。
- ▲ 允许干运转……工作腔为波纹管，因而可以干运转。
- ▲ 寿命长……本腔采用耐曲折特殊配方材料的聚丙烯制成，可以经受数百万次的往复运动。
- ▲ 耐腐蚀性好……泵体采用聚丙烯制成，阀门选用了特种配方的FPM, EPDM, 耐各种酸、碱等腐蚀性液体。
- ▲ 液温……最高药水温度 $60^\circ C$ ，超过 $50^\circ C$ 时，最高压力为 $20^\circ C$ 时的 $1/2$ ，超过 $40^\circ C$ 时液体的腐蚀性会增加，须注意。

FEATURES:


- ▲ Completely leak-free... Without a mechanical shaft seal part, there is no leakage.
- ▲ High precision of output... In the case of clear water, a high precision of $\pm 1.5\%$ can be achieved.
- ▲ Self-priming ability... Under the condition of clear water at room temperature, the suction lift is 1 meter.
- ▲ Allows dry running... The working chamber is a bellows, so it can run dry.
- ▲ Long service life... The chamber is made of polypropylene with a special formula material resistant to bending, which can withstand millions of reciprocating motions.
- ▲ Good corrosion resistance... The pump body is made of polypropylene, and the valves are made of FPM and EPDM with a special formula, which can resist various corrosive liquids such as acids and alkalis.
- ▲ Liquid temperature... The maximum temperature of the chemical liquid is $60^\circ C$. When the temperature exceeds $50^\circ C$, the maximum pressure is half of that at $20^\circ C$. When the temperature exceeds $40^\circ C$, the corrosiveness of the liquid will increase, and attention should be paid.

外形尺寸图 DIMENSION OF STRUCTURE DRAWING

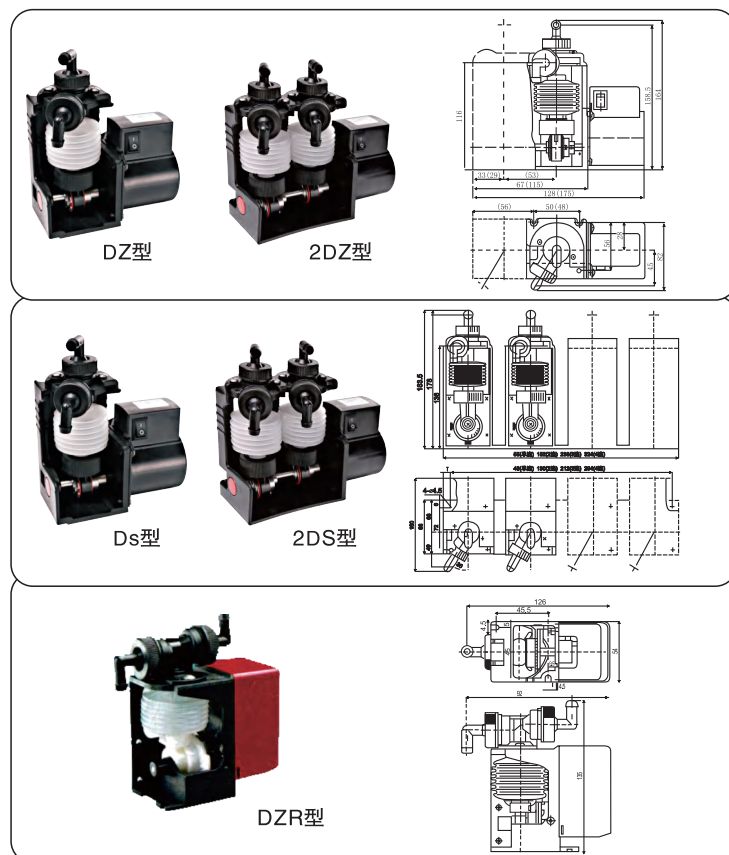

结构图 STRUCTURAL DIAGRAM

No.名称 Name	材质 Material (DZ, DZN, DS型/DZN型)	数量 Quantity
1 阀体 Body	PP	2
2 升阀 Poppet valve	EPDM.CSM.FPM	2
3 波纹管 Bellows	PP	1
4 连杆 Connecting Bod	PP/POM	1
5 支撑轴 Spindle	1Cr18Ni9Ti	1
6 偏心轮 Crank (B)	1Cr18Ni9Ti/POM	1
7 偏心套 Crank (A)	1Cr18Ni9Ti/POM	1
8 螺母 Nut	PP	2
9 尾罩 End Hoose.	ABS	1
10 支架 Trestle	PP/PA66	1
11 马达 Motor	/	1

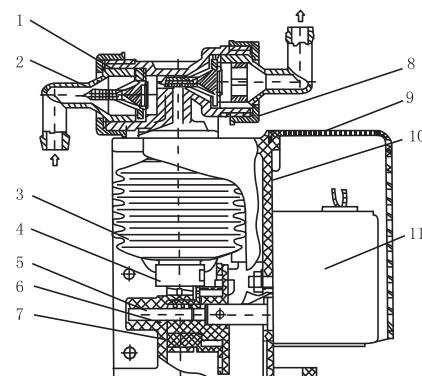

技术参数 TECHNICAL PARAMETER

型 号 Model	连泵数 Pump Number	波纹管型号 Type of bellow pump	最大流量 Max capacity(ml/min)		转 速 Rotate speed(RPM)		最高压力 Max pressure (Mpa)	口 径 Size (mm)	马 达 Moter(W)	自吸高度 Height of self-suction (cm)
			50HZ	60HZ	50HZ	60HZ		进 出 口 Outlet & outlet		
DZ-1X	单连式 Single pump	1	29	35	10	12	0.04	9	5	50
DZ-2X		2	119	141	10	12	0.03			
DZ-2Y			175	210	15	18	0.02			
DZ-2Z			232	278	20	24	0.01			
2DZ-1X	2连式 Double pump	1	29×2	35×2	10	12	0.03			
2DZ-2X		2	119×2	141×2	10	12	0.02			
2DZ-2Y			175×2	210×2	15	18	0.01			
2DZ-2Z			232×2	278×2	20	24	0.01			
DZN-1X	单连至4连 Single pump quadruple pump	1	29	35	10	12	0.04			
DZN-2X		2	119	141	10	12	0.03			
DZN-2Y			175	210	15	18	0.02			
DZN-2Z			232	278	20	24	0.02			
DS-1F	单连式 Single pump	1	115	139	40	48	0.08	9	8	100
DS-1P			200	243	70	84				
DS-1Q			260	310	90	108				
2DS-1F	2连式 Double pump	1	115×2	139×2	40	48				
2DS-1P			200×2	243×2	70	84				
2DS-1Q			260×2	310×2	90	108				
DS-2E	单连式 Single pump	2	357	428	30	36				
DS-2F			460	552	40	48				
DS-2G			570	685	50	60				
DS-2P			798	955	70	84				
DS-2Q			990	1180	90	108				
2DS-2E	2连式 Double pump	2	357×2	428×2	30	36				
2DS-2F			460×2	552×2	40	48				
2DS-2G			570×2	685×2	50	60				
2DS-2P			798×2	955×2	70	84				
2DS-2Q			990×2	1180×2	90	108				
DZR-3X	单连式 Single pump	3	100	120	10	12	0.01	9	6	
DZR-3Y		3	150	180	15	18	0.01			
DZR-3Z		3	200	240	20	24	0.01			

用途:

- ▲彩色胶卷、照片扩印、X光胶片、缩微胶卷、电影胶片等自动冲洗。
- ▲饮料售货机用。
- ▲粘液调和、食品添加剂的定量添加。
- ▲电子基板印刷线路的蚀刻、清洗、印刷制版。
- ▲水处理的酸碱中和，凝析剂的投入。
- ▲电镀液的定量补给。
- ▲广泛应用于添加剂、漂白液等各种药剂的定量注入。

APPLICATIONS:

- ▲ Automatic development of color films, photo enlargement, X-ray films, microfilms, motion picture films, etc.
- ▲ Used in beverage vending machines.
- ▲ Blending of mucilage and quantitative addition of food additives.
- ▲ Etching, cleaning, and printing plate making of printed circuits on electronic substrates.
- ▲ Acid-base neutralization in water treatment and addition of coagulants.
- ▲ Quantitative replenishment of electroplating solutions.
- ▲ Widely applied to the quantitative injection of various chemicals such as additives and bleaching solutions.


HQP系列尿素隔膜泵 ALP Urea Diaphragm Pump



特点 THE CHARACTERISTICS OF

- 耐酸碱防腐蚀, 选用不同材质, 可抽取不同液体, 温度70度以下。
- 无需灌水, 真空自吸, 吸程范围可达5米, 内设回流装置。
- 新升级纯铜电机, 连续工作, 提升使用寿命。
- Acid and alkali resistant, corrosion-resistant, selected from different materials, capable of extracting different liquids at temperatures below 70 degrees Celsius.
- No need for watering, vacuum self priming, suction range up to 5 meters, with built-in reflux device.
- The newly upgraded pure copper motor continuously works to improve its service life

外型尺寸 DIMENSIONS

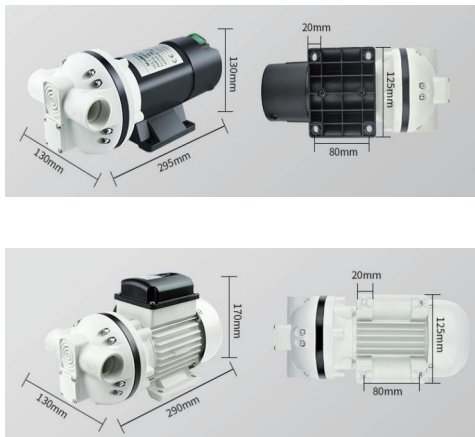

规格 SPECIFICATIC

型号 Model	电压 Voltage (V)	最大电流 Max.current (A)	流量 Max.Flow L/min	扬程 Head (M)	压力 Pressure(max) Psi(bar)	吸程 Suction (m)	调压开关 Pressure switch psi(Mpa)	额定功率 Power (w)
HQP-310	12	8.0	10	30	55(3.8)	5		150
	24	4.0	10	30	55(3.8)	5		150
	220	1.1	15	30	55(3.8)	5	/	240
HQP-420	12	13.0	20	30	70(4.82)	5		120
	24	9.0	20	30	70(4.82)	5		120
	220	1.3	20	30	70(4.82)	5	/	290
	12	12.0	30	10	25(1.7)	5		180
HQP-550	24	6.0	38	10	25(1.7)	5	/	180
	220	2.0	40	10	25(1.7)	5	/	370
		2.0	50	10	25(1.7)	5	/	400
		2.0	40	10	25(1.7)	5	/	370
	380	2.0	40	10	25(1.7)	5	/	370


注:220V 380V 电压为交流, 其他电压为直流

Note:220VAC 380VAC 12VDC 24VDC

应用 application


- 尿素款 可抽车用尿素/清水/海水/机油/柴油等无酸碱性液体, 耐高温60°C
- 耐酸碱款 可抽洗衣液/氢氧化钠/草酸/柠檬酸等弱酸弱碱性液体, 耐高温60°C
- 丙烯酸款 可抽丙烯酸/冰醋酸/乙酸/甲酸中等酸碱性液体, 耐高温60°C
- 硝酸款 可抽硝酸/亚硝酸盐/硫酸盐/磷酸盐等强酸强碱性液体, 耐高温70°C
- 盐酸款 可抽盐酸/硫酸/磷酸/氢氯酸/烧碱等高强度酸碱性液体, 耐高温70°C
- 溶剂款 可抽甲醇/乙醇/缓蚀剂/苯等有机类溶剂, 耐高温60°C
- 抽酒款 可抽食用酒精/白酒/葡萄酒/酱油/饮料等食品级液体, 耐高温60°C
- Urea model: non-acidic and non-alkaline liquids such as vehicle urea, clean water, seawater, engine oil, diesel oil, etc. up to 60°C.
- Acid and alkali model: weak acidic and weak alkaline liquids such as laundry detergent, sodium hydroxide, oxalic acid, citric acid, etc. up to 60°C.
- Acrylic model: medium acidic and alkaline liquids such as acrylic acid, glacial acetic acid, acetic acid, and formic acid. up to 60°C.
- Nitric acid model: strong acidic and alkaline liquids such as nitric acid, phosphites, sulfates, and phosphates. up to 70°C.
- Hydrochloric acid model: high-strength acidic and alkaline liquids such as hydrochloric acid, sulfuric acid, phosphoric acid, hydrochloric acid and caustic soda. up to 70°C.
- Solvent model: organic solvents such as methanol, ethanol, corrosion inhibitor, benzene, etc. up to 60°C.
- Wine model: food-grade liquids such as edible alcohol, Chinese liquor, wine, soy sauce, beverages, etc. high temperatures up to 60°C.

性能曲线 PERFORMANCE CURVES

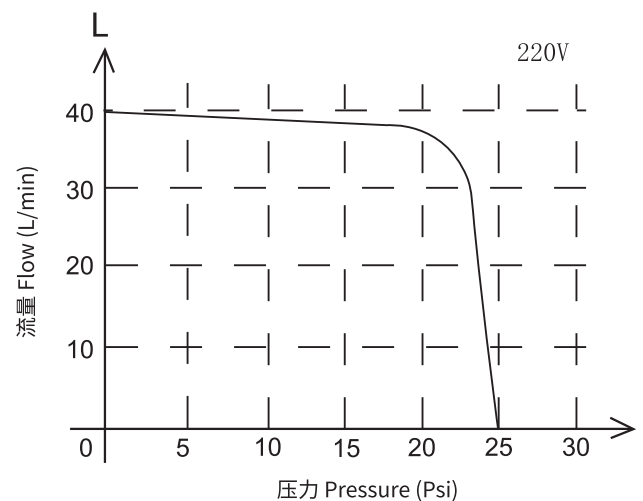

JV系列隔膜式计量泵

DIAPHRGM METERING PUMP

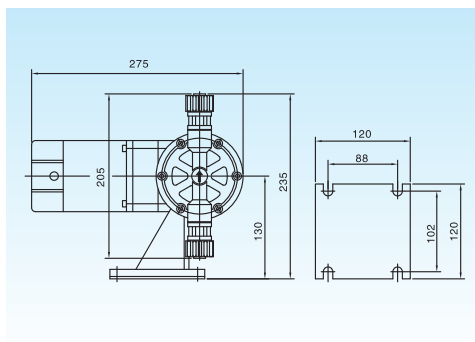


产品特点

Product Features

- 构造上，完全无泄漏。
Structurally, it's completely leak-free.
- 可用PVC、PTFE、304、316L等作为泵头材料。
Optional configurations (Pump Head):
PVC, PTFE, 304 L, 316 L;
- 适用于各种耐酸碱药液。
Suitable for various acid and alkali resistant liquid medications.;
- 可以安装于药桶上。
Can be mounted on chemical barrels.
- 安装容易、维修、保养简便。
Easy to install, maintain and service.
- 操作安全性能高。
High operational safety.
- 运转中流量随意调整。
Flow rate adjustable during operation.

规格 SPECIFICATIC

型 号 MODEL	流量 Max Flow rate (L/H)	压力 Max Pressure (Mpa)	行程 Stroke (mm)	冲次 Stroke speed (SPM)	膜片直径 Diaphragm diameter	进出口径 Connections (mm)	重量 Weight (KG)	功率 Motor powers (W)
JVL6.5/1	6.5	1.0	3.0	56	65	PVC: 9*13软管 DN15胶粘 不锈钢: DN15焊接 PTFE: DN15内螺纹	7	感应电机 三相 380V,60W;或 单相220V,60W
JVL12/1	12	1.0	4.0	56				
JVL24/1	24	1.0	4.0	93				
JVL32/1	32	1.0	4.0	108				
JVL40/1	40	1.0	4.0	135	84	PVC: DN15胶粘 不锈钢: DN15焊接 PTFE: DN15内螺纹	8	感应电机 三相 380V,90W;或 单相220V,90W
JVL60/1	60	1.0	4.0	108				
JVL80/0.5	80	0.5	4.0	135				
JVL100/0.5	100	0.5	5.0	135				
JVL120/0.5	120	0.5	4.0	180				
JVL150/0.3	150	0.3	5.0	180				
JVL180/0.3	180	0.3	5.0	180	94			

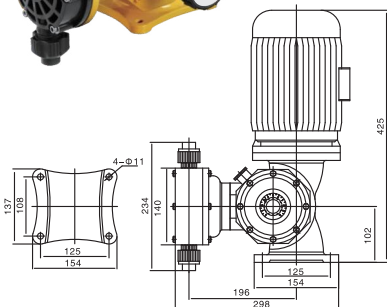

规格 SPECIFICATIC

型 号 MODEL	流量 Max Flow rate (L/H)	压力 Max Pressure (Mpa)	冲次 Stroke speed (SPM)	功率 Motor powers (W)	进出口径 Connections (mm)	重量 Weight (KG)
JVR- 25/1.0	25	1.2	48	0.37	PVC: 9*13软管 DN15胶粘 不锈钢: DN15焊接 PTFE: DN15内螺纹	22
JVR- 50/1.0	50	1.2	48			
JVR- 80/0.7	80	0.7	96			
JVR- 120/0.7	120	0.7	96			
JVR- 170/0.7	170	0.7	96			
JVR- 240/0.7	240	0.7	96	0.55	PVC: DN15胶粘 不锈钢: DN15焊接 PTFE: DN15内螺纹	28
JVR- 320/0.5	320	0.5	144			
JVR- 420/0.5	420	0.5	144			
JVR- 500/0.5	500	0.5	144		PVC: DN25胶粘 不锈钢: DN25焊接 PTFE: DN25内螺纹	