



KAIKANGPOOL

PRODUCT CATALOG

- *Swimming Pool*
- *Aquaculture*
- *SPA Products*
- *Steam*
- *Sauna*

KAIKANGPOOL

One stop pool equipment supplier

Guangzhou KAIKANG Building Material Co., Ltd.
Guangzhou BaiLiHua Pool Sauna Co., Ltd.
<http://kaikangpool.com/>

Come on light up your swimming pool! Underwater lighting can provide gorgeous viewing for your swimming pool at night, and create charming and unforgettable range in various activities. KAIKANGPOOL's underwater lighting series has various styles, which can be installed in various new swimming pools, hot springs, fountains, waterscapes and swimming pool gardens.



Bright and Gorgeous

POOL LIGHT

WALL MOUNTED POOL LIGHT

KK-YC Series

Stainless steel frame: after oxidation polishing and sandblasting, it does not rust and fade, and has good corrosion resistance and pressure resistance.

PC mask: waterproof and explosion-proof mask, high hardness, not easy to break, high transmittance, good heat dissipation effect, and all-round protection of the light source.

High quality light source: two kinds of light sources can be selected, LED light beads, high brightness, low energy consumption, long service life, energy conservation and environmental protection, uniform and soft light.

Easy installation: stainless steel bottom sealing waterproof design, good waterproof performance, wall mounting, simple and convenient.




Lamp lifetime
≥50000 H



Working Temperature
-20℃~40℃



Product Dimension

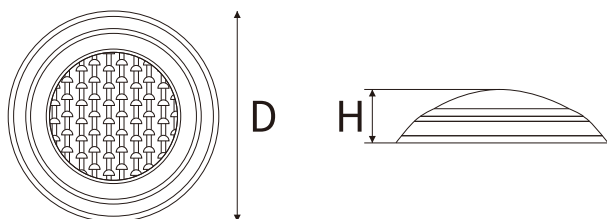

Color Display



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC230-100	100	D230*H48	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC230-H6	6	D230*H48	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC230-H9	9	D230*H48	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC230-H12	12	D230*H48	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC230-SMD9	9	D230*H48	IP 68	SMD2835 LED	AC 12V	
KK-YC230-SMD12	12	D230*H48	IP 68	SMD2835 LED	AC 12V	
KK-YC230-SMD18	18	D230*H48	IP 68	SMD2835 LED	AC 12V	
KK-YC300-100	100	D300*H70	IP 68	Halogen lamp	AC 12V	
KK-YC300-H18	18	D300*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC300-H24	24	D300*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC300-H36	36	D300*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC300-H18X3	18*3	D300*H70	IP 68	High Power LED, 3W/pc	AC 12V	
KK-YC300-SMD18	18	D300*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC300-SMD25	25	D300*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC300-SMD35	35	D300*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC300-SMD45	45	D300*H70	IP 68	SMD2835 LED	AC 12V	

WALL MOUNTED POOL LIGHT

KK-YC295 Series

ABS lamp body: thickened plastic material, corrosion resistance, high temperature resistance, long service life.

High quality lampshade: waterproof and explosion-proof PC lampshade, with high hardness, high light transmittance and good heat dissipation effect.

High quality light source: two kinds of light sources are optional, with high brightness, low power consumption, uniform and soft light, energy conservation and environmental protection, and long service life.

Convenient installation: The bottom is sealed, with good waterproof performance. Wall mounted installation is simple and convenient.



Lamp lifetime
≥50000 H



Working Temperature
-20℃~40℃




KK-YC295-H



KK-YC295-SMD



Product Dimension

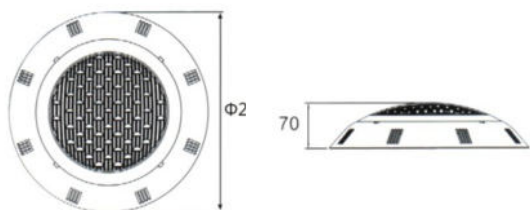

Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC295-100	100	D295*H70	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC295-H12	12	D295*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC295-H18	18	D295*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC295-H24	24	D295*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC295-H12X3	12*3	D295*H70	IP 68	High Power LED, 3W/pc	AC 12V	
KK-YC295-SMD12	12	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-SMD18	18	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-SMD25	25	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-SMD35	35	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-SMD45	45	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC230-A100	100	D230*H58	IP 68	Halogen lamp	AC 12V	
KK-YC230-AH6	6	D230*H58	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC230-AH9	9	D230*H58	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC230-AH12	12	D230*H58	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC230-ASMD9	9	D230*H58	IP 68	SMD2835 LED	AC 12V	
KK-YC230-ASMD12	12	D230*H58	IP 68	SMD2835 LED	AC 12V	
KK-YC230-ASMD18	18	D230*H58	IP 68	SMD2835 LED	AC 12V	

WALL MOUNTED POOL LIGHT

KK-YC292 Series

ABS lamp body: thickened plastic material, corrosion resistance, high temperature resistance, long service life.

High quality lampshade: waterproof and explosion-proof PC lampshade, with high hardness, high light transmittance and good heat dissipation effect.

High quality light source: two kinds of light sources are optional, with high brightness, low power consumption, uniform and soft light, energy conservation and environmental protection, and long service life.

Convenient installation: The bottom is sealed, with good waterproof performance. Wall mounted installation is simple and convenient.




Lamp lifetime
≥50000 H



Working
Temperature
-20℃~40℃



Product Dimension

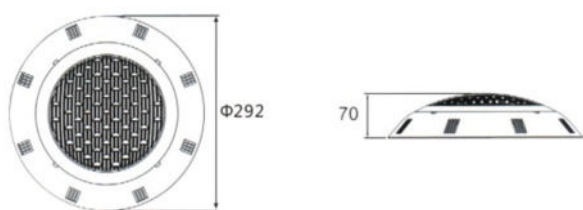

KK-YC292-H



KK-YC292-SMD



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC292-100	100	D292*H70	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC292-H12	12	D292*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC292-H18	18	D292*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC292-H24	24	D292*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC292-H12X3	12*3	D292*H70	IP 68	High Power LED, 3W/pc	AC 12V	
KK-YC292-SMD12	12	D292*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC292-SMD18	18	D292*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC292-SMD25	25	D292*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC292-SMD35	35	D292*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC292-SMD45	45	D292*H70	IP 68	SMD2835 LED	AC 12V	

WALL MOUNTED POOL LIGHT

KK-YC280 Series

ABS lamp body: thickened plastic material, corrosion resistance, high temperature resistance, long service life.

High quality lampshade: waterproof and explosion-proof PC lampshade, with high hardness, high light transmittance and good heat dissipation effect.

High quality light source: two kinds of light sources are optional, with high brightness, low power consumption, uniform and soft light, energy conservation and environmental protection, and long service life.


Convenient installation: The bottom is sealed, with good waterproof performance. Wall mounted installation is simple and convenient.



KK-YC280-H



Product Dimension

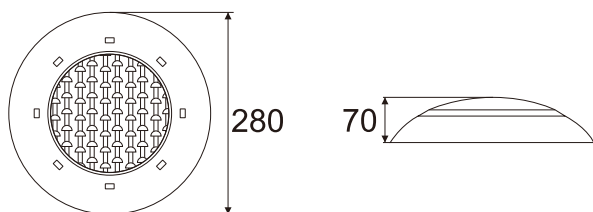

KK-YC280-SMD



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC280-100	100	D280*H70	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC280-H12	12	D280*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC280-H18	18	D280*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC280-H24	24	D280*H70	IP 68	High Power LED, 1W/pc	AC 12V	
KK-YC280-H12X3	12*3	D280*H70	IP 68	High Power LED, 3W/pc	AC 12V	
KK-YC280-SMD12	12	D280*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC280-SMD18	18	D280*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC280-SMD25	25	D280*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC280-SMD35	35	D280*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC280-SMD45	45	D280*H70	IP 68	SMD2835 LED	AC 12V	

WALL MOUNTED POOL LIGHT

KK-YC29A/230A Series

ABS lamp body: thickened plastic material, corrosion resistance, high temperature resistance, long service life.

High quality lampshade: waterproof and explosion-proof PC lampshade, with high hardness, high light transmittance and good heat dissipation effect.

High quality light source: two kinds of light sources are optional, with high brightness, low power consumption, uniform and soft light, energy conservation and environmental protection, and long service life.

Convenient installation: The bottom is sealed, with good waterproof performance. Wall mounted installation is simple and convenient.




Lamp lifetime
≥50000 H



Working
Temperature
-20°C~40°C



Product Dimension

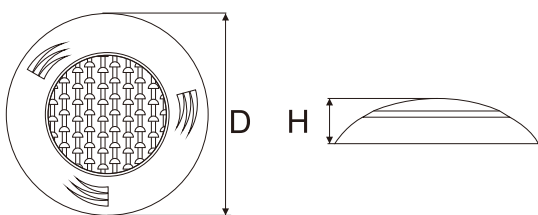

KK-YC295/230-AH



KK-YC295/230-ASMD



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC295-A100	100	D295*H70	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC295-AH12	12	D295*H70	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC295AH-18	18	D295*H70	IP 68	High Power LED, 1w/pc	AC 12V	
KK-Y295-AH24	24	D295*H70	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC295-AH12X3	12*3	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-ASMD12	12	D295*H70	IP 68	Halogen lamp	AC 12V	
KK-YC295-ASMD18	18	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-ASMD25	25	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-ASMD35	35	D295*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC295-ASMD45	45	D295*H70	IP 68	SMD2835 LED	AC 12V	

WALL MOUNTED POOL LIGHT

KK-YC260 Series

ABS lamp body: thickened plastic material, corrosion resistance, high temperature resistance, long service life.

High quality lampshade: waterproof and explosion-proof PC lampshade, with high hardness, high light transmittance and good heat dissipation effect.

High quality light source: two kinds of light sources are optional, with high brightness, low power consumption, uniform and soft light, energy conservation and environmental protection, and long service life.

Convenient installation: The bottom is sealed, with good waterproof performance. Wall mounted installation is simple and convenient.



Lamp lifetime
≥50000 H



Working
Temperature
-20°C~40°C




KK-YC260-AH



KKD-YC260-ASMD



Product Dimension

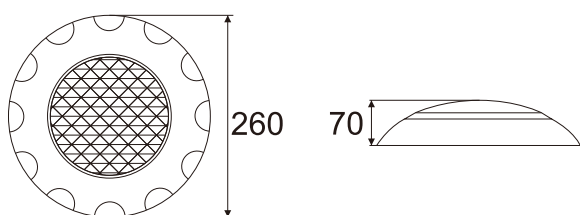

Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC260-100	100	D260*H70	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC260-H12	12	D260*H70	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC260-H18	18	D260*H70	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC260-H24	24	D260*H70	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC260-H12X3	12*3	D260*H70	IP 68	High Power LED, 3w/pc	AC 12V	
KK-YC260-SMD12	12	D260*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC260-SMD18	18	D260*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC260-SMD25	25	D260*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC260-SMD35	35	D260*H70	IP 68	SMD2835 LED	AC 12V	
KK-YC260-SMD45	45	D260*H70	IP 68	SMD2835 LED	AC 12V	

WALL MOUNTED POOL LIGHT

KK-YC260SS Series

Stainless steel shell: It is made of stainless steel shell, which is sturdy and durable. It is made of fine workmanship. It is waterproof, anti-corrosion and crack resistant.


High quality PC lampshade: mirror PC material, high hardness, high transmittance, high strength of heat resistance and cold resistance.

Light source: high-quality LED chip, energy saving, high brightness, low light attenuation.

Convenient installation: the bottom screw buckle is fixed, with good waterproof performance, and the wall mounted installation is simple and convenient.



Product Dimension

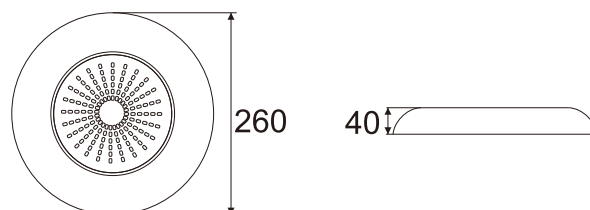

Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-YC260-SS18	18	D260*H40	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-YC260-SS25	25	D260*H40	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC260-SS35	35	D260*H40	IP 68	High Power LED, 1w/pc	AC 12V	
KK-YC260-SS45	45	D260*H40	IP 68	High Power LED, 1w/pc	AC 12V	


RESIN FILLED POOL LIGHT

KK-RF Series



Lamp body material:
stainless steel 316 / stainless steel 304
Lens material: PC
Rim color: Blue / white
Waterproof line length: 1.5m
Energy saving efficiency: 80%
Lamp life: $\geq 50,000$ hours
Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$
Swimming pool: concrete pool and spray pool .
Various landscape pools meeting the installatio
requirements of this lamp. Replace the same typ
of pool light.



KK-RF300

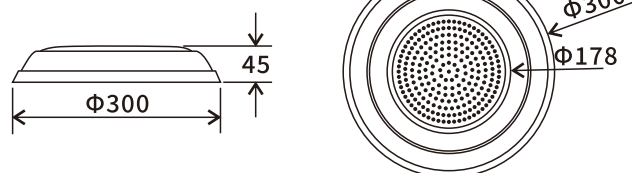

KK-RF230

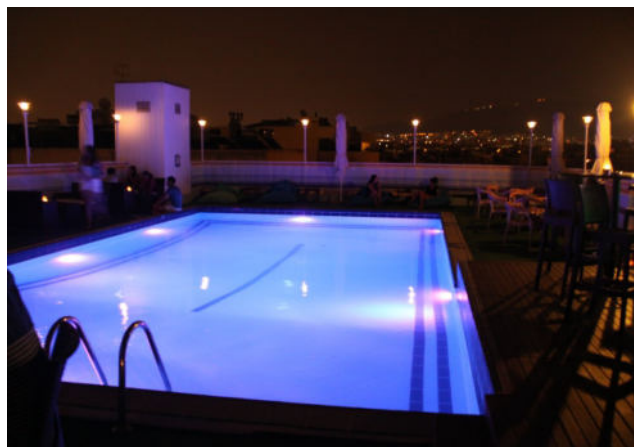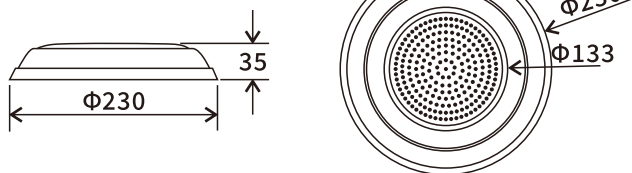

Technical Specifications

Model	Power(W)	IP Grade	Light Source	voltage	Color
KK-RF230-SMD12	12	IP 68	SMD2835 LED	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-RF230-SMD18	18	IP 68	SMD2835 LED	AC 12V	
KK-RF280-SMD18	18	IP 68	SMD2835 LED	AC 12V	
KK-RF280-SMD25	25	IP 68	SMD2835 LED	AC 12V	
KK-RF280-SMD35	35	IP 68	SMD2835 LED	AC 12V	
KK-RF280-SMD45	45	IP 68	SMD2835 LED	AC 12V	

RESIN FILLED POOL LIGHT

KK-RF260-SMD

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC / Rim color: Blue / white

Waterproof line length: 1.5m


Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours

Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Product Dimension

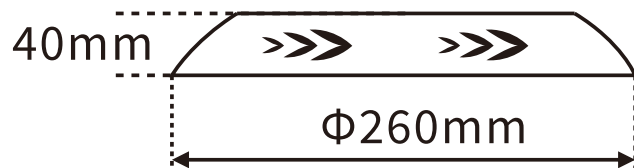

Lamp lifetime
 ≥ 50000 H




Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Detail Display



Color Display

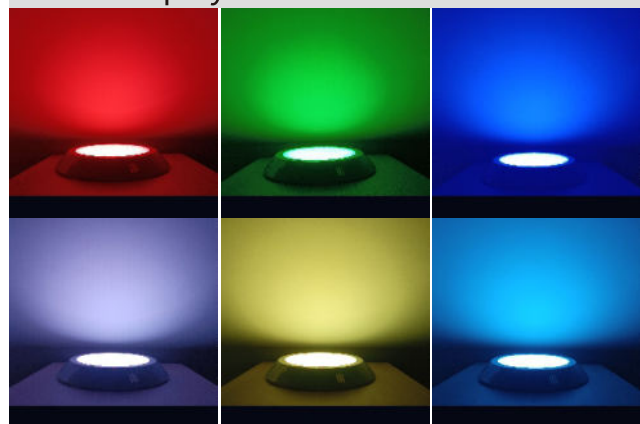



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-RF260-2SMD18	18	D260*H40	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-RF260-2SMD25	25	D260*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF260-2SMD35	35	D260*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF260-2SMD45	45	D260*H40	IP 68	SMD2835 LED	AC 12V	

RESIN FILLED POOL LIGHT

KK-RF260-2SMD

Lamp body material:
stainless steel 316 / stainless steel 304
Lens material: PC
Rim color: Blue / white
Waterproof line length: 1.5m
Energy saving efficiency: 80%
Lamp life: $\geq 50,000$ hours
Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$
Swimming pool: concrete pool and spray pool .
Various landscape pools meeting the installation
requirements of this lamp. Replace the same type
of pool light.

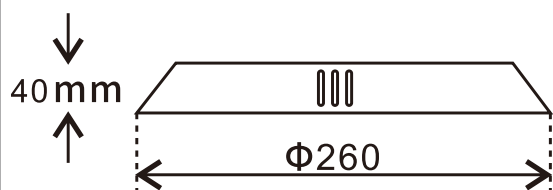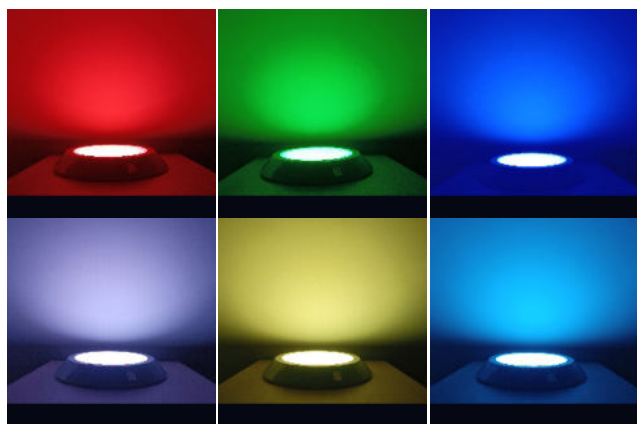

Lamp lifetime
 ≥ 50000 H



Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-RF260-2SMD18	18	D260*H40	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-RF260-2SMD25	25	D260*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF260-2SMD35	35	D260*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF260-2SMD45	45	D260*H40	IP 68	SMD2835 LED	AC 12V	

RESIN FILLED POOL LIGHT

KK-RF230-SMD

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC

Rim color: Blue / white

Waterproof line length: 1.5m


Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours

Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Swimming pool: concrete pool and spray pool .

Various landscape pools meeting the installation requirements of this lamp. Replace the same type of pool light.



Color Display



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-RF230-SMD18	18	D230*H40	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-RF230-SMD25	25	D230*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF230-SMD35	35	D230*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF230-SMD45	45	D230*H40	IP 68	SMD2835 LED	AC 12V	

RESIN FILLED POOL LIGHT

KK-RF280-SMD

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC Rim color: Blue / white

Waterproof line length: 1.5m

Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours

Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Swimming pool: concrete pool and spray pool.


Various landscape pools meeting the installation requirements of this lamp. Replace the same type of pool light.




Lamp lifetime
 ≥ 50000 H



Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$

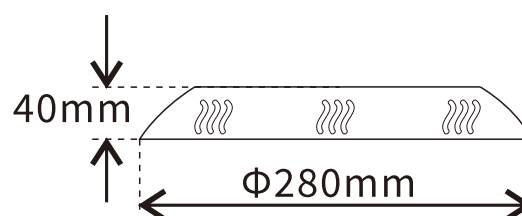

Color Display

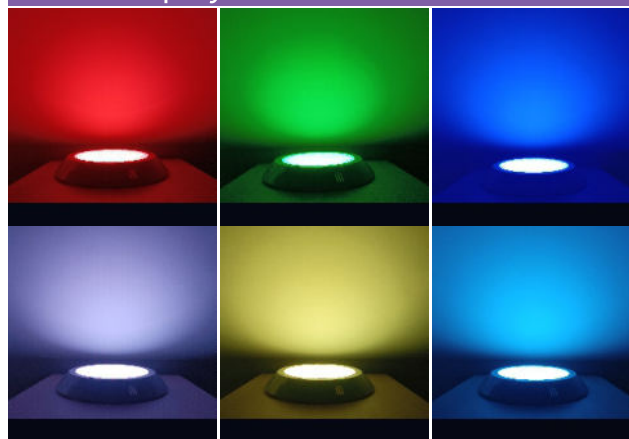

Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-RF280-SMD18	18	D230*H40	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-RF280-SMD25	25	D230*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF280-SMD35	35	D230*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF280-SMD45	45	D230*H40	IP 68	SMD2835 LED	AC 12V	

RESIN FILLED POOL LIGHT

KK-RF260-4SMD

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC Rim color: Blue / white

Waterproof line length: 1.5m

Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours

Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Swimming pool: concrete pool and spray pool .


Various landscape pools meeting the installation requirements of this lamp. Replace the same type of pool light.



Lamp lifetime
 ≥ 50000 H



Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$

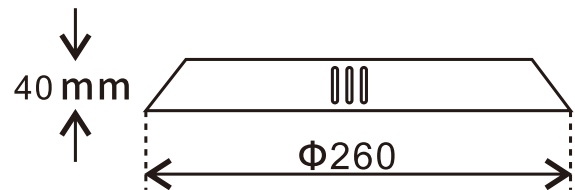

Color Display



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-RF260-4SMD18	18	D260*H40	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-RF260-4SMD25	25	D260*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF260-4SMD35	35	D260*H40	IP 68	SMD2835 LED	AC 12V	
KK-RF260-4SMD45	45	D260*H40	IP 68	SMD2835 LED	AC 12V	

RESIN FILLED POOL LIGHT

KK-RF220-SMD

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC / Rim color: Blue / white

Waterproof line length: 1.5m

Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours


Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Lamp lifetime
 ≥ 50000 H



Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Color Display



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-RF220-SMD18	18	D220*H35	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-RF220-SMD25	25	D220*H35	IP 68	SMD2835 LED	AC 12V	
KK-RF220-SMD35	35	D220*H35	IP 68	SMD2835 LED	AC 12V	
KK-RF220-SMD45	45	D220*H35	IP 68	SMD2835 LED	AC 12V	

SLIM POOL LIGHT

KK-UTSS-series

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC / Rim color: Blue / white

Waterproof line length: 1.5m

Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours



Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Lamp lifetime
 ≥ 50000 H



Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$

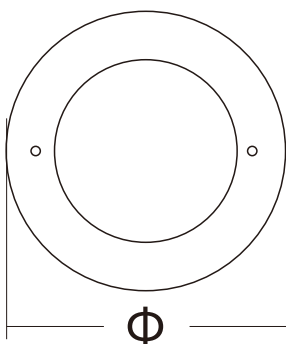

LIGHTING AND DETAILS



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-UTSS-6	6	D90*H18	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-UTSS-12	12	D160*H18	IP 68	SMD2835 LED	AC 12V	
KK-UTSS-18	18	D230*H18	IP 68	SMD2835 LED	AC 12V	
KK-UTSS-25	25	D230*H18	IP 68	SMD2835 LED	AC 12V	
KK-UTSS-35	35	D230*H18	IP 68	SMD2835 LED	AC 12V	

SLIM POOL LIGHT

KK-UT250-series

Lamp body material:

stainless steel 316 / stainless steel 304

Lens material: PC / Rim color: Blue / white

Waterproof line length: 1.5m

Energy saving efficiency: 80%

Lamp life: $\geq 50,000$ hours

Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$





Lamp lifetime
 ≥ 50000 H



Working
Temperature
 $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



IP68



LIGHTING AND DETAILS



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-UT250-18	18	Φ250*H5	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-UT250-25	25		IP 68	SMD2835 LED	AC 12V	
KK-UT250-35	35		IP 68	SMD2835 LED	AC 12V	
KK-UT250-45	45		IP 68	SMD2835 LED	AC 12V	

SLIM AND MINI POOL LIGHT

KK-UT-series


Lamp body material:
stainless steel 316 / stainless steel 304
Lens material: PC / Rim color: Blue / white
Waterproof line length: 1.5m
Energy saving efficiency: 80%
Lamp life: $\geq 50,000$ hours
Working temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Model Display



Color Display

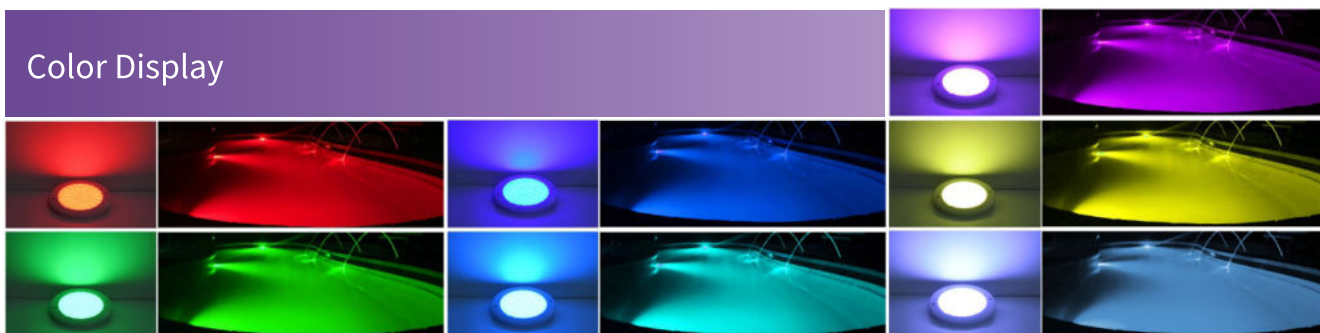


Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-UT06	6	D90*H18	IP 68	SMD2835 LED	AC 12V	White:6000K Warm white:3000K Blue:440-480K RGB-Auto change RGB-Remote
KK-UT12	12	D160*H18	IP 68	SMD2835 LED	AC 12V	
KK-UT18	18	D230*H18	IP 68	SMD2835 LED	AC 12V	
KK-UT25	25	D230*H18	IP 68	SMD2835 LED	AC 12V	
KK-UT35	35	D230*H18	IP 68	SMD2835 LED	AC 12V	

EMBEDDED POOL LIGHT


KK-QR Series

KK-QR95

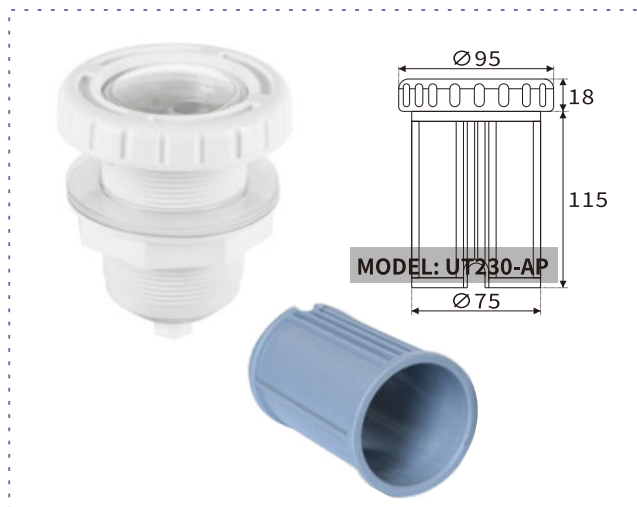


Model	Power(w)	light Source	Size(mm)	Voltage
KK-QR95-3	3	SMD2835 LED	D95*H133	AC 12V
KK-QR95-6	6			
KK-QR95-9	9			
KK-QR95-3V	3			
KK-QR95-6V	6			
KK-QR95-9V	9			

KK-QR105

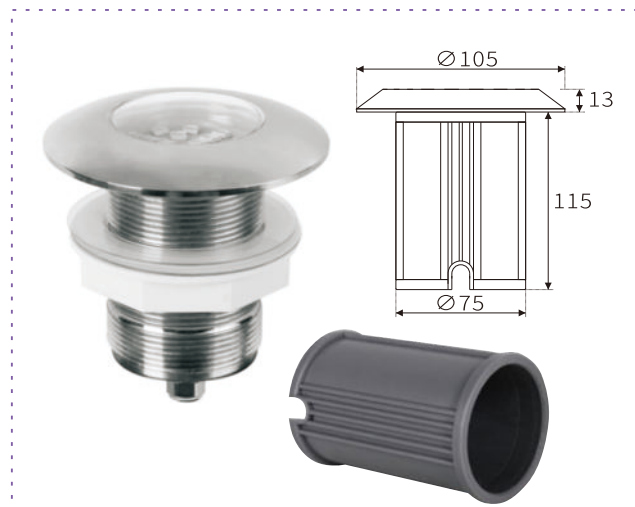


Model	Power(w)	light Source	Size(mm)	Voltage
KK-QR105-3	3	SMD2835 LED	D105*H128	AC 12V
KK-QR105-6	6			
KK-QR105-9	9			
KK-QR105-3V	3			
KK-QR105-6V	6			
KK-QR105-9V	9			

KK-QR220

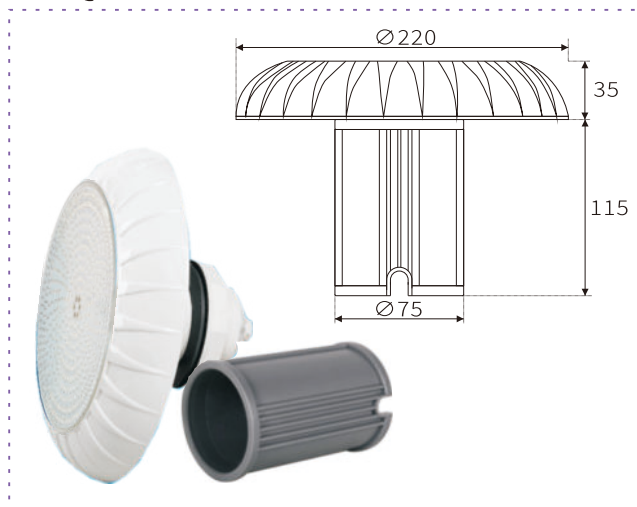

Model	Power(w)	light Source	Size(mm)	Voltage
KK-QR220-18	18	SMD2835 LED	D220*H150	AC 12V
KK-QR220-25	25			
KK-QR220-35	35			
KK-QR220-18V	18			
KK-QR220-25V	25			
KK-QR220-35V	35			

KK-QR220S

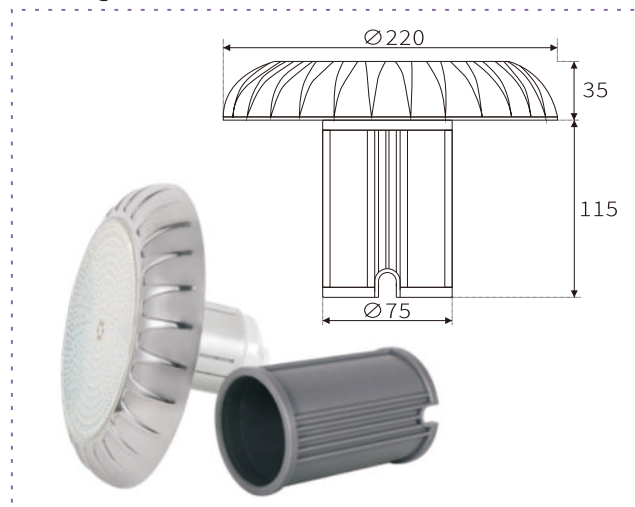

Model	Power(w)	light Source	Size(mm)	Voltage
KK-QR220S-18	18	SMD2835 LED	D220*H150	AC 12V
KK-QR220S-25	25			
KK-QR220S-35	35			
KK-QR220S-18V	18			
KK-QR220S-25V	25			
KK-QR220S-35V	35			

STANDARD LIGHT WITH NICHE

KK-AQ-series


ABS plastic shell: corrosion resistance, high temperature resistance, long service life.

Tempered glass lampshade: It is supported by waterproof and explosion-proof tempered glass, which is hard to break and has high light transmittance.

Waterproof sealing kit: built-in O-ring, waterproof grade IP 68PC embedded parts: corrosion resistant, long service life, protect the lamp body from corrosion.



Dimension

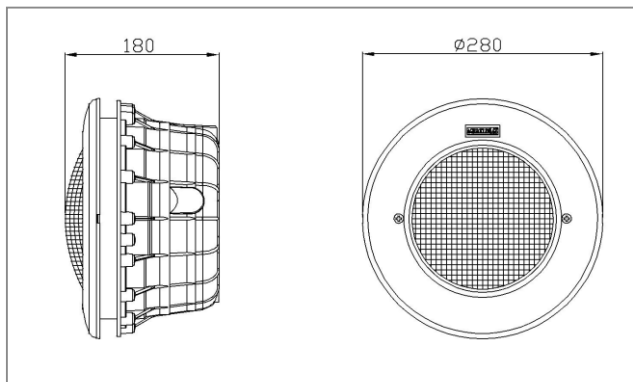

Color Display



Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-AQ290-A300	300	D290*H160	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-AQ290-AH12	12	D290*H160	IP 68	High Power LED, 1w/pc	AC 12V	
KK-AQ290-AH18	18	D290*H160	IP 68	High Power LED, 1w/pc	AC 12V	
KK-AQ290-AH24	24	D290*H160	IP 68	High Power LED, 1w/pc	AC 12V	
KK-AQ290-H12X3	12*3	D290*H160	IP 68	High Power LED, 3w/pc	AC 12V	
KK-AQ290-SMD12	12	D290*H160	IP 68	SMD2835 LED	AC 12V	
KK-AQ290-SMD18	18	D290*H160	IP 68	SMD2835 LED	AC 12V	
KK-AQ290-SMD25	25	D290*H160	IP 68	SMD2835 LED	AC 12V	
KK-AQ290-SMD45	45	D290*H160	IP 68	SMD2835 LED	AC 12V	

STANDARD LIGHT WITH NICHE

KK-QR290-series

1W/Pcs High power LED:

Irradiation long distance and concentrated light.

SMD 2835 LED:

Irradiation area widen. The light is downy and no dazzling no dazzling




Lamp lifetime
≥50000 H



Working
Temperature
-20°C~40°C



Dimension

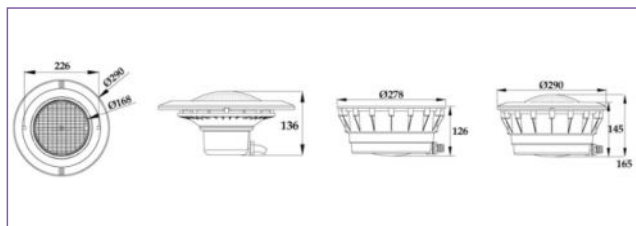

KK-QR290AS



KK-QR290AH




KK-QR290SS



KK-QR290SH

Color Display

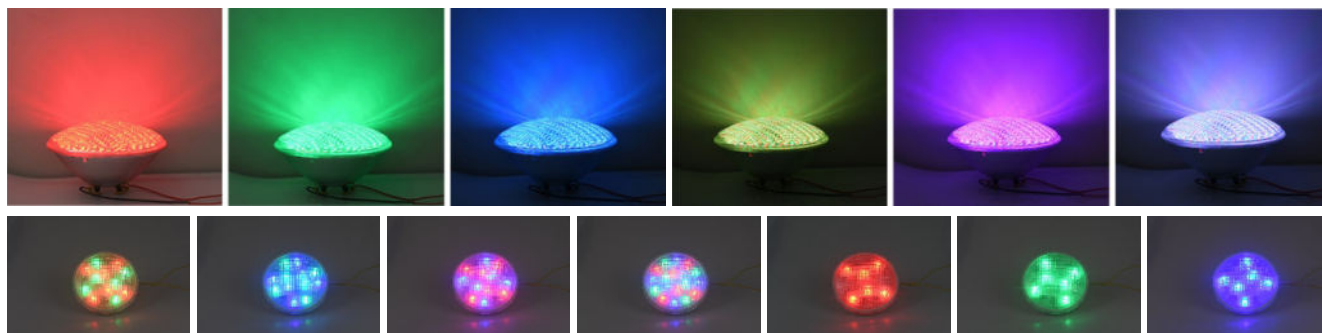

Technical Specifications

Model	Power(W)	Size (mm)	IP Grade	Light Source	voltage	Color
KK-QR290-A300	300	D290*H165	IP 68	Halogen lamp	AC 12V	White: 6000K Warm White: 3000K Blue: 440-480K RGB-Auto change RGB-Remote
KK-QR290-AH12	12	D290*H165	IP 68	High Power LED, 1w/pc	AC 12V	
KK-QR290-AH18	18	D290*H165	IP 68	High Power LED, 1w/pc	AC 12V	
KK-QR290-AH24	24	D290*H165	IP 68	High Power LED, 1w/pc	AC 12V	
KK-QR290-AH12X3	12*3	D290*H165	IP 68	High Power LED, 3w/pc	AC 12V	
KK-QR290-SMD12	12	D290*H165	IP 68	SMD2835 LED	AC 12V	
KK-QR290-SMD18	18	D290*H165	IP 68	SMD2835 LED	AC 12V	
KK-QR290-SMD25	25	D290*H165	IP 68	SMD2835 LED	AC 12V	
KK-QR290-SMD45	45	D290*H165	IP 68	SMD2835 LED	AC 12V	

POOL LIGHT ACCESSORIES

KK-P56 Series

KK-P56P



Model	Size (mm)	light Source	Power(w)	Working Voltage
JKD-P56P-H	D177*H83	High Power LED, 1w/pc High Power LED, 3w/pc	12/18/24/ 12*3	AC 12V
JKD-P56P-SMD		SMD2835 LED	18/25/35/ 45	

KK-P56SS



Model	Size (mm)	light Source	Power(w)	Working Voltage
KK-P56SS-H	D177*H83	High Power LED, 1w/pc High Power LED, 3w/pc	12/18/24/ 12*3	AC 12V
KK-P56SS-SMD		SMD2835 LED	18/25/35/ 45	

KK-P56G



Model	Size (mm)	light Source	Power(w)	Working Voltage
KK-P56G-H	D177*H83	High Power LED, 1w/pc High Power LED, 3w/pc	12/18/24/ 12*3	AC 12V
KK-P56G-SMD		SMD2835 LED	18/25/35/ 45	

KK-RF-LED







Model	Size(mm)	light Source	Power(w)	Working Voltage
KK-RF-LED	D177*H30	SMD2853 LED	18/25/35	AC 12V



INGROUND LIGHT

KK-PB Series

Model	KK-PB-R42	Power	1W		Model	KK-PB-R150	Power	6-9W	
Voltage	AC/DC 12V	Size	Φ42* H72mm		Voltage	AC/DC 12V	Size	Φ150* H105mm	
Model	KK-PB-R52	Power	1W		Model	KK-PB-R180	Power	12W	
Voltage	AC/DC 12V	Size	Φ52* H84mm		Voltage	AC/DC 12V	Size	Φ180* H125mm	
Model	KK-PB-R62	Power	1-3W		Model	KK-PB-R210	Power	15-18W	
Voltage	AC/DC 12V	Size	Φ62* H90mm		Voltage	AC/DC 12V	Size	Φ210* H120mm	
Model	KK-PB-R75	Power	3W		Model	KK-PB-R240	Power	18W	
Voltage	AC/DC 12V	Size	Φ75* H110mm		Voltage	AC/DC 12V	Size	Φ240* H145mm	
Model	KK-PB-R100	Power	3W		Model	KK-PB-R260	Power	24W	
Voltage	AC/DC 12V	Size	Φ100* H100mm		Voltage	AC/DC 12V	Size	Φ260* H155mm	
Model	KK-PB-R130	Power	5-6W		Model	KK-PB-R300	Power	36W	
Voltage	AC/DC 12V	Size	Φ130* H95mm		Voltage	AC/DC 12V	Size	Φ300* H165mm	

KK-PB




Technical Specifications

Model	Power(W)	Size (mm)	Beam Angle	Light Source	voltage	Color
KK-PB10	0.3	D10*H25	30	Epistar/Bridgelux	DC 12V	Single/RGB
KK-PB15	0.3	D15*H25	30	Epistar/Bridgelux	DC 12V	Single/RGB
K-PB22	0.3	D22*H55	30	Epistar/Bridgelux	DC 12V	Single/RGB
KK-PB25	0.3	D25*H35	30	Epistar/Bridgelux	DC 12V	Single/RGB
KK-PB32	0.5	D35*H50	30	Epistar/Bridgelux	DC 12V	Single/RGB


FOUNTAIN LIGHT

SL Series


Model	SL-8001	Power	1W
Voltage	AC/DC 12V	Size	Φ48* H75mm




Model	SL-8009	Power	15-18W
Voltage	AC/DC 12V	Size	Φ190* H220mm




Model	SL-8002	Power	1W
Voltage	AC/DC 12V	Size	Φ65* H80mm




Model	SL-8010	Power	18-24W
Voltage	AC/DC 12V	Size	Φ210* H260mm




Model	SL-8003	Power	3W
Voltage	AC/DC 12V	Size	Φ82* H140mm




Model	SL-8011	Power	24-26W
Voltage	AC/DC 12V	Size	Φ230* H240mm




Model	SL-8004	Power	3W
Voltage	AC/DC 12V	Size	Φ105* H135mm




Model	SL-8012	Power	3W
Voltage	AC/DC 12V	Size	Φ75* H102mm




Model	SL-8005	Power	5-7W
Voltage	AC/DC 12V	Size	Φ120* H140mm




Model	SL-8013	Power	3W
Voltage	AC/DC 12V	Size	Φ76* H106mm




Model	SL-8006	Power	6-9W
Voltage	AC/DC 12V	Size	Φ145* H180mm




Model	SL-8014	Power	6-9W
Voltage	AC/DC 12V	Size	Φ136* H180mm




Model	SL-8007	Power	9-12W
Voltage	AC/DC 12V	Size	Φ160* H190mm



Model	SL-8015	Power	3W
Voltage	AC/DC 12V	Size	Φ70* H110mm



Model	SL-8008	Power	12-15W
Voltage	AC/DC 12V	Size	Φ170* H220mm




FOUNTAIN LIGHT

SL Series


Model	SL-9001	Power	6-9W
Voltage	AC/DC 12V24V	Size	Φ130*H76mm

SL-9001




Model	SL-9002	Power	6-9W
Voltage	AC/DC 12V24V	Size	Φ150*H76mm

SL-9002




Model	SL-9003	Power	6-9W
Voltage	AC/DC 12V24V	Size	Φ170*H76mm

SL-9003




Model	SL-9004	Power	9-12W
Voltage	AC/DC 12V24V	Size	Φ180*H76mm

SL-9004




Model	SL-9005	Power	6W
Voltage	AC/DC 12V	Size	Φ110*H80mm

SL-9005




Model	SL-9006	Power	6-9W
Voltage	AC/DC 12V	Size	Φ130*H85mm

SL-9006




Model	SL-9007	Power	9-12W
Voltage	AC/DC 12V	Size	Φ160*H85mm

SL-9007




Model	SL-9008	Power	12-18W
Voltage	AC/DC 12V	Size	Φ180*H85mm

SL-9008



Model	SL-9009	Power	18-24W
Voltage	AC/DC 12V	Size	Φ200*H85mm

SL-9009



POWER ADAPTOR

Suitable for swimming pool lighting

FEATURES

Safe and reliable power adapter for swimming pool lamps.

1. It is applicable to new equipment or low-voltage lighting system.
2. Fully sealed waterproof design, available for outdoor use.
3. Wiring and connection with flexible cables.
4. The series products have the size suitable for any position.
5. A wide range of products, easy to match with KAIKANG POOL products



Model	TRA-series with plug
Power	10W, 20W, 30W, 50W, 60W, 105W, 150W, 200W, 300W, 400W, 500W, 600W
Input voltage	110-220V
output voltage	AC 12/24



Model	TRA-series
Power	10W, 20W, 30W, 50W, 60W, 105W, 150W, 200W, 300W, 400W, 500W, 600W
Input voltage	110-220V
output voltage	AC 12/24



Model	EL-series
Power	105W, 150W, 200W, 300W, 400W, 500W, 600W
Input voltage	110-220V
output voltage	AC 12/24




Model	EL-series with plug
Power	105W, 150W, 200W, 300W, 400W, 500W, 600W
Input voltage	110-220V
output voltage	AC 12/24

EM2823




Model	Description
EM2823A	Junction Box only
EM2823B	With adaptors
EM2823C	Complete set with 1m hose and adaptors

PA-15862

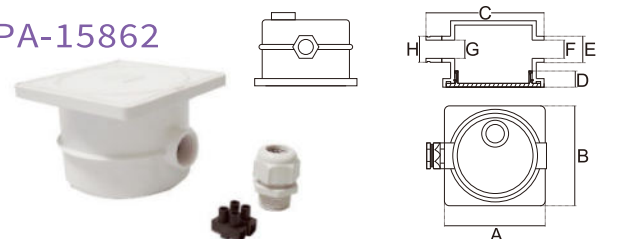

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
PA-15862	129.00	129.00	151.40	20.20	32.00	24.40	24.40	29.70

PA-00395

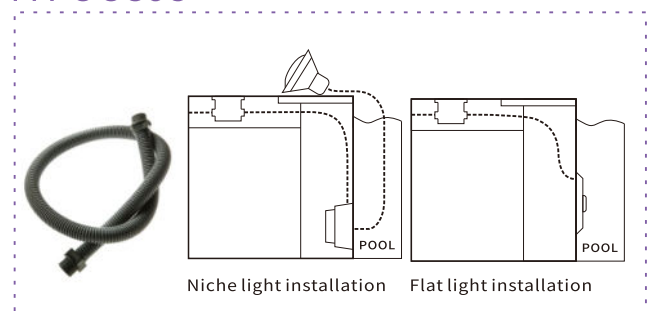

Water enriches our life



KAIKANGPOOL

Guangzhou KAIKANG Building Material Co., Ltd.



Guangzhou BaiLiHua Pool Sauna Co., Ltd

E-mail : poolbuilding@163.com

E-mail : manager@kaikangpool.com

Skype : poolbuilding@163.com

Mobile: 0086-13640680611

Address: Hanwei Creative Park, FangHua Road, Renhe Town,
Baiyun district, Guangzhou city, China

All specifications are subject to change without prior notice



<http://kaikangpool.com/>