



KAIKANGPOOL

PRODUCT CATALOG

- *Swimming Pool*
- *Aquaculture*
- *SPA Products*
- *Steam*
- *Sauna*

KAIKANGPOOL

One stop pool equipment supplier

Guangzhou KAIKANG Building Material Co., Ltd.
Guangzhou BaiLiHua Pool Sauna Co., Ltd.
<http://kaikangpool.com/>

SURROUNDING EQUIPMENT

Corrosion resistant stainless steel

Ladder handrails are made of $\phi 42\text{mm}$ tubes in polished stainless steel 304 (or 316 for saltwater pools). Correct selection and proper placement of handrails and ladders add a significant measure of safety to every pool area. Three kinds of step are available: Plastic, stainless steel, and stainless steel with anti-slip pads. All ladders are available with anchor or flange type fixtures for easy installation.

Pool Ladder

Ladder handrails are made of Ø42mm tubes in polished stainless steel 304 (or 316 for saltwater pools).

Correct selection and proper placement of handrails and ladders add a significant measure of safety to every pool area.

Three kinds of step are available with anchor or flange type fixtures for easy installation.



Ancillary Shoring



1. Stainless Steel



2. Stainless Steel (with anti-slip pad)



Ancillary Shoring is provide with a supporting construction on the wall

Installation Options

Pool ladders can be easily installed either with anchors embedded in the concrete deck or bolted flanges. The fixtures are concealed by stainless steel escutcheons.



1. Anchor Type



2. Flange Type


Bottom cap



1. Soft Rubber Cap



2. Hard Movable Rubber Cap

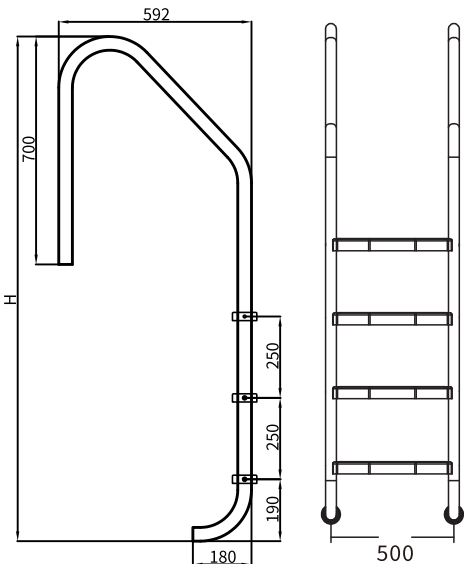


Anchor Type

Model	Description	H (mm)	Step	Weight (kg)
SL-215A	SL-LADDER	1300	2	-
SL-315A		1550	3	-
SL-415A		1800	4	-
SL-515A		2050	5	-

Flange Type

Model	Description	H (mm)	Step	Weight (kg)
SL-215F	SL-LADDER	1300	2	-
SL-315F		1550	3	-
SL-415F		1800	4	-
SL-515F		2050	5	-

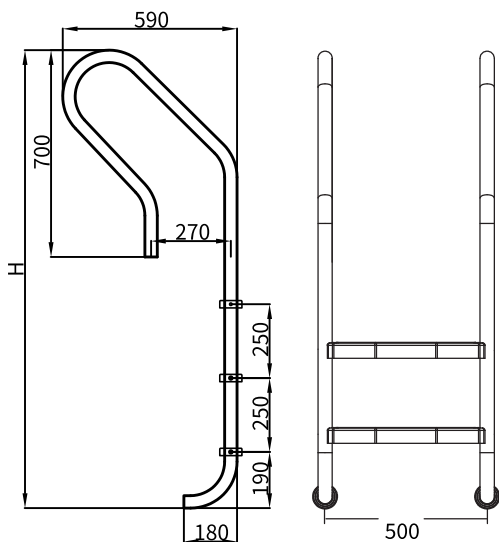

Anchor Type

Model	Description	H (mm)	Step	Weight (kg)
SF-215A	SF-LADDER	1300	2	-
SF-315A		1550	3	-
SF-415A		1800	4	-
SF-515A		2050	5	-


Flange Type

Model	Description	H (mm)	Step	Weight (kg)
SF-215F	SF-LADDER	1300	2	-
SF-315F		1550	3	-
SF-415F		1800	4	-
SF-515F		2050	5	-



Anchor Type

Model	Description	H (mm)	Step	Weight (kg)
MU-215A	MU-LADDER	1300	2	-
MU-315A		1550	3	-
MU-415A		1800	4	-
MU-515A		2050	5	-

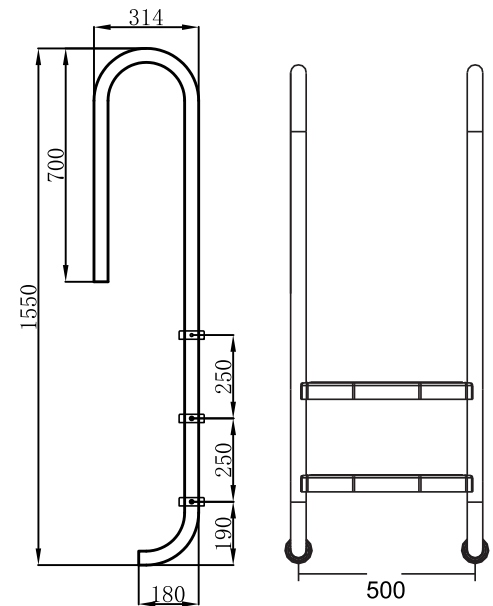


Flange Type

Model	Description	H (mm)	Step	Weight (kg)
MU-215F	MU-LADDER	1300	2	-
MU-315F		1550	3	-
MU-415F		1800	4	-
MU-515F		2050	5	-





Anchor Type

Model	Description	H (mm)	Step	Weight (kg)
OF-215A	OF-LADDER	1464	2	-
OF-315A		1714	3	-
OF-415A		1964	4	-
OF-515A		2214	5	-

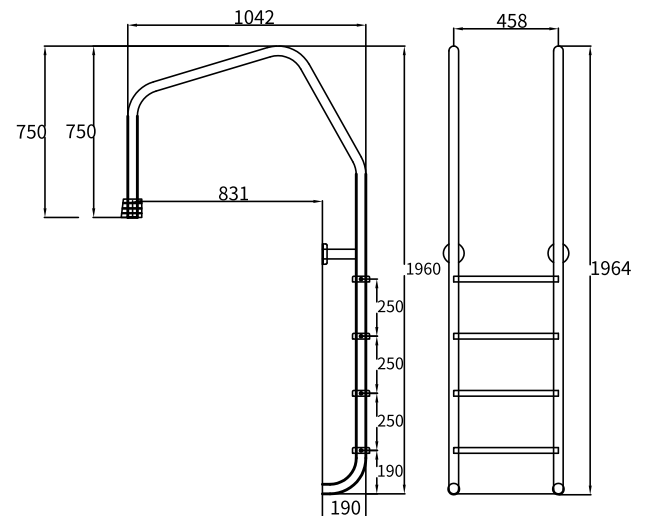

Flange Type

Model	Description	H (mm)	Step	Weight (kg)
OF-215F	OF-LADDER	1464	2	-
OF-315F		1714	3	-
OF-415F		1964	4	-
OF-515F		2214	5	-

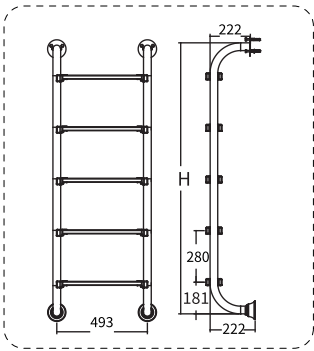

Model	Description	H (mm)	Step	Weight (kg)
BHK-215F	BHK-LADDER	642	2	-
BHK-315F		922	3	-
BHK-415F		1207	4	-
BHK-515F		1487	5	-

Model	Description	H (mm)	Step	Weight (kg)
BHL-215F	BHL-LADDER	530	2	-
BHL-315F		780	3	-
BHL-415F		1030	4	-
BHL-515F		1280	5	-

Other Equipment



Straight Handrails
Handrail length in:
1m/2m/3m/4m/5m/6m




Curved Connector
For joining the Ø42mm pipe



Straight Connector
For joining the Ø42mm pipe



End Cap
for the end of Ø42mm pipe

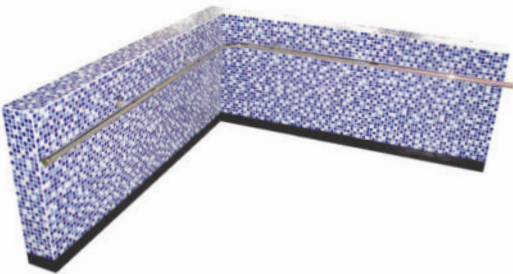


Flange Connection
for Anchor Ladder




Straight Bracket
with Base Plate
Applicable for both concrete
and vinyl pool




KKEH01

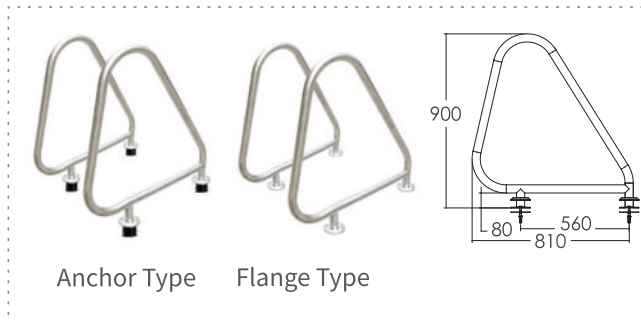


KKEH05

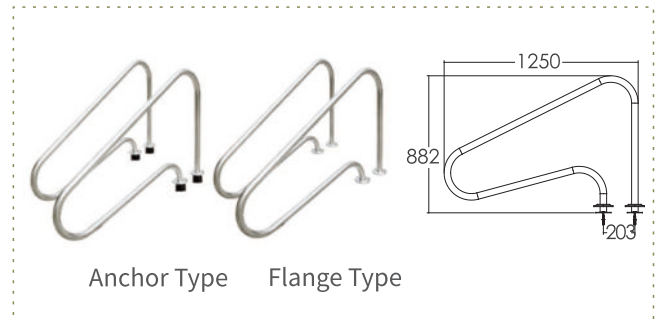


KKEH02

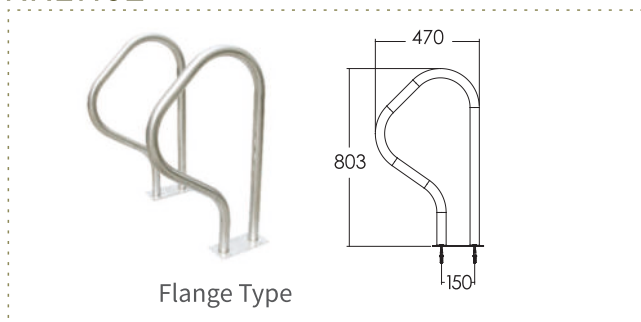


KKEH04

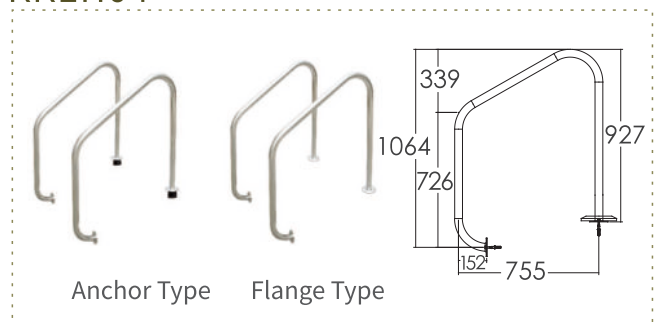


KKEH03

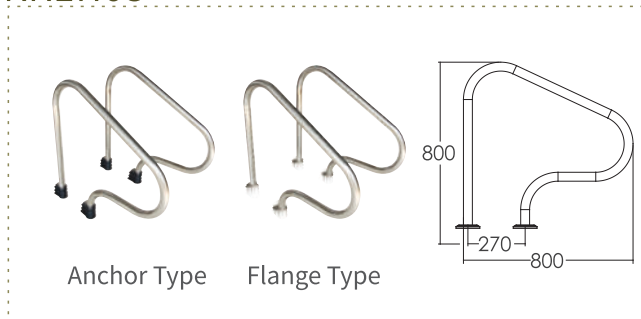

KKEH07

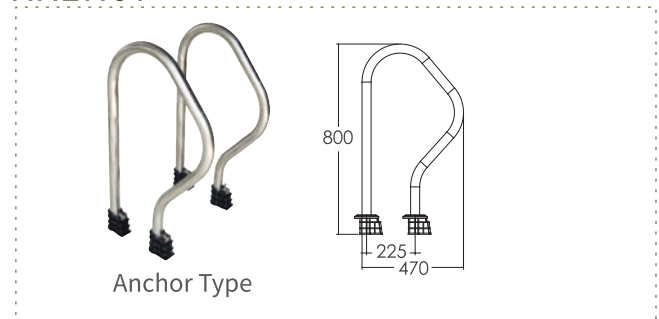


KKEH06

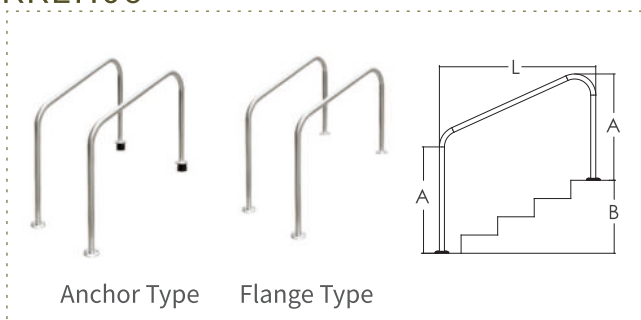

Model	Step	L(mm)	A(mm)	B(mm)
KKEH06-4	4	1220	882	608
KKEH06-5	5	1524	882	855

KKEH08

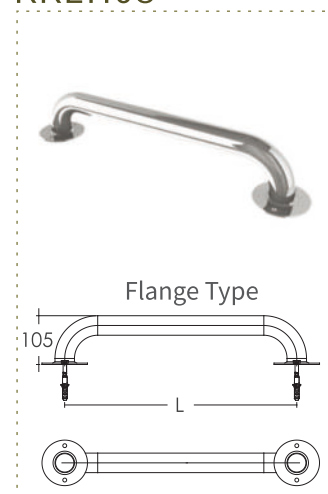

Model	L(mm)
KKEH08-50	500
KKEH08-100	1000
KKEH08-150	1500
KKEH08-200	2000
KKEH08-250	2500
KKEH08-300	3000

PLASTIC LANES

Swimming Pools Line Lanes

KKL-2500/KKL-5000



Model	Length (m)	Pack size (cm)	Weight (kg)	Diameter (cm)	Color
KKL-2500	25	130*50*48	≥17.5	Φ11	Red, blue, yellow and white (customizable)
KKL-5000	50	183*60*55	≥35		

KKL-2501/KKL-5001



Model	Length (m)	Pack size (cm)	Weight (kg)	Diameter (cm)	Color
KKL-2501	25	130*52*55	≥31.4	Φ12	Red, blue, yellow and white (customizable)
KKL-5001	50	190*65*60	≥62.8		

KKL-2502/KKL-5002



Model	Length (m)	Pack size (cm)	Weight (kg)	Diameter (cm)	Color
KKL-2502	25	125*100*60	≥48.5	Φ15	Red, blue, yellow and white (customizable)
KKL-5002	50	125*100*100	≥97		

KKL-2503/KKL-5003



Model	Length (m)	Pack size (cm)	Weight (kg)	Diameter (cm)	Color
KKL-2503	25	100*50*50	≥18.2	Φ9 L:20	Red, blue, yellow and white (customizable)
KKL-5003	50	163*55*50	≥30.4		

KKL-2504/KKL-5004



Model	Length (m)	Pack size (cm)	Weight (kg)	Diameter (cm)	Color
KKL-2504	25	86*45*39	≥13.2	Φ6 L:20	Red, blue, yellow and white (customizable)
KKL-5004	50	100*71*42	≥26.4		

Hook



KKL1001

Rope Hook



KKL1002

Rope Hook
With Protective
sleeve



KKL1003

Rope Cup Anchor
With Cross Bar
(Embedded in concrete)



KKL1004

Rope Cup Anchor



KKL1005

Rope Tensioner



KKL1006


Rope Tensioner



KKL1007

Rope Tensioner

Rope Roller

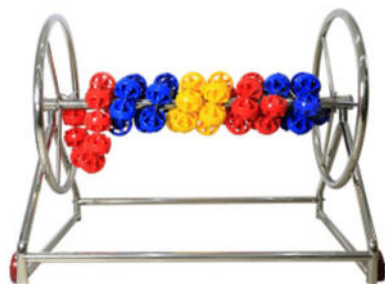

KRR-1200

1200 Series Stainless Steel swimming
Lane Rope Roller Cart for Rolling Up
to 25 Meter of Ø15cm Lane Rope

KRR-1800

1800 Series Stainless Steel swimming
Lane Rope Roller Cart for Rolling Up
to 50 Meter of Ø15cm Lane Rope



KLC-1000

Standard Stainless Steel 201 Grade Step Lifeguard Chair

KLC-1010

Standard Stainless Steel 304 Grade Step Lifeguard Chair

KLC-1100

Premium Stainless Steel 201 Grade Step Lifeguard Chair


KLC-1110

Premium Stainless Steel 304 Grade Step Lifeguard Chair




STARTING BLOCK


KSB/TSB

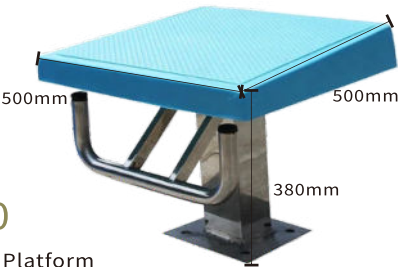

KSB-1000
Standard Starting Platform

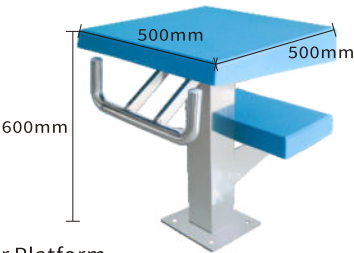

KSB-2000
Tack Start Competitor Platform
With Side Mount

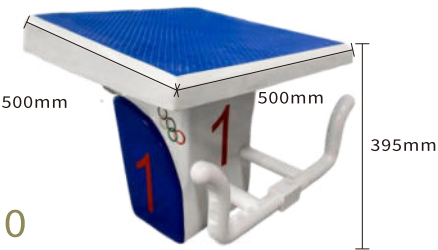


KSB-3000
Standard Starting Platform




KSB-4000
Standard Starting Platform


TSB-001

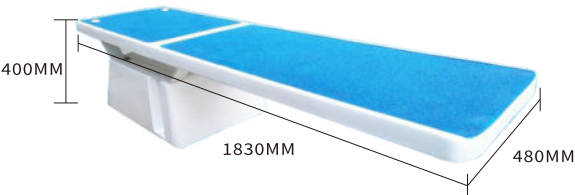

A款

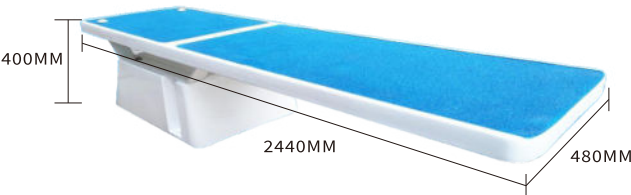

B款


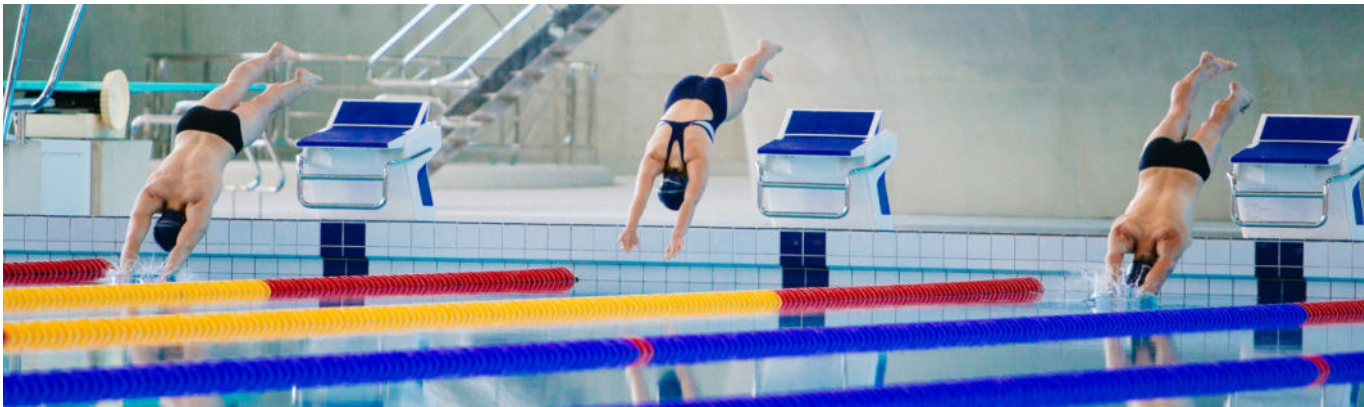


SURROUNDING EQUIPMENT

Shower Head

FEATURES


1. Stainless Steel AISI-304 tube.
2. Chrome plated heads.
3. Hydrotherapy shower effects.
4. Unique design with excellent waterproofing and corrosion resistance.

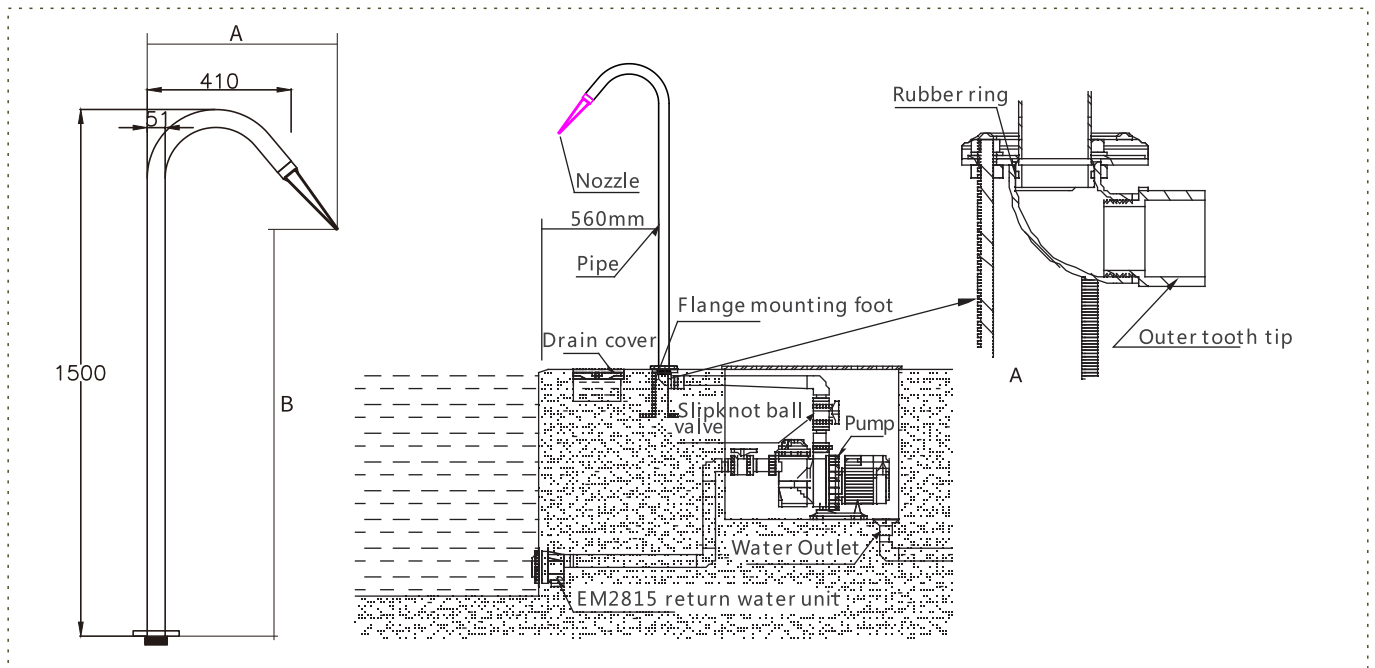

Model	Product Name	Connection Dimensions	Pressure (Kpa)	Flow Rate (m ³ /h)	Pattern	Min Pump Head	A (mm)	B (mm)
EM4401	Fast Spary	1.5"/50mm	20-100	14.0-48.4	Universal Type	2m	663	946
Em4402	Full Body Spary	1.5"/50mm	20-100	14.0-48.4	Universal Type	2m	705	902
Em4403	Intense Jet Spary	1.5"/50mm	20-250	5.8-24.0	Universal Type	2m	630	962
Em4404	Jet spray	1.5"/50mm	20-120	18.0-50.0	Fixed Type	2m	628	968
Em4405	Jet Massage	1.5"/50mm	20-100	14.0-48.4	Fixed Type	2m	553	1016
Em4406	Soft Spary	1.5"/50mm	20-60	5.7-12.0	Fixed Type	2m	598	986
Em4407	Massage Spray	1.5"/50mm	20-80	0.6-1.1	Universal Type	2m	655	958




Model:P01

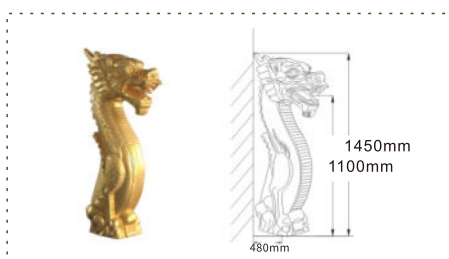


Model:P02




Model:P03

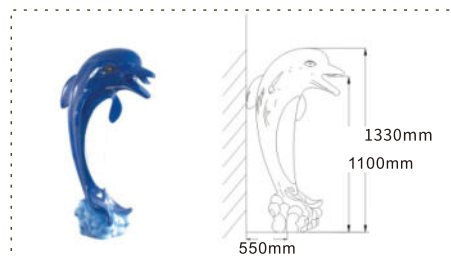


Model:P04

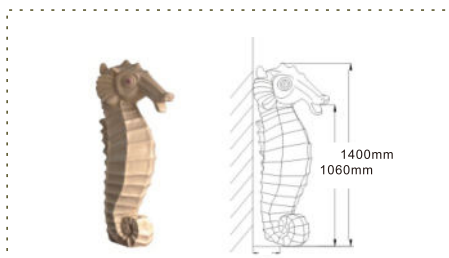


Model:P05

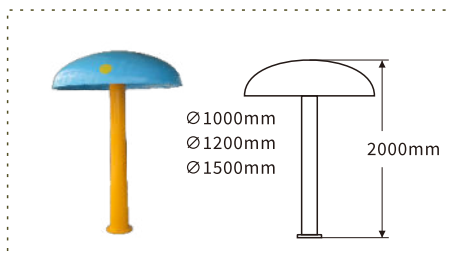

Model:P06

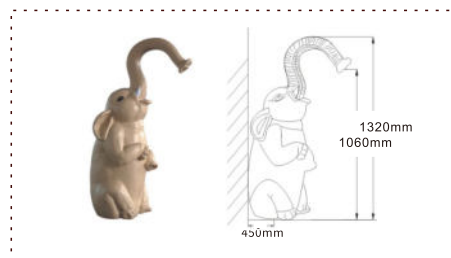

Model:P07

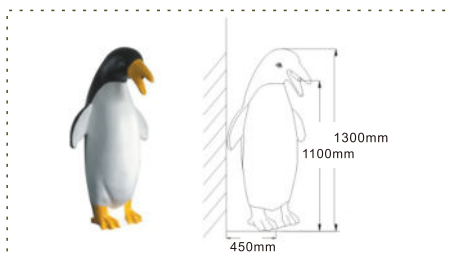


Model:P08



WATER DESCENT


Waterfall Series

Performance chart




Approximate projection
of sheet of water per 300mm
of waterfall length

Technical Information

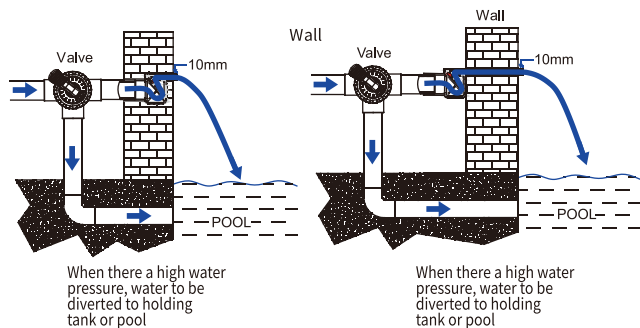

Designed to fit single brick walls & limestone block walls during construction

Dimension

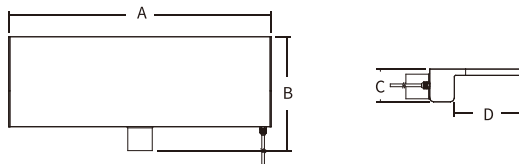

Model	Connection	A(mm)	B(mm)	C(mm)	D(mm)	Power	Volts
With LED							
PB300-25L	1.5 inch/ 50mm	306	138	76	25	4W	DC12V
PB300-150L			263		150		
PB300-230L			343		230		
PB600-25L		606	138	76	25	8W	
PB600-150L			263		150		
PB600-230L			343		230		
PB900-25L		906	138	76	25	12W	
PB900-150L			263		150		
PB900-230L			343		230		
PB1200-25L		1206	138	76	25	17W	
PB1200-150L			263		150		
PB1200-230L			343		230		

Model	Connection	A(mm)	B(mm)	C(mm)	D(mm)	Power	Volts			
Without LED										
PB300-25	1.5 inch/ 50mm	306	138	76	25	-				
PB300-150			263		150					
PB300-230			343		230					
PB600-25		606	138	76	25					
PB600-150			263		150					
PB600-230			343		230					
PB900-25		906	138	76	25					
PB900-150			263		150					
PB900-230			343		230					
PB1200-25		1206	138	76	25					
PB1200-150			263		150					
PB1200-230			343		230					



LED Water descent control box

With input AC 170-250V/50-60Hz & OUTPUT DC12V/60W, it provides 10 patterns on LED Bar.



Model:CB-K80

Working temperature	-20~+40°C
Input	AC 100-240 0.8A 50/60Hz
Output	DC 12V±0.5V 5A 60W



Model:RKPO-UK1201000CD-2

Working temperature	TA:40°C TC:75°C
Input	AC 100-240 0.3A 50/60Hz
Output	DC 12V±0.5V 1A 12W



Model:KK-LED-C03


Output	RGB Single
supply voltage	AC 100-240 0.3A 50/60Hz
Max Output	DC 12V±0.5V 6A 12W




Model:YL-1230

Output	RGB Single
supply voltage	AC 100-240 0.3A 50/60Hz
Max Output	DC 12V±0.5V 2A 12W


KK-SWP1-300/600/900/1200/1500/1800/2000

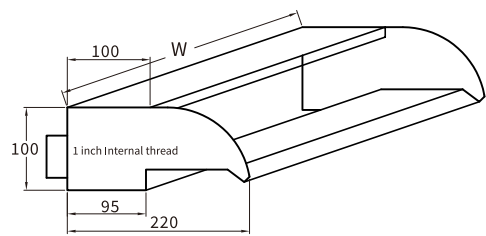


Customizable length: W	300/ 600/ 900/ 1200/ 1500/1800/2000mm
Material	SUS 304/316
light	With light/No light

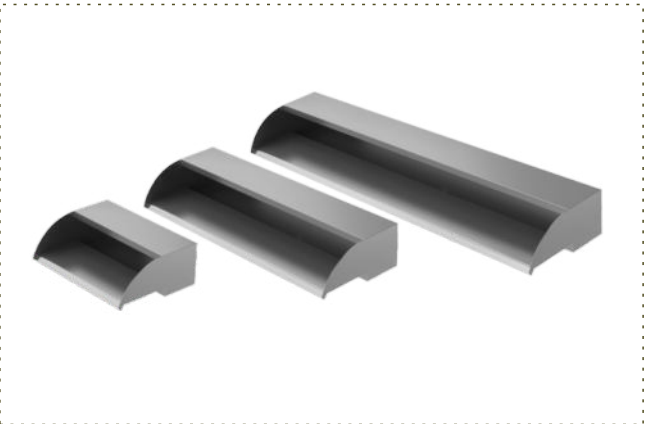


KK-SWP2-300/600/900/1200/1500

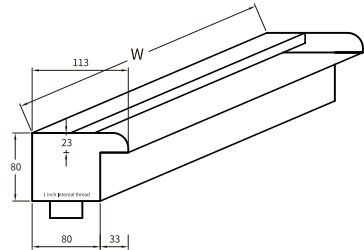

Customizable length: W	300/ 600/ 900/ 1200/ 1500
Material	SUS 304/316
light	With light/No light

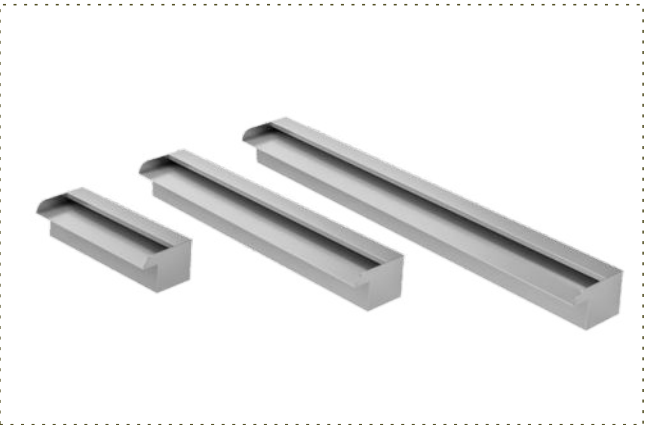


KK-SWP3-300/600/900/1200/1500/1800/2000

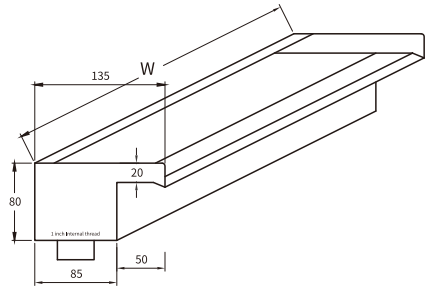


Customizable length: W	300/ 600/ 900/ 1200/ 1500/1800/2000mm
Material	SUS 304/316
light	With light/No light





KK-SWC1-300/600/900/1200/1500

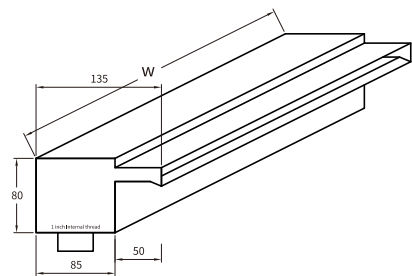



Customizable length: W	300/ 600/ 900/ 1200/ 1500/1800/2000mm
Material	SUS 304/316
With lights	With light/No light

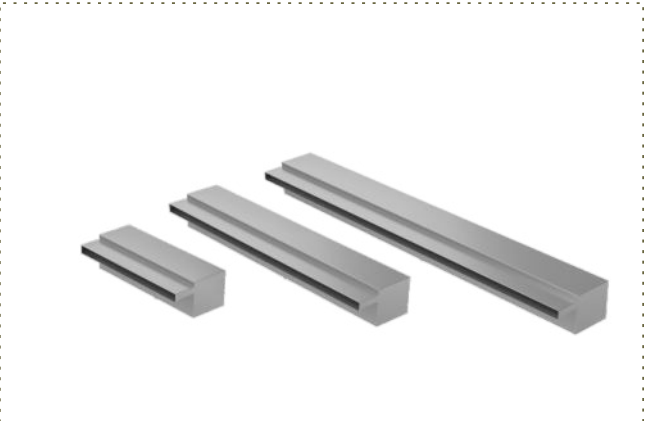


KK-SWC2-300/600/900/1200/1500/1800/2000

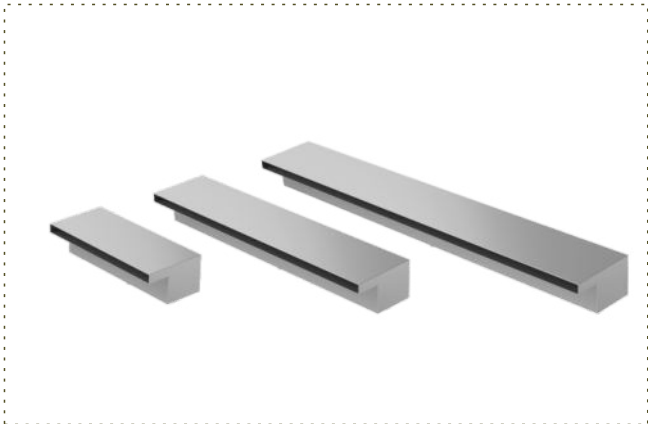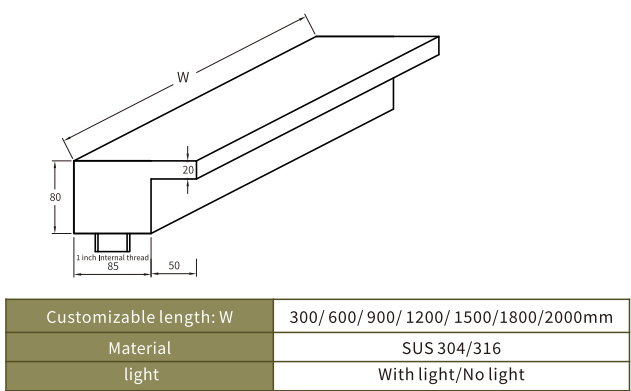


KK-SWC3-300/600/900/1200/1500/1800/2000

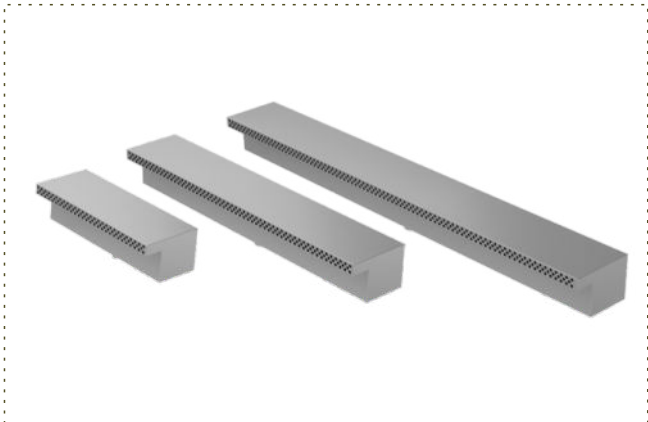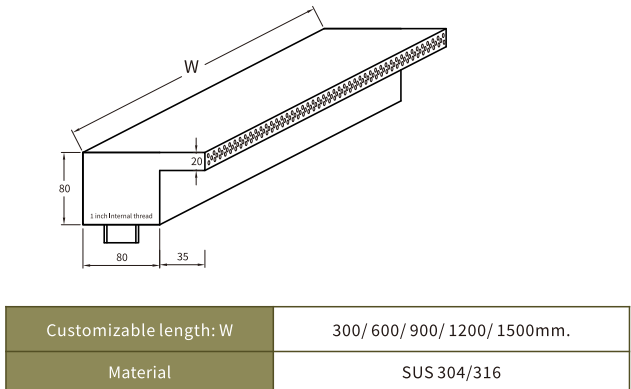


KK-SWR-300/600/900/1200

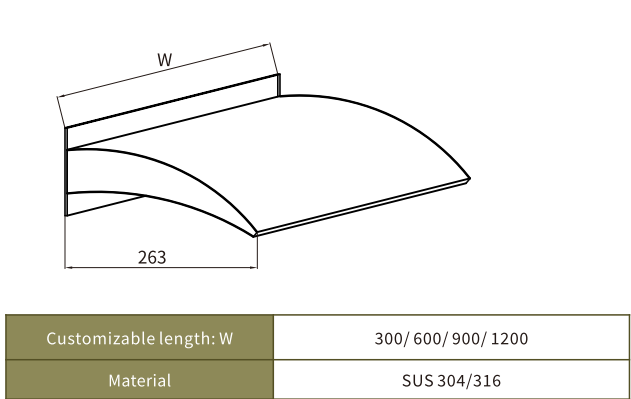


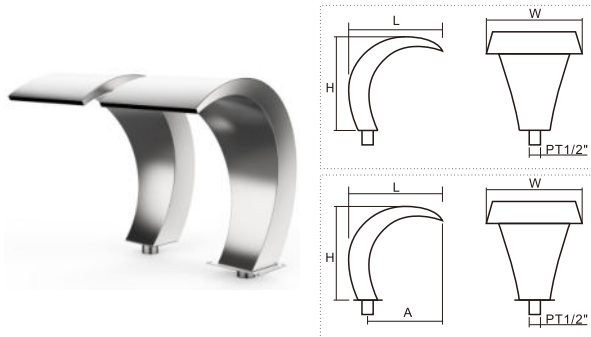


Model	H(mm)	W(mm)	L(mm)	connection	Material	light
CC-6030	600	300	416	1.5"	304/316	With light / No light
CC-6040	600	400	416	1.5"		
CC-6050	600	500	416	1.5"		
CC-8050	800	500	556	2.0"		

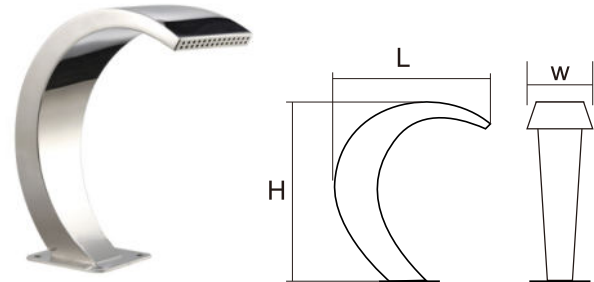


Model	H(mm)	W(mm)	L(mm)	connection	Material	light
KCC-6030	600	300	553	1.5"	304/316	No light
KCC-6530	650	300	600	1.5"		
KCC-7550	750	500	611	1.5"		
KCC-9550	950	500	695	1.5"		

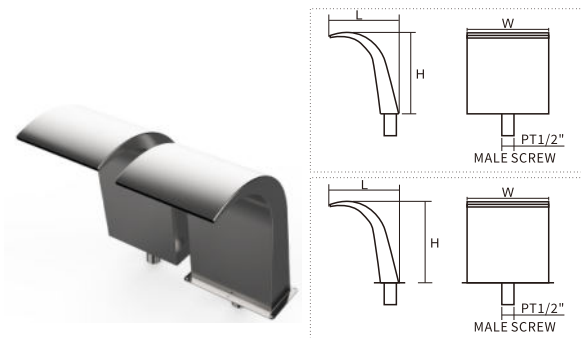

Model	H(mm)	W(mm)	L(mm)	connection	Material	light
WF-6030	600	300	504	1.5"	304/316	With light / No light
WF-6040	600	400	504	1.5"		
WF-8050	800	500	672	2.0"		

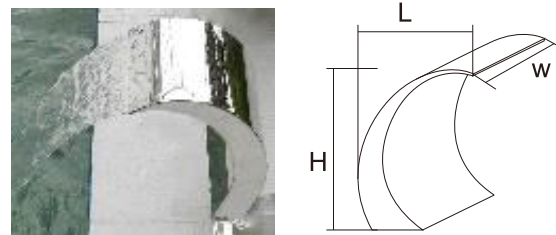


Model	H(mm)	W(mm)	L(mm)	connection	Material	light
ZN-4020	400	200	290	1.5"	304/316	With light / No light
ZN-6020	600	300	435	3.0"		

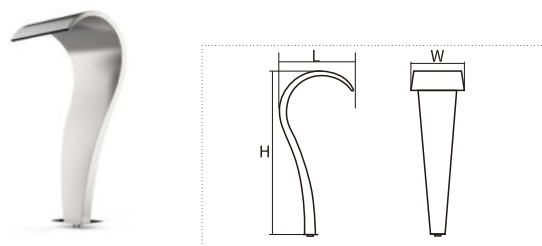


Model	H(mm)	W(mm)	L(mm)	connection	Material	light
MF-6030	600	300	260	1.0"	304/316	With light / No light
MF-7040	700	400	303	1.5"		
MF-8850	880	500	382	2.0"		
MF-1050	1000	500	433	2.0"		




Model	H(mm)	W(mm)	L(mm)	connection	Material	light
SF-6030	600	300	238	1.0"	304/316	With light / No light
SF-7040	700	400	278	1.5"		
SF-8850	880	500	350	2.0"		
SF-1050	1000	500	450	2.0"		

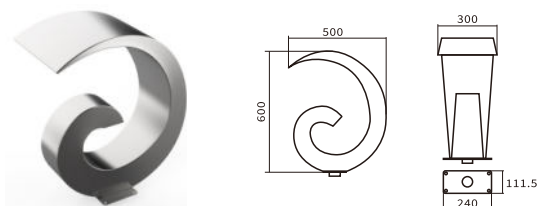


Model	H(mm)	W(mm)	L(mm)	connection	Material
AF-6030	600	300	384	1.5"	304/316
AF-8050	800	500	538	2.0"	
light	With light/No light				

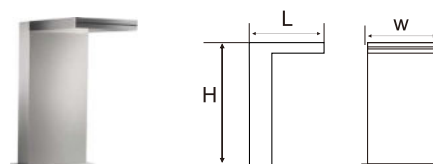


Model	H(mm)	W(mm)	L(mm)	connection	Material	light
TF-7030	700	300	500	1.5"	304/316	No light
TF-7050	700	500	500	2.0"		
TF-7070	700	700	500	2.0"		

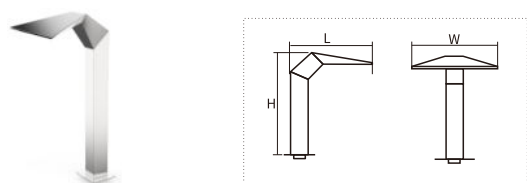


Model	H(mm)	W(mm)	L(mm)	connection	Material
HF-1350	1370	500	610	2.0"	304/316
HF-1360	1370	600	610	2.0"	
light	With light/No light				

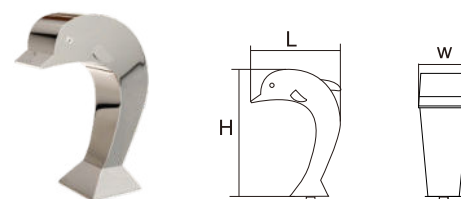


Model	H(mm)	W(mm)	L(mm)	connection	Material
RF-6030	600	300	425	1.5"	304/316
RF-7040	700	400	495	1.5"	
light	With light/No light				

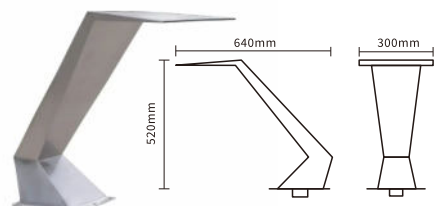


Model	H(mm)	W(mm)	L(mm)	connection	Material
EF-5230	520	300	640	1.5"	304/316
light	With light/No light				

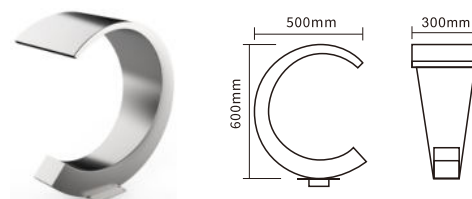


Model	H(mm)	W(mm)	L(mm)	connection	Material
UF-6030	600	300	437	1.5"	304/316
light	With light/No light				

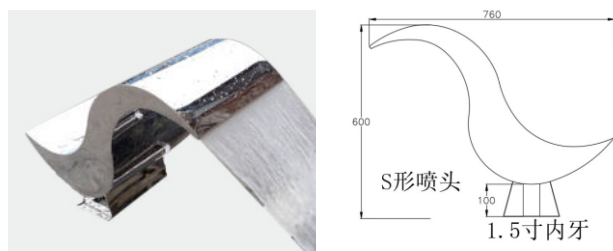


Model	H(mm)	W(mm)	L(mm)	connection	Material
CF-6040	600	400	760	1.5"	304/316
light	With light/No light				

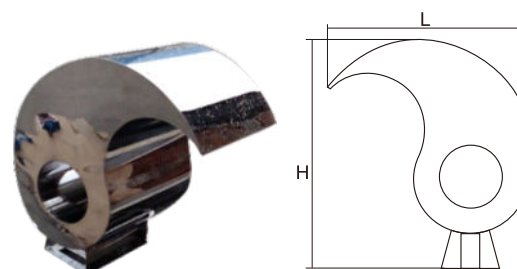



Model	H(mm)	W(mm)	L(mm)	connection	Material
NF-6840	680	400	615	2.0"	304/316
light	With light/No light				



Model	H(mm)	W(mm)	L(mm)	connection	Material
KAW-4445	440	300	450	1.5"	



Model	H(mm)	W(mm)	L(mm)	connection	Material
KAW-6145	610	400	450	1.5"	

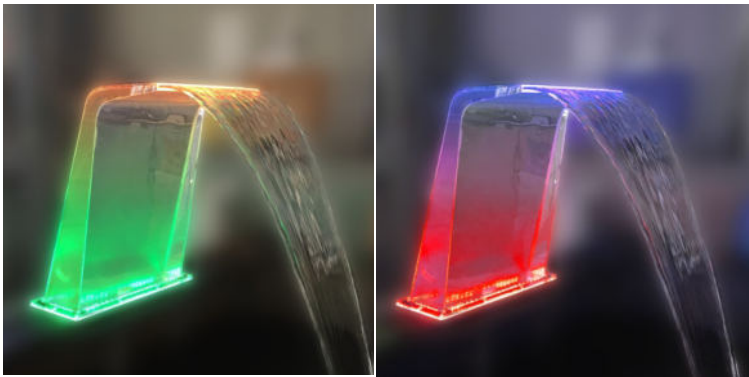

Model	H(mm)	W(mm)	L(mm)	connection	Material
KAW-5225	520	300	250	1.5"	



Water enriches our life



KAIKANGPOOL

Guangzhou KAIKANG Building Material Co., Ltd.



Guangzhou BaiLiHua Pool Sauna Co., Ltd

E-mail : poolbuilding@163.com

E-mail : manager@kaikangpool.com

Skype : poolbuilding@163.com

Mobile: 0086-13640680611

Address: Hanwei Creative Park, FangHua Road, Renhe Town,
Baiyun district, Guangzhou city, China

All specifications are subject to change without prior notice



<http://kaikangpool.com/>